

โปรโมชั่นใหม่ Q1 – Q2

ตั้งแต่วันที่ 1 มกราคม ถึง 30 มิถุนายน พ.ศ.2569

2026

T6200 SERIES

Valid from 1st January to 30th June, 2026




HIGH-PERFORMANCE GRADE SERIES FOR STAINLESS STEEL TURNING

T6215 and **T6225** feature a thick, high-adhesion Al_2O_3 coating with a hardened outer layer, delivering superior wear resistance and long tool life




Inserts:
ISO type

M Stainless steel

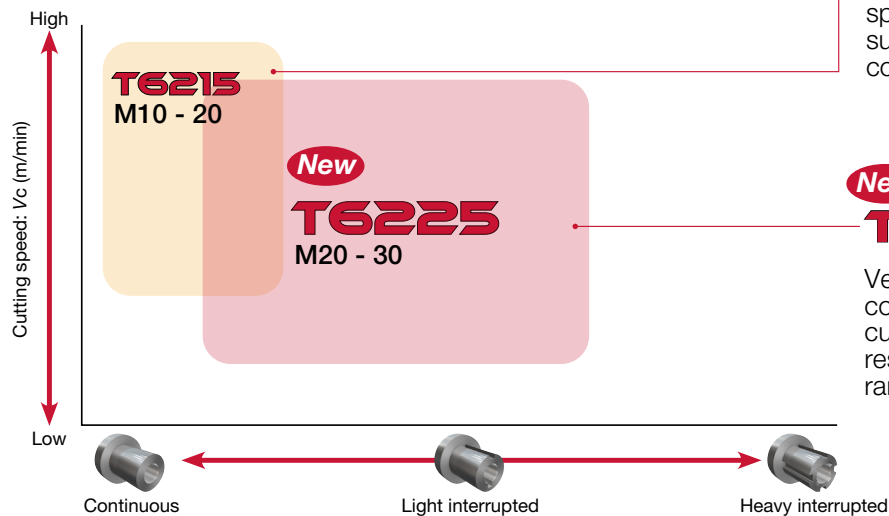



T6215

A CVD-coated grade suited for high speed cutting. Demonstrates superior wear resistance during continuous cutting.



New T6225

Versatile CVD grade covering from continuous to light interrupted cutting. Provides excellent wear resistance in the medium cutting range.

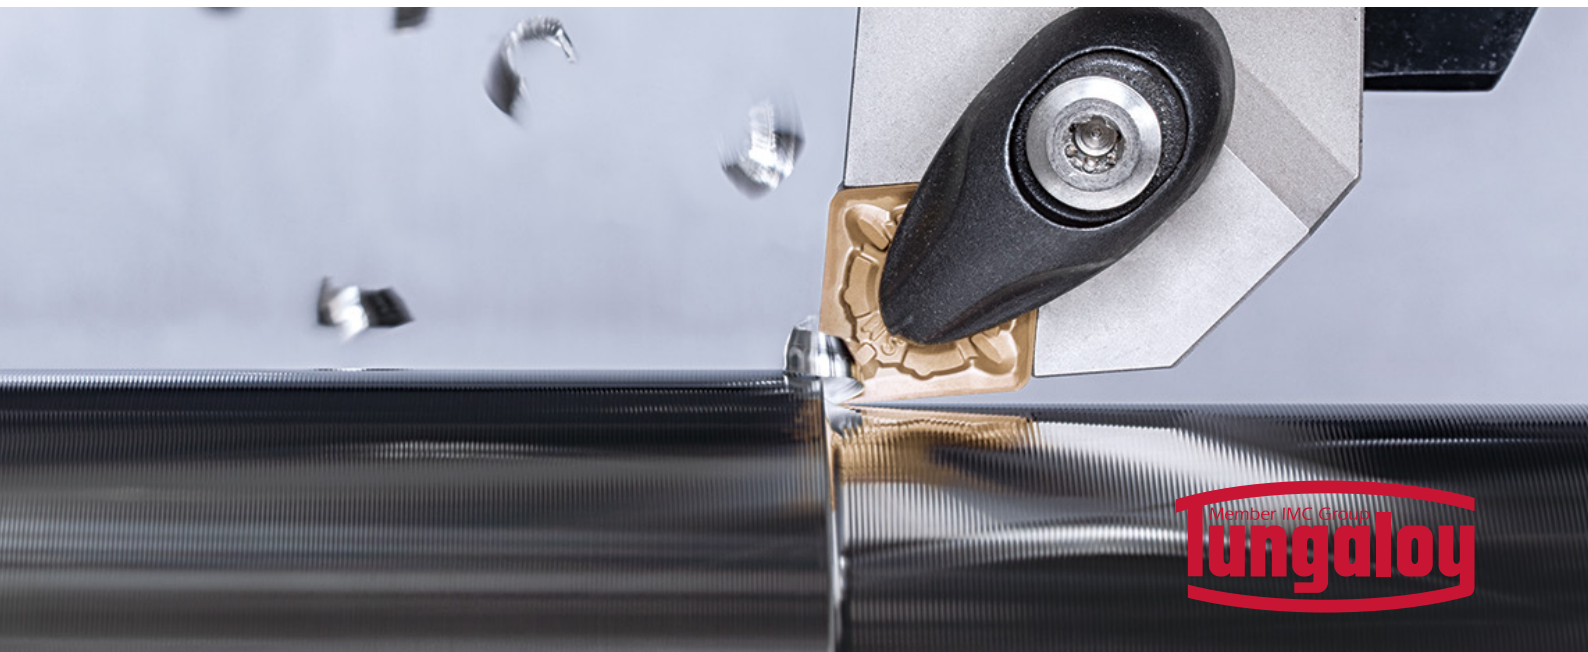

Member IMC Group
Tungaloy

HIGH-PRODUCTIVITY CBN GRADES FOR MULTIPLE MACHINING MATERIALS

BM05M coated CBN grade for high speed continuous cuts of hardened steel parts

BX4015 CBN grade for sintered alloys


SBN30 CBN grade for high speed machining of cast iron

ซื้อ 8 เม็ด

AND

แถม 2 เม็ด

ฟรี!



BM05M

First-choice coated CBN grade for high-speed continuous cutting of hardened steel at speeds up to 350 m/min.

Inserts:

ISO type:

C, D, G, T, V, W

MiniForce-Turn:

DX, WX




SBN30

Solid CBN grade for high-speed cast iron machining, offering deep cuts, high feeds, and exceptional wear and fracture resistance.

Inserts:

ISO type:

C, R, S



BX4015

CBN grade for sintered alloys, delivering excellent performance in continuous to light-interrupted cuts.

Inserts:

ISO type:

C, D, T, V




SUPERB STABILITY AND PRODUCTIVITY IN DEEP FACE GROOVING OPERATIONS

Newly designed insert profile ensures unobstructed chip flow and consistent chip evacuation.

ซื้อ 20 เบ็ดมิด
AND
แถม 1 อะแดปเตอร์ - **ฟรี!**

ซื้อ 20 เบ็ดมิด
AND
ลด 1 ตามจับชุด
มีร่น้ำหล่อเย็น **ส่วนลด 50%**

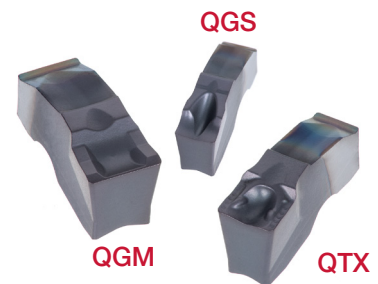

Inserts (Grades AH7025, AH6235):

QGM, QGS and QTX

CW = 3, 4 and 5 mm

Max. grooving depths for face grooving

CDX = 42 mm


Adapters:

QSDR/L-CHP... Face grooving adapter
(for CW = 3,4,5, CDX = 26 - 42 mm)

Holders for adapters:

QHSL/L-CHP

QHTR/L-CHP

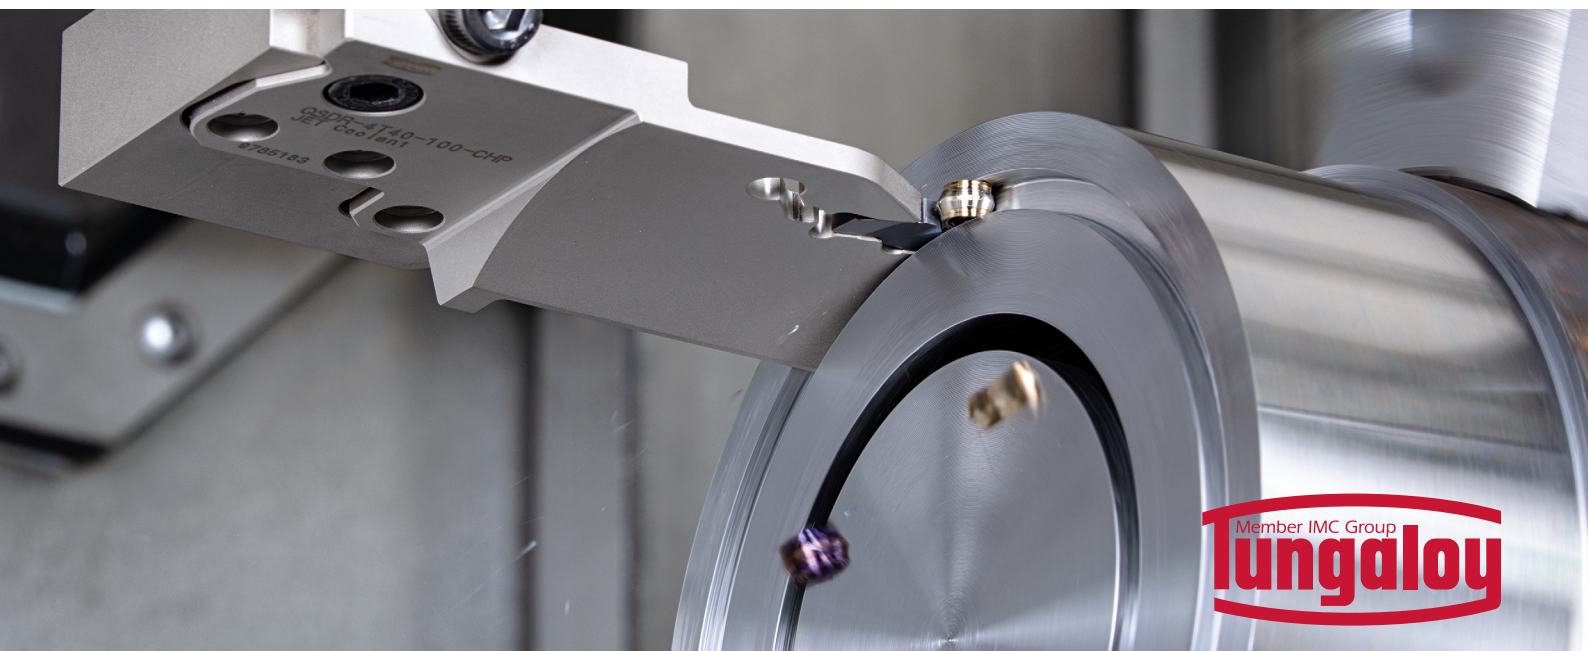

INNOVATIVE 4-CUTTING-EDGE TOOLS FOR FACE GROOVING IN MINIATURE MACHINING

Unique clamping design ensures high rigidity, excellent repeatability, and outstanding productivity.

ซื้อ 10 เม็ดมิด

AND

ลด 1 ตามจับ

ส่วนลด
60%

Inserts (Grades SH7025,
SH725):
TCF18


Toolholders:
JS-STCFL
STCFVR

TCF18

CW = 0.5 - 2.5 mm

Max. grooving depth: 3 mm

Minimum grooving diameter: $\varnothing 6$ mm

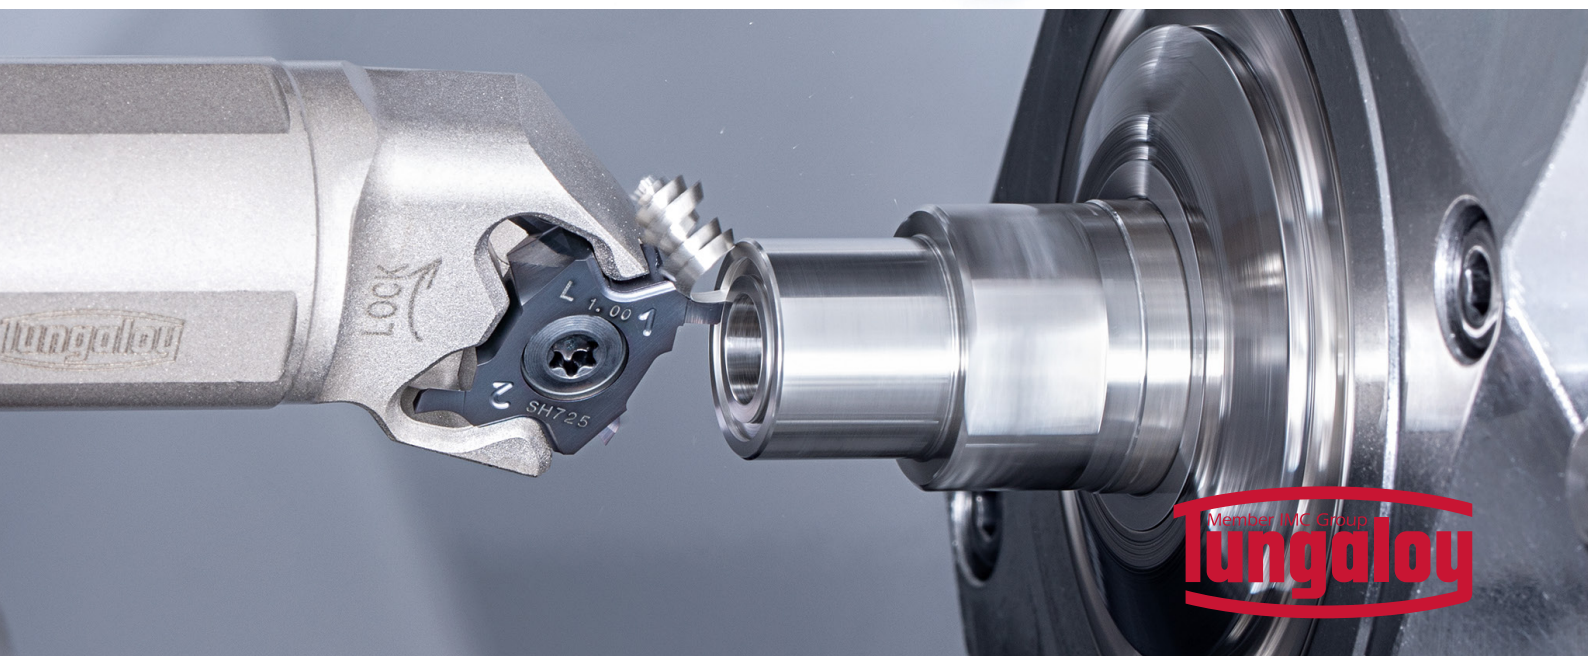

DEEP FACE GROOVING OF UP TO 10 MM DAXN AND UP TO 9 MM GROOVE DEPTH IS POSSIBLE

Extremely rigid insert clamping ensures tool stability during deep face grooving operations.

Sharp cutting edge, **combined with SH7025, the latest PVD grade**, provides long tool life and superior surface quality.

ซ็อก 10 นิ้วมิด

AND

แถม 1 ด้ามจับ


ฟรี!

Inserts (Grade SH7025):

MFGR...

Toolholder:

A-MFR10...



MFGR10



MORE THAN 13,000 POSSIBLE COMBINATIONS

Easy and accurate head-holder coupling provides reduced tool change time and high accuracy of cutting point repeatability

ซื้อ 6 หัวกัด

AND

ลด 1 ด้ามจับ

ส่วนลด
60%

Heads (Grade: AH715, AH725, AH750, GH730, KS15F):

Square heads: **VEH, VEE, VED**

Face mills: **VFM**

High-feed: **VFX**

Ball: **VBB, VBD, VBE**

Radius: **VRB, VRC, VRD**

Barrel: **VBO**

Bull nose: **VBN**

Lens: **VBL**

Chamfering: **VCA, VCW, VCR**

Chamfering and spot drill: **VCP, VDS**

Center drill: **VDP**

Counterboring: **VGC**

Multi-function: **VVFH**

Slotting: **VST, VTB**

Threading: **VMT, VTR**



Shanks:

Steel, Carbide, ER collet type



HIGH FEED MILLING CUTTERS WITH SIX CUTTING EDGE INSERTS

The cutter's small entry angle ensures smooth material access, perfect for long reach applications

ซื้อ 10 เบ็ดมิด
AND ต่อพ็อกเก็ต
แถม 1 หัวคัตเตอร์ - ฟรี !

Inserts (Grades: AH3225, AH3135, AH130, AH8015):

WXMU03-MM/ML/MS
WXMU06-MM

Cutter bodies:

Bore type:

TXWX03

DCX = $\varnothing 40 - \varnothing 80$ mm

TXWX06

DCX = $\varnothing 40 - \varnothing 80$ mm

Shank type:

EXWX03...

DCX = $\varnothing 16 - \varnothing 40$ mm

Modular type:

HXWX03

DCX = $\varnothing 16 - \varnothing 40$ mm



COMPLETE SOLUTION FOR SHOULDER MILLING WITH OUTSTANDING PERFORMANCE AND COST-EFFECTIVE INSERTS

Economical shoulder milling cutter with 3 cutting edged insert with wide range of sizes, grades and diameters

ซื้อ 10 เบ็ดมิด
AND
ต่อพ็อกเก็ต -
แถม 1 หัวคัตเตอร์ ฟรี !

Limited up to diameter 125 mm

Inserts (Grade: T1215, KS05F, DS2005, T3225, AH8015, AH3135, AH3225, AH120):
TO*T04/06/10/15 - MJ/MM/AJ/NMJ

Cutter bodies:

Bore type:

TPA06/10/15

DC = $\varnothing 32 - \varnothing 125$ mm

Shank type:

EPA04/06/10/15

DC = $\varnothing 8 - \varnothing 50$ mm

Modular type:


HPA06/10-M

DCX = $\varnothing 16 - \varnothing 32$ mm




TOMT04

APMX = 3.5 mm




TO*T06

APMX = 6 mm



TO*T10

APMX = 10 mm



TO*T15

APMX = 15 mm



EXCHANGEABLE HEAD DRILL SYSTEM FOR SUPERIOR DRILLING PERFORMANCE AND LONG TOOL LIFE

Quick drill tip change for reduced machine downtime.

Tool inventory and management costs are significantly reduced as there is no need for regrinding.

ซื้อ 4 ดอกสว่าน
AND
ลด 1 ด้ามสว่าน
1.5xD-3.5xD และแบบโมดูลาร์

ส่วนลด 50%

ซื้อ 6 ดอกสว่าน
AND
ลด 1 ด้ามสว่าน
5xD และ 6xD

ส่วนลด 50%

ซื้อ 8 ดอกสว่าน
AND
ลด 1 ด้ามสว่าน
สูงสุด 8xD

ส่วนลด 50%

Drill heads (Grades: AH725, AH9130, KS15F):

DMP, DMC, DMF, DMH, DMN, DMM

Drill bodies:

TID-F (1.5xD, 3xD, 5xD, 8xD)

TID-R (2xD, 3.5xD, 6xD, 8xD)

TIDC (3xD, 5xD)



DRILL HEADS LINEUP



DMP

Drill dia.:
ø6 - ø25.9 mm


General purpose drilling head ideal for various drilling applications



DMC

Drill dia.:
ø6 - ø25.9 mm

High-precision head with double margin and self-centering edge



DMF

Drill dia.:
ø6 - ø25.9 mm

180° flat edges for counterboring and flat bottoms



DMH

Drill dia.:
ø6 - ø25.9 mm

General purpose head with enhanced cutting edge



DMN

Drill dia.:
ø6.8 - ø19.5 mm
Drill head with sharp edges for non-ferrous materials



DMM

Drill dia.:
ø10 - ø19.9 mm
General purpose drilling head for stainless steel materials

DRILL BODIES LINEUP



TIDC

Drill dia.:
ø7.5 - ø19.9 mm
3xD and 5xD



TID-F

Drill dia.:
ø6 - ø25.9 mm
1.5xD, 3xD, 5xD, 8xD



TID-R / TID-R-E

Drill dia.:
ø6 - ø19.9 mm
2xD, 3.5xD, 6xD, 8xD

MODULAR DRILL BODIES LINEUP

video



TID-M

Drill dia.:
ø6 - ø18.9 mm
2xD and 3xD
TungFlex connection



TID-S

Drill dia.:
ø6.5 - ø10.9 mm
2xD
TungMeister connection

video



TID-L-A-M

Drill dia.:
ø6.5 - ø16.9 mm
TungFlex connection
drilling+chamfering /
pre-thread drilling

TMV Chipbreaker Series

Valid from 1st January to 30th June, 2026

NTK


TURNING & MINIATURE

OUTSTANDING CHIPBREAKER FOR CONVENTIONAL AND VIBRATION MACHINING

Advanced chipbreaker design for reliable performance & longer tool life





Inserts (Grades DM4, TM4, ST4 and NTK650):
DCGT, DCGT-WP, TNGG, CCGT, VCGT

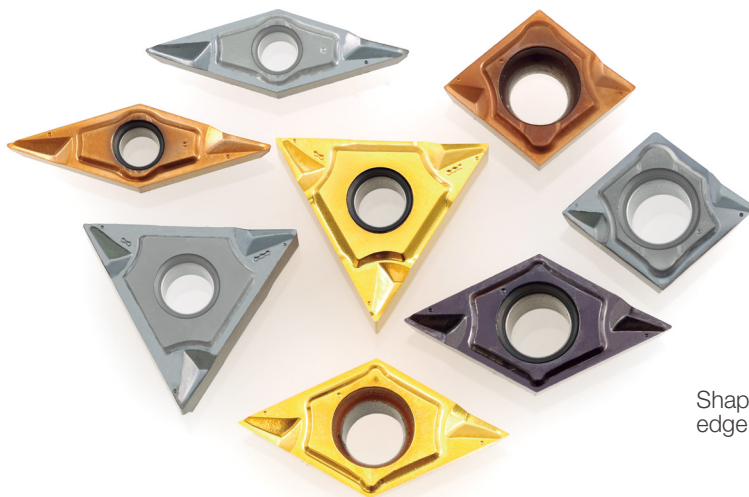

Controls chip flow reliably

Shape to prevent cutting
edge damage from chipping

Rake face shape to withstand
high cutting feeds

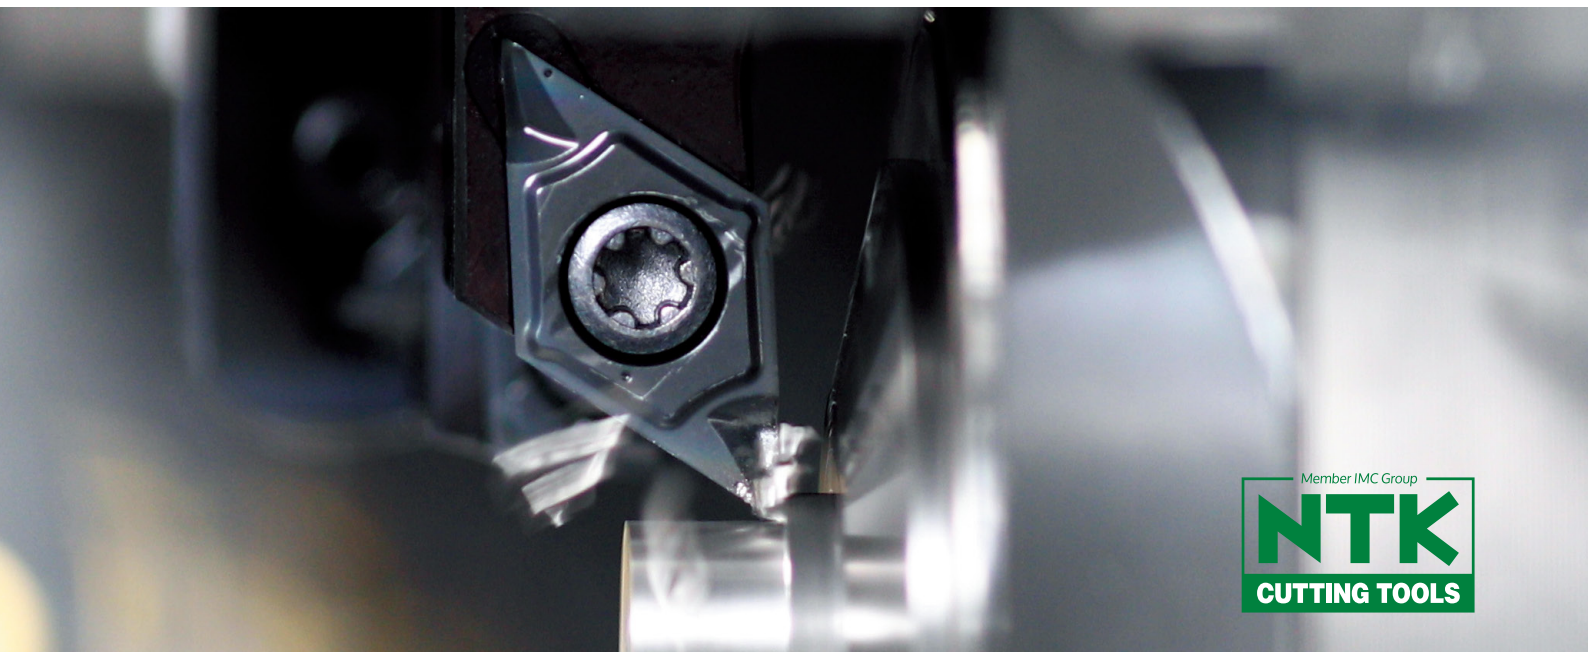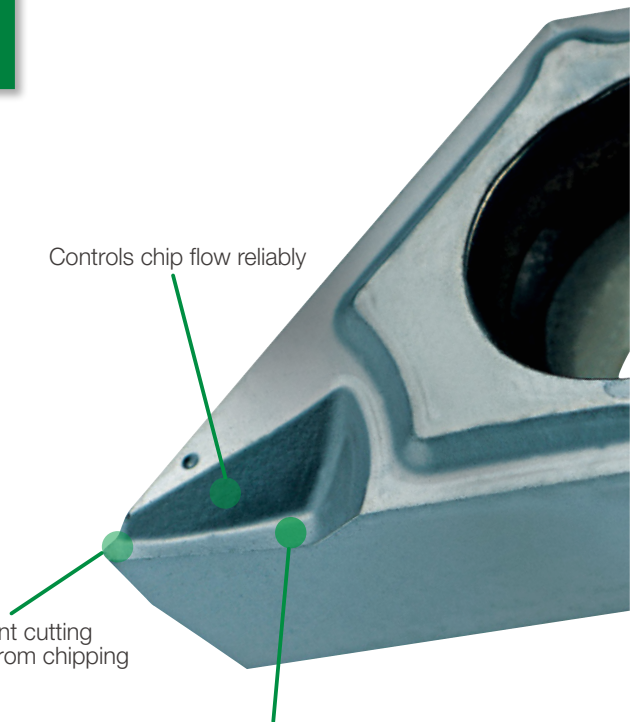

YL Chipbreaker Series

Valid from 1st January to 30th June, 2026

NTK

TURNING & MINIATURE

FIRST RECOMMENDATION FOR FRONT TURNING OPERATIONS

Combination of sharpness, toughness, and chip control to handle an extremely wide range of cutting conditions

ซ็อก 30 เม็ดมิด

AND

แฉก 10 เม็ดมิด

ฟรี!

Inserts (Grades DM4, DT4, TM4, ST4, QM3 and NTK650):
DCGT, CCGT, VBGT, VCGT



N-SWISS JOINT

Valid from 1st January to 30th June, 2026

NTK

TURNING & MINIATURE

QUICK-CHANGE MODULAR-TYPE TOOL SERIES FOR AUTOMATIC LATHES

Multiple heads compatible with a single shank, covering a broad range of applications.

ซื้อ 1 หัวโมดูลาร์
และ 10 เม็ดมีด

AND

แถม 1 ด้ามจับ

ฟรี !

Inserts (Grades NTK650, ST4, DM4,
DT4, QM3, TM4, VM1, ZM3):

ISO inserts

Modular heads (QC10, QC12, QC16):

Front turning: SDJC, SCLC, PTXN,
SVJC

Toolholders:

QC-1012-OH2

QC-1212-OH/OH2

QC-1216-OH/OH2

QC-1616-OH2

ซื้อ 1 หัวโมดูลาร์
และ 10 เม็ดมีด

AND

แถม 1 หัวโมดูลาร์

ส่วนลด
50%



SCLC




SDJC



PTXN



SVJC

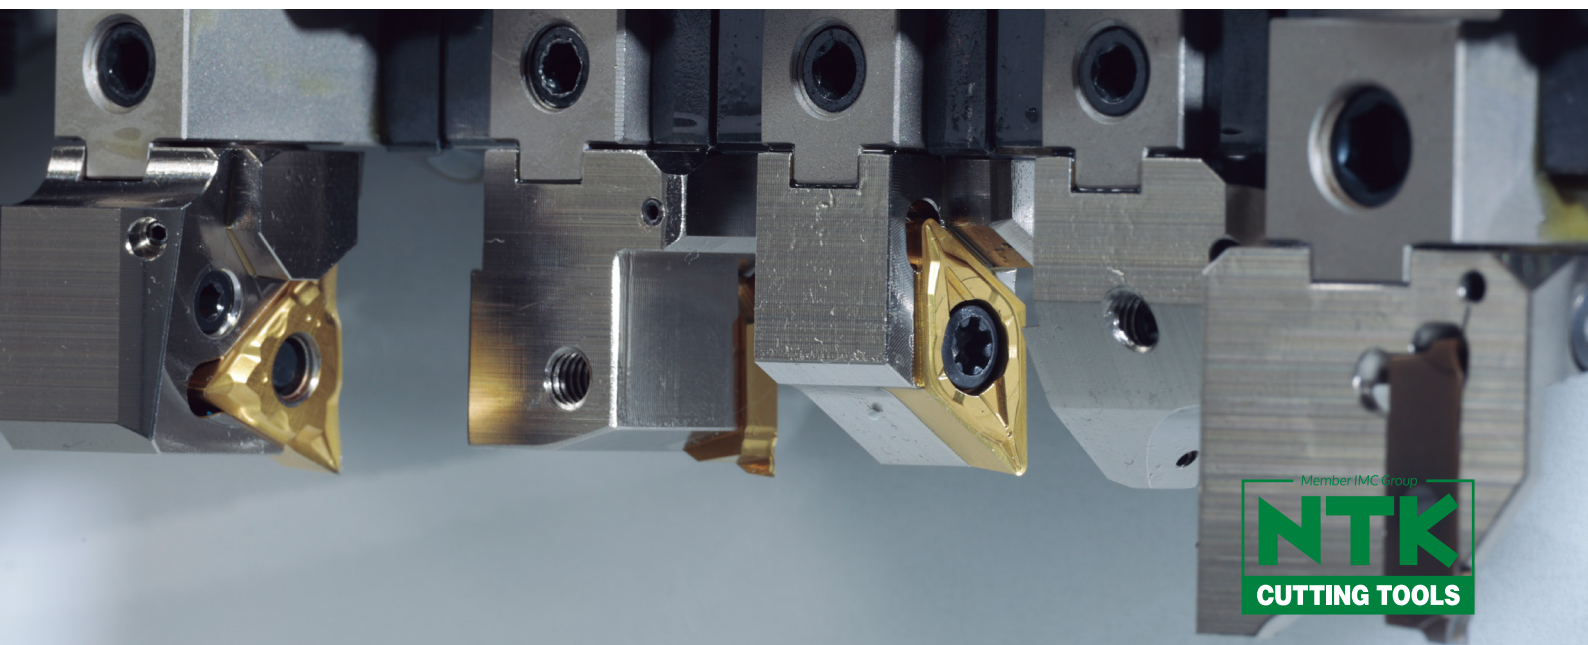

Member IMC Group
NTK
CUTTING TOOLS

DS-ACH Holder Series

Valid from 1st January to 30th June, 2026

NTK

TURNING & MINIATURE

**DESIGNED TO EASILY ADJUST THE CUTTING
EDGE HEIGHT IN MACHINES WITHOUT Y2 AXIS
CAPABILITY**

ซื้อ 20 เม็ดมิด ISO

AND

ลด 1 ด้านจับ

ส่วนลด
50%

Inserts (Grades 650, ST4, DM4, DT4,
QM3, TM4, VM1, ZM3):

ISO inserts

Toolholders:

DS-PTX-ACH-OH


DS-PTX-ACH

DS-SCL-ACH

DS-SDU-ACH-OH


DS-SDU-ACH


DS-SVVPN-ACH

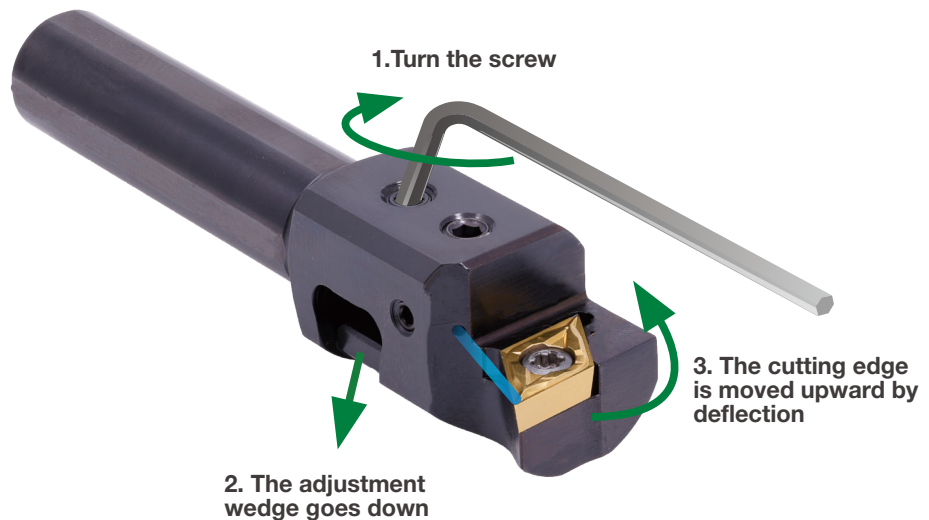

Range of centerline adjustment: 0 - 0.2 mm

Height adjustment of the cutting edge is done by turning a screw and bending the tip of the holder with a wedge mechanism. Patented holder design improves rigidity, compared to conventional holders, to eliminate vibration

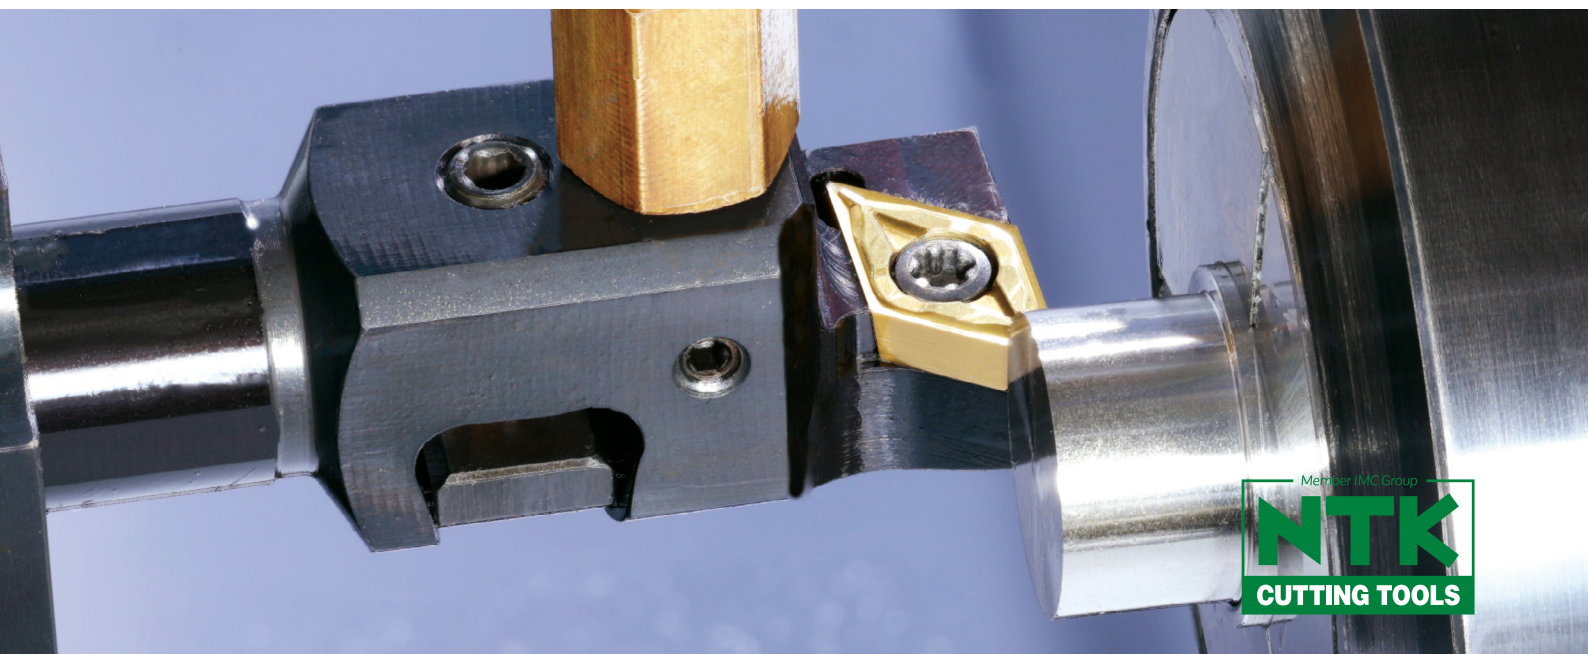

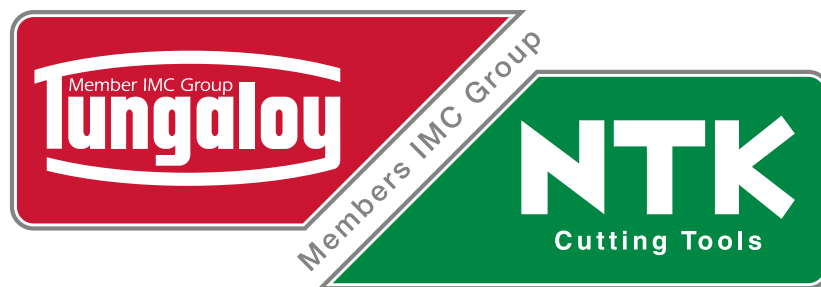

1858/5-7 4th Flr., Debaratna Rd., Bangna Tai,
Bangna, Bangkok 10260

tungaloy.com/th
ntkcuttingtools.com/th

Leading in Innovation

Distributed by:



Dec. 2025 (TJ)