

CONTENTS



General product information

[View](#)

Added products



JBBS-4N, JBBSA-C

New innovative sleeve with 4 coolant holes

[View](#)

TurnLine




TINY^{INI}M^{INI}TURN


www.tungaloy.com

Tungaloy Report No. 402-G

Now **offers collet-chuck sleeves** for easy tool changeover and accurate repeatability

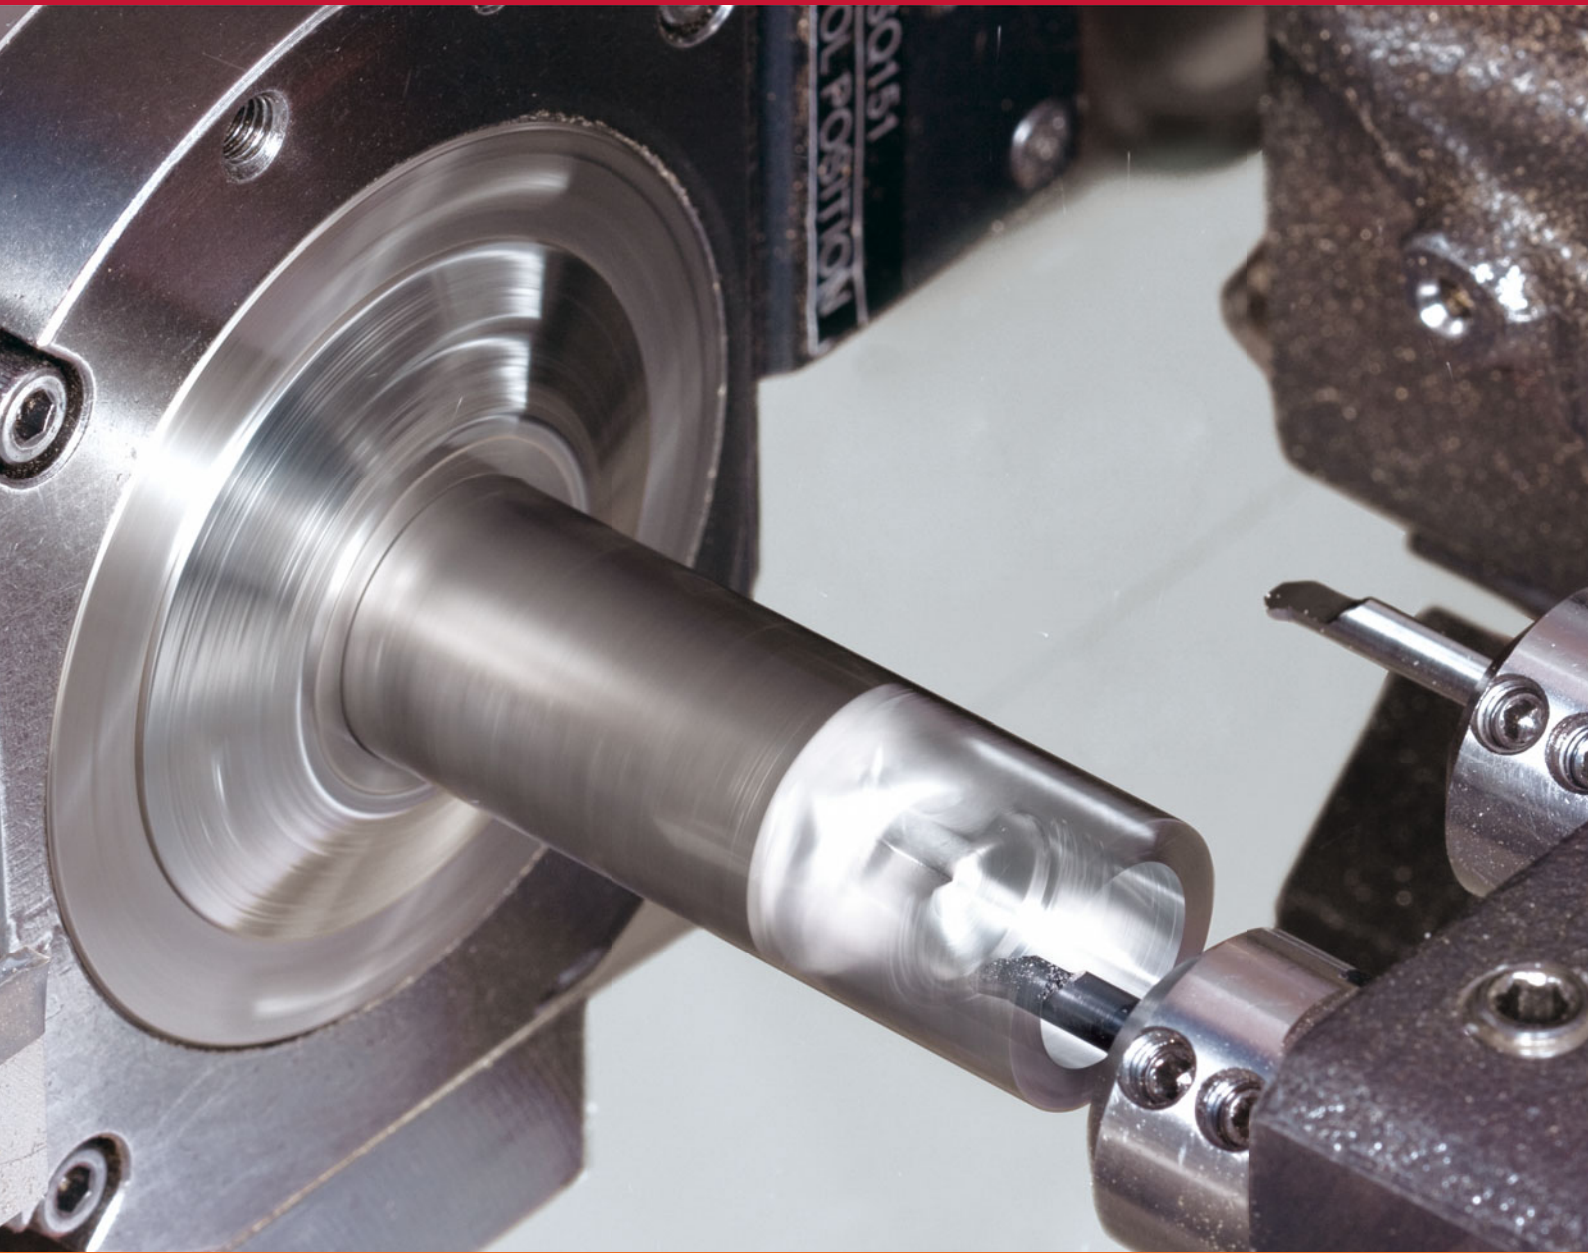

INDUSTRY 4.0
FEED the SPEED!

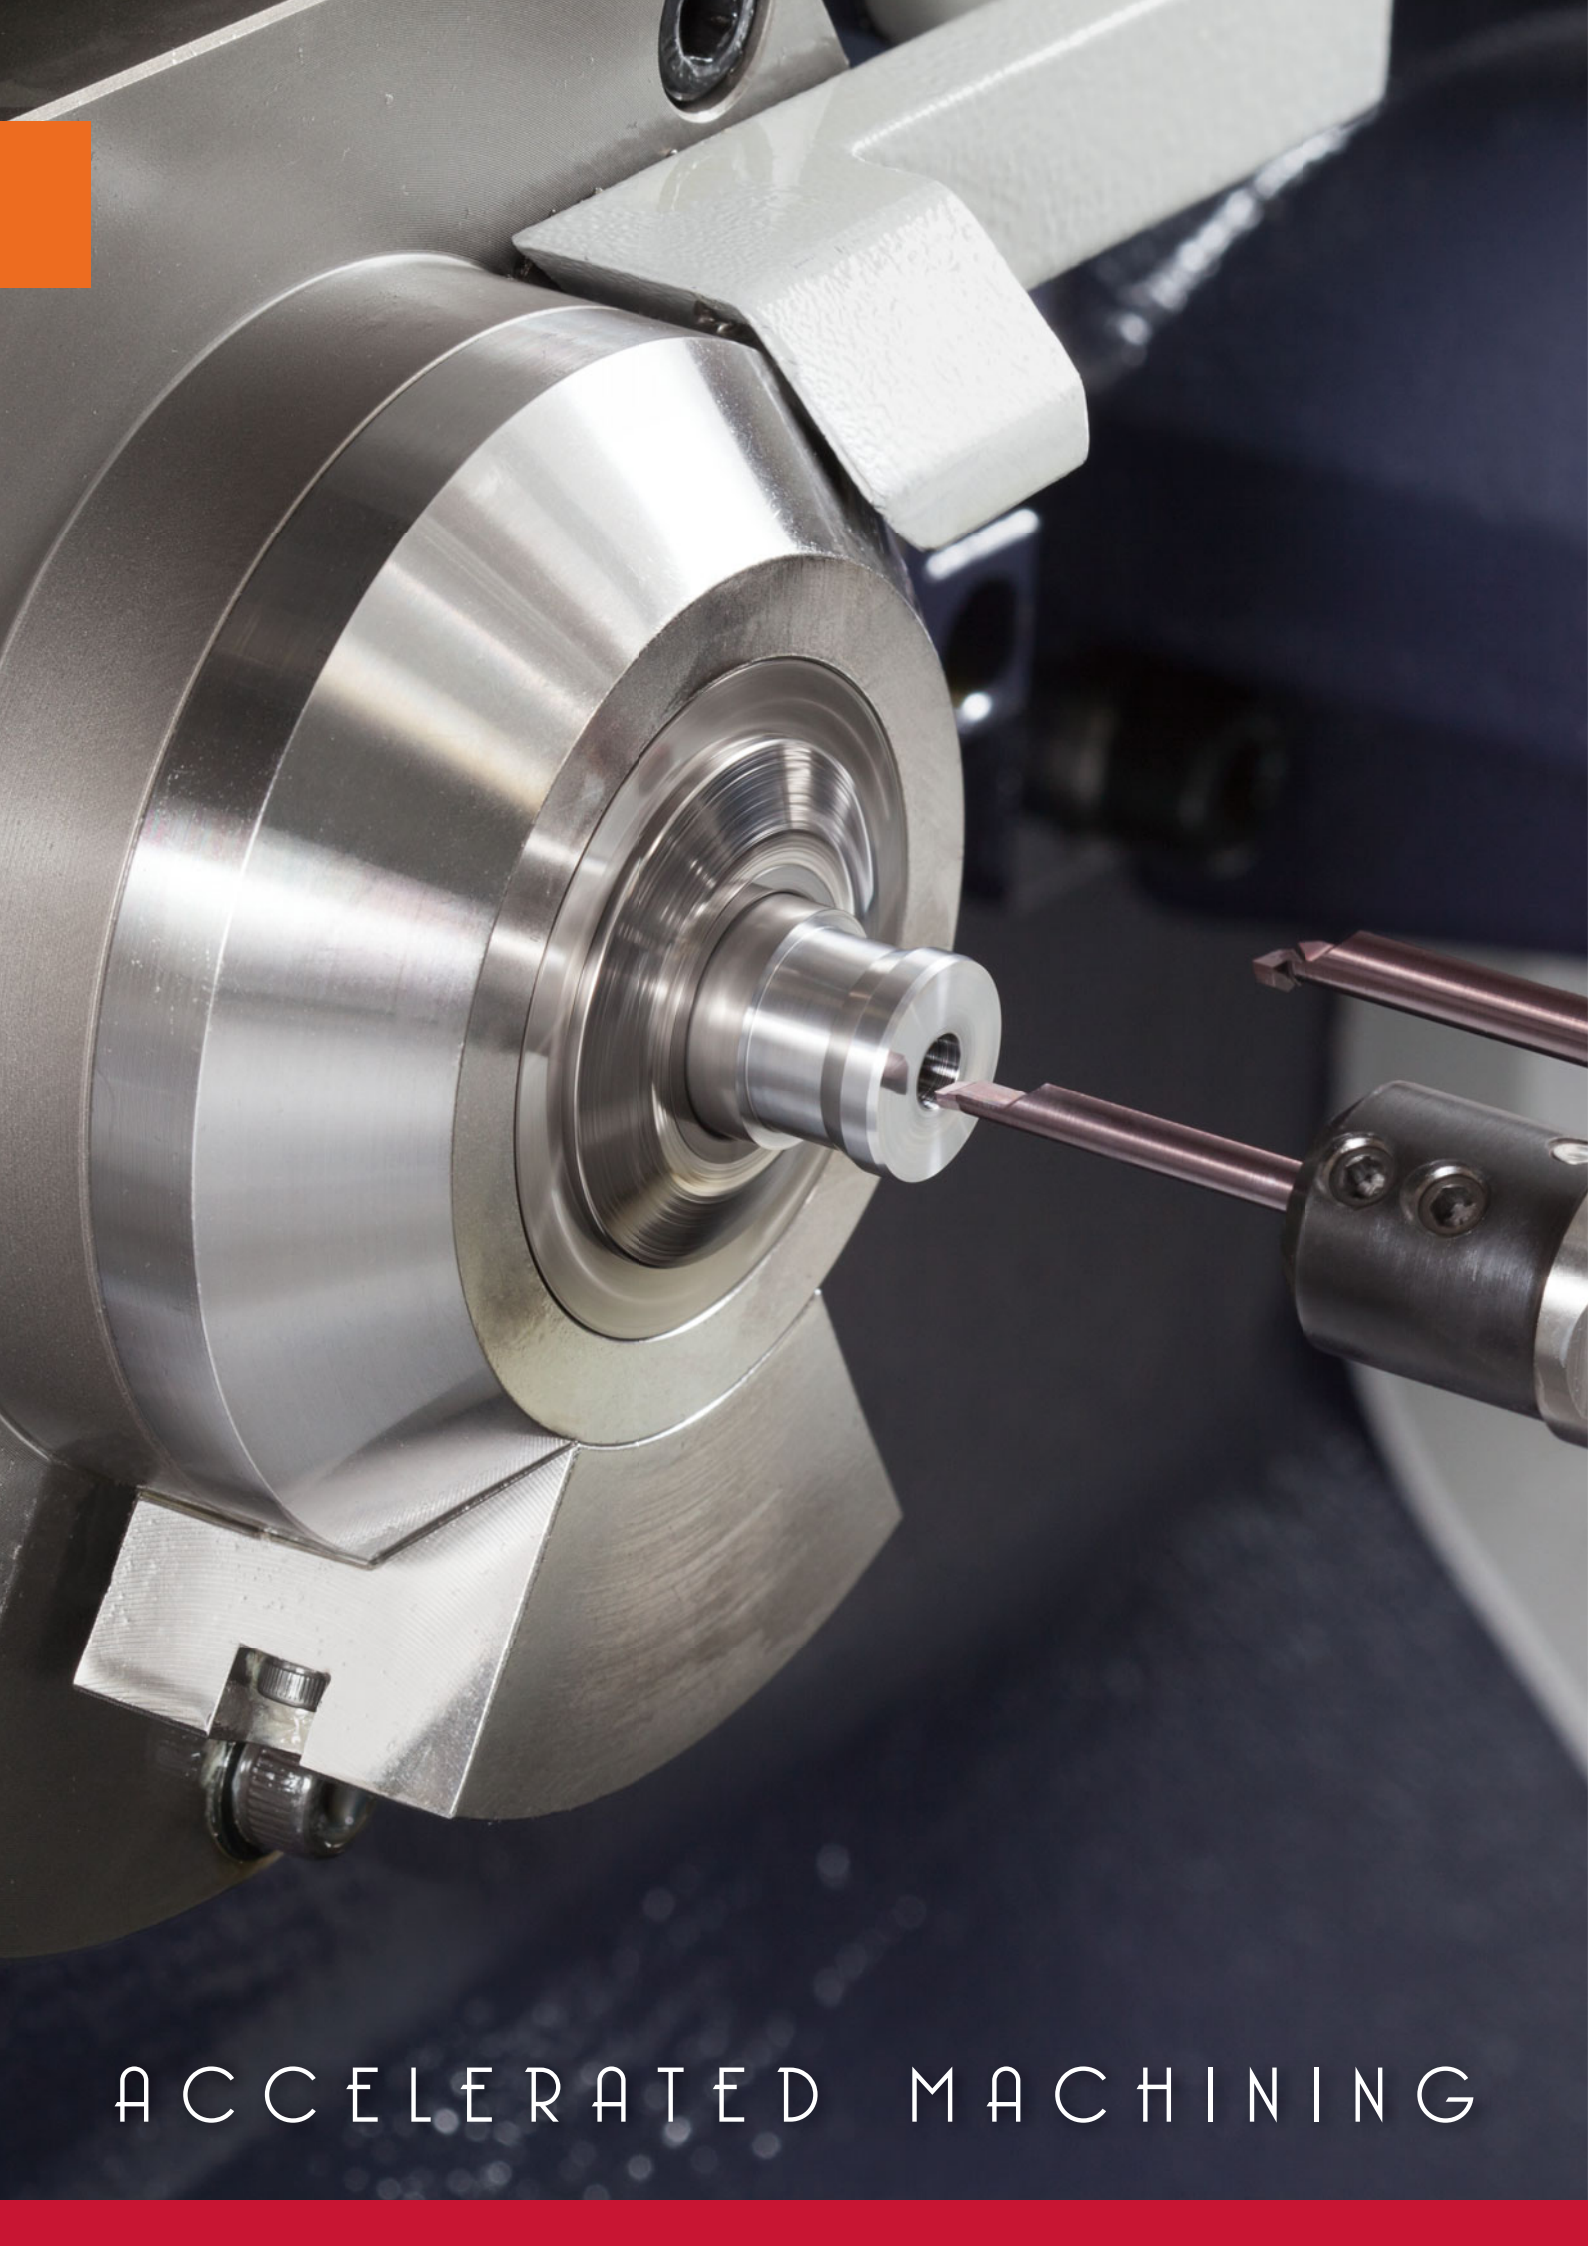

ACCELERATED MACHINING

TurnLine

TINY^{INI}M TURN
TUNGALOY

TUNG FORCE
TURN
ACCELERATED MACHINING



New dedicated sleeves,
allowing easy tool changeover with high repeatability!





High precision and stability in ID turning of small-diameter holes

Designed for high precision


1. Strong cutting edge

Optimized geometry and coating surface

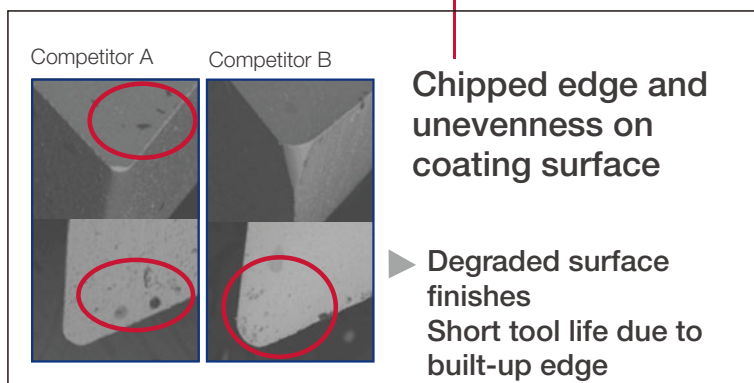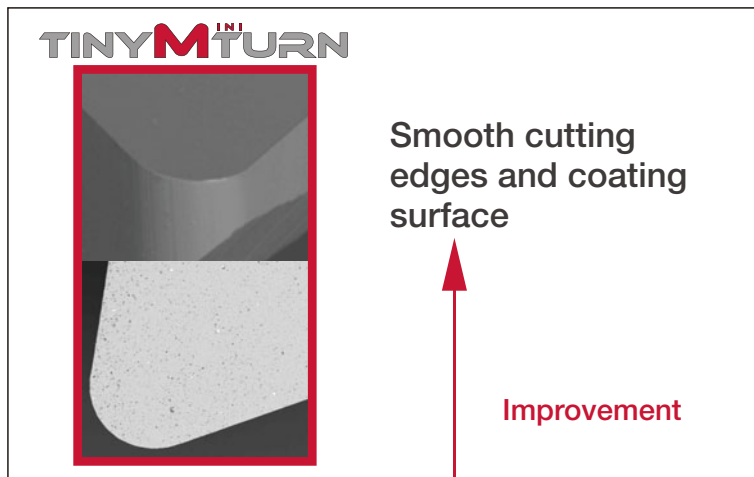


Enhanced cutting edge integrity over the competitors'

- Strong cutting edge ensures stable and good surface finishes
- Smooth cutting edge provides tight dimensional tolerances

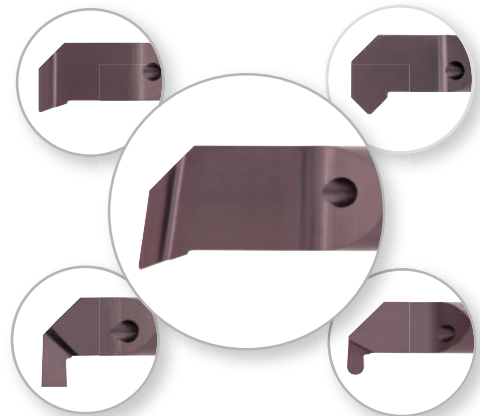

2. Coolant hole






- Supplies coolant directly to the cutting edge.
- Offers remarkable chip evacuation.

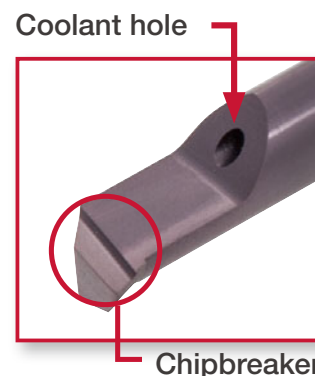


3. Enhanced lineup for a variety of ID turning operations of small-diameter holes

- Full lineup with 146 items of solid carbide boring bars
- Minimum boring diameter : $\varnothing D_m = 0.6 \text{ mm}$





Boring, profiling, chamfering

Type	Application	Shank diameter $\varnothing D_s$ (mm)	Min. boring dia. $\varnothing D_m$ (mm)					
			0	2	4	6	8	10
JBT (P. 10)	 Boring, profiling, chamfering	$\varnothing 4, \varnothing 7$	$\varnothing 0.6$					$\varnothing 7.0$
JBP (P. 11)	 Boring, chamfering	$\varnothing 4, \varnothing 7$			$\varnothing 2.8$			$\varnothing 5.0$
JBU (P. 12)	 Back boring, chamfering	$\varnothing 7$				$\varnothing 5.0$		
JBC (P. 12)	 Boring, 45° chamfering	$\varnothing 7$				$\varnothing 5.0$	$\varnothing 6.8$	
JBB (P. 13)	 Back boring	$\varnothing 4, \varnothing 7$			$\varnothing 3.0$	$\varnothing 7.0$		

Threading

Type	Application	Shank diameter $\varnothing D_s$ (mm)	Min. boring dia. $\varnothing D_m$ (mm)						
			0	2	4	6	8	10	
JBI (P. 14)	 Internal threading (Metric thread)	$\varnothing 4, \varnothing 7$				$\varnothing 4.0$	$\varnothing 7.0$		

Grooving

Type	Application	Shank diameter $\varnothing D_s$ (mm)	Groove widths W (mm)	Min. bore boring $\varnothing D_m$ (mm)										
				0	2	4	6	8	10	12	14	15		
JBG (P. 15)	 Grooving	$\varnothing 4, \varnothing 7$	0.5 - 2.0	$\varnothing 2.0$					$\varnothing 6.8$					
JBF (P. 17)	 Face grooving	$\varnothing 7$	1.0 - 3.0						$\varnothing 6.0$	$\varnothing 15.0$				
JBS (P. 18)	 Face grooving (for shaft)	$\varnothing 7$	2.0					$\varnothing 6.0$						
JBR (P.16)	 Boring, profiling (for full radius)	$\varnothing 7$	1.0				$\varnothing 5.0$					$\varnothing 6.8$		

Enhanced lineup with sophisticated designs offers high productivity in small parts machining!

High precision collet chuck sleeves

1. Excellent indexing accuracy



Innovative chucking system ensures excellent repeatability for precision machining

2. Double ended structure for 2 different shank sizes

One sleeve can accommodate either $\varnothing 4$ mm or $\varnothing 7$ mm shank boring bars

3. Easy tool changeover

Insert clamping screw can be accessed in 45° direction, making tool changeover easy while the sleeve is on the machine

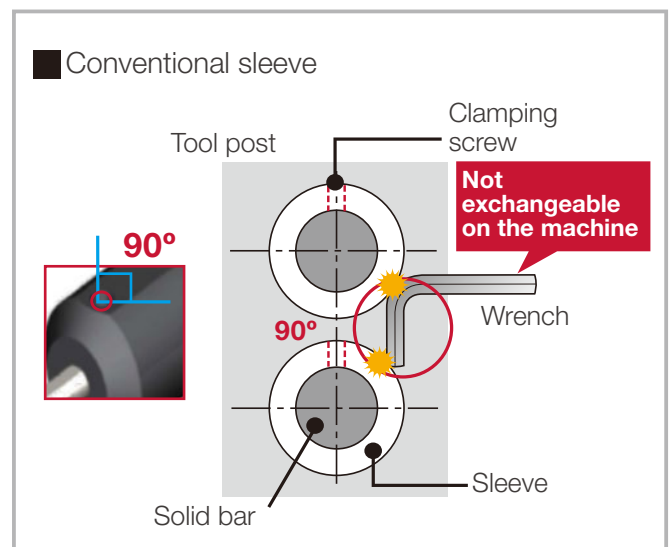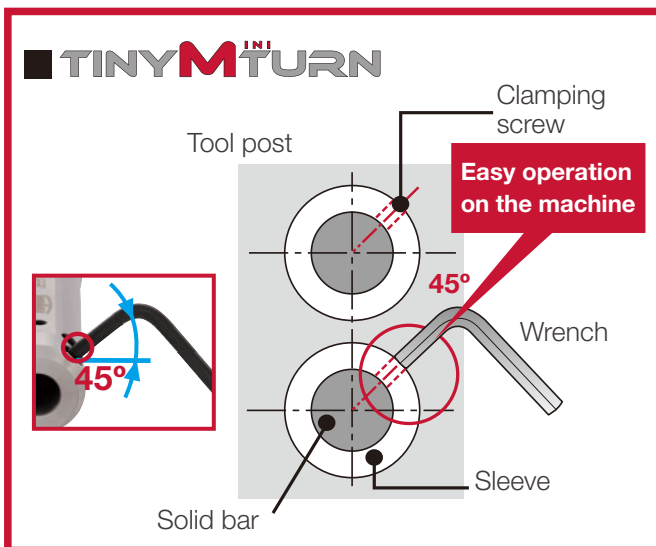

Functional TinyMiniTurn sleeves ensure stability in boring of small-diameter holes!

Sleeve designed for through-coolant supply

1. Easy connection with coolant tube

Rc1/8 threads are provided at the end of the sleeve for coolant tube connection

2. Designed for optimal overhang lengths

Sleeve and flat lengths are designed to provide optimal overhang lengths

3. High accuracy and efficient tool change

Designed to ensure repetitive accuracy as well as faster and efficient tool change without removing the sleeve from the tool post



New

Collet chuck sleeve

1. Easy tool changeover

Simple and easy tool changeover is possible on the machine


1. Place the tool in the sleeve
2. Tighten the cap with the special wrench

2. High indexing accuracy




Innovative collet chucking system ensures excellent repeatability for precision machining

3. Easy connection to coolant tube

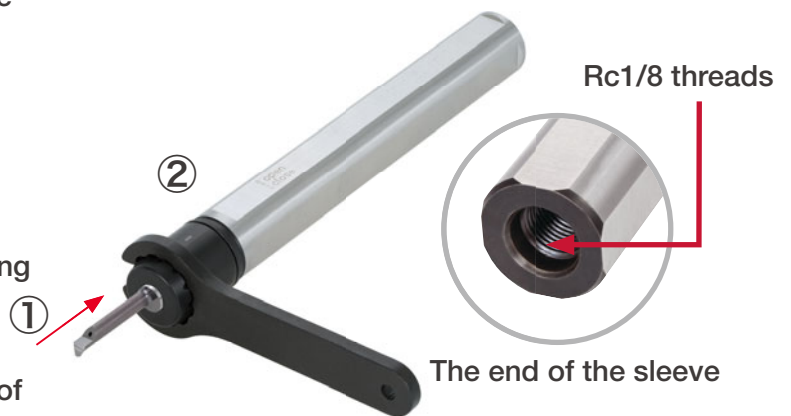Rc1/8 fitting threads is provided at the end of the sleeve. No additional connection is required for internal coolant supply.



Sleeve selections

Sleeve type	 JBBS	 JBBS-C	New  JBBSA-C
Clamping system	Screw	Screw	Built-in collet
Through-coolant	No	Yes	Yes
Adaptable shank size	Both $\phi 4$ mm and $\phi 7$ mm can be assembled on the same sleeve	Separate sleeves for $\phi 4$ mm and $\phi 7$ mm	Separate sleeves for $\phi 4$ mm and $\phi 7$ mm
Available sleeve diameters	10 sizes, $\phi 12.0$ mm - $\phi 25.4$ mm	7 sizes, $\phi 15.875$ mm - $\phi 25.4$ mm	2 sizes, $\phi 16$ mm and $\phi 20$ mm
Tool changeover in the machine	Efficient	Efficient	Very Efficient

Grade


SH730 PVD coated grade

Optimized combination of (Ti,Al)N coating and extremely tough carbide substrate ensures longer tool life and cutting edge integrity

Excellent chipping & welding resistance

Thin (Ti,Al)N coating layer is deposited evenly without sacrificing the cutting edge sharpness

Tough carbide substrate ensures resistance to plastic deformation

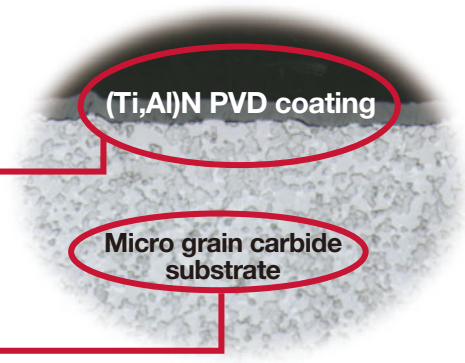

Application	ISO classification code	Grade	Substrate			Coating layer		Features
			Specific gravity	Hardness (HRA)	T.R.S. (GPa)	Main Composition	Thickness (μm)	
P Steel	P20 - P30	SH730	14.4	91.5	3.0	(Ti,Al)N	1.0	Versatile PVD coated grade for wide range of materials and applications.
M Stainless	M20 - M30	SH730	14.4	91.5	3.0	(Ti,Al)N	1.0	
K Cast iron	K20 - K30	SH730	14.4	91.5	3.0	(Ti,Al)N	1.0	
N Non-ferrous	N20 - N30	SH730	14.4	91.5	3.0	(Ti,Al)N	1.0	
S Superalloys	S20 - S30	SH730	14.4	91.5	3.0	(Ti,Al)N	1.0	

STANDARD CUTTING CONDITIONS



Boring, profiling, chamfering, back boring


ISO	Workpiece materials	Grade	Cutting speed V _c (m/min)	Feed f (mm/rev)
P	Low carbon steels (C15, C20 etc.)	SH730	40 - 140	0.01 - 0.08 *
	Carbon steels, Alloy steels (C55, 42CrMoS4 etc.)	SH730	40 - 140	0.01 - 0.08 *
	Prehardened steels (NAK80, PX5 etc.)	SH730	40 - 140	0.01 - 0.08 *
M	Stainless steels (X5CrNi18-9, X5CrNiMo17-12-2 etc.)	SH730	40 - 140	0.01 - 0.08 *
K	Grey cast irons (250, 300 etc.)	SH730	30 - 100	0.01 - 0.08 *
	Ductile cast irons (400-15, 600-3 etc.)	SH730	30 - 100	0.01 - 0.08 *
N	Aluminium alloys, Copper alloys Si < 12%	SH730	90 - 200	0.01 - 0.08 *
S	Titanium alloys (Ti-6Al-4V, etc.)	SH730	30 - 100	0.01 - 0.08 *
	Superalloys (Inconel718, etc.)	SH730	30 - 100	0.01 - 0.08 *

* JBTR/L04020004-D006,
JBTR/L04030004-D006
Max. f = 0.01 mm/rev




Threading (metric thread)

ISO	Workpiece materials	Grade	Cutting speed V _c (m/min)	Number of passes Pitch (mm)				
				0.5	0.75	1	1.25	1.5
P	Low carbon steels (C15, C20 etc.)	SH730	40 - 140	6 - 8	8 - 10	10 - 12	12 - 15	15 - 18
	Carbon steels, Alloy steels (C55, 42CrMoS4 etc.)	SH730	40 - 140	6 - 8	8 - 10	10 - 12	12 - 15	15 - 18
	Prehardened steels (NAK80, PX5 etc.)	SH730	40 - 140	6 - 8	8 - 10	10 - 12	12 - 15	15 - 18
M	Stainless steels (X5CrNi18-9, X5CrNiMo17-12-2 etc.)	SH730	40 - 140	8	10	12	15	18
K	Grey cast irons (250, 300 etc.)	SH730	30 - 100	7	9	12	14	17
	Ductile cast irons (400-15, 600-3 etc.)	SH730	30 - 100	7	9	12	14	17
N	Aluminium alloys, Copper alloys Si < 12%	SH730	90 - 200	6	8	10	12	15



Internal grooving

ISO	Workpiece materials	Grade	Cutting speed Vc (m/min)	Feed f (mm/rev)
P	Low carbon steels (C15, C20 etc.)	SH730	40 - 140	0.01 - 0.03
	Carbon steels, Alloy steels (C55, 42CrMoS4 etc.)	SH730	40 - 140	0.01 - 0.03
	Prehardened steels (NAK80, PX5 etc.)	SH730	40 - 140	0.01 - 0.03
M	Stainless steels (X5CrNi18-9, X5CrNiMo17-12-2 etc)	SH730	40 - 140	0.01 - 0.03
K	Grey cast irons (250, 300 etc.)	SH730	30 - 100	0.01 - 0.03
	Ductile cast irons (400-15, 600-3 etc.)	SH730	30 - 100	0.01 - 0.03
N	Aluminium alloys, Copper alloys Si < 12%	SH730	90 - 200	0.01 - 0.03
S	Titanium alloys Ti-6Al-4V etc.	SH730	30 - 100	0.01 - 0.03
	Superalloys (Inconel718, etc.)	SH730	30 - 100	0.01 - 0.03




Face grooving

ISO	Workpiece materials	Grade	Cutting speed Vc (m/min)	Feed f (mm/rev)
P	Low carbon steels (C15, C20 etc.)	SH730	40 - 140	0.01 - 0.05
	Carbon steels, Alloy steels (C55, 42CrMoS4 etc.)	SH730	40 - 140	0.01 - 0.05
	Prehardened steels (NAK80, PX5 etc.)	SH730	40 - 140	0.01 - 0.05
M	Stainless steels (X5CrNi18-9, X5CrNiMo17-12-2 etc)	SH730	40 - 140	0.01 - 0.05
K	Grey cast irons (250, 300 etc.)	SH730	30 - 100	0.01 - 0.05
	Ductile cast irons (400-15, 600-3 etc.)	SH730	30 - 100	0.01 - 0.05
N	Aluminium alloys, Copper alloys Si < 12%	SH730	90 - 200	0.01 - 0.05
S	Titanium alloys Ti-6Al-4V etc.	SH730	30 - 100	0.01 - 0.05
	Superalloys (Inconel718, etc.)	SH730	30 - 100	0.01 - 0.05

JBT R/L

Solid boring bars for boring, profiling & chamfering

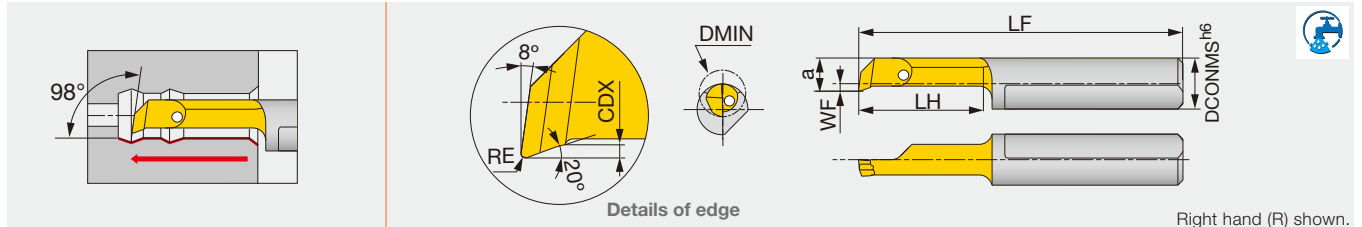


Right hand (R) shown.

Designation	SH730	DMIN	DCONMS	WF	a	LF	LH	CDX	RE ^{+0.05} ₀
JBTR04020004-D006	●	0.6	4	-	0.5	18.5	2	0.08	0.04
JBTR04030004-D006	●	0.6	4	-	0.5	19.5	3	0.08	0.04
JBTR04045005-D010	●	1	4	-	0.9	21	4.5	0.1	0.05
JBTR04065005-D010	●	1	4	-	0.9	23	6.5	0.1	0.05
JBTR04040005-D020	●	2	4	-	1.7	20.5	4	0.1	0.05
JBTR04090005-D020	●	2	4	-	1.7	25.5	9	0.1	0.05
JBTR04140005-D020	●	2	4	-	1.7	30.5	14	0.1	0.05
JBTR/L04090010-D028	●	2.8	4	0.9	2.6	25.5	9	0.2	0.1
JBTR/L04150010-D028	●	2.8	4	0.9	2.6	31.5	15	0.2	0.1
JBTR/L04190010-D028	●	2.8	4	0.9	2.6	35.5	19	0.2	0.1
JBTR/L04090010-D040	●	4	4	1.5	3.5	25.5	9	0.3	0.1
JBTR/L04150010-D040	●	4	4	1.5	3.5	31.5	15	0.3	0.1
JBTR/L04190010-D040	●	4	4	1.5	3.5	35.5	19	0.3	0.1
JBTR04230010-D040	●	4	4	1.5	3.5	39.5	23	0.3	0.1
JBTR04270010-D040	●	4	4	1.5	3.5	43.5	27	0.3	0.1
JBTR/L07090015-D050	●	5	7	0.9	4.4	25	9	0.5	0.15
JBTR/L07140015-D050	●	5	7	0.9	4.4	30	14	0.5	0.15
JBTR/L07190015-D050	●	5	7	0.9	4.4	35	19	0.5	0.15
JBTR/L07240015-D050	●	5	7	0.9	4.4	40	24	0.5	0.15
JBTR/L07290015-D050	●	5	7	0.9	4.4	45	29	0.5	0.15
JBTR07340015-D050	●	5	7	0.9	4.4	50	34	0.5	0.15
JBTR/L07140015-D060	●	6	7	1.8	5.3	30	14	0.5	0.15
JBTR/L07210015-D060	●	6	7	1.8	5.3	37	21	0.5	0.15
JBTR/L07240015-D060	●	6	7	1.8	5.3	40	24	0.5	0.15
JBTR/L07290015-D060	●	6	7	1.8	5.3	45	29	0.5	0.15
JBTR07340015-D060	●	6	7	1.8	5.3	50	34	0.5	0.15
JBTR07410015-D060	●	6	7	1.8	5.3	57	41	0.5	0.15
JBTR/L07190015-D068	●	6.8	7	2.8	6.3	35	19	0.6	0.15
JBTR07240015-D068	●	6.8	7	2.8	6.3	40	24	0.6	0.15
JBTR/L07290015-D068	●	6.8	7	2.8	6.3	45	29	0.6	0.15
JBTR/L07340015-D070	●	7	7	2.8	6.3	50	34	0.6	0.15
JBTR07390015-D070	●	7	7	2.8	6.3	55	39	0.6	0.15
JBTR07440015-D070	●	7	7	2.8	6.3	60	44	0.6	0.15
JBTR07490015-D070	●	7	7	2.8	6.3	65	49	0.6	0.15

● : Line up

JBP R

Solid boring bars for boring & chamfering

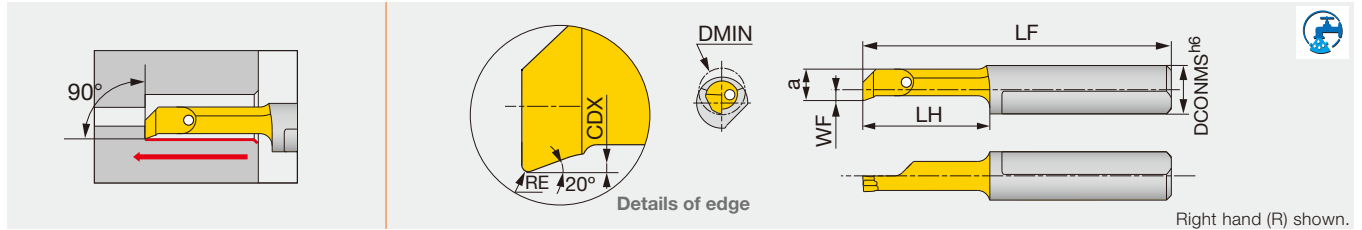


Designation	SH730	DMIN	DCONMS	WF	a	LF	LH	CDX	RE $^{+0.05}_0$
JBPR04090010-D028	●	2.8	4	0.9	2.6	25.5	9	0.2	0.1
JBPR04150010-D028	●	2.8	4	0.9	2.6	31.5	15	0.2	0.1
JBPR04090010-D040	●	4	4	1.5	3.5	25.5	9	0.3	0.1
JBPR04150010-D040	●	4	4	1.5	3.5	31.5	15	0.3	0.1
JBPR07140015-D050	●	5	7	0.9	4.4	30	14	0.5	0.15
JBPR07190015-D050	●	5	7	0.9	4.4	35	19	0.5	0.15

● : Line up

JBU R

Solid boring bars for back boring & chamfering

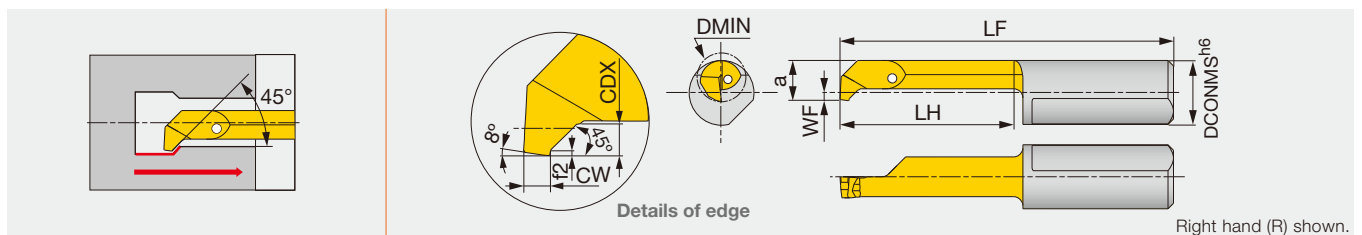


Designation	SH730	DMIN	DCONMS	WF	a	LF	LH	f2	CDX	CW $^{+0.05}_0$
JBUR07140010-D050	●	5	7	0.9	4.4	30	14	0.2	1	1
JBUR07190010-D050	●	5	7	0.9	4.4	35	19	0.2	1	1

● : Line up

JBC R

Solid boring bars for boring & 45° chamfering

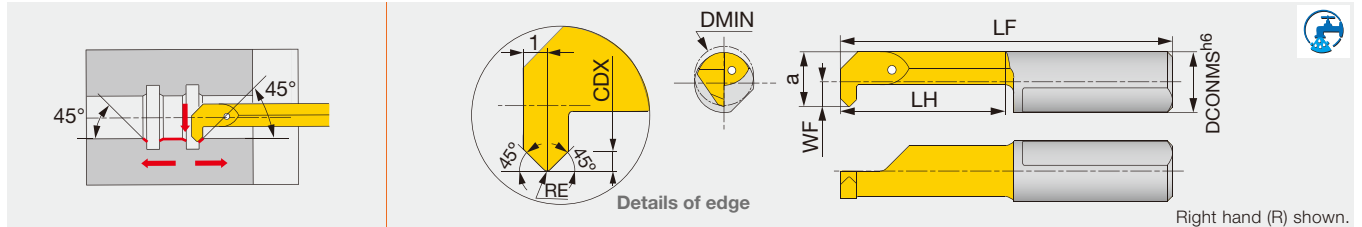


Designation	SH730	DMIN	DCONMS	WF	a	LF	LH	CDX	RE ±0.05
JBCR07140020-D050	●	5	7	0.9	4.4	30	14	0.7	0.2
JBCR07190020-D050	●	5	7	0.9	4.4	35	19	0.7	0.2
JBCR07190020-D068	●	6.8	7	2.8	6.3	35	19	0.7	0.2

● : Line up

JBB R

Solid boring bars for back boring

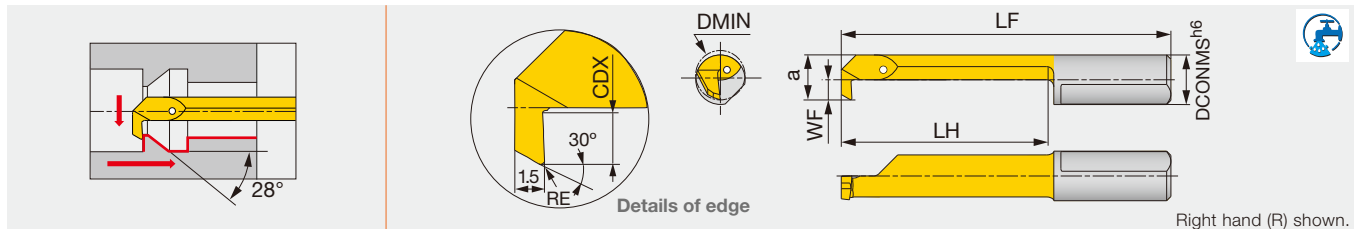


Designation	SH730	DMIN	DCONMS	WF	a	LF	LH	CDX	RE ±0.05
JBBR04140020-D030	●	3	4	0.6	2.6	30	14	0.5	0.2
JBBR04190020-D030	●	3	4	0.6	2.6	35	19	0.5	0.2
JBBR04140015-D040	●	4	4	1.5	3.5	30	14	0.8	0.15
JBBR04240015-D040	●	4	4	1.5	3.5	40	24	0.8	0.15
JBBR07190020-D050	●	5	7	0.9	4.4	35	19	1	0.2
JBBR07290020-D050	●	5	7	0.9	4.4	45	29	1	0.2
JBBR07190020-D060	●	6	7	1.8	5.3	35	19	1.8	0.2
JBBR07290020-D060	●	6	7	1.8	5.3	45	29	1.8	0.2
JBBR07190020-D070	●	7	7	2.8	6.3	35	19	2.5	0.2
JBBR07290020-D070	●	7	7	2.8	6.3	45	29	2.5	0.2

● : Line up

JBIR R

Solid boring bars for threading (metric)

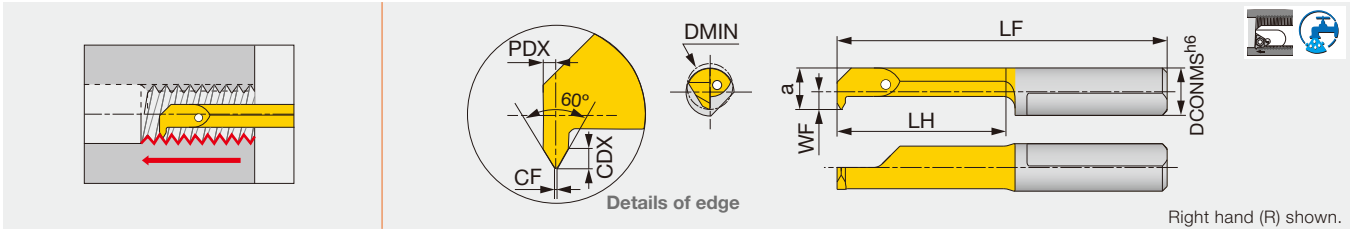


Right hand (R) shown.

Designation	SH730	Pitch	DMIN	CF ⁰ _{-0.02}	DCONMS	WF	a	LF	LH	CDX	PDX
JBIR04140050-D040	●	0.5	4	0.06	4	1.5	3.5	30	14	0.3	0.35
JBIR07140050-D050	●	0.5	5	0.06	7	0.9	4.4	30	14	0.3	0.35
JBIR07140075-D050	●	0.75	5	0.09	7	0.9	4.4	30	14	0.4	0.45
JBIR07140100-D048	●	1	4.8	0.12	7	0.9	4.4	30	14	0.6	0.55
JBIR07140100-D060	●	1	6	0.12	7	1.8	5.3	30	14	0.6	0.55
JBIR07140125-D060	●	1.25	6	0.15	7	1.8	5.3	30	14	0.7	0.65
JBIR07140150-D060	●	1.5	6	0.18	7	1.8	5.3	30	14	0.8	0.75
JBIR07140150-D070	●	1.5	7	0.18	7	2.8	6.3	30	14	0.8	0.75

● : Line up

JBG R/L

Solid boring bars for internal grooving

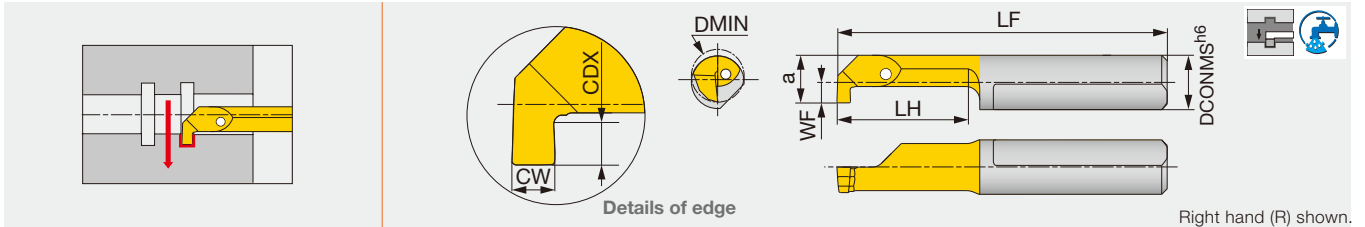


Designation	SH730	Cw ^{+0.05} ₀	DMIN	DCONMS	WF	a	LF	LH	CDX
JBGR04050050-D020	●	0.5	2	4	0.2	1.8	21	5	0.4
JBGR04100050-D020	●	0.5	2	4	0.2	1.8	26	10	0.4
JBGR04050070-D030	●	0.7	3	4	0.7	2.7	21	5	0.6
JBGR04100070-D030	●	0.7	3	4	0.7	2.7	26	10	0.6
JBGR04090100-D040	●	1	4	4	1.5	3.5	25.5	9	0.8
JBGR04150100-D040	●	1	4	4	1.5	3.5	31.5	15	0.8
JBGR07090100-D050	●	1	5	7	0.9	4.4	25	9	1
JBGR07140100-D050	●	1	5	7	0.9	4.4	30	14	1
JBGR07090150-D050	●	1.5	5	7	0.9	4.4	25	9	1
JBGR07140150-D050	●	1.5	5	7	0.9	4.4	30	14	1
JBGR07090200-D050	●	2	5	7	0.9	4.4	25	9	1
JBGR07190200-D050	●	2	5	7	0.9	4.4	35	19	1
JBGR/L07090100-D060	●	1	6	7	1.8	5.3	25	9	1.8
JBGR07140100-D060	●	1	6	7	1.8	5.3	30	14	1.8
JBGR07210100-D060	●	1	6	7	1.8	5.3	37	21	1.8
JBGR07290100-D060	●	1	6	7	1.8	5.3	45	29	1.8
JBGR/L07090150-D060	●	1.5	6	7	1.8	5.3	25	9	1.8
JBGR07140150-D060	●	1.5	6	7	1.8	5.3	30	14	1.8
JBGR07210150-D060	●	1.5	6	7	1.8	5.3	37	21	1.8
JBGR07240150-D060	●	1.5	6	7	1.8	5.3	40	24	1.8
JBGR07290150-D060	●	1.5	6	7	1.8	5.3	45	29	1.8
JBGR07090200-D060	●	2	6	7	1.8	5.3	25	9	1.8
JBGR07140200-D060	●	2	6	7	1.8	5.3	30	14	1.8
JBGR07210200-D060	●	2	6	7	1.8	5.3	37	21	1.8
JBGR07240200-D060	●	2	6	7	1.8	5.3	40	24	1.8
JBGR07290200-D060	●	2	6	7	1.8	5.3	45	29	1.8
JBGR07090100-D068	●	1	6.8	7	2.7	6.2	25	9	2.5
JBGR07140100-D068	●	1	6.8	7	2.7	6.2	30	14	2.5
JBGR07210100-D068	●	1	6.8	7	2.7	6.2	37	21	2.5
JBGR07090150-D068	●	1.5	6.8	7	2.7	6.2	25	9	2.5
JBGR07140150-D068	●	1.5	6.8	7	2.7	6.2	30	14	2.5
JBGR07210150-D068	●	1.5	6.8	7	2.7	6.2	37	21	2.5
JBGR07290150-D068	●	1.5	6.8	7	2.7	6.2	45	29	2.5
JBGR07090200-D068	●	2	6.8	7	2.7	6.2	25	9	2.5
JBGR/L07140200-D068	●	2	6.8	7	2.7	6.2	30	14	2.5
JBGR07210200-D068	●	2	6.8	7	2.7	6.2	37	21	2.5
JBGR07250200-D068	●	2	6.8	7	2.7	6.2	40	25	2.5
JBGR07290200-D068	●	2	6.8	7	2.7	6.2	45	29	2.5

* Corner radius : less than 0.1 mm.

● : Line up

JBFR R/L

Solid boring bars for face grooving

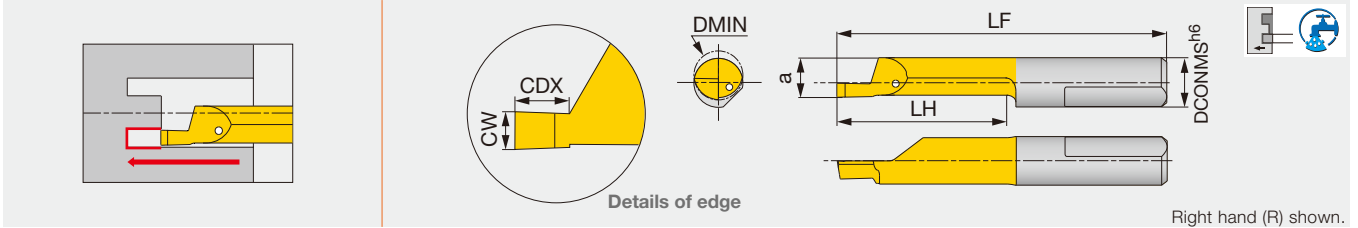


Designation	SH730	Cw $^{+0.05}_0$	DMIN	DCONMS	a	LF	LH	CDX
JBFR07110100-D060	●	1	6	7	5.2	26	10	1.5
JBFR07110150-D060	●	1.5	6	7	5.2	26	10	2
JBFR07110200-D060	●	2	6	7	5.2	26	10	3
JBFR07110100-D080	●	1	8	7	5.9	27	11	1.5
JBFR07110150-D080	●	1.5	8	7	5.9	27	11	2.5
JBFR07110200-D080	●	2	8	7	5.9	27	11	3
JBFR07110250-D080	●	2.5	8	7	5.9	27	11	3.5
JBFR07110300-D080	●	3	8	7	5.9	27	11	3.5
JBFR/L07210150-D080	●	1.5	8	7	5.9	36	21	2.5
JBFR07210200-D080	●	2	8	7	5.9	36	21	3
JBFR07210250-D080	●	2.5	8	7	5.9	36	21	3.5
JBFR07210300-D080	●	3	8	7	5.9	36	21	3.5
JBFR/L07300200-D080	●	2	8	7	5.9	46	30	3
JBFR07300300-D080	●	3	8	7	5.9	46	30	3.5
JBFR07200200-D080	●	2	8	7	5.9	36	20	3
JBFR07200250-D150	●	2.5	15	7	5.9	36	20	20
JBFR07200300-D150	●	3	15	7	5.9	36	20	20
JBFR07300300-D150	●	3	15	7	5.9	46	30	30

* Corner radius : less than 0.1 mm.

● : Line up

JBS R

Solid boring bars for face grooving (for shaft machining)

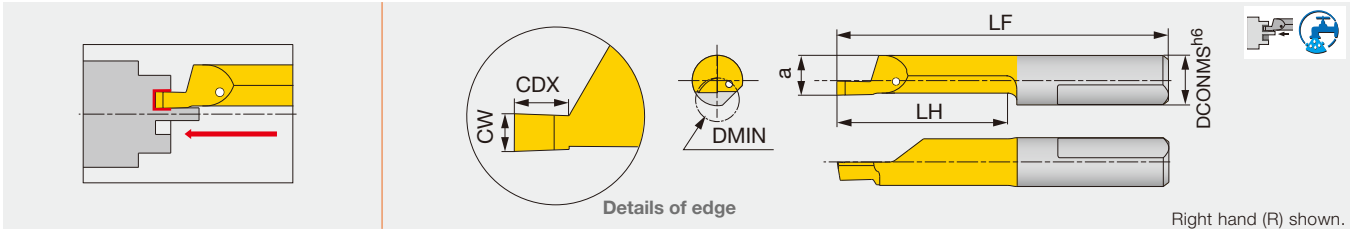

Right hand (R) shown.


Designation	SH730	Cw $^{+0.05}_0$	DMIN	DCONMS	a	LF	LH	CDX
JBRSR07200200-D060	●	2	6	7	5.2	36	20	4

* Corner radius : less than 0.1 mm.

● : Line up

JBR R

Solid boring bars for Boring & profiling (full radius type)

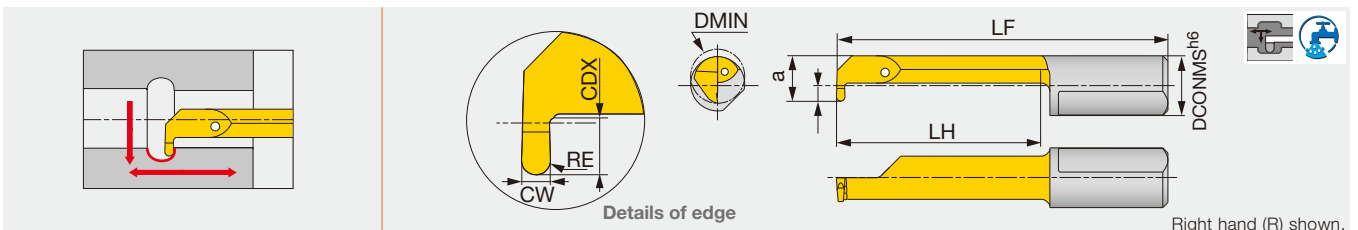

Right hand (R) shown.


Designation	SH730	Cw $^{+0.05}_0$	DMIN	DCONMS	WF	a	LF	LH	CDX	RE
JBRR07190050-D050	●	1	5	7	0.9	4.4	35	19	1	0.5
JBRR07240050-D060	●	1	6	7	1.8	5.3	40	24	1.8	0.5
JBRR07290050-D068	●	1	6.8	7	2.8	6.3	45	29	2.5	0.5

● : Line up

JBBSA-C

Collet chuck sleeve for solid carbide bars

New

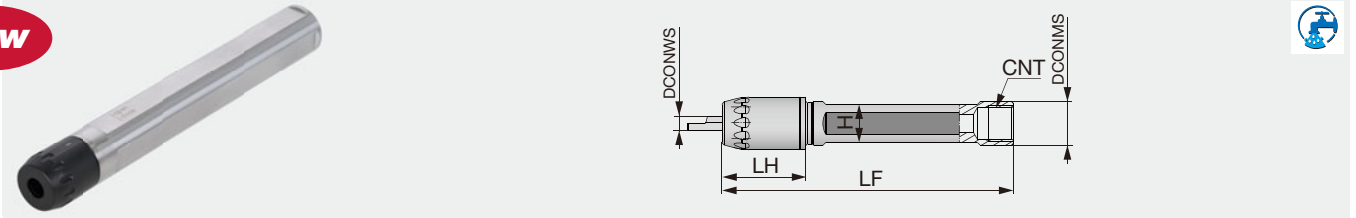

Designation	DCONMS	DCONWS	LF	LH	H	CNT
JBBSA16-4-L100C	16	4	100	23	14	Rc1/8
JBBSA16-7-L100C	16	7	100	23	14	Rc1/8
JBBSA20-4-L120C	20	4	120	23	18	Rc1/8
JBBSA20-7-L120C	20	7	120	23	18	Rc1/8


SPARE PARTS



Designation	Cap	Wrench
JBBSA**-4-L100C	CAP-A-4	WRENCH-A-4
JBBSA**-7-L100C	CAP-A-7	WRENCH-A-7

JBBS

Sleeve for external coolant supply

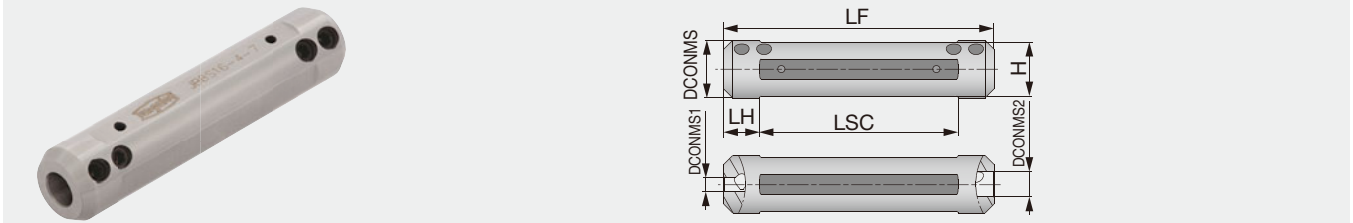

Designation	DCONMS	DCONWS1	DCONWS2	LF	LH	LSC	H
JBBS12-4-4	12	4	4	75	10	55	10.3
JBBS127-4-4	12.7	4	4	76.2	10	56.2	11.6
JBBS14-4-4	14	4	4	75	10	55	12
JBBS159-4-7	15.875	4	7	76.2	10	56.2	14
JBBS16-4-7	16	4	7	75	10	55	15
JBBS19-4-7	19.05	4	7	89	10	69	17.2
JBBS20-4-7	20	4	7	90	10	70	18
JBBS22-4-7	22	4	7	90	10	70	20
JBBS25-4-7	25	4	7	100	10	80	23
JBBS254-4-7	25.4	4	7	90	10	70	23.4


SPARE PARTS



Designation	Clamping screw	Wrench
JBBS12-4-4	SSHM5-4PF-S	P-2.5
JBBS127-4-4	SSHM5-6PF-S	P-2.5
JBBS14-4-4	SSHM5-4PF-S	P-2.5
JBBS*-4-7	SSHM5-6PF-S	P-2.5

JBBS-C

Sleeve for internal coolant supply

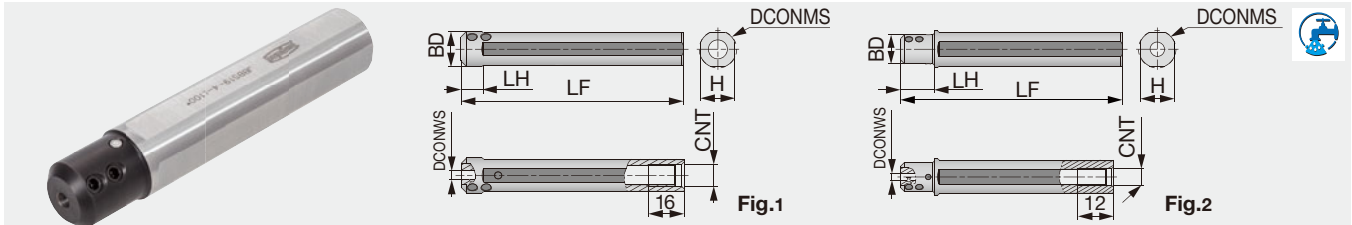

Designation	DCONMS	BD	DCONWS	LF	LH	H	CNT	Fig
JBBS159-4-L100C	15.875	15.875	4	100	10	14.58	Rc1/8	1
JBBS159-7-L100C	15.875	15.875	7	100	10	14.58	Rc1/8	1
JBBS16-4-L100C	16	16	4	100	10	15	Rc1/8	1
JBBS16-7-L100C	16	16	7	100	10	15	Rc1/8	1
JBBS19-4-L100C	19.05	17.5	4	100	20	17.2	Rc1/8	2
JBBS19-7-L100C	19.05	17.5	7	100	20	17.2	Rc1/8	2
JBBS20-4-L100C	20	17.5	4	100	20	18	Rc1/8	2
JBBS20-7-L100C	20	17.5	7	100	20	18	Rc1/8	2
JBBS22-4-L100C	22	17.5	4	100	20	20	Rc1/8	2
JBBS22-7-L100C	22	17.5	7	100	20	20	Rc1/8	2
JBBS25-4-L100C	25	18	4	100	23	23	Rc1/8	2
JBBS25-7-L100C	25	18	7	100	23	23	Rc1/8	2
JBBS254-4-L100C	25.4	18	4	100	23	23.4	Rc1/8	2
JBBS254-7-L100C	25.4	18	7	100	23	23.4	Rc1/8	2


SPARE PARTS



Designation	Clamping screw	Wrench
JBBS**-4-L100C	SSHM5-6PF-S	P-2.5
JBBS**-7-L100C	SSHM5-4PF-S	P-2.5

KIT-TINYTURN-GENERAL

General kit





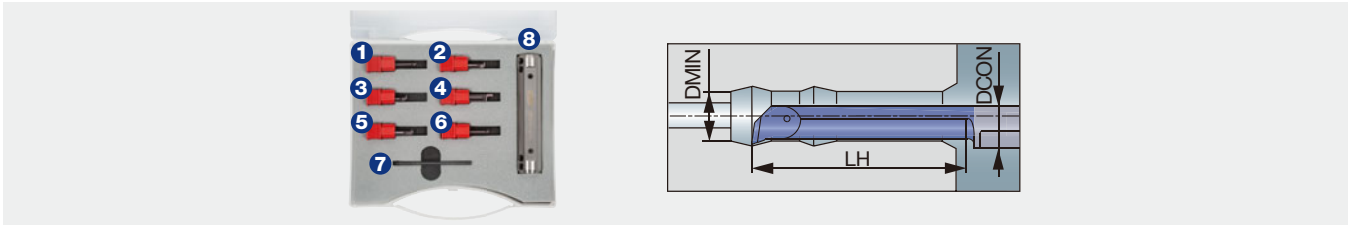


Cat. No.

Kit

KIT-TINYTURN-GENERAL

General

Applications	Cat. No.	DMIN	DCON	LH	RE	CW	Pitch
 Boring	① JBTR04150010-D040	4.0	4.0	15.0	0.1	-	-
	② JBTR07140015-D060	6.0	7.0	14.0	0.15	-	-
 Boring 45° Chamfering	⑤ JBGR07140020-D050	5.0	7.0	14.0	0.2	-	-
 Internal Grooving	③ JBGR07090100-D060	6.0	7.0	9.0	-	1.0	-
 Face Grooving	④ JBFR07110200-D060	6.0	7.0	11.0	-	2.0	-
 Threading	⑥ JBIR07140125-D060	6.0	7.0	14.0	-	1.25	1.25


Parts	Cat. No.
Wrench	⑦ P-2.5

Parts	Cat. No.
Sleeve	⑧ JBBS20-4-7



KIT-TINYTURN-THREADING

Boring, Threading and Grooving kit



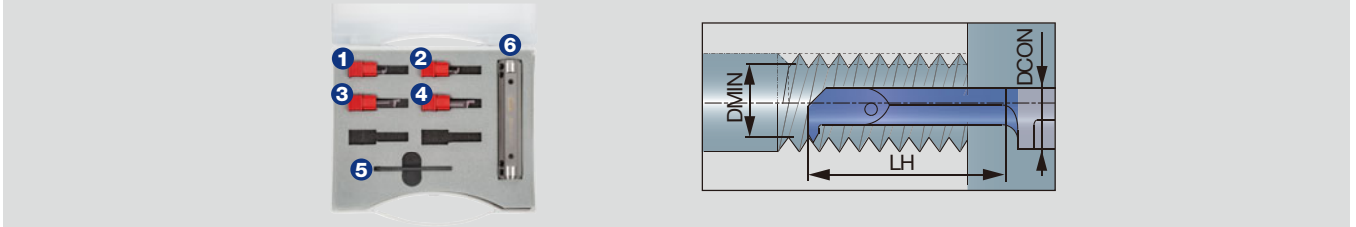


Cat. No.

Kit

KIT-TINYTURN-THREADING

Boring, Threading and Grooving

Applications	Cat. No.	DMIN	DCON	LH	RE	CW	Pitch
 Boring	① JBTR04150010-D040	4.0	4.0	15.0	0.1	-	-
 Threading	③ JBIR04140050-D040	4.0	4.0	14.0	-	-	0.5
	④ JBIR07140075-D050	5.0	7.0	14.0	-	-	0.75
 Internal Grooving	② JBGR04150100-D040	4.0	4.0	15.0	-	1.0	-


Parts	Cat. No.
Wrench	⑤ P-2.5

Parts	Cat. No.
Sleeve	⑥ JBBS20-4-7



KIT-TINYTURN-GROOVING

Grooving kit


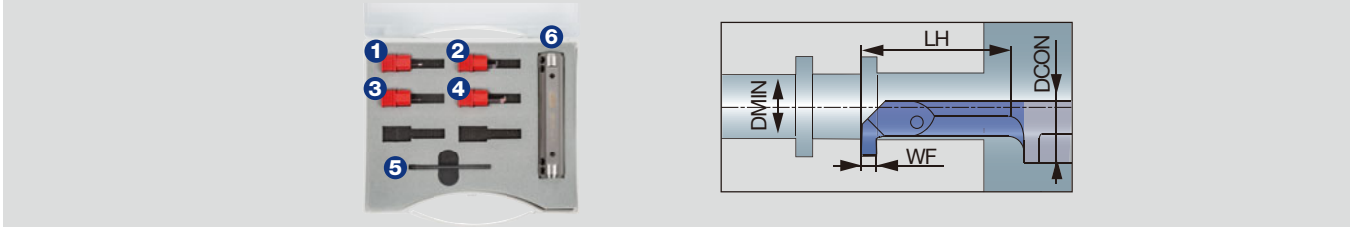


Cat. No.

Kit

KIT-TINYTURN-GROOVING

Grooving

Applications	Cat. No.	DMIN	DCON	LH	RE
 Internal Grooving	❶ JBGR07090100-D060	6.0	7.0	9.0	1.0
	❷ JBGR07140200-D068	6.8	7.0	14.0	2.0
 Face Grooving	❸ JBFR07110150-D060	6.0	7.0	15.0	1.5
	❹ JBFR07110200-D060	6.0	7.0	11.0	2.0

Parts	Cat. No.
Wrench	❺ P-2.5

Parts	Cat. No.
Sleeve	❻ JBBS20-4-7



Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima, 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy America, Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloy.com/us

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy de Mexico S.A.

C Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx

Tungaloy do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy Germany GmbH

An der Alten Ziegelei 1
D-40789 Monheim, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.de

Tungaloy France S.A.S.

ZA Courtaboeuf - Le Rio
1 rue de la Terre de feu
F-91952 Courtaboeuf Cedex, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
Fax: +34 93 876 2798
www.tungaloy.es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
www.tungaloy.se

Tungaloy Rus, LLC

115432, Moscow, Andropov Avenue, 18,
building 7, 11th floor (office 3). Metro station
"Technopark". Business center «I-Land».
Phone: +7-499-683-01-80/81
www.tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

ul. Genewska 24
03-963 Warszawa, Poland
Phone: +48-22-617-0890
Fax: +48-22-617-0890
www.tungaloy.com/pl

Tungaloy U.K. Ltd

Gallan Park
Watling Street
Cannock WS11 0XG, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk
salesinfo@tungaloyuk.co.uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu
info@tungaloytools.hu

Tungaloy Turkey

Dudullu OSB 4. Cad No:4
34776 Umraniye Istanbul, TURKEY
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com.tr
info@tungaloy.com.tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy-benelux.com

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430 Samobor
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.hr

Tungaloy Cutting Tool (Shanghai) Co.,Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.com/cn

Tungaloy Cutting Tools Taiwan Co.,Ltd.

9F.No.293, Zhongyang Rd.
Xinzhuan Dist.
New Taipei City 24251
Phone: +886-2-8521-9986
Fax: +886-2-8521-8935
www.tungaloy.com/tw

Tungaloy Cutting Tool (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.co.th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/sg

Tungaloy Vietnam

LE04.38, Lexington Residence
67 Mai Chi Tho St., Dist. 2,
Ho Chi Minh City, Vietnam
Phone: +84-2837406660
www.tungaloy.com/sg

Tungaloy India Pvt. Ltd.

Indiabulls Finance Centre,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai -400013, India
Phone: +91-22-6124-8804
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

PO Box 2232, 68/1470
Ferntree Gully Road, Knoxfield
Victoria 3180, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com.au

PT. Tungaloy Indonesia

Kompleks Grand Wisata Block AA-10 No.3-5
Cibitung
Bekasi 17510, Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id



www.tungaloy.com

follow us at:
facebook.com/tungaloyjapan
twitter.com/tungaloyjapan

To see this product in action visit:

Tung-TV

www.youtube.com/tungaloycorporation

Distributed by:



DOWNLOAD
Dr. Carbide
Tungaloy



Available on the
App Store



GET IT ON
Google play



AS9100 Certified
78006
2015.11.04
ISO14001 Certified
EC97J1123
1997.11.26

TINY^{INI}MTURN

Tungaloy Report No. 402S1-G

New innovative sleeve with 4 coolant holes





New sleeve offers high chip evacuation and stable tool life with 4 coolant holes

■ New concept sleeve

- 4 coolant holes offers super high chip evacuation
- No chip jamming, No machine downtime
- Stable and longer tool life
- Effective for various applications
internal turning, grooving, threading etc.



■ Super high chip evacuation

Internal coolant sleeve




Excellent chip evacuation!




- No jamming
- Smoothly start the next part

Conventional sleeve (External coolant)



- Chips are jamming
- Need to stop machine


Stable tool life

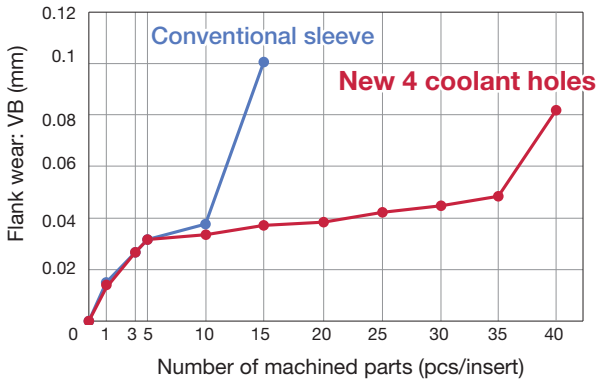

M


Sleeve : **NEW** JBBS19-7-L100C-4N (4 holes internal coolant)
 Conventional JBBS19-4-7 (External coolant)
 Solid bar : JBTR07210015-D060 SH730
 Workpiece material : SUS316L
 Cutting speed : $V_c = 60$ m/min
 Feed : $f = 0.02$ mm/rev
 Depth of cut : $a_p = 0.5$ mm
 Coolant : Wet

New JBBS19-7-L100C-4N

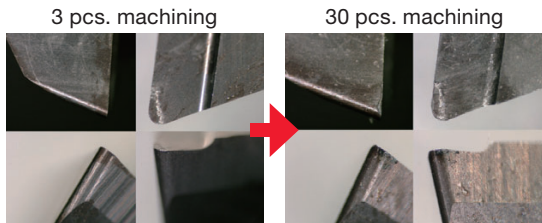

Stable tool life

Conventional JBBS19-4-7

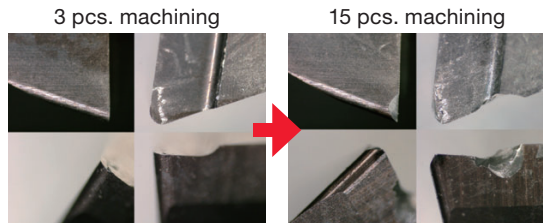


Sudden fracture by chip jamming

4 coolant holes prevent chip jamming and sudden fracture by super high chip evacuation

New

JBBS-4N

Sleeve for internal coolant supply with 4 coolant holes

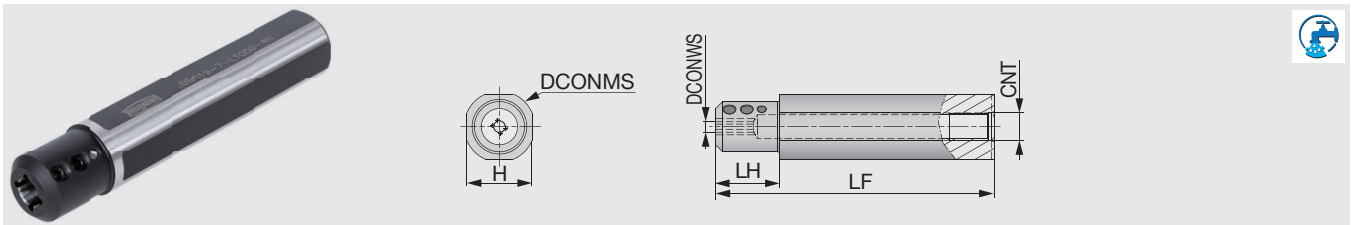


Designation	DCONMS	DCONWS	LF	LH	H	CNT
JBBS12-4-L80C-4N	12	4	80	10	10.3	Rc1/16
JBBS127-4-L80C-4N	12.7	4	80	10	11.6	Rc1/16
JBBS14-4-L80C-4N	14	4	80	10	12	Rc1/8
JBBS159-4-L100C-4N	15.875	4	100	10	14.58	Rc1/8
JBBS159-7-L100C-4N	15.875	7	100	10	14.58	Rc1/8
JBBS16-4-L100C-4N	16	4	100	10	15	Rc1/8
JBBS16-7-L100C-4N	16	7	100	10	15	Rc1/8
JBBS19-4-L100C-4N	19.05	4	100	20	17.2	Rc1/8
JBBS19-7-L100C-4N	19.05	7	100	20	17.2	Rc1/8
JBBS20-4-L100C-4N	20	4	100	20	18	Rc1/8
JBBS20-7-L100C-4N	20	7	100	20	18	Rc1/8
JBBS22-4-L100C-4N	22	4	100	20	20	Rc1/8
JBBS22-7-L100C-4N	22	7	100	20	20	Rc1/8
JBBS25-4-L100C-4N	25	4	100	23	23	Rc1/8
JBBS25-7-L100C-4N	25	7	100	23	23	Rc1/8
JBBS254-4-L100C-4N	25.4	4	100	23	23.4	Rc1/8
JBBS254-7-L100C-4N	25.4	7	100	23	23.4	Rc1/8

SPARE PARTS

Designation	Clamping screw	Wrench
JBBS**-4-L**C-4N	SSHM5-6PF-S	P-2.5
JBBS**-7-L**C-4N	SSHM5-4PF-S	P-2.5

JBBSA-C

Collet chuck sleeve with internal coolant supply - Line up expansion

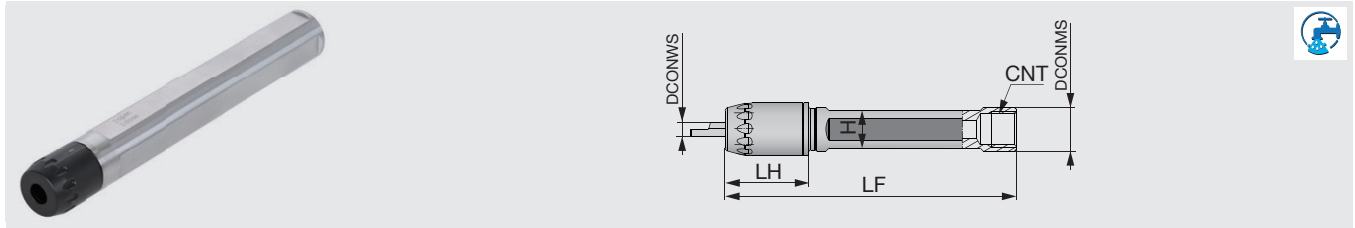

Designation	DCONMS	DCONWS	LF	LH	H	CNT
JBBSA12-4-L80C	12	4	80	23	10.3	Rc1/8
JBBSA127-4-L80C	12.7	4	80	23	11.6	Rc1/8
JBBSA14-4-L80C	14	4	80	23	12	Rc1/8
JBBSA159-4-L100C	15.875	4	100	23	14	Rc1/8
JBBSA159-7-L100C	15.875	7	100	23	14	Rc1/8
JBBSA16-4-L100C	16	4	100	23	14	Rc1/8
JBBSA16-7-L100C	16	7	100	23	14	Rc1/8
JBBSA19-4-L120C	19.05	4	120	23	17.2	Rc1/8
JBBSA19-7-L120C	19.05	7	120	23	17.2	Rc1/8
JBBSA20-4-L120C	20	4	120	23	18	Rc1/8
JBBSA20-7-L120C	20	7	120	23	18	Rc1/8
JBBSA22-4-L135C	22	4	135	23	20	Rc1/8
JBBSA22-7-L135C	22	7	135	23	20	Rc1/8
JBBSA25-4-L135C	25	4	120	23	23	Rc1/8
JBBSA25-7-L135C	25	7	120	23	23	Rc1/8
JBBSA254-4-L120C	25.4	4	120	23	23.4	Rc1/8
JBBSA254-7-L120C	25.4	7	120	23	23.4	Rc1/8

SPARE PARTS



Designation	Cap	Wrench
JBBSA**-4-L...	CAP-A-4	WRENCH-A-4
JBBSA**-7-L...	CAP-A-7	WRENCH-A-7



www.tungaloy.com

follow us at:
facebook.com/tungaloyjapan
twitter.com/tungaloyjapan
www.youtube.com/tungaloycorporation



AS9100 Certified
 78006
 2015.11.04
 ISO 14001 Certified
 EC97J1123
 1997.11.26

Distributed by:



FIND US ON THE CLOUD!
machingcloud.com

