


CONTENTS



General product information

[View](#)

Added products



TCL18, TCG18

Expanded groove width options for [TCL18](#) and [TCG18](#) inserts

[View](#)



TCF18

Latest additions of [TCF18](#) inserts and [holders](#) for [small-diameter face grooving](#) on Swiss lathes

[View](#)



TCL38

TetraForce-Cut [TCL38](#) insert for deep grooving and parting processes

[View](#)

GrooveLine



TETRAMCUT/TETRAFCUT


www.tungaloy.com

Tungaloy Report No. 416-G

Now offers **TCL18** and **TCL27**
geometry for low cutting force



INDUSTRY 4.0
FEED the SPEED!

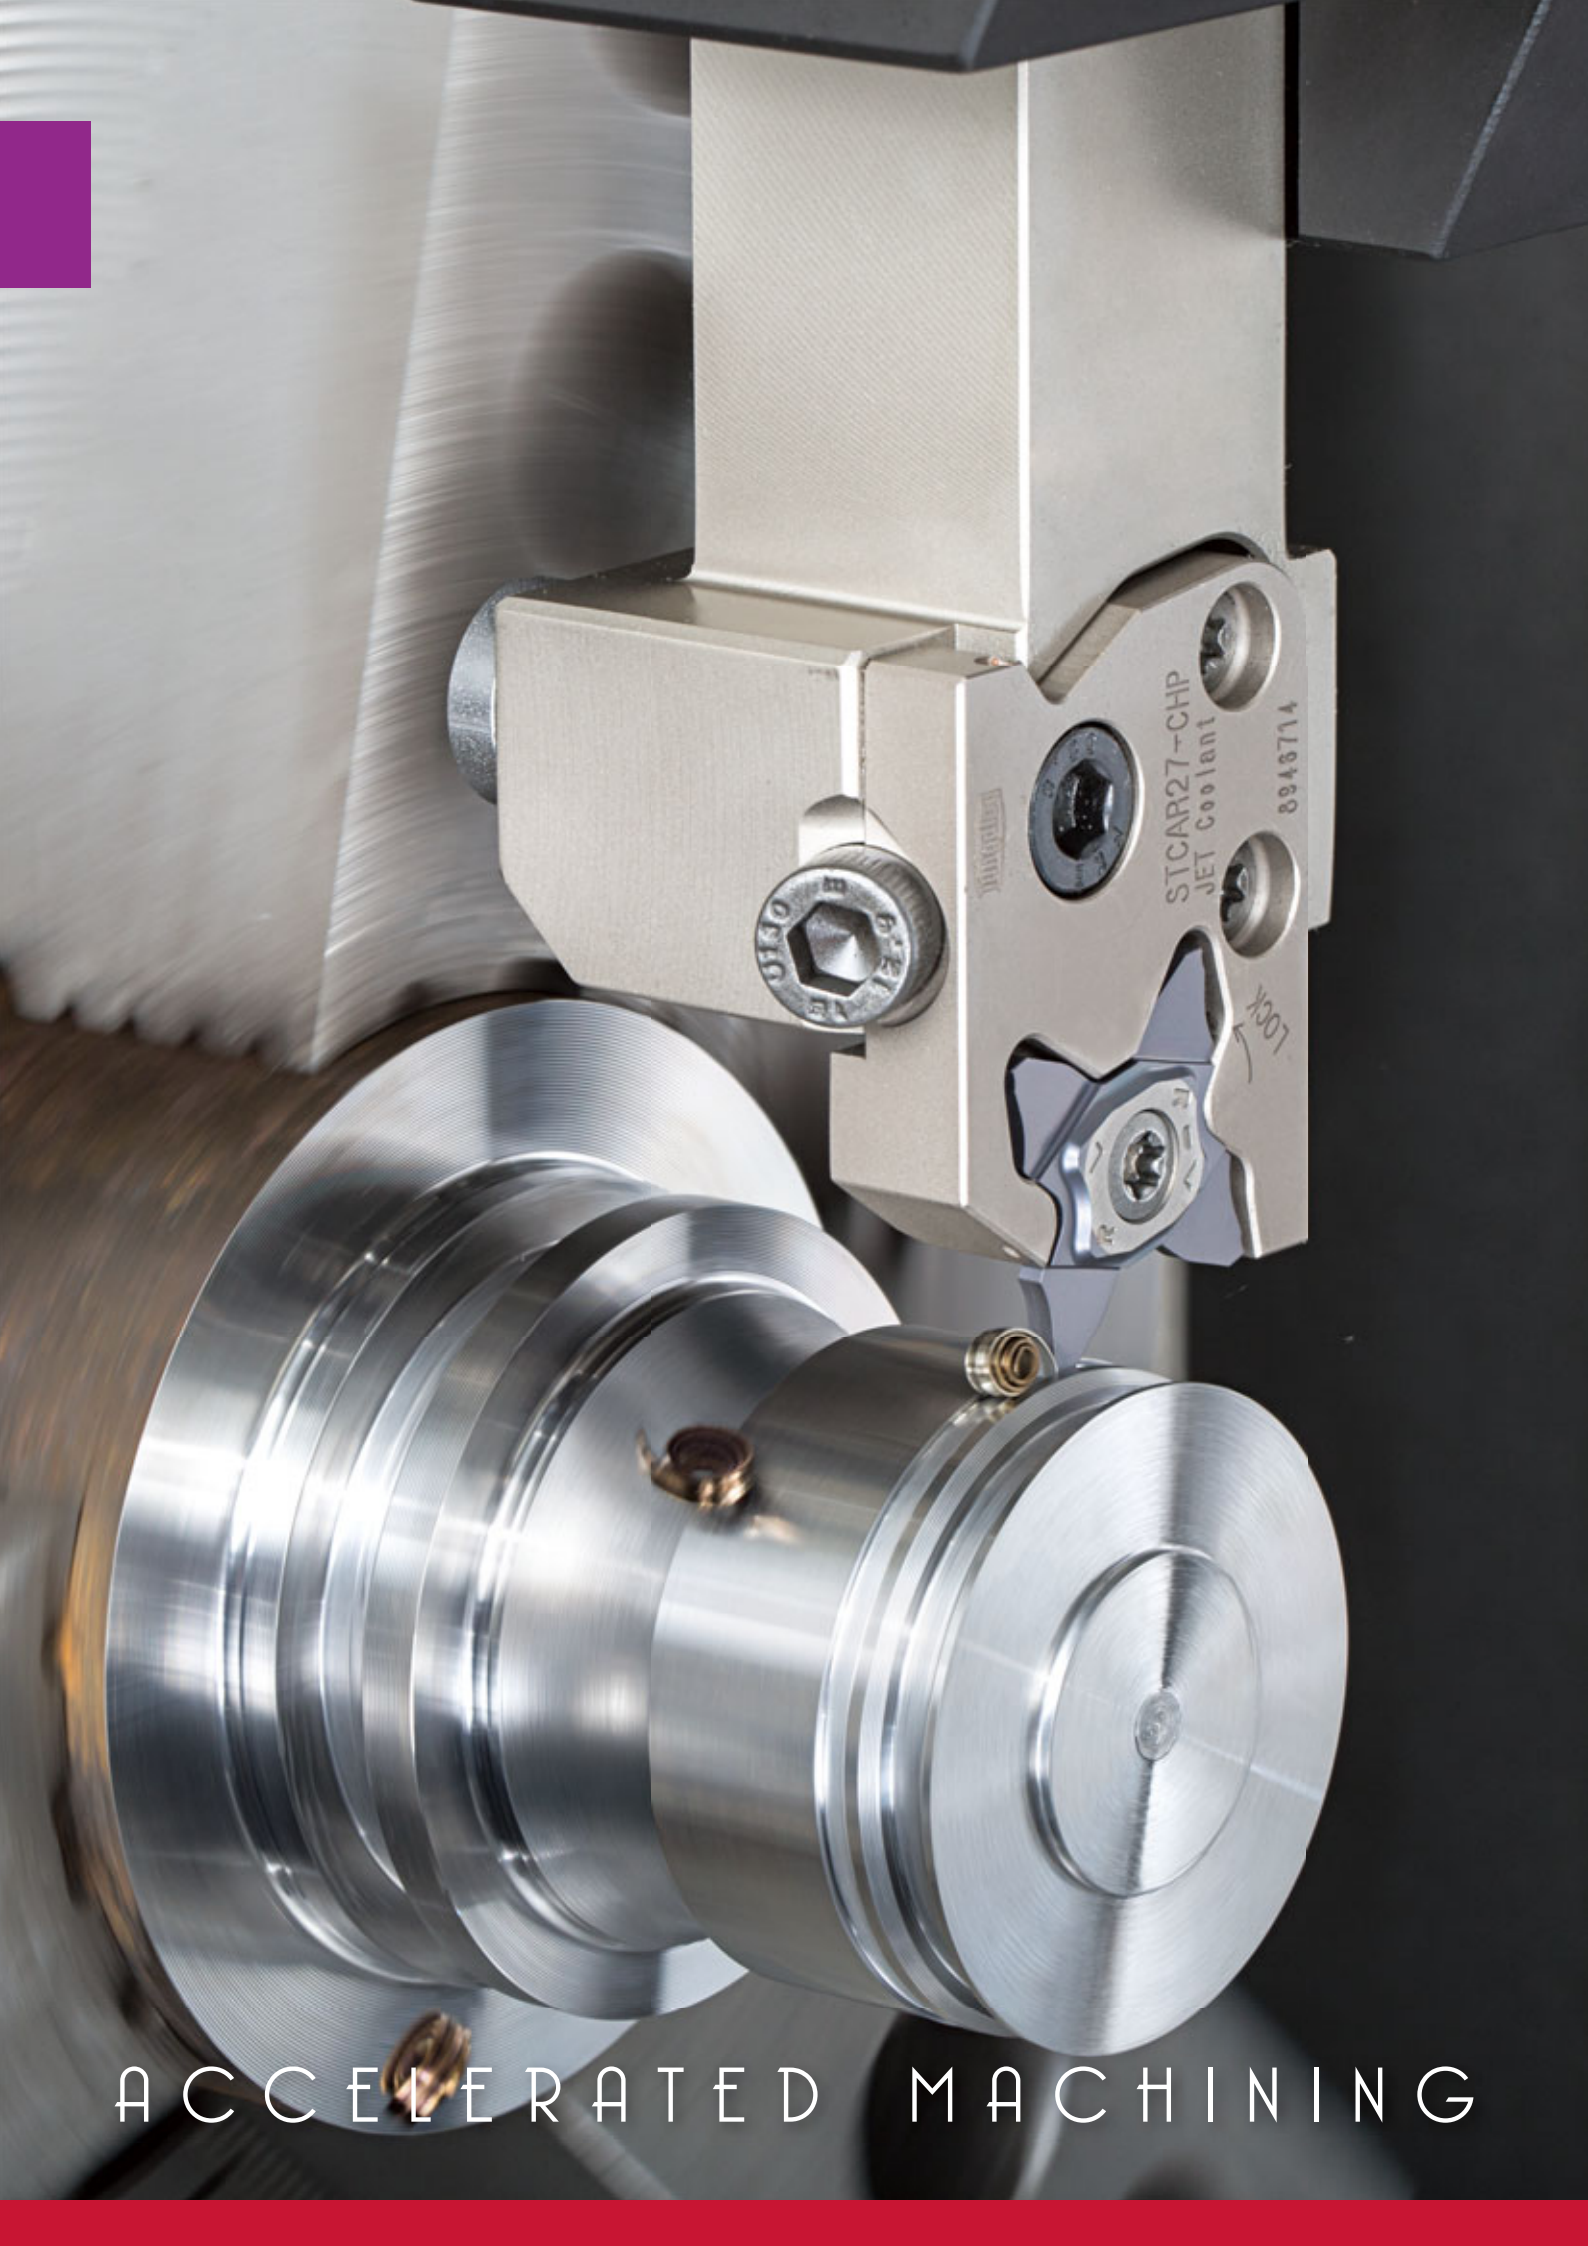

ACCELERATED MACHINING




Influential grooving lines, **TetraMini-Cut** and **TetraForce-Cut** offer ground inserts with a robust clamping structure for exceptional stability and repeatability

Multi-purpose grooving insert with economical 4-cutting edges


Unique 3-point clamping system

The unique pocket design provides accurate indexing repeatability of the cutting edge height.

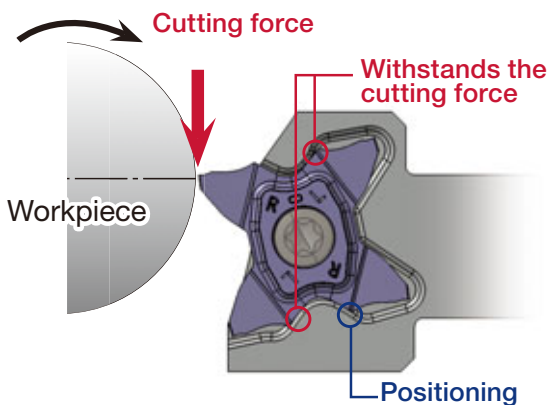

The insert pocket protects all unused cutting edges

Strong and stable clamping design protects unused insert corners from damage during operation.

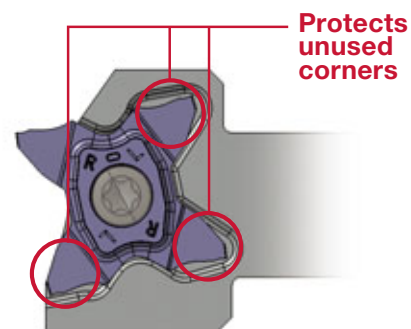


AH7025 ideal grade for grooving application



AH7025 uses the world's first coating technology of a nano-scale multi-layered AlTiN PVD coating with high Al content, featuring

- Coating hardness increased by 20%
- A multi-layered coating structure impedes micro-crack propagation, reducing insert failures
- Enhanced adhesion strength between the coating and carbide substrate layer

High wear and fracture resistant carbide substrate for optimal grooving performance

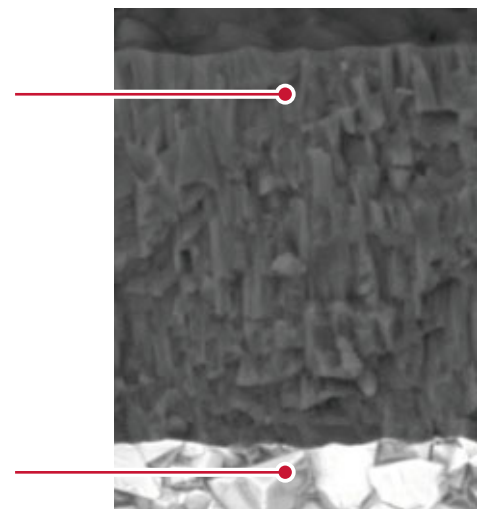


The result : a dramatic increase in tool life and machining stability

TETRAMCUT 18 type Groove widths: 0.33 - 3 mm

See P. 6

- TCL-style chipbreaker for improved chip control at low feed rates
- Full profile threading inserts are added. Thread pitch : 0.5 mm to 1.5 mm
- 3 different types of chipbreakers each with dedicated edge preparation
- Through-coolant supply system (tool code suffix "-CHP") to ensure high efficient machining

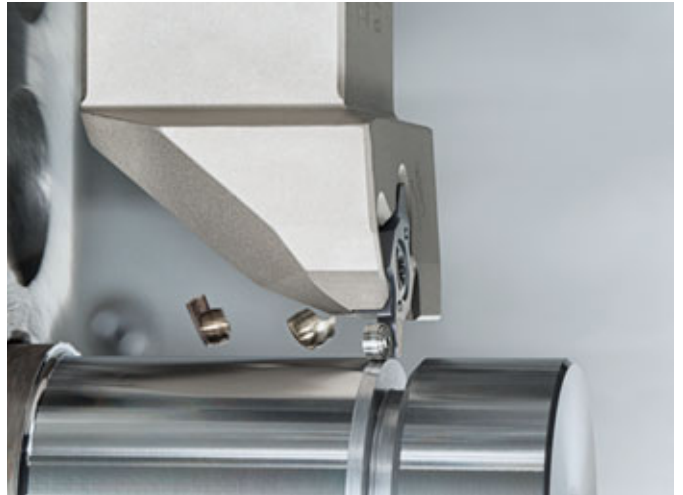

DIRECTJET

- Toolholders featuring a hose-free, direct through-coolant supply system



TETRAFORCE 27 type Groove widths: 0.5 - 3.18 mm

See P. 27

- TCL-style chipbreaker for improved chip control at low feed rates
- General-purpose, AH725 grade for various types of application
- Through-coolant supply system (tool designation suffix "-CHP") to ensure high efficient machining




Major expansion to the TCG-style chipbreaker line Enhanced lineup for greater flexibility

- An expanded range of tools allows for an easy selection of the ideal insert
- The same toolholder for both grooving and threading


New selection system

3D chipbreakers

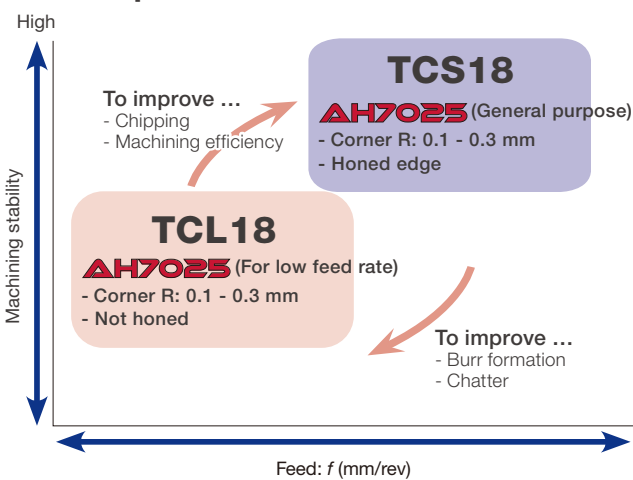

- 2 styles of 3D chipbreakers are available as standard for reliable chip control.
- TCS: general-purpose chipbreaker, TCL: for applications where low cutting force is essential


Ground-to-form chipbreakers

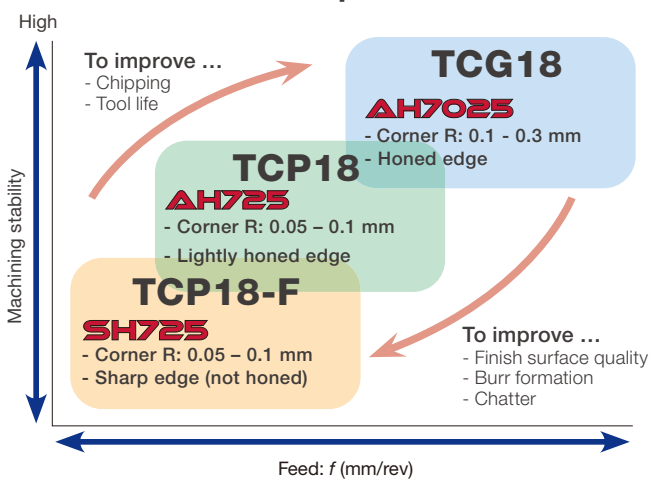

- Choose the best of all three insert types according to the machining requirements
- A variety of widths and corner radii are available in all three insert types


Grooving

New **TCL18 type**
(With 3D chipbreaker for low feed rates)

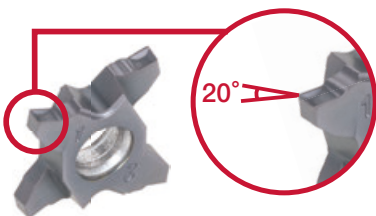


- The chipbreaker incorporates a dimple-like recess on the rake face to facilitate smooth chip flow with light cutting action
- The chipbreaker ensures low cutting force, providing reliable chip flow at low feed rates

TCS18 type
(With 3D chipbreaker for general purpose)

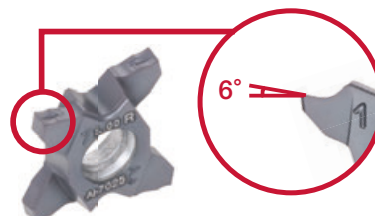


- The chipbreaker incorporates a dimple-like recess on the rake face to facilitate smooth chip flow with light cutting action

TCG18 type (Honed edge)

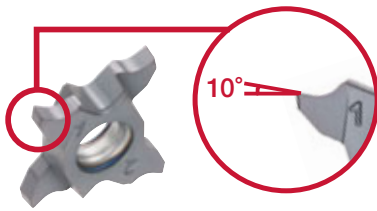


- Optimized rake angle and edge preparation enhances fracture resistance, allowing for smooth cutting
- AH7025 grade features a superior combination of wear and fracture resistances

TCP18 type (Lightly honed edge)

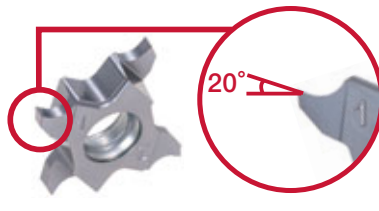

- A large rake angle ensures smooth cutting for excellent surface finish
- The insert in grade AH725 features a tough edge preparation for high resistance to fracture

TCP18-F type (Sharp edge)

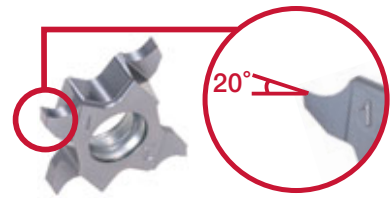

- High quality surface finish and precision thanks to the sharp cutting edge
- A quality level equivalent to that with cermet is achievable
- An extremely hard coating layer on grade SH725 provides sharp cutting edges, making it perfect for small part grooving

Threading

TCT18 type




Full-profile insert

- Full profile inserts for burr-less threading are newly added. Pitch : 0.5 - 1.5 mm.
- Sharp cutting edge for reduced cutting load, improving thread surface quality
- Suitable for thread pitches ranging from 0.4 mm to 3 mm


PRECISION GROOVING & THREADING

Minimum diameter for face grooving

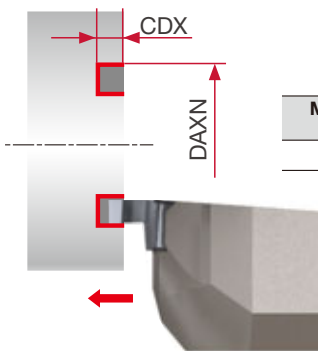




Minimum face diameter DAXN (mm)	Maximum groove depth CDX (mm)
65	3

Machining next to shoulder

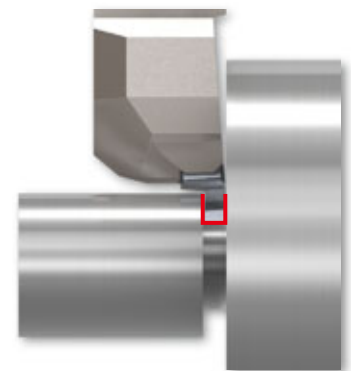

Dmax. parting-off




Groove depth capacity and Dmax. capacity

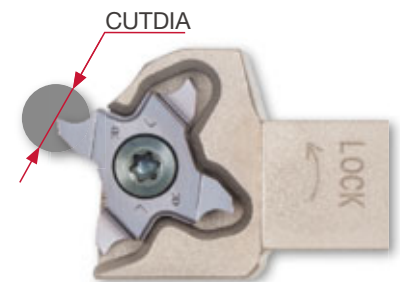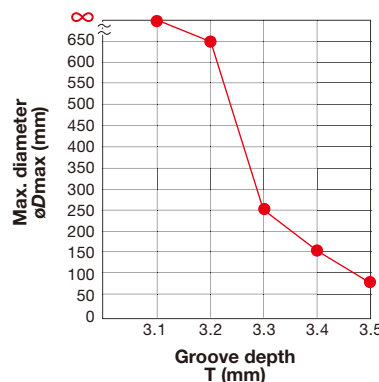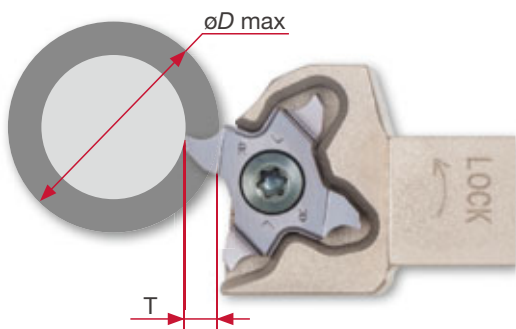

Max. diameter øDmax (mm)
7

CUTTING PERFORMANCE

Tool rigidity

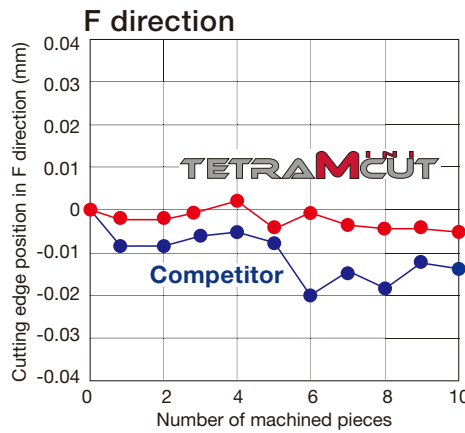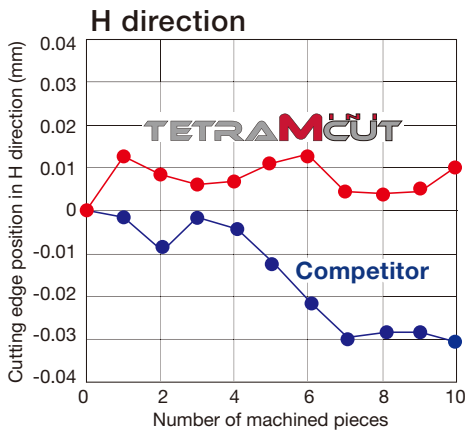


Process: Measure #1 → machining → Measure #2


Displacement of cutting edge position: Difference between Measure #1 & #2

Tool life

P Alloy steel

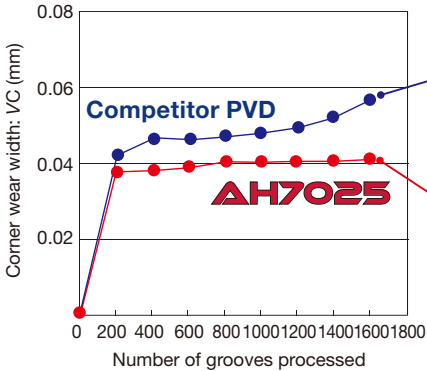

M Stainless steel

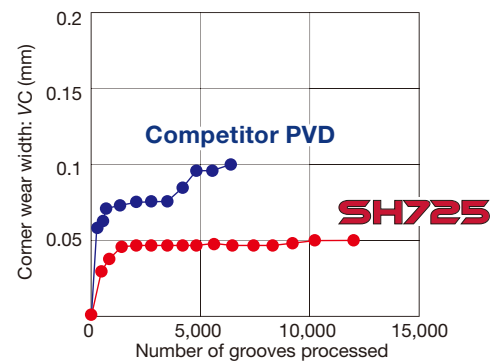

Toolholder : STCR2525Z18
 Insert : TCG18R200-020 AH7025
 Workpiece material : SCM440 / 42CrMo4
 Cutting speed : $V_c = 180$ m/min
 Feed : $f = 0.07$ mm/rev
 Groove width : 2 mm
 Groove depth : 2.5 mm

Toolholder : STCR1010X18
 Insert : TCP18R200F-010 SH725
 Workpiece material : SUS304 / X5CrNi18-9
 Cutting speed : $V_c = 120$ m/min
 Feed : $f = 0.05$ mm/rev
 Groove width : 2 mm
 Groove depth : 2.5 mm
 Coolant type : Wet

Chip control


New

With TCL18 style 3D chipbreaker

Cutting speed: V_c (m/min)	80				
	150				
		0.03	0.05	0.07	0.1
Feed: f (mm/rev)					

P

Steel



Toolholder : STCR2525Z18
 Insert : TCL18R200-020 AH7025
 Workpiece material : SCM415

With TCS18 style 3D chipbreaker


Cutting speed: V_c (m/min)	50				
	100				
		0.05	0.10	0.15	0.20
Feed: f (mm/rev)					

P

Steel



Chipbreaker position may be different depending on the groove width. In widening, it is recommended that the chipbreaker position is close to the widening pass.

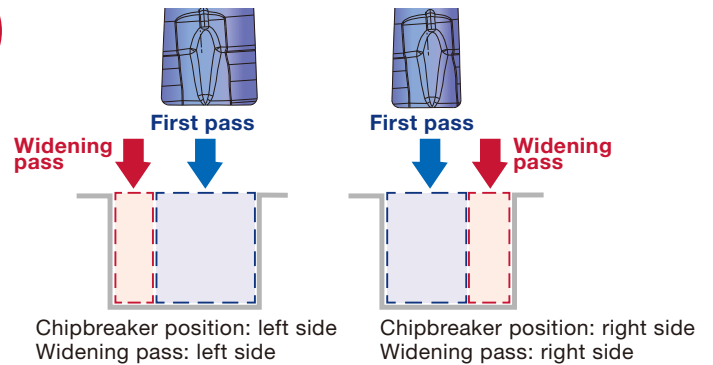


Toolholder : STCR2525Z18
 Insert : TCS18R200-020 AH7025
 Workpiece material : S45C / C45


DIRECTT^{UNG}JET system

Tube-less design streamlines tool setup
Through-coolant supply enables high productivity

DirectTungJet system

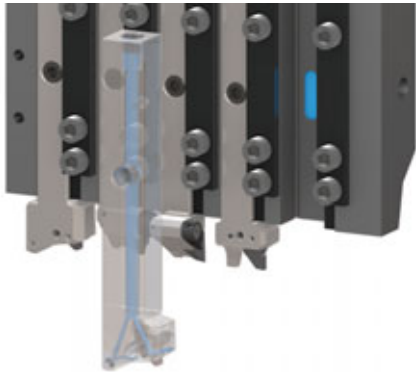

Coolant is supplied from the tool post directly to the tools

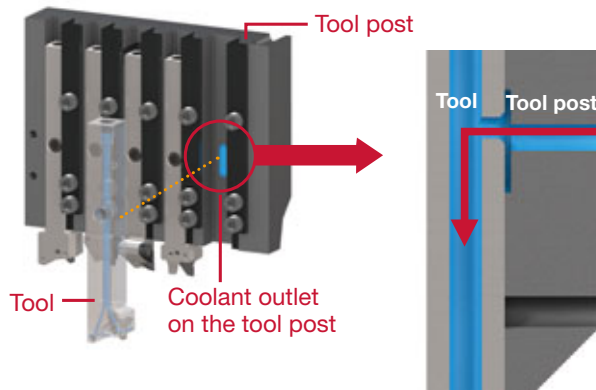

No need for coolant tube setup.
Eliminates chip entanglement on tubes and streamlines tool replacements.


S Titanium alloy: External turning (Ti-6Al-4V)

Material : Ti-6Al-4V
Holder : STCR1212X18-CHP
Insert : TCP18R200F-010 SH725
Cutting speed : $V_c = 100$ m/min
Feed rate : $f = 0.05$ mm/rev
Groove width : 2 mm
Groove depth : 2.5 mm
Coolant type : Oil



STCR/L-18

Precision grooving tools with uniquely shaped insert for swiss type machine and general lathes

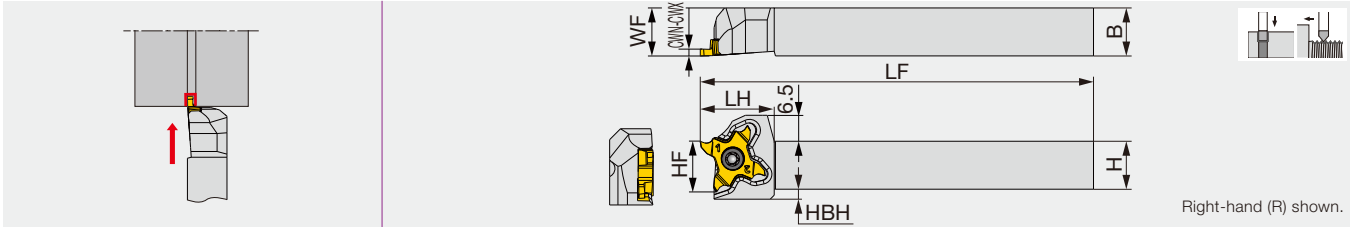

Designation	CWN	CWX	H	B	LF	LH	HF	WF	HBH	Insert	Torque*
STCR/L1010X18	0.33	3	10	10	120	18.5	10	10	4.5	TC*18...	1.2
STCR/L1212F18	0.33	3	12	12	85	18.5	12	12	2.5	TC*18...	1.2
STCR/L1212X18	0.33	3	12	12	120	18.5	12	12	2.5	TC*18...	1.2
STCR/L1616X18	0.33	3	16	16	120	18.5	16	16	-	TC*18...	1.2
STCR/L2020H18	0.33	3	20	20	100	18.5	20	20	-	TC*18...	1.2
STCR/L2020X18	0.33	3	20	20	120	23.0	20	25	-	TC*18...	1.2
STCR/L2525Z18	0.33	3	25	25	135	23.0	25	30	-	TC*18...	1.2

The right hand insert (TC*18R...) is used for the right hand toolholders (STCR...), and the left hand insert is used for the left hand toolholders

*Torque: Recommended torque (N-m) for clamping

Left-Hand Insert



TC*18L...

Right-Hand Insert



TC*18R...


SPARE PARTS

Designation	Clamping screw	Wrench
STCR**18	CSTC-4L100DL	T-1008/5
STCL**18	CSTC-4L100DR	T-1008/5

STCR/L-18-CHP



Threading tool - compatible to DirectTung-Jet high pressure coolant system

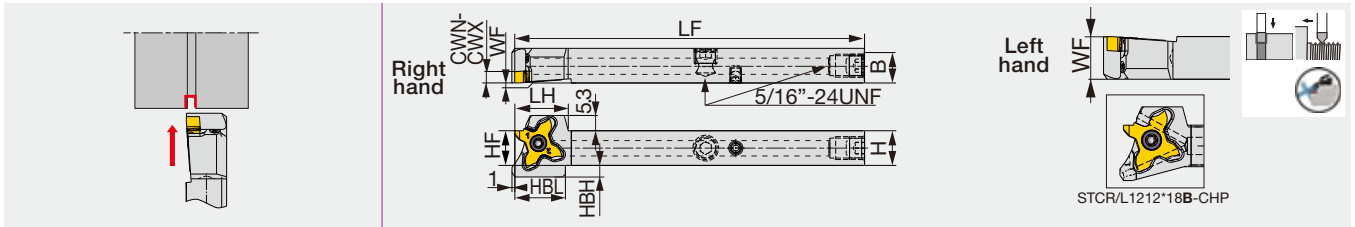

Designation	CWN	CWX	H	B	LF	LH	HBL	HF	WF	HBH	Insert	Torque*
STCR/L1212X18-CHP*** ⁽¹⁾	0.33	3	12	12	120	18.5	17.5	12	0/12	4	TC*18...	1.2
STCR/L1212X18B-CHP ⁽¹⁾	0.33	3	12	12	120	18.5	17.5	12	0/12	4	TC*18...	1.2
STCR/L1616X18-CHP ⁽¹⁾	0.33	3	16	16	120	18.5	-	16	0/16	-	TC*18...	1.2

(1) Compatible to DirectTungJet system


Use the right hand insert (TC*18R...) with the right hand toolholders (STCR...). Use the left hand insert (TC*18...) with the left hand holder (STCL...)

***: To be replaced with the new design

STCR/L-18-CHP



Threading tool - for external threading with high pressure coolant capability (no tool offset needed)

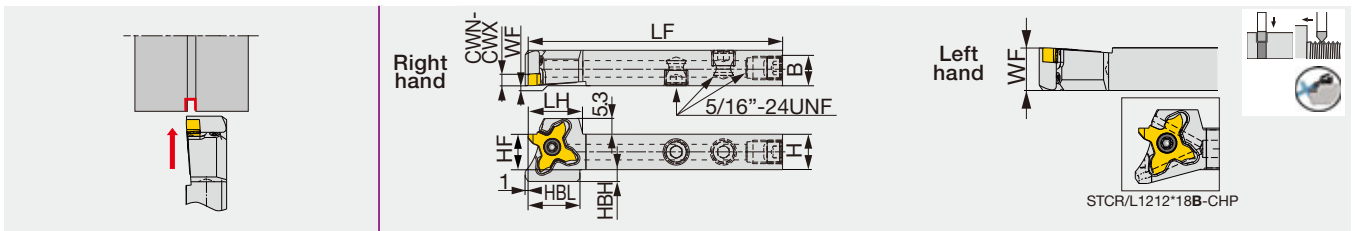

Designation	CWN	CWX	H	B	LF	LH	HBL	HF	WF	HBH	Insert	Torque*
STCR/L1212F18-CHP***	0.33	3	12	12	85	18.5	17.5	12	0/12	4	TC*18...	1.2
STCR/L1212F18B-CHP	0.33	3	12	12	85	18.5	17.5	12	0/12	4	TC*18...	1.2

Use the right hand insert (TC*18R...) with the right hand toolholders (STCR***). Use the left hand insert (TC*18...) with the left hand holder (STCL...)


*Torque: Recommended torque (N·m) for clamping

***: To be replaced with the new design

STCR/L-18-CHP



Threading tool - for external threading with high pressure coolant capability

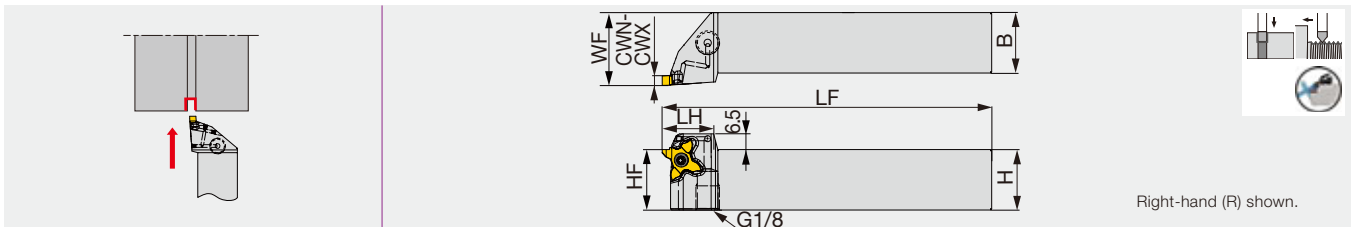

Designation	CWN	CWX	H	B	LF	LH	HBL	HF	WF	HBH	Insert	Torque*
STCR/L2020X18-CHP	0.33	3	20	20	120	23	-	20	25	-	TC*18...	1.2
STCR/L2525Z18-CHP	0.33	3	25	25	135	23	-	25	30	-	TC*18...	1.2

Use the right hand insert (TC*18R...) with the right hand toolholders (STCR...). Use the left hand insert (TC*18...) with the left hand holder (STCL...)

*Torque: Recommended torque (N·m) for clamping

SPARE PARTS




Designation	Clamping screw	Wrench
STCL**18-CHP	CSTC-4L100DR	T-1008/5
STCR**18-CHP	CSTC-4L100DL	T-1008/5

See page 40 for connections and coolant hoses.

JS-STCL18

Precision grooving tools with uniquely shaped insert for swiss type machine and general lathes

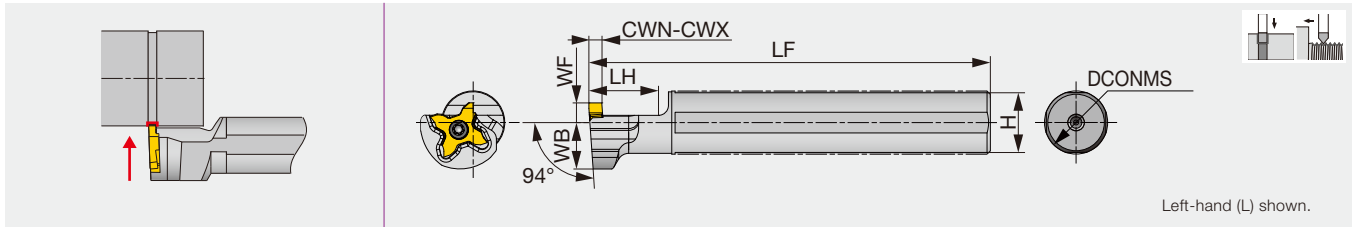

Designation	CWN	CWX	DCONMS	LF	LH	H	WB	WF	Insert	Torque*
JS14H-STCL18	0.33	3	14	100	20	13	14	6	TC*18R...	1.2
JS159F-STCL18	0.33	3	15.875	85	20	15	14	6	TC*18R...	1.2
JS16F-STCL18	0.33	3	16	85	20	15	14	6	TC*18R...	1.2
JS19G-STCL18	0.33	3	19.05	90	20	18	14	6	TC*18R...	1.2
JS19X-STCL18	0.33	3	19.05	120	20	18	14	6	TC*18R...	1.2
JS20G-STCL18	0.33	3	20	90	20	19	14	6	TC*18R...	1.2
JS20X-STCL18	0.33	3	20	120	20	19	14	6	TC*18R...	1.2
JS22X-STCL18	0.33	3	22	120	20	21	12.25	10	TC*18R...	1.2
JS25H-STCL18	0.33	3	25	100	20	24	12.25	10	TC*18R...	1.2
JS254X-STCL18	0.33	3	25.4	120	20	24	12.25	10	TC*18R...	1.2

The left hand toolholder (STCL...) is used with the right hand inserts (TC*18R...)

*Torque: Recommended torque (N·m) for clamping

SPARE PARTS




Designation	Clamping screw	Wrench
JS**STCL18	CSTC-4L100DL	T-1008/5

New

STCAR/L18-CHP

TUNGALOY **MODULAR SYSTEM**

Modular blade with high pressure coolant channels

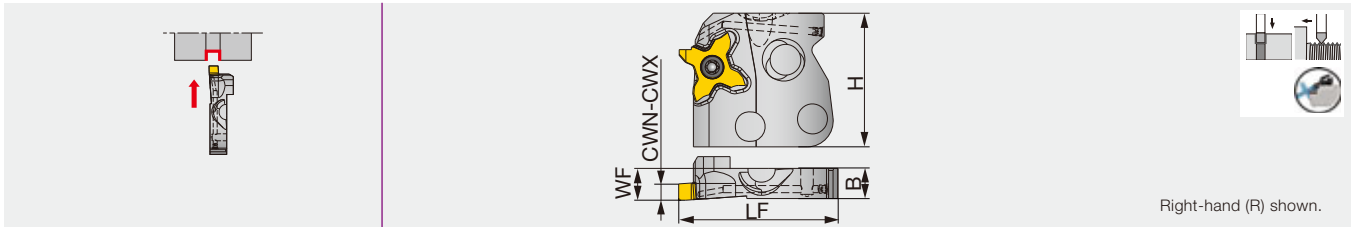

Designation	CWN	CWX	WF	H	LF	B	Insert	Torque*
STCAR/L18-CHP	0.33	3	7.5	33	38	7.2	TC*18...	1.2

Use the right hand insert (TC*18R...) with the right hand blade (STCAR...). Use the left hand insert (TC*18L...) with the left hand blade (STCAL...)

*Torque: Recommended torque (N·m) for clamping

SPARE PARTS


Designation	Clamping screw	Wrench
STCAL18-CHP	CSTC-4L100DR	T-1008/5
STCAR18-CHP	CSTC-4L100DL	T-1008/5

New

CHSR/L-CHP

TUNGALOY **MODULAR SYSTEM**

Shank for blade, with channels for high pressure coolant

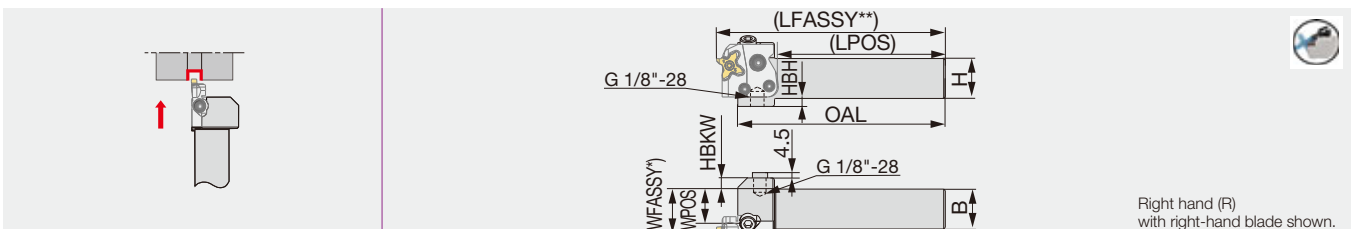

Designation	H	B	OAL	LPOS	WPOS	HBKW	HBH
CHSR/L2020-CHP	20	20	130	105.5	15.1	12	10
CHSR/L2525-CHP	25	25	130	105.5	20.1	7	5

*WFASSY : shank (WPOS) + blade (WF)

**LFASSY : shank (LPOS) + blade (LF)

Use the right-hand blade for the right-hand shank

SPARE PARTS

Designation	Screw	Wrench	Clamping screw	Clamping screw	Wrench	O-ring	Plug
CHSR/L*-CHP	SRM5-04451	T-20/5	SRM6X12DIN6912	SRM6X20-XT	HW5.0	OR5X1N	PLUGG1/8ISO1179

See page 39 for blade assembly/disassembly instruction

See page 40 for connections and coolant hoses

Recommended torque


Clamping screw	Torque (N · m)
SRM5-04451	5
SRM6X12DIN6912	8.5
SRM6X20-XT	8.5

New

CHFVR/L-CHP

TUNG M^{ODULAR} SYSTEM

Shank for blade, with channels for high pressure coolant

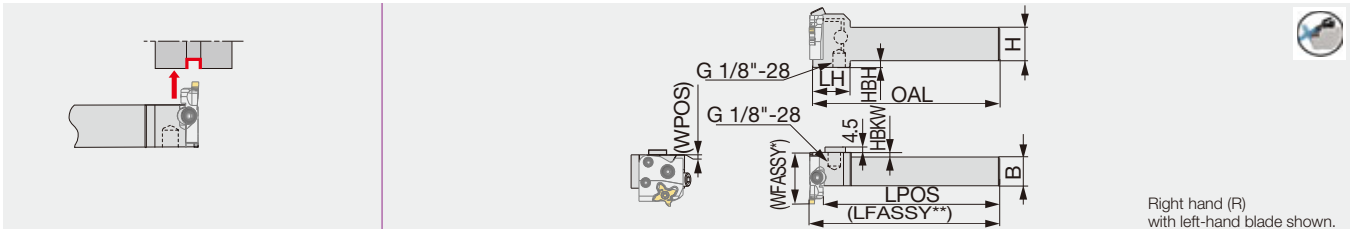

Right hand (R)
with left-hand blade shown.

Designation	H	B	OAL	LH	LPOS	WPOS	HBKW	HBH
CHFVR/L2020-CHP	20	20	140	28	135.1	0.5	5	10
CHFVR/L2525-CHP	25	25	140	28	135.1	0.5	0	5

*WFASSY : shank (WPOS) + blade (LF)

**LFASSY : shank (LPOS) + blade (WF)

Use the left-handed blade for the right-handed shank

SPARE PARTS

Designation	Clamping screw	Wrench	Clamping screw	Clamping screw	Wrench	O-ring	Plug
CHFVR/L*-CHP	SRM5-04451	T-20/5	SRM6X12DIN6912	SRM6X20-XT	HW5.0	OR5X1N	PLUGG1/8ISO1179

See page 39 for blade assembly/disassembly instructions


See page 40 for connections and coolant hoses.

New

C*CHSN-CHP

TUNGCAP TUNG M^{ODULAR} SYSTEM

TungCap shank for blade, with channels for high pressure coolant

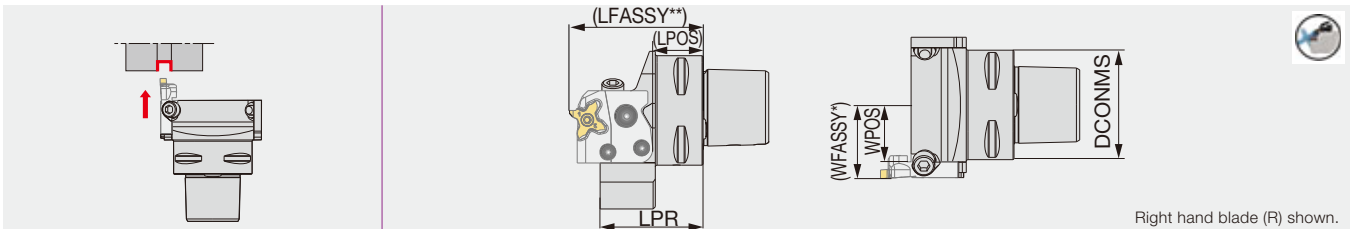

Right hand blade (R) shown.

Designation	DCONMS	LPR	LPOS	WPOS
C3CHSN19045-CHP**	32	45	17.5	18.5
C4CHSN21047-CHP	40	46.5	21.5	21
C5CHSN26047-CHP	50	47	22.5	26
C6CHSN33050-CHP	63	50	24.5	32.5

*WFASSY : shank (WPOS) + blade (WF)

**LFASSY : shank (LPOS) + blade (LF)

SPARE PARTS

Designation	Clamping screw	Wrench	Clamping screw	Clamping screw	Wrench	O-ring
C*CHSN*-CHP	SRM5-04451	T-20/5	SRM6X12DIN6912	SRM6X20-XT	HW5.0	OR5X1N


See page 39 for blade assembly/disassembly instructions

New

C*CHFVN-CHP

TUNG**CAP** TUNG**M**^{OBULAR}SYSTEM

TungCap shank for blade, with channels for high pressure coolant

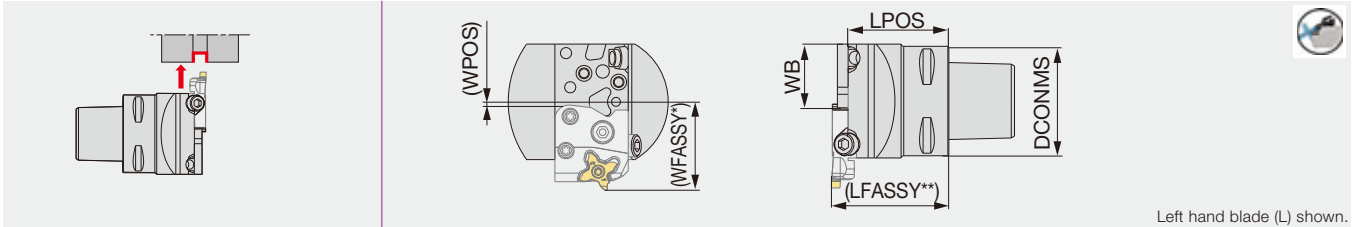

Left hand blade (L) shown.

Designation	DCONMS	LPOS	WB	WPOS
C3CHFVN26040-CHP	32	40	26	1.5
C4CHFVN26046-CHP	40	46	26	1.5
C5CHFVN26046-CHP	50	46	26	1.5
C6CHFVN33046-CHP	63	46	33	8.5

*WFASSY : shank (WPOS) + blade (LF)

**LFASSY : shank (LPOS) + blade (WF)

SPARE PARTS

Designation	Clamping screw	Wrench	Clamping screw	Clamping screw	Wrench	O-ring
C*CHFVN**-CHP	SRM5-04451	T-20/5	SRM6X12DIN6912	SRM6X20-XT	HW5.0	OR5X1N

See page 39 for blade assembly/disassembly instructions


Standard lineup of TetraMini-Cut grooving inserts

Groove width CW (mm)	Corner rad. RE (mm)	New				
		TCL18R (P.18)	TCS18R (P.19)	TCG18R/L (P.20)	TCP18R/L (P.22)	TCP18R/L-F (P.23)
		AH7025 Honed edge	AH7025 Honed edge	AH7025 Honed edge	AH725 Lightly honed edge	SH725 Sharp edge
0.33	0.05				●	●
0.43	0.05				●	●
0.50	0.05				●	●
0.75	0.05				●	●
0.95	0.05				●	●
1.00	0.05					●
	0.1		●	●	●	●
1.20	0.05					●
	0.1		●	●	●	●
1.25	0.05					●
	0.1		●	●	●	●
	0.2		●	●		
1.30	0.2		●	●		
1.40	0.1		●	●	●	●
	0.2		●	●		
1.45	0.05					●
	0.1		●	●	●	●
	0.2			●		
1.50	0.05					●
	0.1	●	●	●	●	●
	0.2	●	●	●		
1.60	0.2		●	●		
1.70	0.2		●	●		
1.75	0.05					●
	0.1		●	●	●	●
	0.2		●	●		
1.85	0.2		●	●		
1.95	0.2		●	●		
2.00	0.05					●
	0.1	●	●	●	●	●
2.25	0.2	●	●	●		
2.30	0.2		●	●		
2.50	0.1		●	●	●	●
	0.2		●	●		
	0.3		●	●		
2.65	0.3		●	●		
2.80	0.3		●	●		
3.00	0.1	●	●	●	●	●
	0.2	●	●	●		
	0.3	●	●	●		

For standard threading inserts of TetraMini-Cut, please see P.25

●: New
●: Line up

New TCL18R (3D chipbreaker, honed edge)

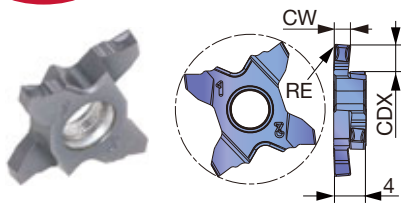

P	Steel	★							
M	Stainless	★							
K	Cast iron	★							
N	Non-ferrous								
S	Superalloys	★							
H	Hard materials								


★ : First choice
☆ : Second choice

Designation	HAND	CW±0.02	RE	Coated							CDX
				AH7025							
TCL18R150-010	R	1.5	0.1	●							3.5
TCL18R150-020	R	1.5	0.2	●							3.5
TCL18R200-010	R	2	0.1	●							3.5
TCL18R200-020	R	2	0.2	●							3.5
TCL18R300-010	R	3	0.1	●							3.5
TCL18R300-020	R	3	0.2	●							3.5
TCL18R300-030	R	3	0.3	●							3.5

5 pieces per package

● : New

TCS18R (3D chipbreaker, honed edge)

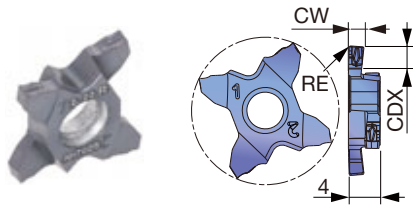

P	Steel	★							
M	Stainless	★							
K	Cast iron	★							
N	Non-ferrous								
S	Superalloys	★							
H	Hard materials								


★ : First choice
☆ : Second choice

Designation	HAND	CW±0.02	RE	Coated						CDX
				AH7025						
TCS18R100-010	R	1	0.1	●						2
TCS18R120-010	R	1.2	0.1	●						2
TCS18R125-010	R	1.25	0.1	●						2
TCS18R125-020	R	1.25	0.2	●						2
TCS18R130-020	R	1.3	0.2	●						3.5
TCS18R140-010	R	1.4	0.1	●						3.5
TCS18R140-020	R	1.4	0.2	●						3.5
TCS18R145-010	R	1.45	0.1	●						3.5
TCS18R150-010	R	1.5	0.1	●						3.5
TCS18R150-020	R	1.5	0.2	●						3.5
TCS18R160-020	R	1.6	0.2	●						3.5
TCS18R170-020	R	1.7	0.2	●						3.5
TCS18R175-010	R	1.75	0.1	●						3.5
TCS18R175-020	R	1.75	0.2	●						3.5
TCS18R185-020	R	1.85	0.2	●						3.5
TCS18R195-020	R	1.95	0.2	●						3.5
TCS18R200-010	R	2	0.1	●						3.5
TCS18R200-020	R	2	0.2	●						3.5
TCS18R225-020	R	2.25	0.2	●						3.5
TCS18R230-020	R	2.3	0.2	●						3.5
TCS18R250-010	R	2.5	0.2	●						3.5
TCS18R250-020	R	2.5	0.2	●						3.5
TCS18R250-030	R	2.5	0.3	●						3.5
TCS18R265-030	R	2.65	0.3	●						3.5
TCS18R280-030	R	2.8	0.3	●						3.5
TCS18R300-010	R	3	0.1	●						3.5
TCS18R300-020	R	3	0.2	●						3.5
TCS18R300-030	R	3	0.3	●						3.5

5 pieces per package

● : Line up

TCG18R/L (with edge preparation)

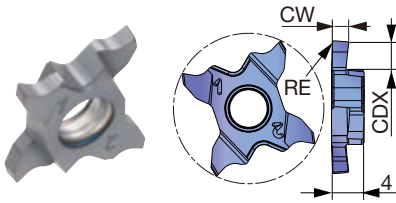

P	Steel	★							
M	Stainless	★							
K	Cast iron	★							
N	Non-ferrous								
S	Superalloys	★							
H	Hard materials								

★ : First choice
☆ : Second choice

Designation	HAND	CW±0.02	RE	Coated						CDX
				AH7025						
TCG18R100-010	R	1	0.1	●						2
TCG18L100-010	L	1	0.1	●						2
TCG18R120-010	R	1.2	0.1	●						2
TCG18L120-010	L	1.2	0.1	●						2
TCG18R125-010	R	1.25	0.1	●						2
TCG18L125-010	L	1.25	0.1	●						2
TCG18R125-020	R	1.25	0.2	●						2
TCG18L125-020	L	1.25	0.2	●						2
TCG18R130-020	R	1.3	0.2	●						2
TCG18L130-020	L	1.3	0.2	●						2
TCG18R140-010	R	1.4	0.1	●						3.5
TCG18L140-010	L	1.4	0.1	●						3.5
TCG18R140-020	R	1.4	0.2	●						3.5
TCG18L140-020	L	1.4	0.2	●						3.5
TCG18R145-010	R	1.45	0.1	●						3.5
TCG18L145-010	L	1.45	0.1	●						3.5
TCG18R145-020	R	1.45	0.2	●						3.5
TCG18L145-020	L	1.45	0.2	●						3.5
TCG18R150-010	R	1.5	0.1	●						3.5
TCG18L150-010	L	1.5	0.1	●						3.5
TCG18R150-020	R	1.5	0.2	●						3.5
TCG18L150-020	L	1.5	0.2	●						3.5
TCG18R160-020	R	1.6	0.2	●						3.5
TCG18L160-020	L	1.6	0.2	●						3.5
TCG18R170-020	R	1.7	0.2	●						3.5
TCG18L170-020	L	1.7	0.2	●						3.5
TCG18R175-010	R	1.75	0.1	●						3.5
TCG18L175-010	L	1.75	0.1	●						3.5
TCG18R175-020	R	1.75	0.2	●						3.5
TCG18L175-020	L	1.75	0.2	●						3.5
TCG18R185-020	R	1.85	0.2	●						3.5
TCG18L185-020	L	1.85	0.2	●						3.5
TCG18R195-020	R	1.95	0.2	●						3.5
TCG18L195-020	L	1.95	0.2	●						3.5

5 pieces per package

● : Line up


P	Steel	★							
M	Stainless	★							
K	Cast iron	★							
N	Non-ferrous								
S	Superalloys	★							
H	Hard materials								

★ : First choice
☆ : Second choice

Designation	HAND	CW±0.02	RE	Coated					CDX	
				AH7025						
TCG18R200-010	R	2	0.1	●						3.5
TCG18L200-010	L	2	0.1	●						3.5
TCG18R200-020	R	2	0.2	●						3.5
TCG18L200-020	L	2	0.2	●						3.5
TCG18R225-020	R	2.25	0.2	●						3.5
TCG18L225-020	L	2.25	0.2	●						3.5
TCG18R230-020	R	2.3	0.2	●						3.5
TCG18L230-020	L	2.3	0.2	●						3.5
TCG18R250-010	R	2.5	0.1	●						3.5
TCG18L250-010	L	2.5	0.1	●						3.5
TCG18R250-020	R	2.5	0.2	●						3.5
TCG18L250-020	L	2.5	0.2	●						3.5
TCG18R250-030	R	2.5	0.3	●						3.5
TCG18L250-030	L	2.5	0.3	●						3.5
TCG18R265-030	R	2.65	0.3	●						3.5
TCG18L265-030	L	2.65	0.3	●						3.5
TCG18R280-030	R	2.8	0.3	●						3.5
TCG18L280-030	L	2.8	0.3	●						3.5
TCG18R300-010	R	3	0.1	●						3.5
TCG18L300-010	L	3	0.1	●						3.5
TCG18R300-020	R	3	0.2	●						3.5
TCG18L300-020	L	3	0.2	●						3.5
TCG18R300-030	R	3	0.3	●						3.5
TCG18L300-030	L	3	0.3	●						3.5

5 pieces per package
● : Line up

TCP18R/L (lightly honed edge)




P	Steel	★
M	Stainless	★
K	Cast iron	★
N	Non-ferrous	
S	Superalloys	★
H	Hard materials	

★ : First choice
☆ : Second choice

Designation	HAND	CW±0.02	RE	Coated						CDX
				AH725						
TCP18R033-005	R	0.33	0.05	●						0.8
TCP18L033-005	L	0.33	0.05	●						0.8
TCP18R043-005	R	0.43	0.05	●						1.2
TCP18L043-005	L	0.43	0.05	●						1.2
TCP18R050-005	R	0.50	0.05	●						1.2
TCP18L050-005	L	0.50	0.05	●						1.2
TCP18R075-005	R	0.75	0.05	●						2
TCP18L075-005	L	0.75	0.05	●						2
TCP18R095-005	R	0.95	0.05	●						2
TCP18L095-005	L	0.95	0.05	●						2
TCP18R100-010	R	1	0.1	●						2
TCP18L100-010	L	1	0.1	●						2
TCP18R120-010	R	1.2	0.1	●						2
TCP18L120-010	L	1.2	0.1	●						2
TCP18R125-010	R	1.25	0.1	●						2
TCP18L125-010	L	1.25	0.1	●						2
TCP18R140-010-35	R	1.4	0.1	●						3.5
TCP18L140-010-35	L	1.4	0.1	●						3.5
TCP18R145-010	R	1.45	0.1	●						2
TCP18L145-010	L	1.45	0.1	●						2
TCP18R145-010-35	R	1.45	0.1	●						3.5
TCP18L145-010-35	L	1.45	0.1	●						3.5
TCP18R150-010	R	1.5	0.1	●						2
TCP18L150-010	L	1.5	0.1	●						2
TCP18R150-010-35	R	1.5	0.1	●						3.5
TCP18L150-010-35	L	1.5	0.1	●						3.5
TCP18R175-010	R	1.75	0.1	●						2
TCP18L175-010	L	1.75	0.1	●						2
TCP18R175-010-35	R	1.75	0.1	●						3.5
TCP18L175-010-35	L	1.75	0.1	●						3.5
TCP18R200-010	R	2	0.1	●						2.5
TCP18L200-010	L	2	0.1	●						2.5
TCP18R200-010-35	R	2	0.1	●						3.5
TCP18L200-010-35	L	2	0.1	●						3.5
TCP18R250-010	R	2.5	0.1	●						2.5
TCP18L250-010	L	2.5	0.1	●						2.5
TCP18R250-010-35	R	2.5	0.1	●						3.5
TCP18L250-010-35	L	2.5	0.1	●						3.5
TCP18R300-010	R	3	0.1	●						2.5
TCP18L300-010	L	3	0.1	●						2.5
TCP18R300-010-35	R	3	0.1	●						3.5
TCP18L300-010-35	L	3	0.1	●						3.5

5 pieces per package
● : Line up

TCP18R/L-F (sharp edge)

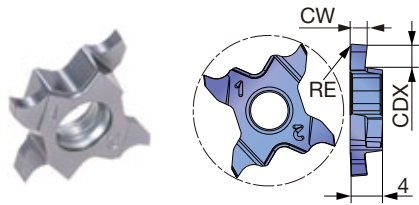

P	Steel	★
M	Stainless	★
K	Cast iron	★
N	Non-ferrous	
S	Superalloys	★
H	Hard materials	

★ : First choice
☆ : Second choice

Designation	HAND	CW±0.02	RE	Coated						CDX
				SH725						
TCP18R033F-005	R	0.33	0.05	●						0.8
TCP18L033F-005	L	0.33	0.05	●						0.8
TCP18R043F-005	R	0.43	0.05	●						1.2
TCP18L043F-005	L	0.43	0.05	●						1.2
TCP18R050F-005	R	0.5	0.05	●						1.2
TCP18L050F-005	L	0.5	0.05	●						1.2
TCP18R075F-005	R	0.75	0.05	●						2
TCP18L075F-005	L	0.75	0.05	●						2
TCP18R095F-005	R	0.95	0.05	●						2
TCP18L095F-005	L	0.95	0.05	●						2
TCP18R100F-005	R	1	0.05	●						2
TCP18R100F-010	R	1	0.1	●						2
TCP18L100F-010	L	1	0.1	●						2
TCP18R120F-005	R	1.2	0.05	●						2
TCP18R120F-010	R	1.2	0.1	●						2
TCP18L120F-010	L	1.2	0.1	●						2
TCP18R125F-005	R	1.25	0.05	●						2
TCP18R125F-010	R	1.25	0.1	●						2
TCP18L125F-010	L	1.25	0.1	●						2
TCP18R140F-010-35	R	1.4	0.1	●						3.5
TCP18R145F-005-35	R	1.45	0.05	●						3.5
TCP18R145F-010	R	1.45	0.1	●						2
TCP18L145F-010	L	1.45	0.1	●						2
TCP18R145F-010-35	R	1.45	0.1	●						3.5
TCP18L145F-010-35	L	1.45	0.1	●						3.5
TCP18R150F-005-35	R	1.5	0.05	●						3.5
TCP18R150F-010	R	1.5	0.1	●						2
TCP18L150F-010	L	1.5	0.1	●						2
TCP18R150F-010-35	R	1.5	0.1	●						3.5
TCP18L150F-010-35	L	1.5	0.1	●						3.5
TCP18R175F-005-35	R	1.75	0.05	●						3.5
TCP18R175F-010	R	1.75	0.1	●						2
TCP18L175F-010	L	1.75	0.1	●						2
TCP18R175F-010-35	R	1.75	0.1	●						3.5
TCP18L175F-010-35	L	1.75	0.1	●						3.5
TCP18R200F-005-35	R	2	0.05	●						3.5
TCP18R200F-010	R	2	0.1	●						2.5
TCP18L200F-010	L	2	0.1	●						2.5
TCP18R200F-010-35	R	2	0.1	●						3.5
TCP18L200F-010-35	L	2	0.1	●						3.5
TCP18R250F-010	R	2.5	0.1	●						2.5
TCP18L250F-010	L	2.5	0.1	●						2.5
TCP18R250F-010-35	R	2.5	0.1	●						3.5
TCP18L250F-010-35	L	2.5	0.1	●						3.5
TCP18R300F-010	R	3	0.1	●						2.5
TCP18L300F-010	L	3	0.1	●						2.5
TCP18R300F-010-35	R	3	0.1	●						3.5
TCP18L300F-010-35	L	3	0.1	●						3.5

5 pieces per package
● : Line up

STANDARD CUTTING CONDITIONS

TCS18R (3D chipbreaker) , TCG18R/L (honed edge)


ISO	Workpiece materials	Grades	Cutting speed Vc (m/min)	Feed: f (mm/rev)		
				TCL18	TCS18	TCG18
P	Low carbon steel (S15C / C15, S20C / C20, etc.)	AH7025	80 - 180	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
	Carbon steels, Alloy steel (S55C / C55, SCM440 / 42CrMoS4, etc.)	AH7025	80 - 180	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
	Prehardened steel (NAK80, PX5, etc.)	AH7025	80 - 180	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
M	Stainless steel (SUS304 / X5CrNi18-9, X5CrNiMo17-12-2, etc.)	AH7025	50 - 120	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
K	Grey cast iron (FC250 / GG25 / 250, FC300 / GG30 / 300, etc.)	AH7025	50 - 180	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
	Ductile cast iron (FCD400 / 400-15, FCD600 / 600-3, etc.)	AH7025	50 - 180	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
S	Titanium alloys (Ti-6Al-4V, etc.)	AH7025	30 - 80	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
	Superalloys (Inconel718, etc.)	AH7025	20 - 60	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14

TCP18R/L (lightly honed edge) / TCP18R/L-F (sharp edge)

ISO	Workpiece materials	Priority	Grades	Cutting speed Vc (m/min)	Feed f (mm/rev)
P	Low carbon steel (S15C / C15, S20C / C20, etc.)	First choice	SH725	80 - 180	0.03 - 0.1
		Toughness	AH725	80 - 180	0.03 - 0.1
	Carbon steels, Alloy steel (S55C / C55, SCM440 / 42CrMoS4, etc.)	First choice	SH725	80 - 180	0.03 - 0.1
		Toughness	AH725	80 - 180	0.03 - 0.1
M	Prehardened steel (NAK80, PX5, etc.)	First choice	SH725	80 - 180	0.03 - 0.1
		Toughness	AH725	80 - 180	0.03 - 0.1
	Stainless steel (SUS304 / X5CrNi18-9, X5CrNiMo17-12-2, etc.)	First choice	SH725	50 - 120	0.03 - 0.1
		Toughness	AH725	50 - 120	0.03 - 0.1
K	Grey cast iron (FC250 / GG25 / 250, FC300 / GG30 / 300, etc.)	First choice	AH725	50 - 180	0.03 - 0.1
		Sharpness	SH725	50 - 180	0.03 - 0.1
	Ductile cast iron (FCD400 / 400-15, FCD600 / 600-3, etc.)	First choice	AH725	50 - 180	0.03 - 0.1
		Sharpness	SH725	50 - 180	0.03 - 0.1
S	Titanium alloys (Ti-6Al-4V, etc.)	First choice	SH725	30 - 80	0.03 - 0.1
		Toughness	AH725	30 - 80	0.03 - 0.1
	Superalloys (Inconel718, etc.)	First choice	SH725	20 - 60	0.03 - 0.1
		Toughness	AH725	20 - 60	0.03 - 0.1

New

TCT18FR/R-ISO (Full profile threading insert)

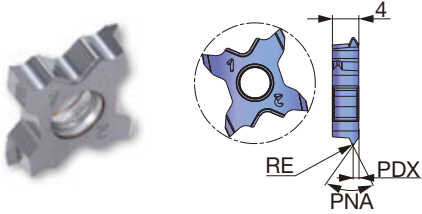

Right-hand (R) shown.


P Steel	★ ★							
M Stainless	★ ★							
K Cast iron	★ ★							
N Non-ferrous								
S Superalloys	★ ★							
H Hard materials								

★ : First choice
☆ : Second choice

Designation	HAND	RE	Coated		Pitch min	Pitch max	PDX	PNA
			SH725	AH725				
TCT18FR-05ISO	R	0.06	●		0.5	0.35	60°	
TCT18FR-07ISO	R	0.09	●		0.7	0.45	60°	
TCT18FR-075ISO	R	0.09	●		0.75	0.5	60°	
TCT18FR-08ISO	R	0.1	●		0.8	0.5	60°	
TCT18R-10ISO	R	0.13		●	1	0.6	60°	
TCT18R-125ISO	R	0.17		●	1.25	0.7	60°	
TCT18R-15ISO	R	0.2		●	1.5	0.8	60°	

● : Line up

TCT18FR/R/L (Threading insert)

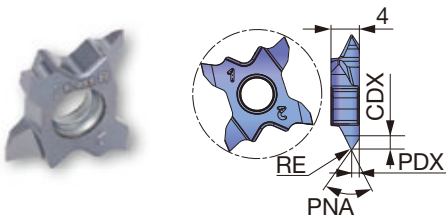

Right-hand (R) shown.

P Steel	★ ★							
M Stainless	★ ★							
K Cast iron	★ ★							
N Non-ferrous								
S Superalloys	★ ★							
H Hard materials								

★ : First choice
☆ : Second choice

Designation	HAND	RE	Coated		Pitch min	Pitch max	PDX	CDX	PNA
			SH725	AH725					
TCT18FR-60A-005	R	0.05	●		0.4	1	0.6	0.99	60°
TCT18FR-60A-010	R	0.1	●		1	2	1	1.63	60°
TCT18R-60N-010	R	0.1		●	0.8	3	1.6	2.67	60°
TCT18L-60N-010	L	0.1		●	0.8	3	1.6	2.67	60°
TCT18R-60N-020	R	0.2		●	1.5	3	1.6	2.57	60°
TCT18L-60N-020	L	0.2		●	1.5	3	1.6	2.57	60°



● : Line up

STANDARD CUTTING CONDITIONS



TCT18FR/R-ISO (Full profile threading insert) / TCT18FR (Threading insert)

ISO	Workpiece materials	Priority	Grades	Cutting speed Vc (m/min)	Pitch (mm)	TPI
P	Low carbon steel (S15C / C15, S20C / C20, etc.)	First choice	SH725	60 - 150	0.4 - 2.0	64 - 18
		Toughness	AH725	60 - 150	0.8 - 3.0	32 - 8
	Carbon steels, Alloy steel (S55C / C55, SCM440 / 42CrMoS4, etc.)	First choice	SH725	60 - 150	0.4 - 2.0	64 - 18
		Toughness	AH725	60 - 150	0.8 - 3.0	32 - 8
M	Prehardened steel (NAK80, PX5, etc.)	First choice	SH725	60 - 150	0.4 - 2.0	64 - 18
		Toughness	AH725	60 - 150	0.8 - 3.0	32 - 8
K	Grey cast iron (FC250 / GG25 / 250, FC300 / GG30 / 300, etc.)	First choice	AH725	50 - 100	0.8 - 3.0	32 - 8
		Sharpness	SH725	50 - 100	0.4 - 2.0	64 - 18
	Ductile cast iron (FCD400 / 400-15, FCD600 / 600-3, etc.)	First choice	AH725	50 - 100	0.8 - 3.0	32 - 8
		Sharpness	SH725	50 - 100	0.4 - 2.0	64 - 18
S	Titanium alloys (Ti-6Al-4V, etc.)	First choice	SH725	30 - 100	0.4 - 2.0	64 - 18
		Toughness	AH725	30 - 100	0.8 - 3.0	32 - 8
	Superalloys (Inconel718, etc.)	First choice	SH725	30 - 100	0.4 - 2.0	64 - 18
		Toughness	AH725	30 - 100	0.8 - 3.0	32 - 8

Cautions when machining in guide bushing

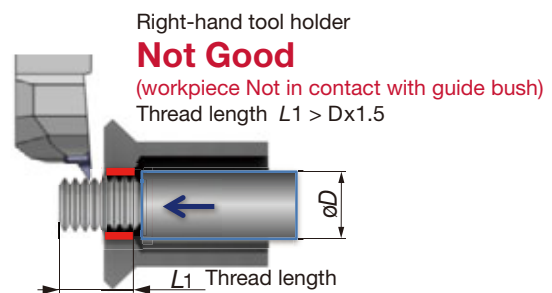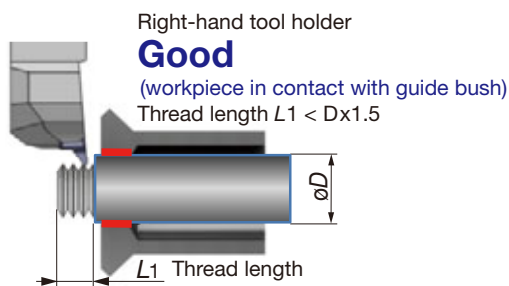


Threading operation following back-turning

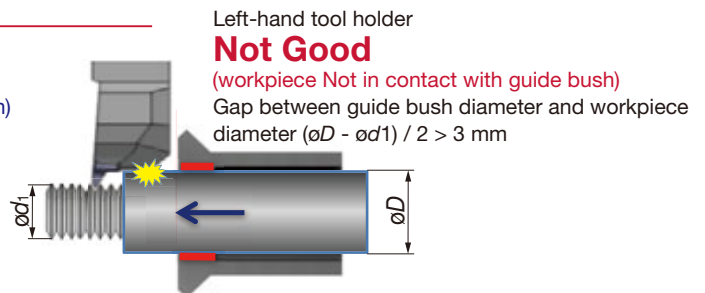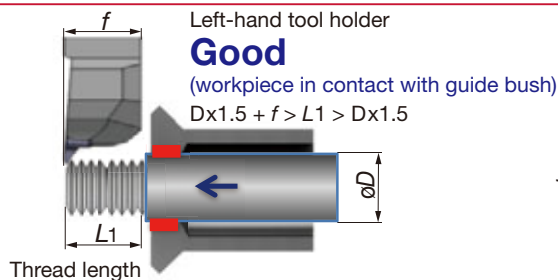


INNOVATIVE INSERTS


- Suitable for precision grooving or parting-off in general machining including small parts
- Three types of chipbreakers available for TC*27 inserts

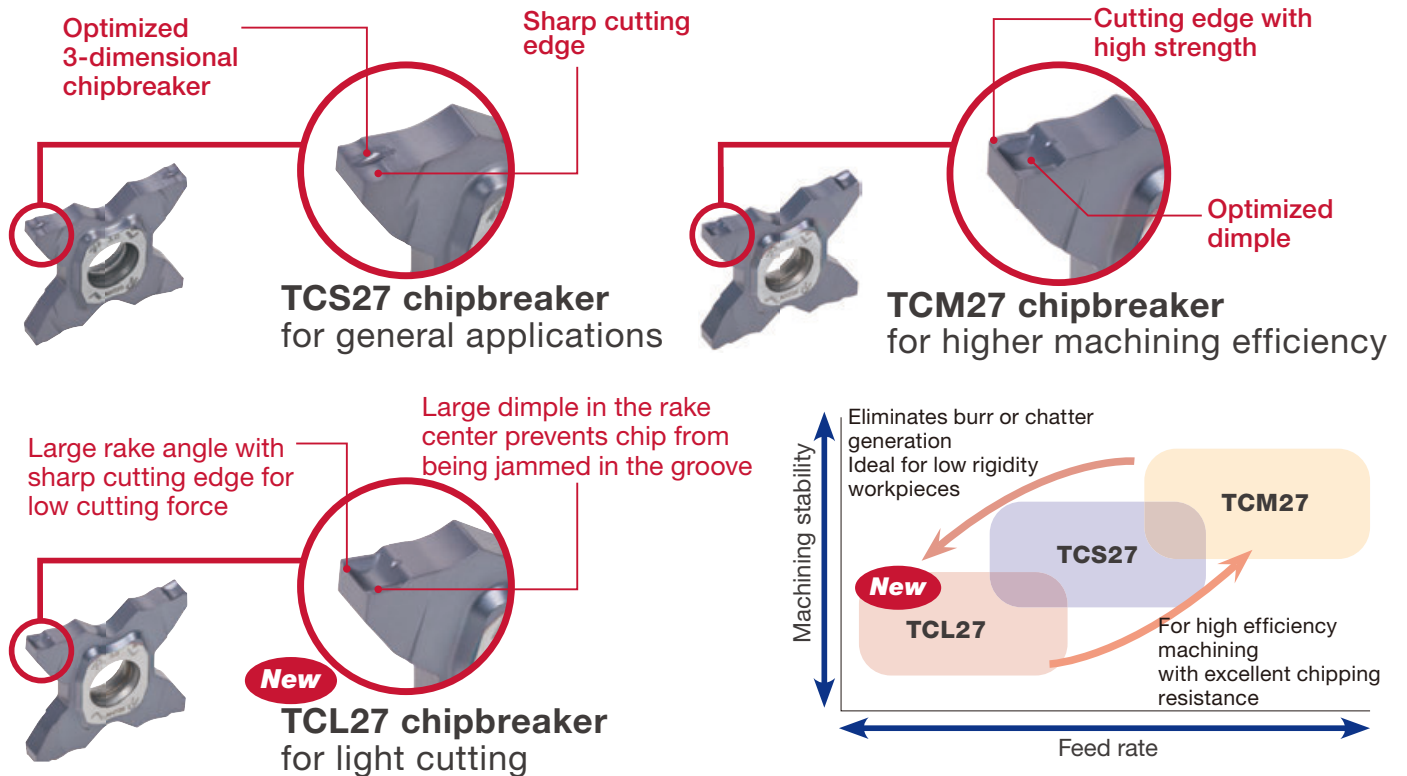

One insert fits right-hand or left-hand holders

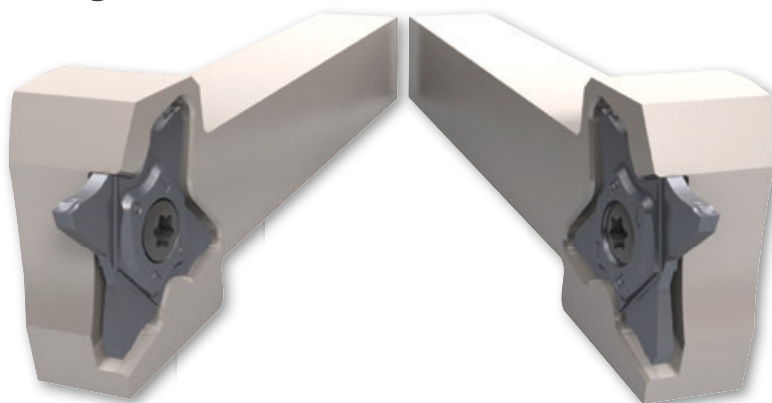

Insert can be clamped either from front or back side of the holder

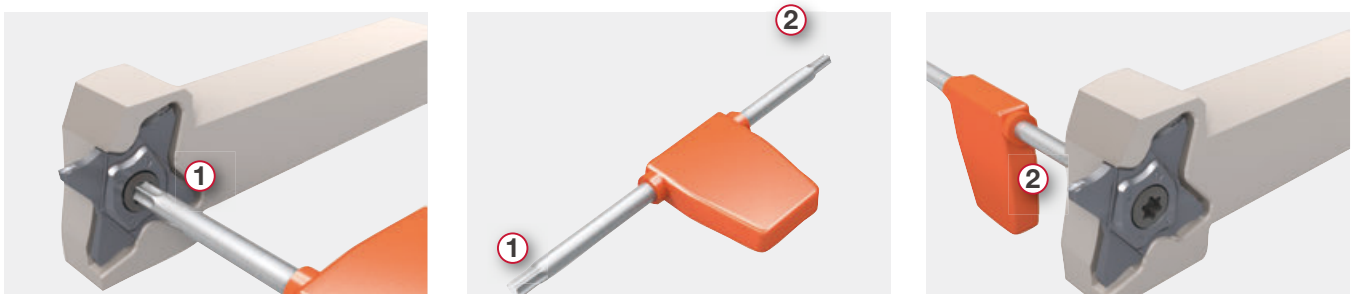

CUTTING PERFORMANCE

P Alloy steel TCL27 chipbreaker
for improved chip control at low feed rate

New



Material : SCM415
Holder : STCL2525-27
Insert : TCL27-200-020 SH725
Cutting speed : $V_c = 150$ m/min
Groove width : 2 mm
Groove depth : 3 mm


	$f = 0.05$ mm/rev	$f = 0.07$ mm/rev	$f = 0.1$ mm/rev	$f = 0.12$ mm/rev
$V_c = 150$ m/min				

Benefits of using high pressure coolant

Coolant pressure comparison

Tool life

Chip form

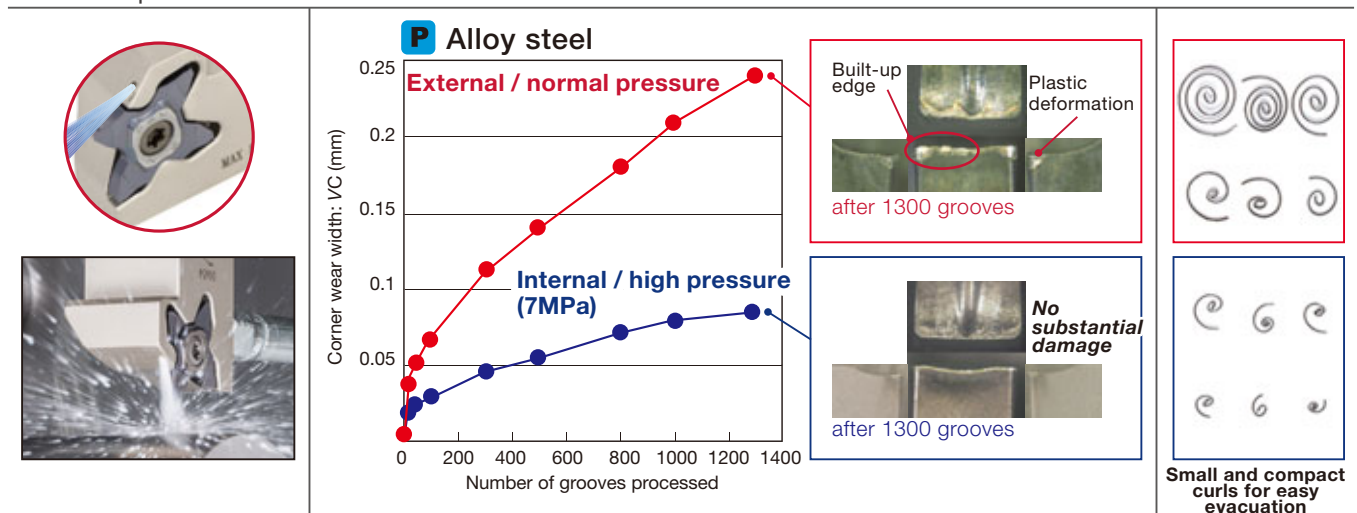

Toolholder : STCR2525-27-CHP
Insert : TCS27-200-020 AH725
Workpiece material : SCM440 / 42CrMo4
Cutting speed : $V_c = 180$ m/min
Feed : $f = 0.12$ mm/rev
Groove width : 2 mm
Groove depth : 5 mm


CHP type toolholders for high-pressure coolant

The coolant is supplied to the cutting edge providing good chip control and long tool life.



STCR/L-27

External toolholders for grooving, parting

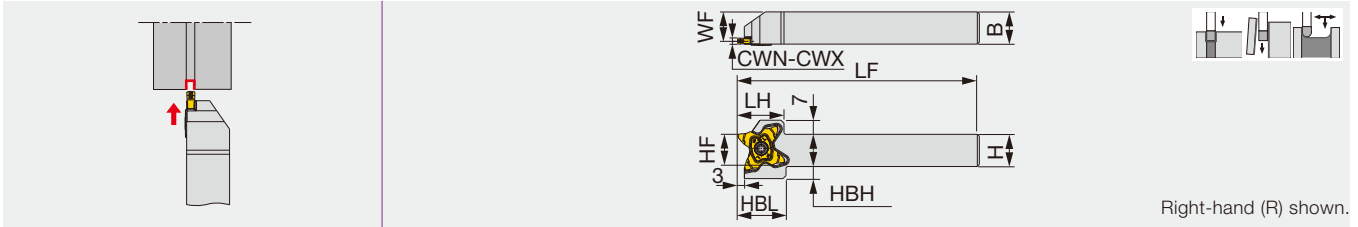

Designation	CWN	CWX	H	B	LF	LH	HBL	HF	WF	HBH	Insert	Torque*
STCR/L1010-27	0.5	3.18	10	10	120	23	24	10	8.5	9.5	TC*27...	2.5
STCR/L1212-27	0.5	3.18	12	12	120	23	24	12	10.5	8	TC*27...	2.5
STCR/L1616-27	0.5	3.18	16	16	120	23	24	16	14.5	6	TC*27...	2.5
STCR/L2020-27	0.5	3.18	20	20	120	23	24	20	18.5	2	TC*27...	2.5
STCR/L2525-27	0.5	3.18	25	25	135	23	-	25	23.5	-	TC*27...	2.5

*Torque: Recommended torque (N·m) for clamping

SPARE PARTS




Designation	Screw	Wrench
STCR*-27	SR16-212-01397L	T-2010/5
STCL*-27	SR16-212-01397	T-2010/5

STCR/L-27-CHP



Grooving and parting-off tool with DirectTung-Jet high pressure coolant capability

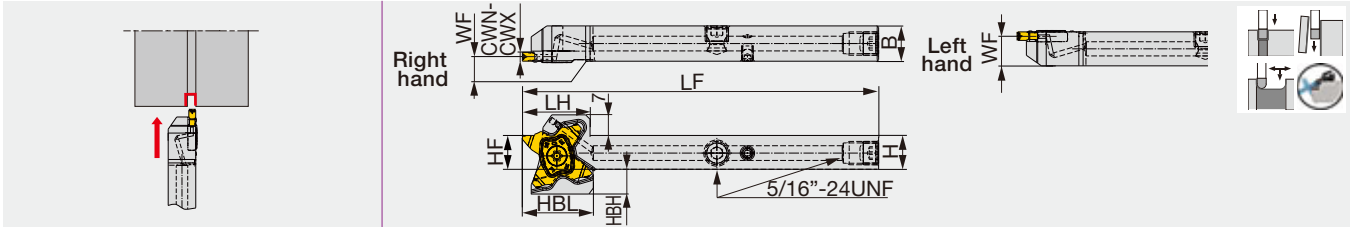

Designation	CWN	CWX	H	B	LF	LH	HF	WF ⁽¹⁾	HBH	HBL	Insert	Torque*
STCR/L1212-27-CHP	0.5	3.18	12	12	120	23	12	1.5/10.5	8	24	TC*27...	2.5

Make sure to avoid tool interferences when used on Swiss machines


*Torque: Recommended torque (N·m) for clamping

(1) The above WF value is valid when an insert width of CW=3 is mounted

STCR/L-27-CHP



External grooving and parting-off toolholder, high pressure coolant compatible

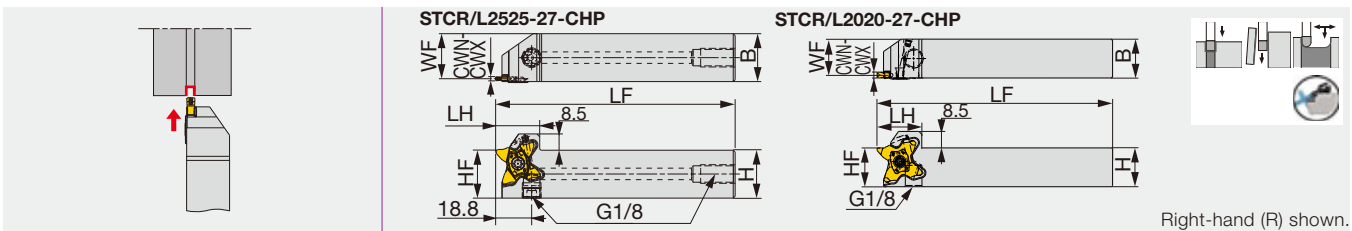

Designation	CWN	CWX	H	B	LF	LH	HF	WF	insert	Torque*
STCR/L2020-27-CHP	0.5	3.18	20	20	120	23	20	18.5	TC*27...	2.5
STCR/L2525-27-CHP	0.5	3.18	25	25	125	23	25	23.5	TC*27...	2.5

*Torque: Recommended torque (N·m) for clamping

SPARE PARTS



Designation	Screw	Wrench
STCR*-27-CHP	SR16-212-01397L	T-2010/5
STCL*-27-CHP	SR16-212-01397	T-2010/5


See page 40 for connections and coolant hoses.

New

STCAR/L27-CHP

TUNGALLOY SYSTEM

Modular blade with high pressure coolant channels

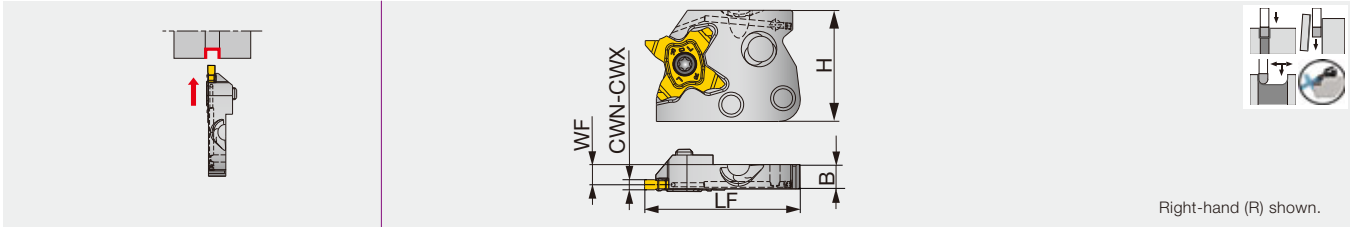

Designation	CWN	CWX	WF	H	LF	B	Insert	Torque*
STCAR/L27-CHP	0.5	3.18	6	33	46	7.2	TC*27...	2.5

*Torque: Recommended torque (N-m) for clamping

SPARE PARTS


Designation	Screw	Wrench
STCAR27-CHP	SR16-212-01397L	T-2010/5
STCAL27-CHP	SR16-212-01397	T-2010/5

New

CHSR/L-CHP

TUNGALLOY SYSTEM

Shank for CAER/L-CHP, with channels for high pressure coolant

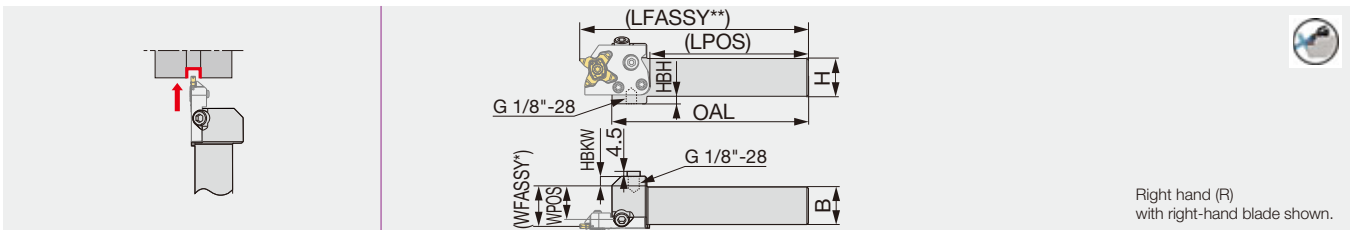

Designation	H	B	OAL	LPOS	WPOS	HBKW	HBH
CHSR/L2020-CHP	20	20	130	105.5	15.1	12	10
CHSR/L2525-CHP	25	25	130	105.5	20.1	7	5

*WFASSY : shank (WPOS) + blade (WF)

**LFASSY : shank (LPOS) + blade (LF)

Use the right-hand blade for the right-hand shank.

SPARE PARTS

Designation	Screw	Wrench	Clamping screw	Clamping screw	Wrench	O-ring	Plug
CHSR/L*-CHP	SRM5-04451	T-20/5	SRM6X12DIN6912	SRM6X20-XT	HW5.0	OR5X1N	PLUGG1/8ISO1179

See page 39 for blade assembly/disassembly instructions


See page 40 for connections and coolant hoses

New

CHFVR/L-CHP

TUNGALOY **M^{ODULAR} SYSTEM**

Shank for blade, with channels for high pressure coolant

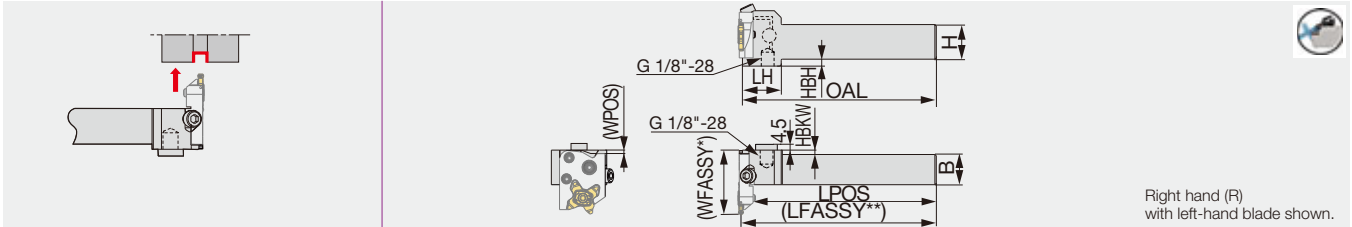

Right hand (R)
with left-hand blade shown.

Designation	H	B	OAL	LPOS	WPOS	LH	HBKW	HBH
CHFVR/L2020-CHP	20	20	140	135.1	0.5	28	5	10
CHFVR/L2525-CHP	25	25	140	135.1	0.5	28	0	5

*WFASSY : shank (WPOS) + blade (LF)

**LFASSY : shank (LPOS) + blade (WF)

Use the left-handed blade for the right-handed shank

SPARE PARTS

Designation	Clamping screw	Wrench	Clamping screw	Clamping screw	Wrench	O-ring	Plug
CHFVR/L*-CHP	SRM5-04451	T-20/5	SRM6X12DIN6912	SRM6X20-XT	HW5.0	OR5X1N	PLUGG1/8ISO1179

See page 39 for blade assembly/disassembly instructions


See page 40 for connections and coolant hoses

New

C*CHSN-CHP

TUNGALOY **TCAP** TUNGALOY **M^{ODULAR} SYSTEM**

TungCap shank for CAER/L-CHP, with channels for high pressure coolant

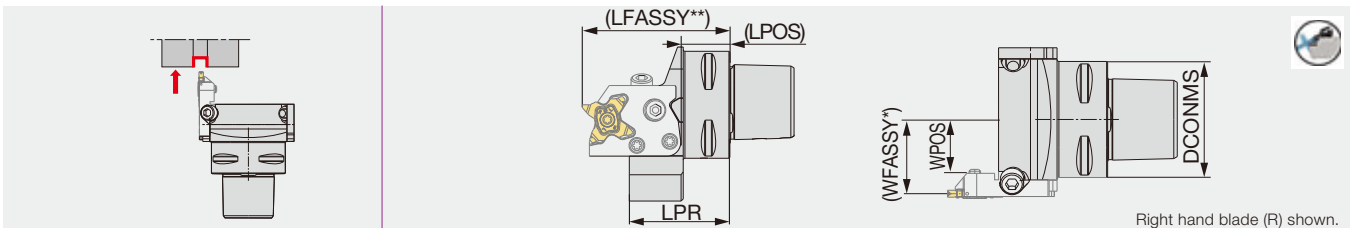

Right hand blade (R) shown.

Designation	DCONMS	LPR	LPOS	WPOS
C3CHSN19045-CHP	32	45	17.5	18.5
C4CHSN21047-CHP	40	46.5	21.5	21
C5CHSN26047-CHP	50	47	22.5	26
C6CHSN33050-CHP	63	50	24.5	32.5

*WFASSY : shank (WPOS) + blade (WF)

**LFASSY : shank (LPOS) + blade (LF)

SPARE PARTS

Designation	Clamping screw	Wrench	Clamping screw	Clamping screw	Wrench	O-ring
C*CHSN*-CHP	SRM5-04451	T-20/5	SRM6X12DIN6912	SRM6X20-XT	HW5.0	OR5X1N


See page 39 for blade assembly/disassembly instructions

New

C*CHFVN-CHP

TUNGCAP TUNGMSYSTEM

TungCap shank for CAER/L-CHP, with channels for high pressure coolant

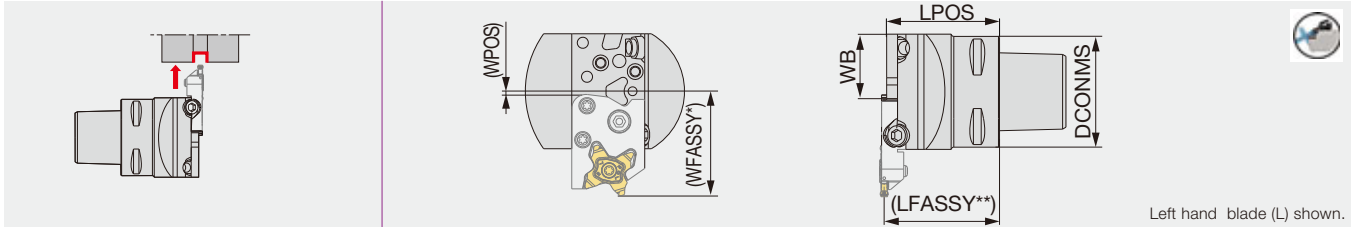

Designation

	DCONMS	LPOS	WB	WPOS
C3CHFVN26040-CHP	32	40	26	1.5
C4CHFVN26046-CHP	40	46	26	1.5
C5CHFVN26046-CHP	50	46	26	1.5
C6CHFVN33046-CHP	63	46	33	8.5

*WFASSY : shank (WPOS) + blade (LF)

**LFASSY : shank (LPOS) + blade (WF)


SPARE PARTS

Designation	Clamping screw	Wrench	Clamping screw	Clamping screw	Wrench	O-ring
C*CHFVN**-CHP	SRM5-04451	T-20/5	SRM6X12DIN6912	SRM6X20-XT	HW5.0	OR5X1N

See page 39 for blade assembly/disassembly instructions

New


TCL27

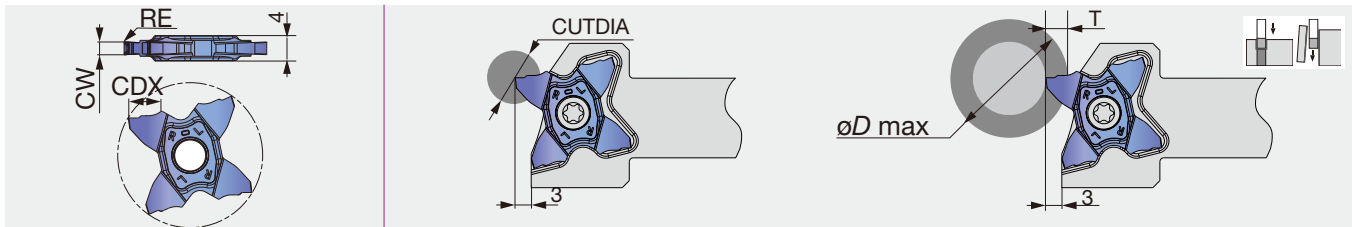

Designation	Grade AH725	CW ± 0.02	RE	CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)											
						T≤1.0	T≤2.0	T≤3.0	T≤3.5	T≤4.0	T≤4.5	T≤5.0	T≤5.5	T≤5.7	T≤6.0	T≤6.2	T≤6.4
TCL27-150-015	●	1.5	0.15	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCL27-200-020	●	2.0	0.2	6.4	12.8	∞	∞	∞	600	280	180	130	105	85	60	50	30
TCL27-250-020	●	2.5	0.2	6.4	12.8	∞	∞	∞	600	280	180	130	105	85	60	50	30
TCL27-300-020	●	3.0	0.2	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55

Package Quantity = 5 pcs.
● : New product


TCS27

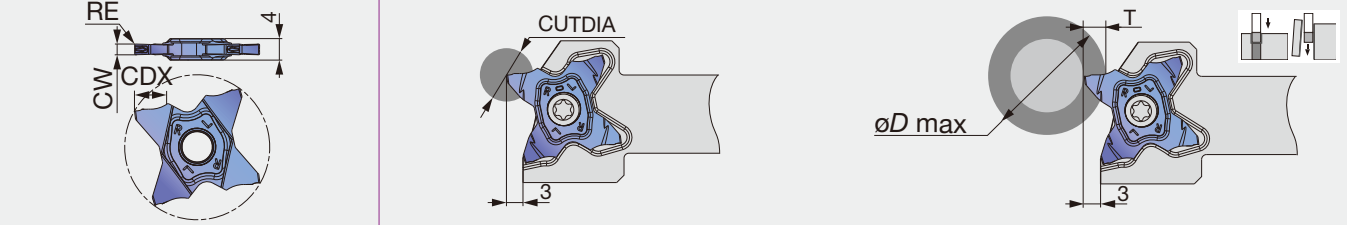

Designation	Grade AH725	CW ± 0.02	RE	CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)												
						T≤1.0	T≤2.0	T≤3.0	T≤3.5	T≤4.0	T≤4.5	T≤5.0	T≤5.5	T≤5.7	T≤6.0	T≤6.2	T≤6.4	
TCS27-050-000	●	0.5	0	1	2	∞	-	-	-	-	-	-	-	-	-	-	-	-
TCS27-050-004	●	0.5	0.04	2.5	5	∞	∞	-	-	-	-	-	-	-	-	-	-	-
TCS27-075-010	●	0.75	0.1	2.5	5	∞	∞	-	-	-	-	-	-	-	-	-	-	-
TCS27-080-000	●	0.8	0	1.6	3.2	∞	-	-	-	-	-	-	-	-	-	-	-	-
TCS27-100-006	●	1	0.06	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-	-
TCS27-100-010	●	1	0.1	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-	-
TCS27-104-000	●	1.04	0	2	4	∞	∞	-	-	-	-	-	-	-	-	-	-	-
TCS27-120-000	●	1.2	0	2	4	∞	∞	-	-	-	-	-	-	-	-	-	-	-
TCS27-125-010	●	1.25	0.1	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-	-
TCS27-125-020	●	1.25	0.2	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-	-
TCS27-140-000	●	1.4	0	2	4	∞	∞	-	-	-	-	-	-	-	-	-	-	-
TCS27-147-000	●	1.47	0	2.5	5	∞	∞	-	-	-	-	-	-	-	-	-	-	-
TCS27-150-010	●	1.5	0.1	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-	-
TCS27-150-020	●	1.5	0.2	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-	-
TCS27-157-015	●	1.57	0.15	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-	-
TCS27-170-010	●	1.7	0.1	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-	-
TCS27-175-010	●	1.75	0.1	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-	-
TCS27-175-020	●	1.75	0.2	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-	-
TCS27-178-018	●	1.78	0.18	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-	-
TCS27-185-020	●	1.85	0.2	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-	-
TCS27-196-015	●	1.96	0.15	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-	-
TCS27-200-010	●	2	0.1	6.4	12.8	∞	∞	∞	600	280	180	130	105	85	60	50	30	-
TCS27-200-020	●	2	0.2	6.4	12.8	∞	∞	∞	600	280	180	130	105	85	60	50	30	-
TCS27-222-015	●	2.22	0.15	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-	-
TCS27-230-020	●	2.3	0.2	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-	-
TCS27-239-015	●	2.39	0.15	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-	-
TCS27-247-020	●	2.47	0.2	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-	-
TCS27-250-010	●	2.5	0.1	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-	-
TCS27-250-030	●	2.5	0.3	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-	-
TCS27-270-010	●	2.7	0.1	6.2	12.4	∞	∞	∞	600	280	180	135	105	95	85	78	-	-
TCS27-287-020	●	2.87	0.2	6.2	12.4	∞	∞	∞	600	280	180	135	105	95	85	78	-	-
TCS27-300-000	●	3	0	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55	-
TCS27-300-020	●	3	0.2	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55	-
TCS27-300-030	●	3	0.3	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55	-
TCS27-300-040	●	3	0.4	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55	-
TCS27-315-015	●	3.15	0.15	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	68	-
TCS27-318-020	●	3.18	0.2	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	68	-

Package Quantity = 5 pcs.
● : Line up


TCS27-R/L

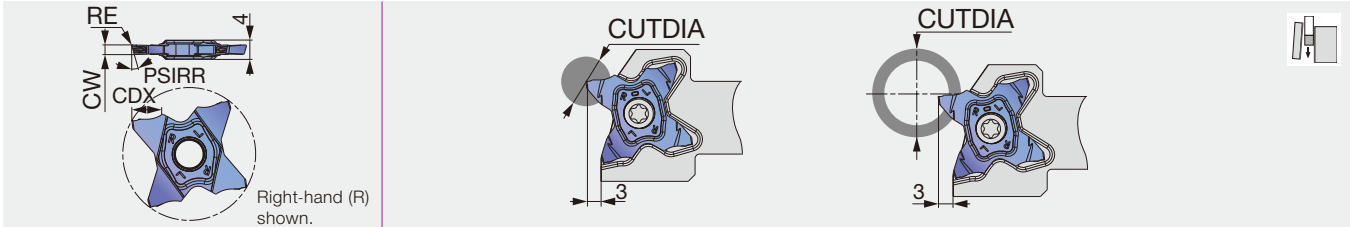

Designation	Grade		CW ± 0.02	RE	CDX	PSIRR/L	Max. parting-off dia.	
	AH725						øD max	
	R	L					Solid bar	Tube
TCS27-100-15R/L	●	●	1	0.06	3.5	15°	7	600
TCS27-150-6R/L	●	●	1.5	0.06	5.7	6°	11.4	35
TCS27-150-15R/L	●	●	1.5	0.06	5.7	15°	11.4	35
TCS27-200-6R/L	●	●	2	0.10	6.4	6°	12.8	30
TCS27-200-15R/L	●	●	2	0.10	6.4	15°	12.8	30

Package Quantity = 5 pcs.
● : Line up


TCS27-Full R

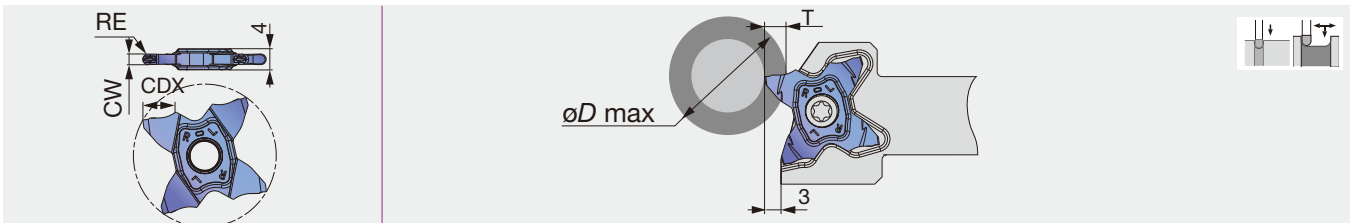

Designation	Grade	CW ± 0.02	RE	CDX	Relation of groove depth (T) and Max. diameter (øD max)												
					AH725												
					T≤1.0	T≤2.0	T≤3.0	T≤3.5	T≤4.0	T≤4.5	T≤5.0	T≤5.5	T≤5.7	T≤6.0	T≤6.2	T≤6.4	
TCS27-157-079	●	1.57	0.79	3	∞	∞	∞	-	-	-	-	-	-	-	-	-	
TCS27-200-100	●	2	1	3	∞	∞	∞	-	-	-	-	-	-	-	-	-	
TCS27-239-120	●	2.39	1.2	5.7	∞	∞	∞	600	280	180	130	50	35	-	-	-	
TCS27-300-150	●	3	1.5	6.4	∞	∞	∞	600	280	180	135	105	95	85	78	55	

Package Quantity = 5 pcs.
● : Line up

TCM27

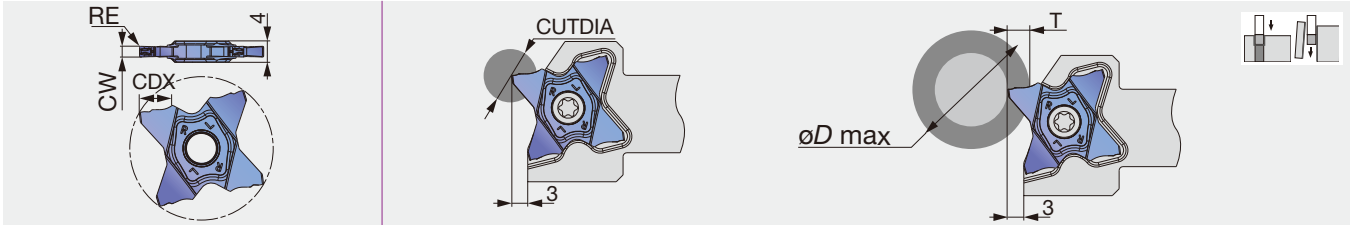


Designation	Grade AH725	CW ± 0.02	RE	CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)											
						T≤1.0	T≤2.0	T≤3.0	T≤3.5	T≤4.0	T≤4.5	T≤5.0	T≤5.5	T≤5.7	T≤6.0	T≤6.2	T≤6.4
TCM27-150-010	●	1.5	0.1	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCM27-150-020	●	1.5	0.2	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCM27-157-015	●	1.57	0.15	3.0	6.0	∞	∞	∞	-	-	-	-	-	-	-	-	
TCM27-170-010	●	1.7	0.1	3.0	6.0	∞	∞	∞	-	-	-	-	-	-	-	-	
TCM27-175-010	●	1.75	0.1	3.0	6.0	∞	∞	∞	-	-	-	-	-	-	-	-	
TCM27-175-020	●	1.75	0.2	3.0	6.0	∞	∞	∞	-	-	-	-	-	-	-	-	
TCM27-178-018	●	1.78	0.18	3.0	6.0	∞	∞	∞	-	-	-	-	-	-	-	-	
TCM27-185-020	●	1.85	0.2	3.0	6.0	∞	∞	∞	-	-	-	-	-	-	-	-	
TCM27-196-015	●	1.96	0.15	3.0	6.0	∞	∞	∞	-	-	-	-	-	-	-	-	
TCM27-200-010	●	2	0.1	6.4	12.8	∞	∞	∞	600	280	180	130	105	85	60	50	30
TCM27-200-020	●	2	0.2	6.4	12.8	∞	∞	∞	600	280	180	130	105	85	60	50	30
TCM27-222-015	●	2.22	0.15	3.5	7.0	∞	∞	∞	600	-	-	-	-	-	-	-	
TCM27-230-020	●	2.3	0.2	3.5	7.0	∞	∞	∞	600	-	-	-	-	-	-	-	
TCM27-239-015	●	2.39	0.15	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCM27-247-020	●	2.47	0.2	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCM27-250-010	●	2.5	0.1	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCM27-250-030	●	2.5	0.3	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCM27-270-010	●	2.7	0.1	6.2	12.4	∞	∞	∞	600	280	180	135	105	95	85	78	-
TCM27-287-020	●	2.87	0.2	6.2	12.4	∞	∞	∞	600	280	180	135	105	95	85	78	-
TCM27-300-000	●	3	0	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55
TCM27-300-020	●	3	0.2	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55
TCM27-300-030	●	3	0.3	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55
TCM27-300-040	●	3	0.4	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55
TCM27-315-015	●	3.15	0.15	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	68
TCM27-318-020	●	3.18	0.2	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	68

Package Quantity = 5 pcs.

● : Line up


TCM27-Full R

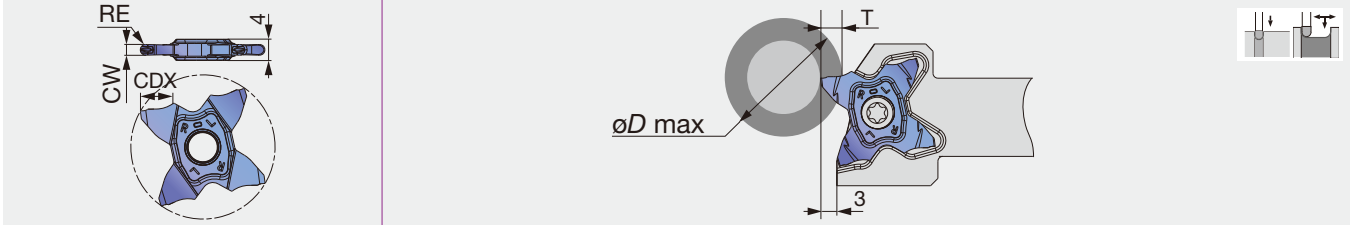

Designation	Grade AH725	CW ± 0.02	RE	CDX	Relation of groove depth (T) and Max. diameter (øD max)												
					T≤1.0	T≤2.0	T≤3.0	T≤3.5	T≤4.0	T≤4.5	T≤5.0	T≤5.5	T≤5.7	T≤6.0	T≤6.2	T≤6.4	
TCM27-157-079	●	1.57	0.79	3	∞	∞	∞	-	-	-	-	-	-	-	-	-	-
TCM27-200-100	●	2	1	3	∞	∞	∞	-	-	-	-	-	-	-	-	-	-
TCM27-239-120	●	2.39	1.2	5.7	∞	∞	∞	600	280	180	130	50	35	-	-	-	-
TCM27-300-150	●	3	1.5	6.4	∞	∞	∞	600	280	180	135	105	95	85	78	55	-

Package Quantity = 5 pcs.
● : Line up

HOW TO INDEX INSERTS

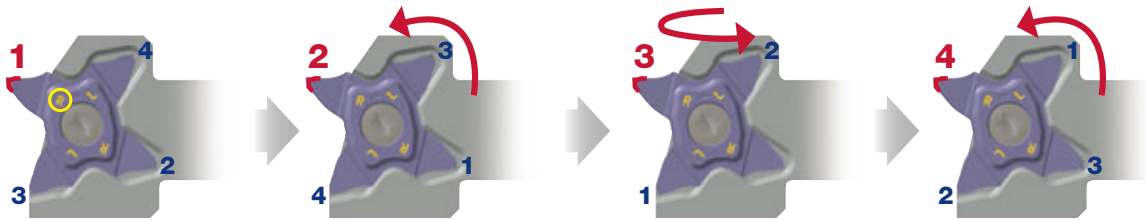

1. Right-hand edge (R) is used for the right-hand toolholders.
2. Rotate the insert
3. Flip over the insert
4. Rotate the insert


STANDARD CUTTING CONDITIONS

ISO	Workpiece materials	Grades	Cutting speed Vc (m/min)	Feed: f (mm/rev)						Depth of cut for profiling (with full radius insert)
				Grooving, parting-off		Parting-off (with hand)		Profiling (with full radius insert)		
				TCL27	TCS27	TCM27	TCS27	TCS27	TCM27	
P	Carbon steel (S45C / C45, etc.)	AH725	100 - 200	0.03 - 0.12	0.05 - 0.15	0.05 - 0.25	0.04 - 0.12	0.05 - 0.10	0.05 - 0.15	0.5
	Alloy steel (SCM435 / 34CrMo4, etc.)	AH725	50 - 180	0.03 - 0.12	0.05 - 0.15	0.05 - 0.25	0.04 - 0.12	0.05 - 0.10	0.05 - 0.15	0.5
M	Stainless steel (SUS304 / X5CrNi18-9, etc.)	AH725	100 - 150	0.03 - 0.12	0.05 - 0.15	0.05 - 0.20	0.04 - 0.12	0.05 - 0.10	0.05 - 0.15	0.5
K	Grey cast iron (FC250 / 250 / GGG25, etc.)	AH725	50 - 180	0.03 - 0.12	0.05 - 0.15	0.05 - 0.25	0.04 - 0.12	0.05 - 0.10	0.05 - 0.15	0.5
	Ductile cast iron (FCD400 / 400-15 / GGG400, etc.)	AH725	50 - 120	0.03 - 0.12	0.05 - 0.15	0.05 - 0.20	0.04 - 0.12	0.05 - 0.10	0.05 - 0.15	0.5
S	Titanium alloys (Ti-6Al-4V, etc.)	AH725	30 - 60	0.03 - 0.12	0.05 - 0.15	0.05 - 0.15	0.04 - 0.12	0.05 - 0.10	0.05 - 0.10	0.5
	Superalloys (Inconel718, etc.)	AH725	20 - 50	0.03 - 0.12	0.05 - 0.15	0.05 - 0.15	0.04 - 0.12	0.05 - 0.10	0.05 - 0.10	0.5


Instructions for CHP blade assembly/disassembly




Blade assembly



1 Remove all 4 screws and ensure the O rings are all in place.





2 Place the blade and tighten 2 bottom clamping screws.



3 Tighten the fixing screw in the center.



4 Place the long screw in the angular direction and tighten to clamp the insert.

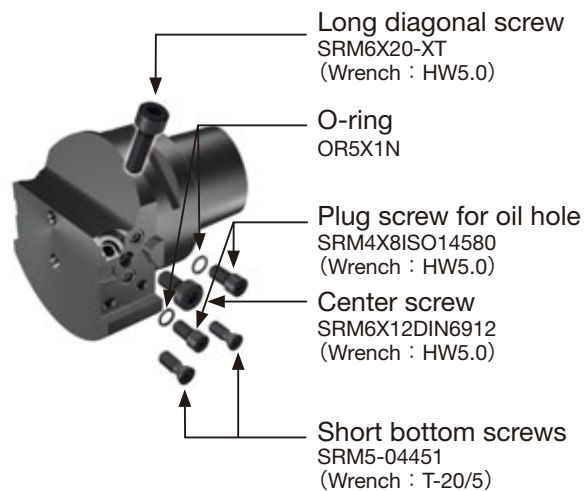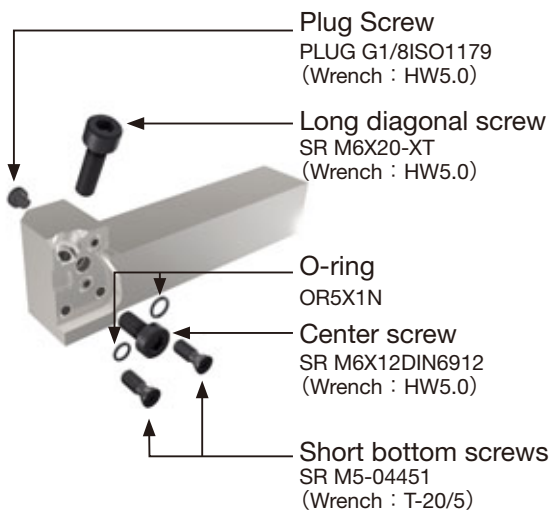

► All parts listed here are included in the tool holder.

PARTS FOR COOLANT HOSE

Connecting hose

Fig. 1



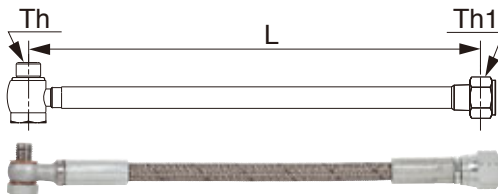


Fig. 2

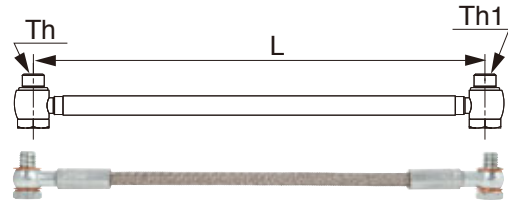

Designation	Length	Threading size		Max. pressure (Mpa)	Fig.
	L	Th	Th1		
CHP-HOSE-G1/8-7/16-200BS	200	G1/8"-28 BSPP	7/16"-20 UNF	26	1
CHP-HOSE-G1/8-7/16-250BS	250	G1/8"-28 BSPP	7/16"-20 UNF	26	1
CHP-HOSE-5/16-7/16-200BS	200	5/16"-24UNF	7/16"-20 UNF	20	1
CHP-HOSE-5/16-G1/8-200BS	200	5/16"-24UNF	G1/8"-28 BSPP	20	1
CHP-HOSE-G1/8-G1/8-200BB	200	G1/8"-28 BSPP	G1/8"-28 BSPP	26	2
CHP-HOSE-G1/8-G1/8-250BB	250	G1/8"-28 BSPP	G1/8"-28 BSPP	26	2


Connector

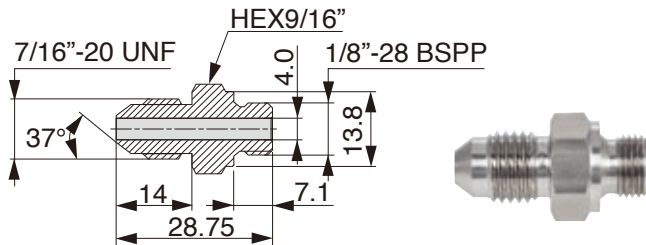

Designation

CHP-NIPPLE-G1/8-7/16UNF


Seal washer



Designation

Designation	øD	ød	W
CHP-COPPER-SEAL1/8	15	8	1
CHP-COPPER-SEAL5/16	11	8	1
CHP-COPPER-SEAL5/16-2.5	11	8	2.5

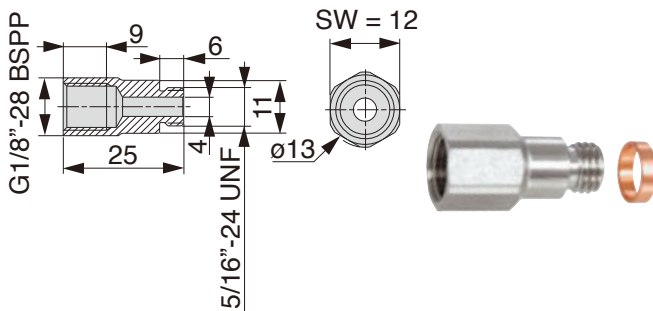







Connector for small lathe with seal washer



Designation

CHP-CONNECTOR/5/16-G1/8

PRACTICAL EXAMPLES

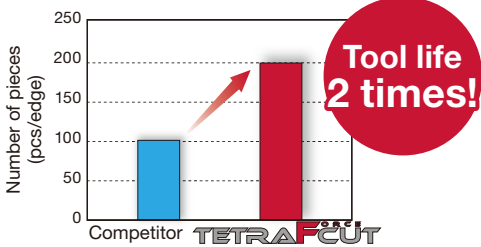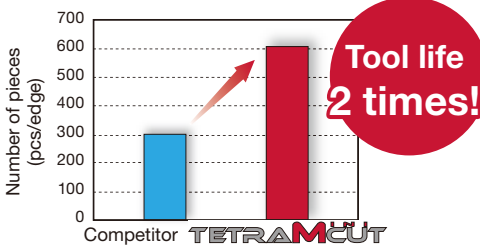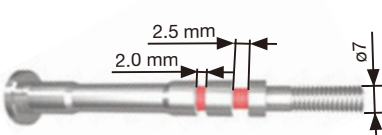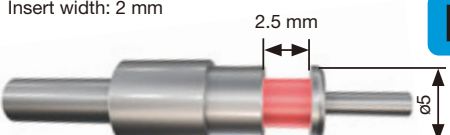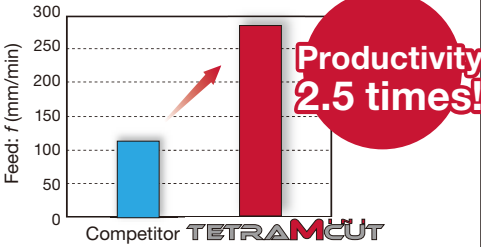Workpiece type	Shaft stator	Input shaft	
Toolholder	STCR2525-27	STCR2525Z18	
Insert	TCS27-200-020	TCG18R150-020	
Grade	AH725	AH7025	
Workpiece material	S45C / C45	SCr420 / 20Cr4	
Workpiece material	 P	 P	
Cutting conditions	Cutting speed : V_c (m/min)	210	100
	Feed : f (mm/rev)	0.15	0.08
	Groove depth : CDX (mm)	2	2.1
	Groove width : CW (mm)	2	2
	Machining	External grooving	External grooving
	Coolant	Wet	Wet
Machine	NC lathe	NC lathe	
Results	 <p>Due to the incredible wear resistance, TetraForce-Cut doubles tool life compared to the competitor. TCS chipbreaker improves chip control in which the competitor's chipbreaker has problems.</p>	 <p>Thanks to its high wear resistance, AH7025 has successfully machined 600 parts and was still able to continue.</p>	
	<p>Workpiece type</p> <p>Toolholder</p> <p>Insert</p> <p>Grade</p> <p>Workpiece material</p>	<p>Spool shaft</p> <p>STCR1010X18</p> <p>TCP18R200F-010</p> <p>SH725</p> <p>S45C / C45</p>  P	<p>Shaft</p> <p>STCR1212X18-CHP</p> <p>TCP18R200F-010</p> <p>SH725</p> <p>S15C / C15E4</p> <p>Insert width: 2 mm</p>  P
Cutting conditions	Cutting speed : V_c (m/min)	43	95
	Feed : f (mm/rev)	0.10	0.03
	Groove depth : CDX (mm)	1.5 / 1.1	1
	Groove width : CW (mm)	2 / 2.5	2.5
	Machining	External grooving	External grooving
	Coolant	Wet	Wet
Machine	Swiss lathe	Swiss lathe	
Results	 <p>Due to the rigid clamping, TetraMini-Cut provides higher feed than the competitor, achieving 2.5 times better productivity.</p>	 <p>External supply (at normal pressure)</p> <p>TUNG TJET</p> <p>1.5 MPa</p> <p>No chip packing in the workpiece</p> <p>Thanks to its high pressure coolant jet system, TugnTurn-Jet has improved the chip evacuation, eliminating the post-work chip cleaning process.</p>	

Expedited delivery service for special grooving insert

Expedited delivery service for special grooving inserts is rendered under the following lead time and quantity terms. Please note that this service is applicable only for the order for an initial test batch; a repeat order is to be placed through the regular ordering process.

ORDER
3 - 15 pcs.




LEAD TIME
from the point of order receipt
(excluding transportation)

COATED INSERT
4 weeks

NON-COATED INSERT
3 weeks



DELIVERY



TETRAMINI CUT
TUNGALOY

Special width
& corner radii



With chamfer
edges



Grade

Coated carbide

AH725

SH725

TCP18
R/L



TETRAFORCE CUT
TUNGALOY

Special width
& corner radii



With chamfer edges



Grade


Coated carbide

AH725

TCG27



Special width & corner radii

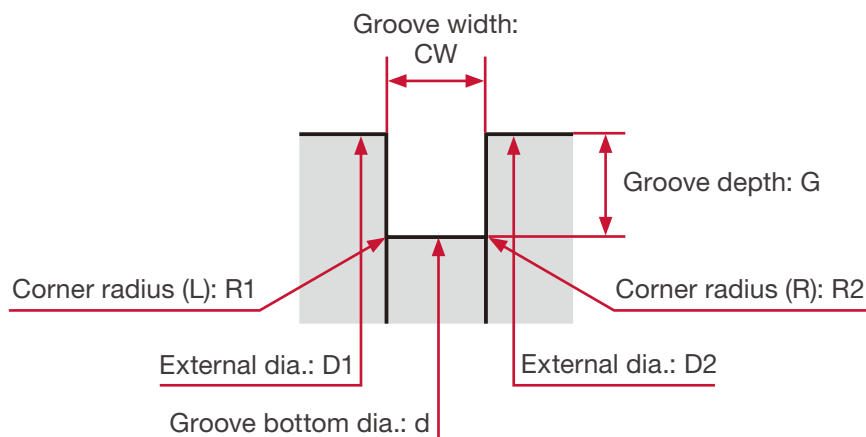

TETRAMCUT
TUNGALOY

Groove width (CW)	Max. groove depth (G)	Corner radii (R1 / R2)	Toolholder
0.33 ~ 0.49 mm	~ 1.0 mm	0	STCR/L****-18
0.50 ~ 0.74 mm	~ 2.0 mm	0.05 ~ CW/2	
0.75 ~ 3.18 mm	~ 2.5 mm	(Full radius is available)	


*Tolerances of the insert are based on the standard item.

TETRAFORCE
TUNGALOY

Groove width (CW)	Max. groove depth (G)	Corner radii (R1 / R2)	Toolholder
0.33 ~ 0.49 mm	~ 1.0 mm	0	STCR/L****-27
0.50 ~ 0.99 mm	~ 2.5 mm	0	
1.0 ~ 1.49 mm	~ 3.5 mm	0.05 ~ CW/2	
1.50 ~ 1.99 mm	~ 5.7 mm	(Full radius is available)	
2.00 ~ 3.18 mm	~ 6.4 mm		

*Tolerances of the insert are based on the standard item.

Grooving & chamfering

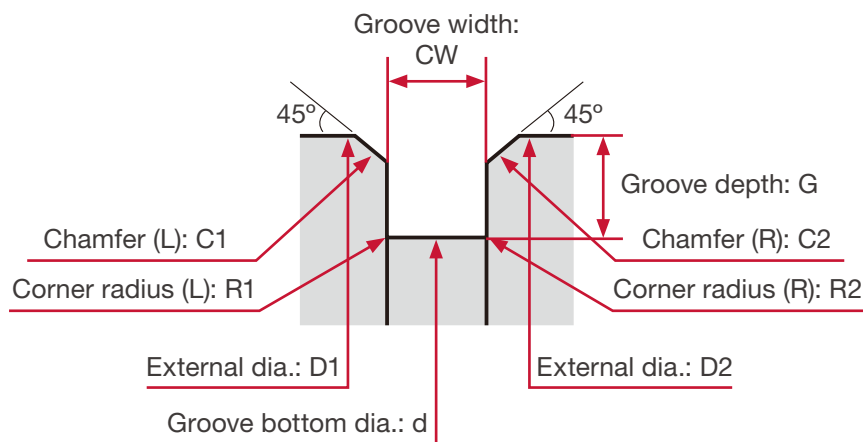

TETRAMCUT
TUNGALOY

Groove width + chamfer width (CW+2C)	Max. groove depth (G)	Corner radii (R1 / R2)	Toolholder
0.5 ~ 3.5 mm	0.50 ~ 2.00 mm	0 or 0.05 ~ CW/2 (Full radius is available)	STCR/L****-18

*Tolerances of the insert are based on the standard item.

Max. width of chamfer is 0.5 mm.

Some combinations of a groove width, depth, a corner radius(R), and chamfer may be unable to be manufactured.

TETRAFORCE
TUNGALOY

Groove width + chamfer width (CW+2C)	Max. groove depth (G)	Corner radii (R1 / R2)	Toolholder
0.5 ~ 3 mm	0.50 ~ 3.00 mm	0 or 0.05 ~ CW/2 (Full radius is available)	STCR/L****-27

*Tolerances of the insert are based on the standard item.

Max. width of chamfer is 0.5 mm.

Some combinations of a groove width, depth, a corner radius(R), and chamfer may be unable to be manufactured.

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima, 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy America, Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloy.com/us

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy de Mexico S.A.

C Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx

Tungaloy do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy Germany GmbH

An der Alten Ziegelei 1
D-40789 Monheim, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.de

Tungaloy France S.A.S.

ZA Courtaboeuf - Le Rio
1 rue de la Terre de feu
F-91952 Courtaboeuf Cedex, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
Fax: +34 93 876 2798
www.tungaloy.es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
www.tungaloy.se

Tungaloy Rus, LLC

115432, Moscow, Andropov Avenue, 18,
building 7, 11th floor (office 3). Metro station
"Technopark". Business center «I-Land».
Phone: +7-499-683-01-80/81
www.tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

ul. Genewska 24
03-963 Warszawa, Poland
Phone: +48-22-617-0890
Fax: +48-22-617-0890
www.tungaloy.com/pl

Tungaloy U.K. Ltd

Gallan Park
Watling Street
Cannock WS11 0XG, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk
salesinfo@tungaloyuk.co.uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu
info@tungaloytools.hu

Tungaloy Turkey

Dudullu OSB 4. Cad No:4
34776 Umraniye Istanbul, TURKEY
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com.tr
info@tungaloy.com.tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy-benelux.com

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430 Samobor
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.hr

Tungaloy Cutting Tool (Shanghai) Co.,Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.com/cn

Tungaloy Cutting Tools Taiwan Co.,Ltd.

9F.No.293, Zhongyang Rd.
Xinzhuan Dist.
New Taipei City 24251
Phone: +886-2-8521-9986
Fax: +886-2-8521-8935
www.tungaloy.com/tw

Tungaloy Cutting Tool (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.co.th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/sg

Tungaloy Vietnam

LE04.38, Lexington Residence
67 Mai Chi Tho St., Dist. 2,
Ho Chi Minh City, Vietnam
Phone: +84-2837406660
www.tungaloy.com/sg

Tungaloy India Pvt. Ltd.

Indiabulls Finance Centre,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai -400013, India
Phone: +91-22-6124-8804
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

PO Box 2232, 68/1470
Ferntree Gully Road, Knoxfield
Victoria 3180, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com.au

PT. Tungaloy Indonesia

Kompleks Grand Wisata Block AA-10 No.3-5
Cibitung
Bekasi 17510, Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id



www.tungaloy.com

follow us at:

facebook.com/tungaloyjapan
twitter.com/tungaloyjapan
www.youtube.com/tungaloycorporation



AS9100 Certified
78006
2015.11.04
ISO14001 Certified
EC97J1123
1997.11.26

Distributed by:



FIND US ON THE CLOUD!
machiningcloud.com



GrooveLine



TETRAMCUT

www.tungaloy.com

Tungaloy Report No. 416S1-G

Expanded groove width options for **TCL18 and TCG18 inserts**




INDUSTRY 4.0
FEED the SPEED!



For more information

TCL18R (3D chipbreaker)

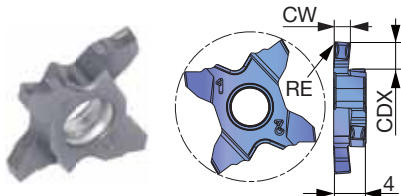

Right-hand (R) shown.

P	Steel	★							
M	Stainless	★							
K	Cast iron	★							
N	Non-ferrous								
S	Superalloys	★							
H	Hard materials								

★ : First choice
☆ : Second choice

Designation	HAND	CW±0.02	RE	Coated						CDX	
				AH7025							
New TCL18R175-020	R	1.75	0.2	●							3.5
New TCL18R250-030	R	2.5	0.3	●							3.5

5 pieces per package
● : New product

New TCG18R/L (Full R)



Right-hand (R) shown.

P	Steel	★							
M	Stainless	★							
K	Cast iron	★							
N	Non-ferrous								
S	Superalloys	★							
H	Hard materials								

★ : First choice
☆ : Second choice

Designation	HAND	CW±0.02	RE	Coated						CDX	
				AH7025							
TCG18R100-050	R	1	0.5	★							2
TCG18L100-050	L	1	0.5	★							2
TCG18R158-079	R	1.58	0.79	★							3.5
TCG18L158-079	L	1.58	0.79	★							3.5
TCG18R200-100	R	2	1	★							3.5
TCG18L200-100	L	2	1	★							3.5
TCG18R239-120	R	2.39	1.2	★							3.5
TCG18L239-120	L	2.39	1.2	★							3.5
TCG18R300-150	R	3	1.5	★							3.5
TCG18L300-150	L	3	1.5	★							3.5
TCG18R318-159	R	3.18	1.59	★							3.5
TCG18L318-159	L	3.18	1.59	★							3.5

5 pieces per package
★ : To be released in 2020

STANDARD CUTTING CONDITIONS

TCL18R (3D chipbreaker), TCG18R/L (Full R)

ISO	Workpiece materials	Grades	Cutting speed Vc (m/min)	Feed: f (mm/rev)	
				TCL18	TCG18
P	Low carbon steel S15C / C15, S20C / C20, etc.	AH7025	80 - 180	0.03 - 0.12	0.04 - 0.14
	Carbon steels, Alloy steel S55C / C55, SCM440 / 42CrMoS4, etc.	AH7025	80 - 180	0.03 - 0.12	0.04 - 0.14
	Prehardened steel NAK80, PX5, etc.	AH7025	80 - 180	0.03 - 0.12	0.04 - 0.14
M	Stainless steel SUS304 / X5CrNi18-9, X5CrNiMo17-12-2, etc.	AH7025	50 - 120	0.03 - 0.12	0.04 - 0.14
K	Grey cast iron FC250 / GG25 / 250, FC300 / GG30 / 300, etc.	AH7025	50 - 180	0.03 - 0.12	0.04 - 0.14
	Ductile cast iron FCD400 / 400-15, FCD600 / 600-3, etc.	AH7025	50 - 180	0.03 - 0.12	0.04 - 0.14
S	Titanium alloys Ti-6Al-4V, etc.	AH7025	30 - 80	0.03 - 0.12	0.04 - 0.14
	Superalloys Inconel718, etc.	AH7025	20 - 60	0.03 - 0.12	0.04 - 0.14

Standard lineup of TetraMini-Cut grooving inserts

Groove width CW (mm)	Corner rad. RE (mm)	TCL18R	TCS18R	TCG18R/L	TCP18R/L	TCP18R/L-F
		AH7025	AH7025	AH7025	AH725	SH725
0.33	0.05				●	●
0.43	0.05				●	●
0.50	0.05				●	●
0.75	0.05				●	●
0.95	0.05				●	●
1.00	0.05					●
	0.1		●	●	●	●
1.20	0.5			★		
	0.05					●
1.25	0.1		●	●	●	●
	0.1		●	●	●	●
1.30	0.05					●
	0.1		●	●	●	●
1.40	0.2		●	●	●	●
	0.1		●	●	●	●
1.45	0.2		●	●	●	●
	0.05					●
1.50	0.1	●	●	●	●	●
	0.2	●	●	●	●	●
1.58	0.79			★		
1.60	0.2		●	●	●	●
1.70	0.2		●	●	●	●
1.75	0.05					●
	0.1		●	●	●	●
1.85	0.2	●	●	●	●	●
	0.2	●	●	●	●	●
2.00	0.05					●
	0.1	●	●	●	●	●
2.25	0.2	●	●	●	●	●
	0.2	●	●	●	●	●
2.30	0.2		●	●	●	●
2.39	1.2			★		
2.50	0.1		●	●	●	●
	0.2		●	●	●	●
2.65	0.3	●	●	●	●	●
	0.3	●	●	●	●	●
2.80	0.3		●	●	●	●
3.00	0.1	●	●	●	●	●
	0.2	●	●	●	●	●
3.18	0.3	●	●	●	●	●
	1.5			★		
	1.59			★		

● : New product ★ : To be released in 2020 ● : Line up

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy America, Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloy.com/us

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy de Mexico S.A.

C. Los Arellano 113,
Parque Industrial Siglo XXI,
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx

Tungaloy do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy Germany GmbH

An der Alten Ziegelei 1
D-40789 Monheim, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.com/de

Tungaloy France S.A.S.

ZA Courtaboef - Le Rio
1 rue de la Terre de feu
F-91952 Courtaboef Cedex, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.com/fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.com/it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.com/cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
Fax: +34 93 876 2798
www.tungaloy.com/es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
Fax: +46-462119207
www.tungaloy.com/se

Tungaloy Rus, LLC

Andropova avenue, h.18/7,
11 floor, office 3, 115432,
Moscow, Russia
Phone: +7-499-683-01-80
Fax: +7-499-683-01-81
www.tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

Ul. Irysowa 1, 55-040 Bielany
Wroclawskie, Poland
Phone: +48 607 907 237
www.tungaloy.com/pl

Tungaloy U.K. Ltd

Gallan Park, Watling Street,
Cannock, WS110XG, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu

Tungaloy Turkey

Serifali Mah.bayraktar Bulvari Kule Sk. No:26
34775 Umraniye / Istanbul / Turkey
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com/tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy.com/nl

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430, Samobor, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.com/hr

Tungaloy Cutting Tool (Shanghai) Co.,Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.com/cn

Tungaloy Cutting Tools (Taiwan) Co.,Ltd.

9F, No.293, Zhongyang Rd,
Xinzhuan Dist, New Taipei City,
24251 Taiwan
Phone: +886-2-8521-9986
Fax: +886-2-8521-8935
www.tungaloy.com/tw

Tungaloy Cutting Tools (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.com/th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/sg

Tungaloy Vietnam

LE04.38, Lexington Residence
67 Mai Chi Tho St., Dist. 2,
Ho Chi Minh City, Vietnam
Phone: +84-2837406660
www.tungaloy.com/sg

Tungaloy India Pvt. Ltd.

Indiabulls Finance Centre,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai -400013, India
Phone: +91-22-6124-8804
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

Unit 68 1470 Ferntree Gully Road
Knoxfield 3180 Victoria, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com/au

PT. Tungaloy Indonesia

Kompleks Grand Wisata Block AA-10 No.3-5
Cibitung
Bekasi 17510, Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id



www.tungaloy.com

follow us at:

facebook.com/tungaloyjapan
twitter.com/tungaloyjapan
www.youtube.com/tungaloycorporation



AS9100 Certified
78006
2015.11.04
ISO14001 Certified
EC97J1123
1997.11.26

Distributed by:




FIND US ON THE CLOUD!
machingcloud.com



TETRAMCUT

Tungaloy Report No. 416S2-G

Latest additions of **TCF18 inserts** and **holders** for **small-diameter face grooving** on Swiss lathes

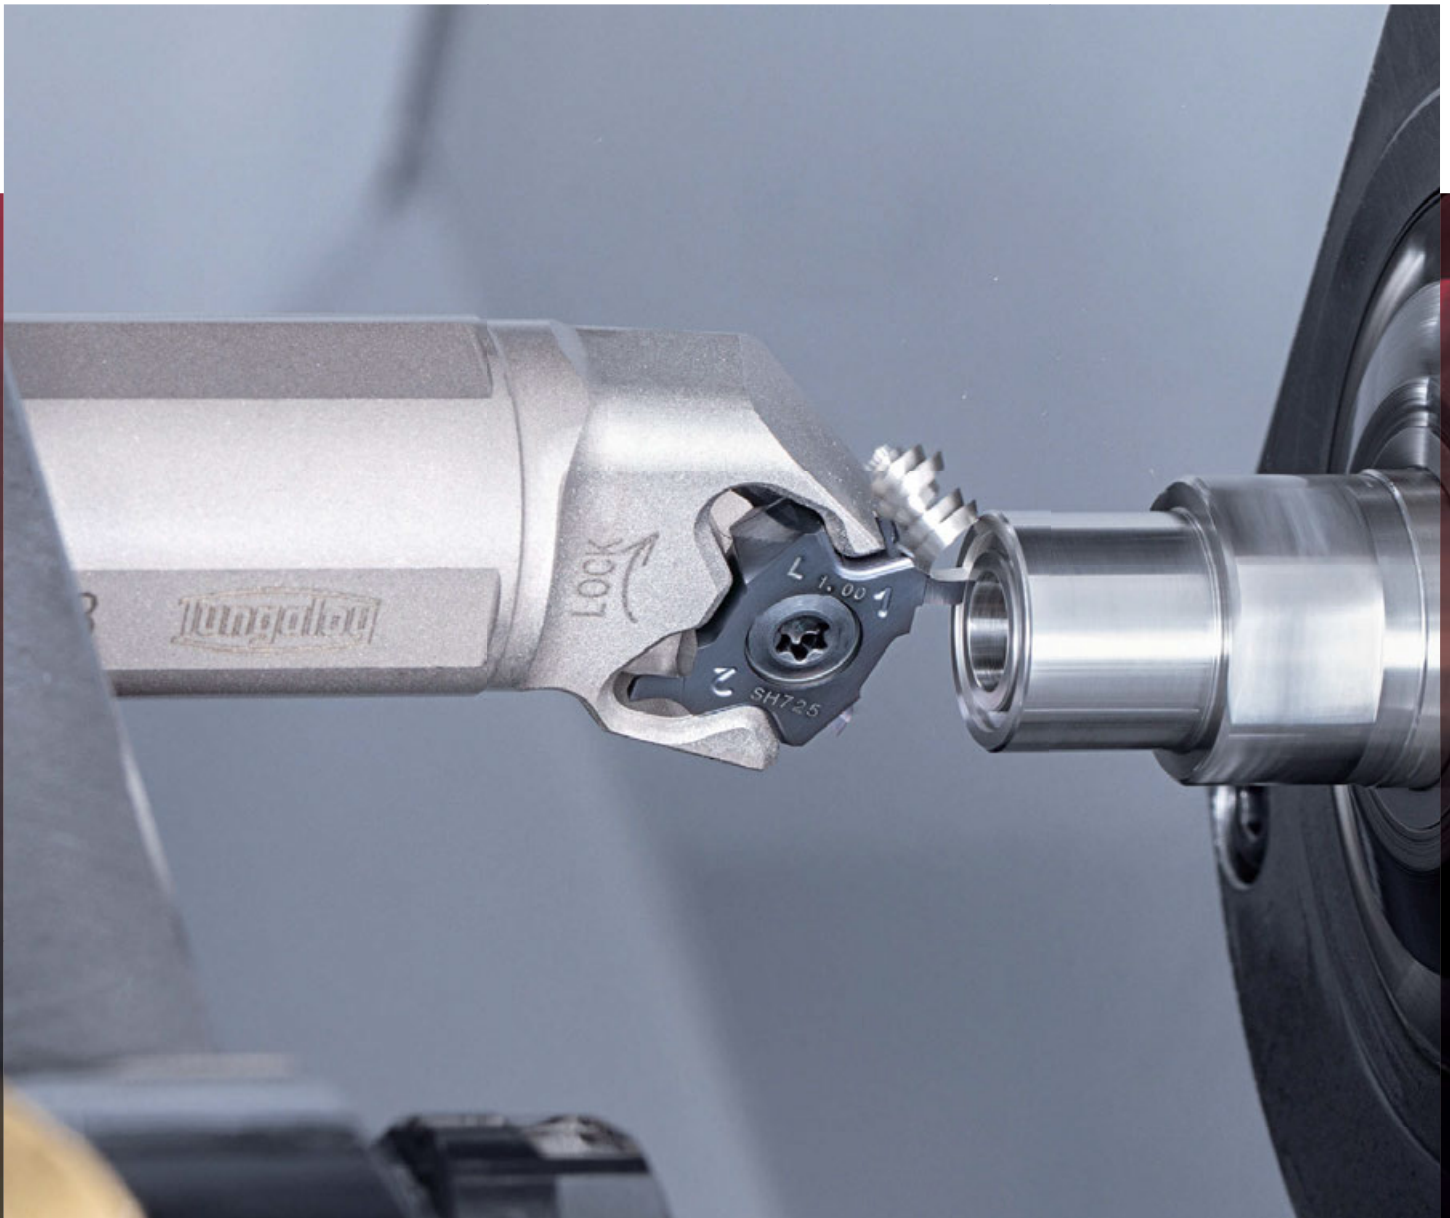




For more information



Face grooving for 6 mm minimum groove diameter!

- Sharp cutting edge and insert clamping rigidity provide superior surface finish
- Groove width: 0.5 - 2.5 mm
- Mountable on existing TetraMini-Cut toolholders

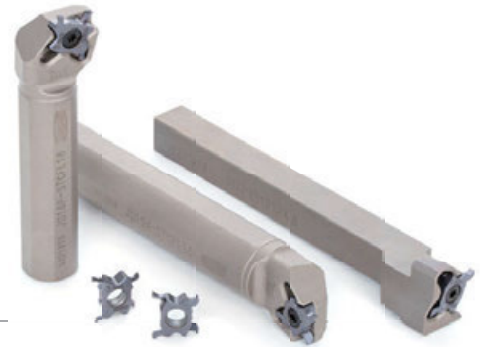

New

TCF18 type

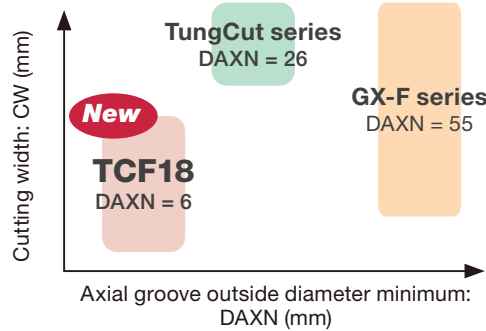

CUTTING PERFORMANCE



Competitor
Chatter marks




TETRAMCUT
Good surface finish
with no chatter marks

- Insert : TCF18L200F-005 SH725
- Workpiece material : SUS316L
- Cutting speed : $V_c = 50$ m/min
- Feed : $f = 0.03$ mm/rev
- Groove width : $CW = 2$ mm
- Groove depth : $CDX = 3$ mm
- Coolant : Wet
- Axial groove outside diameter : 6, 13 mm

INSERTS

New TCF18L (Face grooving)

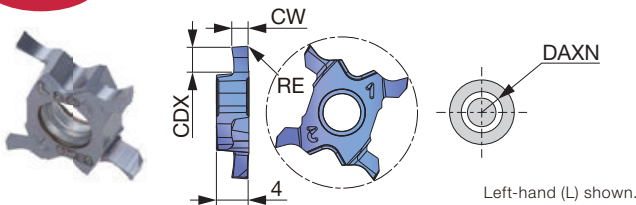

P	Steel	★								
M	Stainless	★								
K	Cast iron	★								
N	Non-ferrous									
S	Superalloys	★								
H	Hard materials									★: First choice


Designation	HAND	CW±0.02	RE	Coated							CDX	DAXN
				SH725								
TCF18L050F-005	L	0.5	0.05	●							1	6
TCF18L100F-005	L	1	0.05	●							2.5	6
TCF18L150F-005	L	1.5	0.05	●							2.5	6
TCF18L200F-005	L	2	0.05	●							3	6
TCF18L250F-005	L	2.5	0.05	●							3	6

5 pieces per package
●: New lineup

New

JS-STCFL18

Face grooving toolholder with round shank

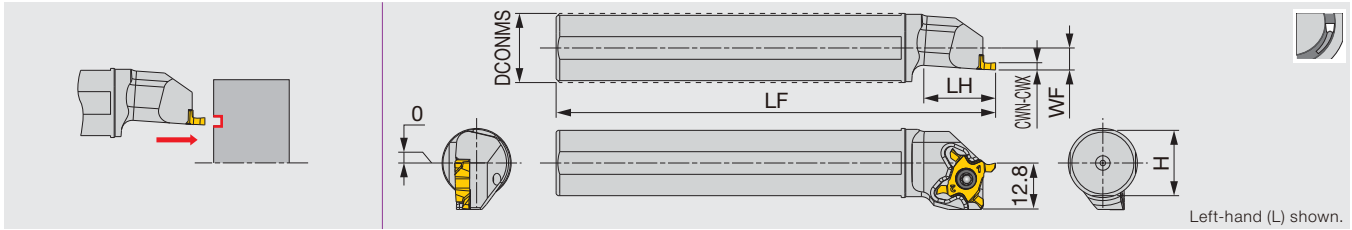

Designation	CWN	CWX	DCONMS	LF	LH	H	WF	Insert	Torque*
JS16F-STCFL18	0.5	2.5	16	85	20	15	6	TCF18L...	1.2
JS19G-STCFL18	0.5	2.5	19.05	90	20	18	6	TCF18L...	1.2
JS19X-STCFL18	0.5	2.5	19.05	120	20	18	6	TCF18L...	1.2
JS20G-STCFL18	0.5	2.5	20	90	20	19	6	TCF18L...	1.2
JS20X-STCFL18	0.5	2.5	20	120	20	19	6	TCF18L...	1.2
JS22X-STCFL18	0.5	2.5	22	120	20	21	6	TCF18L...	1.2
JS25H-STCFL18	0.5	2.5	25	100	20	24	6	TCF18L...	1.2
JS254X-STCFL18	0.5	2.5	25.4	120	20	24.5	6	TCF18L...	1.2


Note: The left hand insert (L) is used for the left hand toolholders (L).

*Torque: Recommended clamping torque: N·m

New

STCFVR-18

Face grooving toolholder with square shank, for Swiss lathes

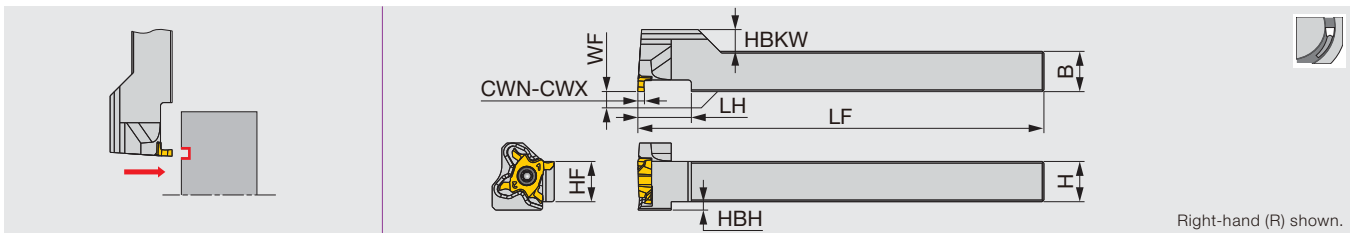

Designation	CWN	CWX	H	B	LF	LH	HF	WF	HBKW	HBH	Insert	Torque*
STCFVR1010H18	0.5	2.5	10	10	100	12	10	0	8.5	4.5	TCF18L...	1.2
STCFVR1212F18	0.5	2.5	12	12	85	16	12	0	6.5	2.5	TCF18L...	1.2
STCFVR1212X18	0.5	2.5	12	12	120	16	12	0	6.5	2.5	TCF18L...	1.2
STCFVR1616X18	0.5	2.5	16	16	120	20	16	0	2.5	0	TCF18L...	1.2

Note: The left hand insert (L) is used for the right hand toolholders (R).

*Torque: Recommended clamping torque: N·m

SPARE PARTS



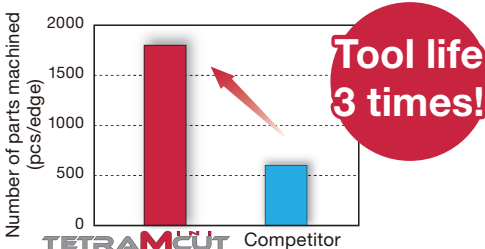
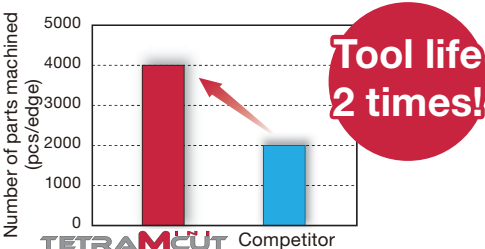
Designation	Clamping screw	Wrench
JS**-STCFL18 / STCFVR**18	CSTC-4L100DR	T-1008/5

STANDARD CUTTING CONDITIONS

TCF18L (Face grooving)

ISO	Workpiece materials	Grades	Cutting speed Vc (m/min)	Feed f (mm/rev)
P	Low carbon steel S15C, C15E, C15E4, S20C, C20, etc.	SH725	30 - 100	0.01 - 0.04
	Carbon steels, Alloy steel S55C, C55, SCM440, 42CrMoS4, etc.	SH725	30 - 100	0.01 - 0.04
	Prehardened steel NAK80, PX5, etc.	SH725	30 - 100	0.01 - 0.04
M	Stainless steel SUS304, X5CrNi18-9, X5CrNiMo17-12-2, etc.	SH725	30 - 100	0.01 - 0.04
K	Grey cast iron FC250, GG25, 250, FC300, GG30, 300, etc.	SH725	30 - 100	0.01 - 0.04
	Ductile cast iron FCD400, 400-15, FCD600, GGG60, 600-3, etc.	SH725	30 - 100	0.01 - 0.04
S	Titanium alloys Ti-6Al-4V, etc.	SH725	20 - 40	0.01 - 0.04
	Superalloys Inconel718, etc.	SH725	10 - 30	0.01 - 0.04

■ PRACTICAL EXAMPLES

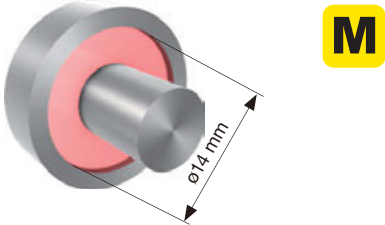Workpiece type	Valve parts	Shaft (Car air-conditioner parts)
Toolholder	JS16F-STCFL18	JS19X-STCFL18
Insert	TCF18L200F-005	TCF18L100F-005
Grade	SH725	SH725
Workpiece material	SUS304 / X5CrNi18-9 	S20C / C20 
Cutting conditions	Groove width : CW (mm)	2
	Groove depth : CDX (mm)	1
	Cutting speed : Vc (m/min)	50
	Feed : f (mm/rev)	0.04
	Machining	Face grooving
Coolant	Wet	Wet
Results	 <p>Tool life 3 times!</p> <p>TetraMini-Cut eliminated chatter thanks to secure insert clamping and rigid holder, providing 3 times tool life increase.</p>	 <p>Tool life 2 times!</p> <p>TetraMini-Cut provided part quality consistency thanks to secure insert clamping and also provided 2 times tool life increase.</p>



www.tungaloy.com

follow us at:
facebook.com/tungaloyjapan
twitter.com/tungaloyjapan
www.youtube.com/tungaloycorporation



AS9100 Certified
 78006
 2015.11.04
 ISO 14001 Certified
 EC97J1123
 1997.11.26

Distributed by:



FIND US ON THE CLOUD!
machiningcloud.com



TETRA^{FORCE}CUT

Tungaloy Report No. 416S3-G

TetraForce-Cut **TCL38 insert** for
deep grooving and parting processes





For more information

- Unique insert clamping method provides high repeatability and stability for effective deep grooving and parting applications
- Light cutting geometry ensures consistent chip control for reduced chatter
- Efficient multi-edged insert solution for OD grooving and parting applications exceeding 6.4 mm in cutting depth
- Economical 4-edge insert
- Precision coolant delivery ensures effective chip removal during deep grooving




CUTTING PERFORMANCE

Chipbreaker features

Large positive rake angle

Provides sharp cutting edge and low cutting force that eliminate burr formation and chatter

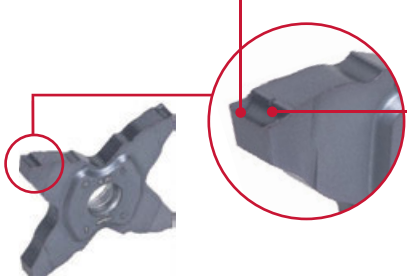

Large dimple on the rake face

Ensures reliable chip removal during a low feed motion

CHP type toolholders for high-pressure coolant

The coolant is supplied to the cutting edge providing good chip control and long tool life



Chip control




GROOVING AND PARTING

P


Carbon steel
(S45C / C45)

$V_c = 160$ m/min
CDX = 9 mm

TCL38 (CW = 2 mm)

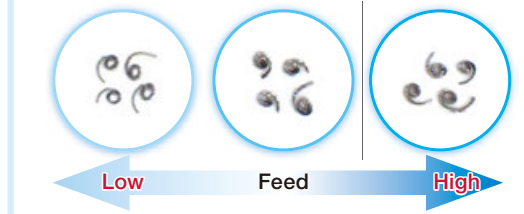

Standard feed



M


Stainless steel
(SUS304 / X5CrNi18-9)

$V_c = 120$ m/min
CDX = 9 mm

TCL38 (CW = 2 mm)




Standard feed



New

TCL38

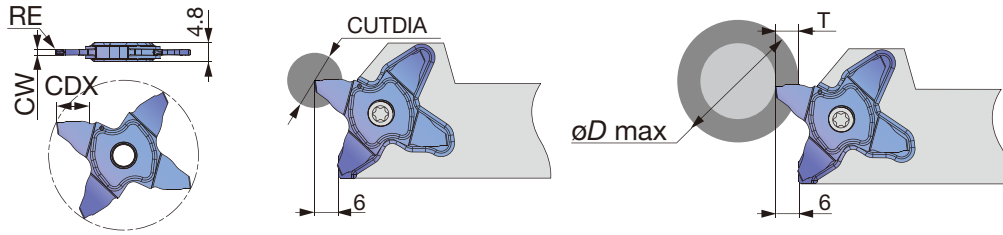

P	Steel	★	
M	Stainless	★	
K	Cast iron	★	
N	Non-ferrous		
S	Superalloys	★	
H	Hard materials		

★ : First choice

Designation	CW±0.02	RE	Coated AH7025	CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)					
						T ≤ 5	T ≤ 6	T ≤ 7	T ≤ 8	T ≤ 9	T ≤ 10
						TCL38-150-020	1.5	0.2	●	9	18
TCL38-200-020	2	0.2	●	9	18	∞	950	315	190	45	-
TCL38-300-020	3	0.2	●	10	20	∞	950	315	190	130	50
TCL38-400-030	4	0.3	●	10	20	∞	950	315	190	130	50


5 pieces per package

● : New

New

STCR/L-38 (-CHP)

External grooving and parting toolholder

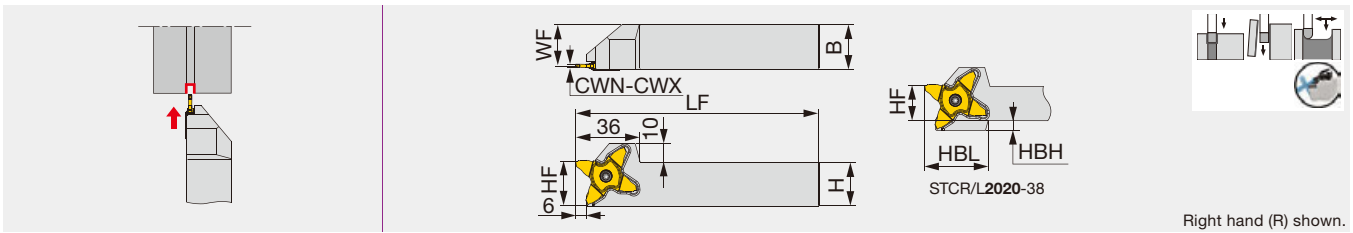

Designation	CWN	CWX	H	B	LF	HF	WF	HBH	HBL	Insert	Torque*
STCR/L2020-38	1.5	4	20	20	120	20	18.1	5	35	TCL38...	2.5
STCR/L2525-38	1.5	4	25	25	135	25	23.1	-	-	TCL38...	2.5
STCR/L3232-38	1.5	4	32	32	135	32	30.1	-	-	TCL38...	2.5
STCR/L2525-38-CHP	1.5	4	25	25	135	25	23.1	-	-	TCL38...	2.5

*Torque: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Screw	Wrench
STCR****-38 (-CHP)	SR16-212-01397L	T-2010/5
STCL****-38 (-CHP)	SR16-212-01397	T-2010/5

STANDARD CUTTING CONDITIONS

ISO	Workpiece materials	Grades	Cutting speed Vc (m/min)	Feed: f (mm/rev)
				Grooving, Parting TCL38
P	Carbon steel (S45C / C45, etc.)	AH7025	80 - 180	0.03 - 0.18
	Alloy steel (SCM435 / 34CrMo4, etc.)	AH7025	50 - 180	0.03 - 0.18
M	Alloy steel (SCM435 / 34CrMo4, etc.)	AH7025	50 - 150	0.03 - 0.14
K	Grey cast iron (FC250 / 250 / GG25, etc.)	AH7025	50 - 180	0.03 - 0.14
	Ductile cast iron (FCD400 / 400-15 / GGG400, etc.)	AH7025	50 - 120	0.03 - 0.14
S	Titanium alloys (Ti-6Al-4V, etc.)	AH7025	30 - 60	0.03 - 0.14
	Superalloys (Inconel718, etc.)	AH7025	20 - 50	0.03 - 0.14

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy America, Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloy.com/us

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy de Mexico S.A.

C. Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx

Tungaloy do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy Germany GmbH

An der Alten Ziegelei 1
D-40789 Monheim, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.com/de

Tungaloy France S.A.S.

ZA Courtaboeuf - Le Rio
1 rue de la Terre de feu
F-91952 Courtaboeuf Cedex, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.com/fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.com/it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.com/cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
Fax: +34 93 876 2798
www.tungaloy.com/es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
Fax: +46-462119207
www.tungaloy.com/se

Tungaloy Rus, LLC

Andropova avenue, h.18/7,
11 floor, office 3, 115432,
Moscow, Russia
Phone: +7-499-683-01-80
Fax: +7-499-683-01-81
www.tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

Ul. Irysowa 1, 55-040 Bielany
Wroclawskie, Poland
Phone: +48 607 907 237
www.tungaloy.com/pl

Tungaloy U.K. Ltd

Gallan Park, Watling Street,
Cannock, WS110XG, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu

Tungaloy Turkey

Serifali Mah.bayraktar Bulvari Kule Sk. No:26
34775 Umraniye / Istanbul / Turkey
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com/tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy.com/nl

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430, Samobor, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.com/hr

Tungaloy Cutting Tool (Shanghai) Co.,Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.com/cn

Tungaloy Cutting Tools (Taiwan) Co.,Ltd.

9F. No.293, Zhongyang Rd,
Xinzhuan Dist, New Taipei City,
24251 Taiwan
Phone: +886-2-8521-9986
Fax: +886-2-8521-8935
www.tungaloy.com/tw

Tungaloy Cutting Tools (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.com/th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/sing

Tungaloy Vietnam

LE04.38, Lexington Residence
67 Mai Chi Tho St., Dist. 2,
Ho Chi Minh City, Vietnam
Phone: +84-2837406660
www.tungaloy.com/sing

Tungaloy India Pvt. Ltd.

Indiabulls Finance Centre,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai-400013, India
Phone: +91-22-6124-8804
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

Unit 68 1470 Ferntree Gully Road
Knoxfield 3180 Victoria, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com/au

PT. Tungaloy Indonesia

Kompleks Grand Wisata Block AA-10 No.3-5
Cibitung
Bekasi 17510, Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id



www.tungaloy.com

follow us at:

facebook.com/tungaloyjapan
twitter.com/tungaloyjapan
www.youtube.com/tungaloycorporation



AS9100 Certified
78006
2015.11.04
ISO 14001 Certified
EC97J1123
1997.11.26

Distributed by:



FIND US ON THE CLOUD!
machingcloud.com



Available on the
App Store



GET IT ON
Google play



Available on the
App Store



GET IT ON
Google play