




Grooving and parting-off tool

TETRA^{MC}CUT/TETRA^{FC}CUT

Tungaloy Report No. 416-G

Introducing PVD grades **AH8005,**
AH7025 and AH6235



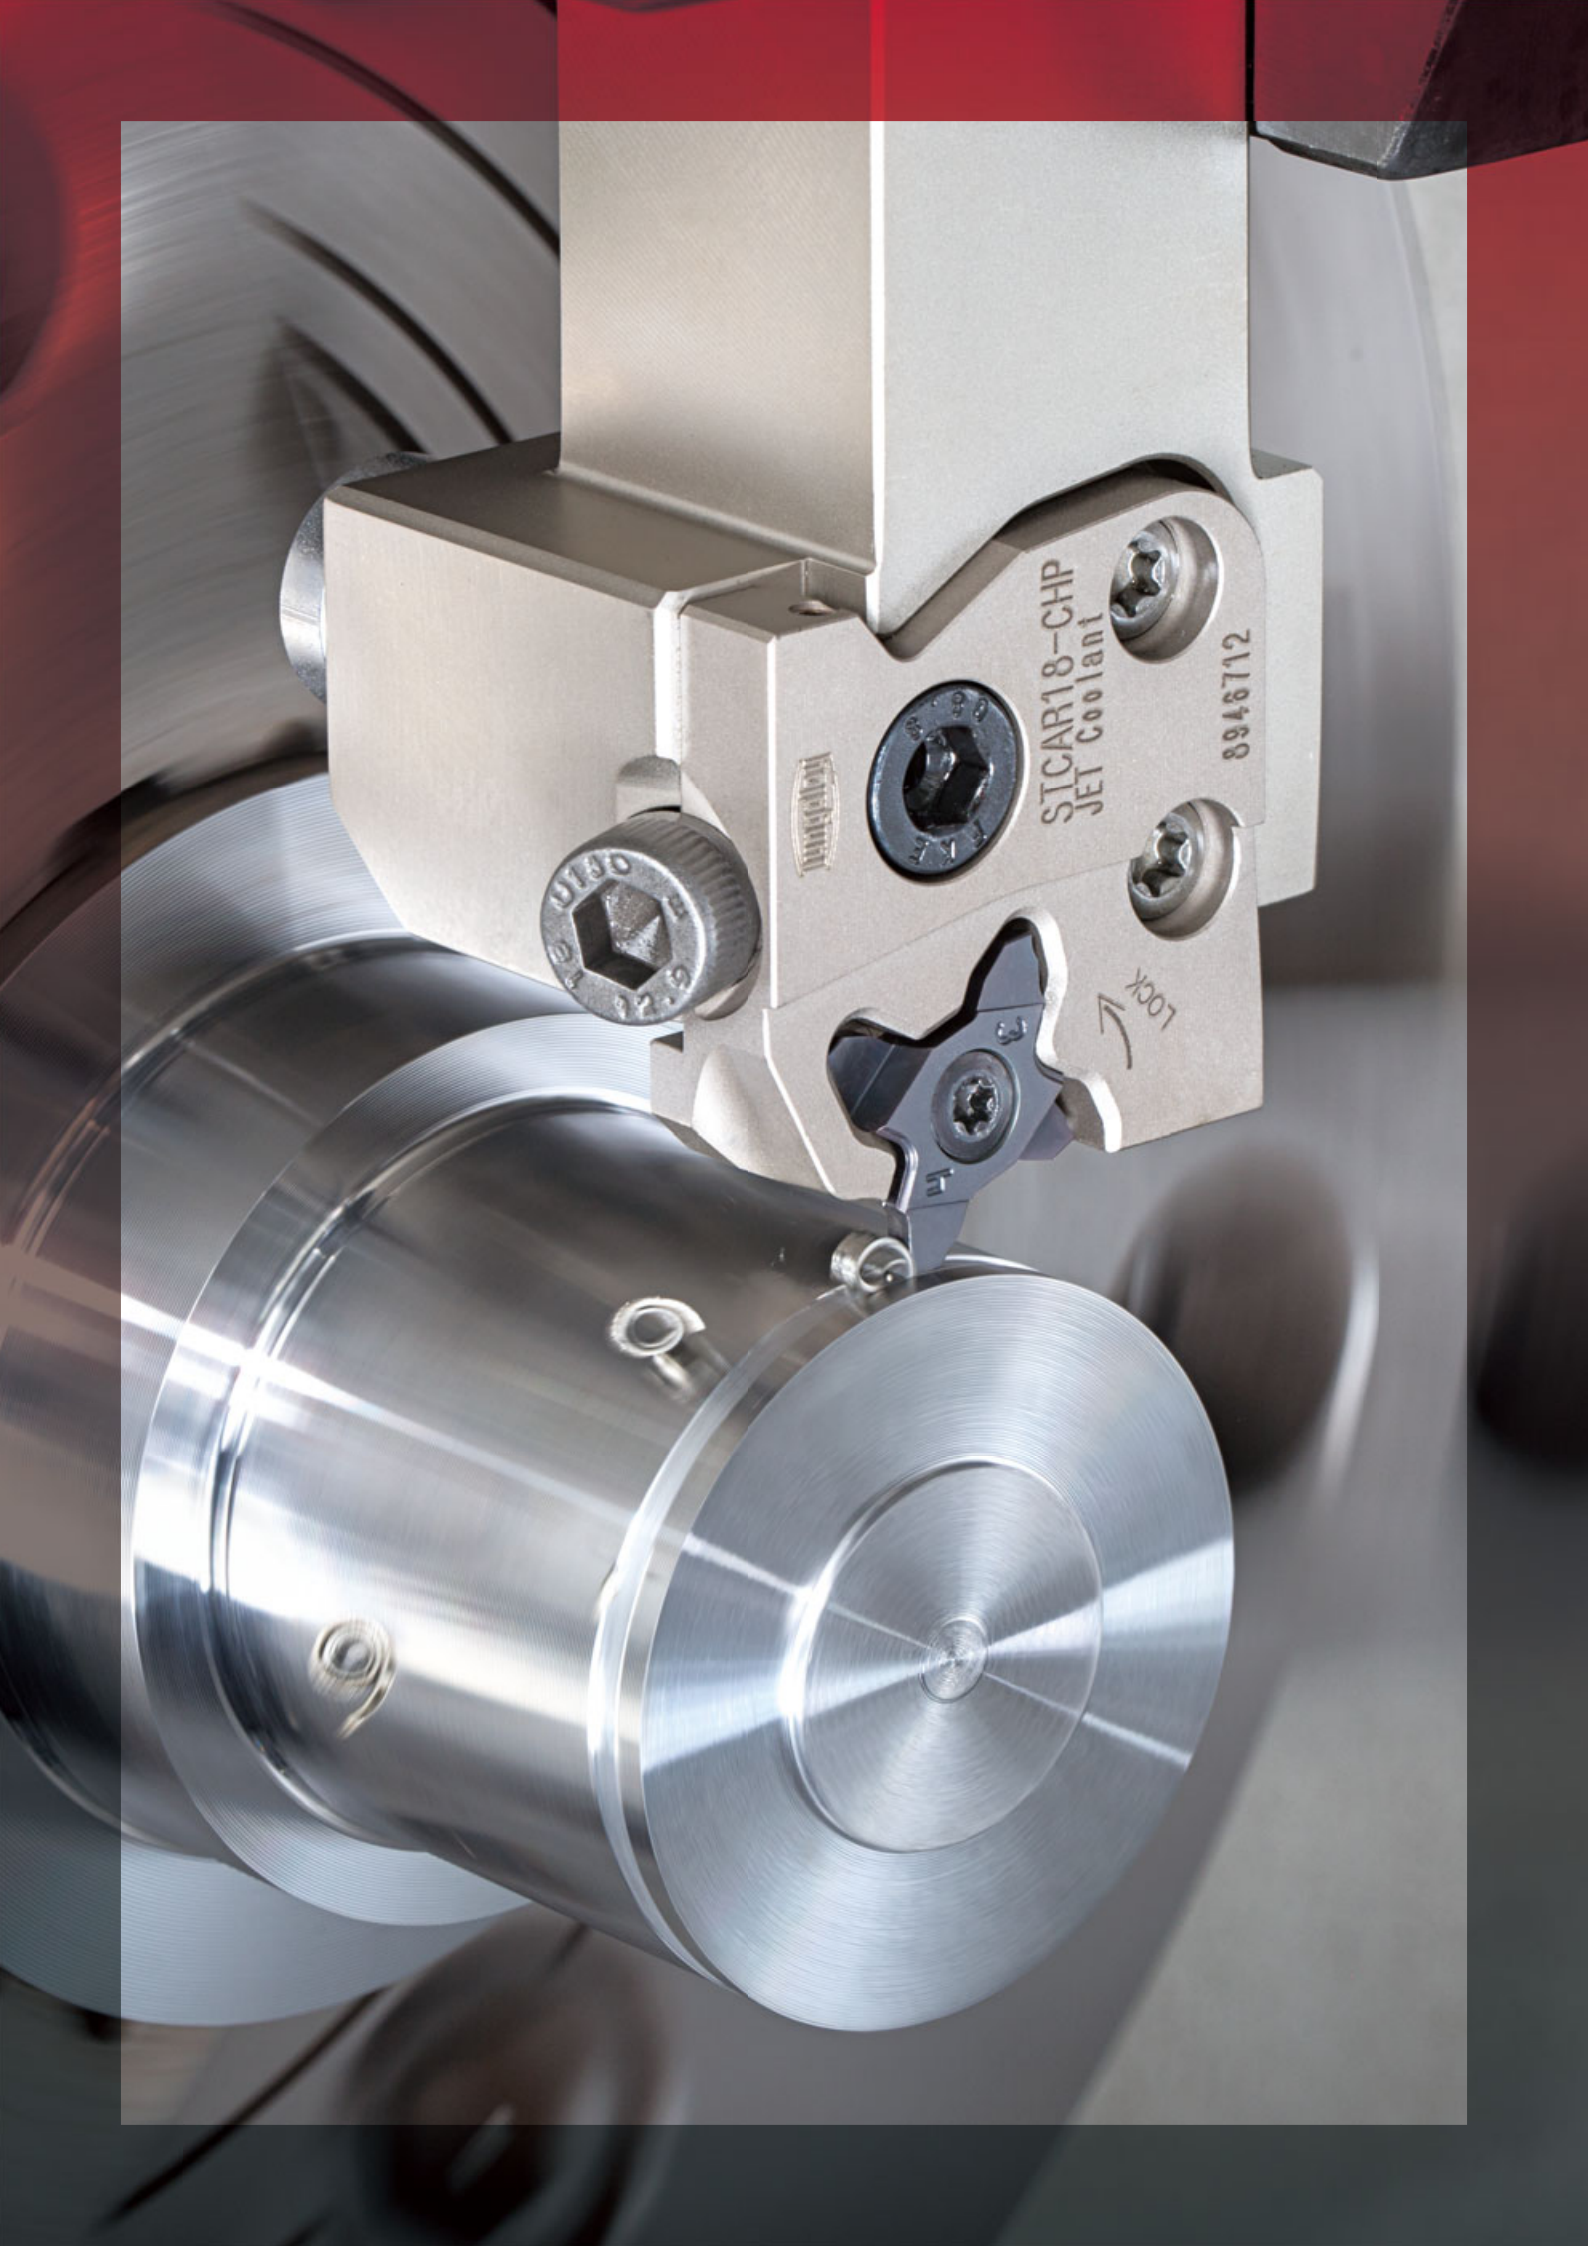



TETRA^MCUT/TETRA^{ORCE}CUT




Influential grooving lines, **TetraMini-Cut** and **TetraForce-Cut** offer ground inserts with a robust clamping structure for exceptional stability and repeatability

Multi-purpose grooving insert with economical 4 cutting edges


Unique 3-point clamping system

The unique pocket design provides accurate indexing repeatability of the cutting edge height.

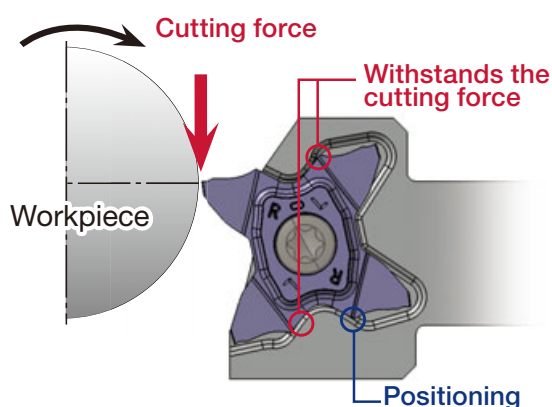

The insert pocket protects all unused cutting edges

Strong and stable clamping design protects unused insert corners from damage during operation.

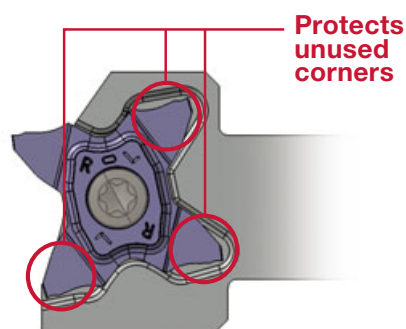

■ Provides increased productivity in external turning, parting, face grooving, thread turning, and custom profiling applications

External grooving / Parting-off

P13 -, P43 -



TETRAMINI-CUT
TETRAFORCE-CUT

Groove width: 0.33 - 4 mm
Max grooving depth: - 10 mm

Face grooving

P25 -



TETRAMINI-CUT
Groove width: 0.5 - 2.5 mm
Max grooving depth: - 3 mm
Minimum grooving diameter: ø6 mm

Threading

P36 -



TETRAMINI-CUT
Partial profile
Thread angle: 55, 60°
Full profile
ISO, UN, UNJ

Wide profile grooving

P56 -




TETRAFORCE-CUT
Max. width: ~ 20 mm
Max. depth: ~ 6.4 mm

TETRAMCUT 18 type

P7 -

- Available with 3D chipbreaker for excellent chip control
- 3 different types of chipbreakers each with dedicated edge preparation
- Full profile threading inserts are added. Thread pitch : 0.5 mm to 1.5 mm
- Through-coolant supply system (tool code suffix "-CHP") to ensure high efficient machining

■ External grooving /Parting-off



Groove width:
0.33 - 3 mm
Max grooving depth:
- 3 mm



TCG18/TCP18/
TCP18-F



TCS18



TCL18

■ Face grooving



Groove width:
0.5 - 2.5 mm
Max grooving depth:
- 3 mm
Minimum grooving diameter:
ø6 mm



TCF18

■ Threading



Partial profile

55° Thread angle: Pitch = 8 ~ 28TPI
60° Thread angle: Pitch = 0.4 ~ 3 mm

Full profile

ISO: Pitch = 0.5 ~ 1.5 mm
UN: Pitch = 16 ~ 32 TPI
UNJ: Pitch = 28 ~ 32 TPI
W: Pitch = 11 ~ 28 TPI




TCT18

TETRAFORCE CUT 27 type

P41 -

- Available with 3D chipbreaker for excellent chip control
- Through-coolant supply system (tool designation suffix "-CHP") to ensure high efficient machining

■ External grooving /Parting-off



Groove width: 0.33 - 3.18 mm
Max grooving depth: - 6.4 mm



TCL27



TCS27



TCM27



TCG27

TETRAFORCE-CUT 38 type

P48, 54

- Unique insert clamping method provides high repeatability and stability for effective deep grooving and parting applications
- Light cutting geometry ensures consistent chip control for reduced chatter
- Efficient multi-edged insert solution for OD grooving and parting applications exceeding 6.4 mm in cutting depth
- Economical 4-edge insert
- Precision coolant delivery ensures effective chip removal during deep grooving


■ External grooving /Parting-off



Groove width: 0.33 - 3.18 mm
Max grooving depth: - 6.4 mm



TCL38

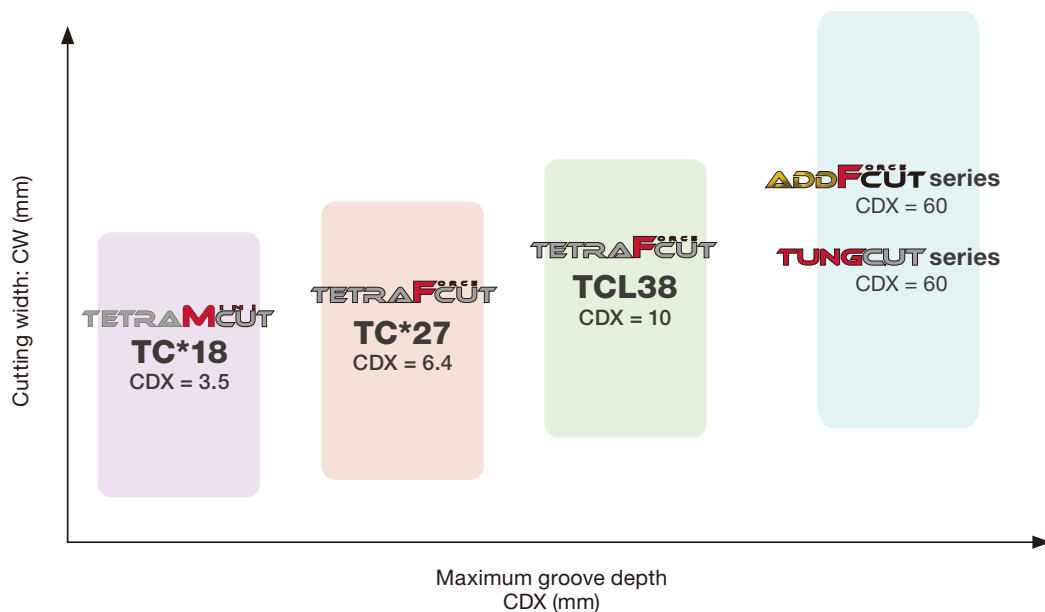

■ Available with 3D chipbreaker for excellent chip control. An extensive lineup covers a broad range of grooving applications from small to general size parts

- An expanded range of tools allows for an easy selection of the ideal insert
- The same toolholder for both grooving and threading

Grooving

TCL18 type


(With 3D chipbreaker for low feed rates)



- The chipbreaker incorporates a dimple-like recess on the rake face to facilitate smooth chip flow with light cutting action
- The chipbreaker ensures low cutting force, providing reliable chip flow at low feed rates


TCS18 type

(With 3D chipbreaker for general purpose)

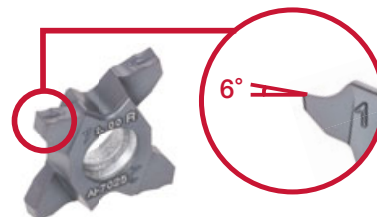


- The chipbreaker incorporates a dimple-like recess on the rake face to facilitate smooth chip flow with light cutting action

TCG18 type (Honed edge)

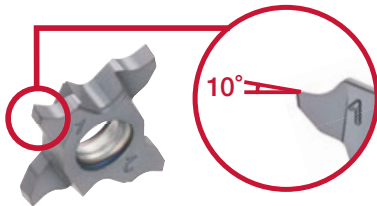


- Optimized rake angle and edge preparation enhances fracture resistance, allowing for smooth cutting
- Available in Grade AH8005, AH7025, or AH6235

TCP18 type (Lightly honed edge)

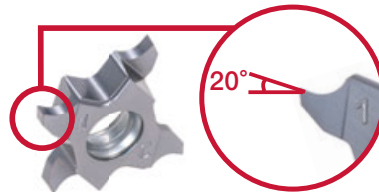

- A large rake angle ensures smooth cutting for excellent surface finish
- The insert in grade AH725 features a tough edge preparation for high resistance to fracture

TCP18-F type (Sharp edge)

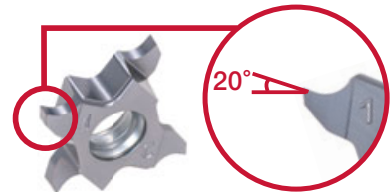

- High quality surface finish and precision thanks to the sharp cutting edge
- A quality level comparable to that of cermet can be achieved
- An extremely hard coating layer on grade SH7025 provides sharp cutting edges, making it perfect for small part grooving

Face grooving

TCF18 type



- Sharp cutting edge and strong insert retention allow high surface quality.
- DAXN from 6 mm

Threading

TCT18 type




Full-profile insert

- Full profile inserts for burr-less threading are newly added. Pitch : 0.5 - 1.5 mm.
- Sharp cutting edge for reduced cutting load, improving thread surface quality
- Suitable for thread pitches ranging from 0.4 mm to 3 mm


NEW SELECTION SYSTEM

3D chipbreakers

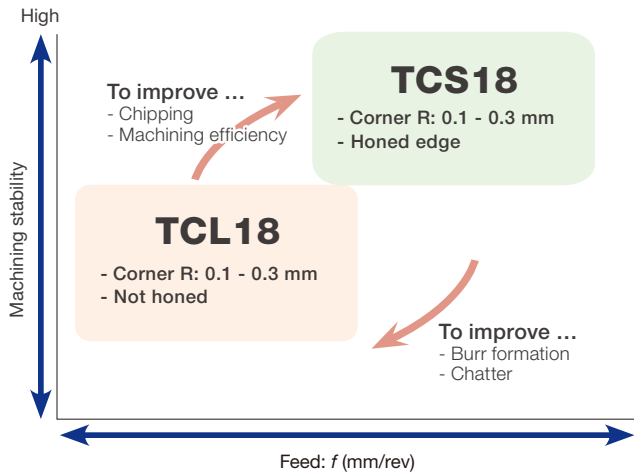

- 2 styles of 3D chipbreakers are available as standard for reliable chip control.
- TCS: general-purpose chipbreaker, TCL: for applications where low cutting force is essential


Ground-to-form chipbreakers

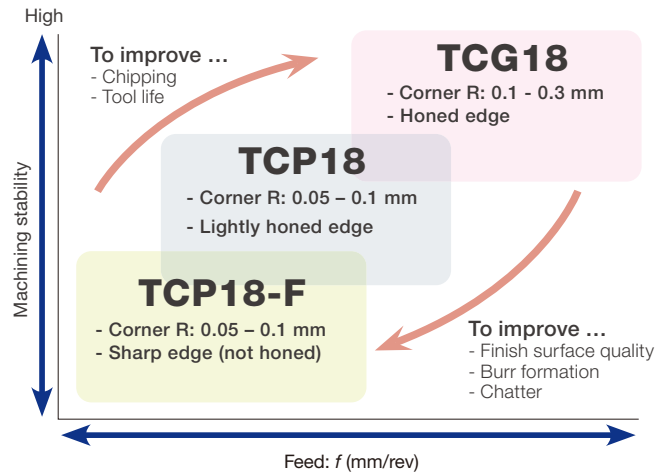


- Choose the best of all three insert types according to the machining requirements
- A variety of widths and corner radii are available in all three insert types

APPLICATION AREA

3D chipbreakers

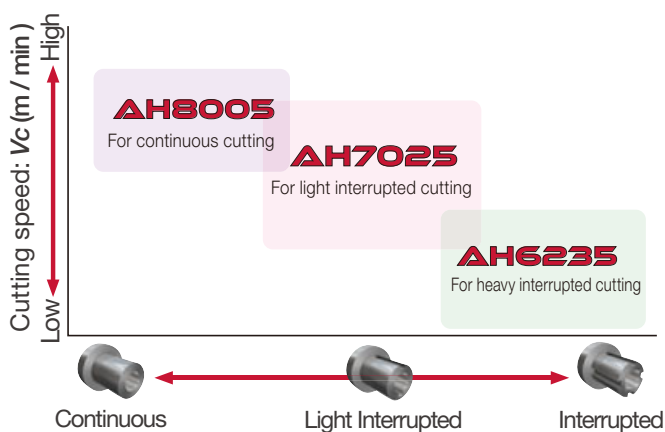


Ground-in chipbreaker

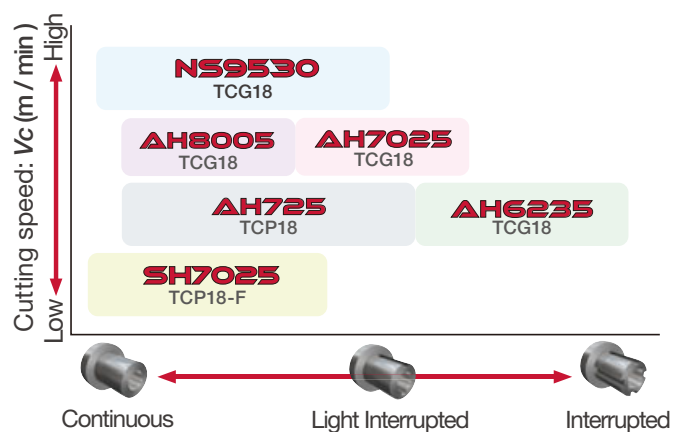


PRECISION GROOVING & THREADING

Grooving


Groove depth capacity and Dmax. capacity

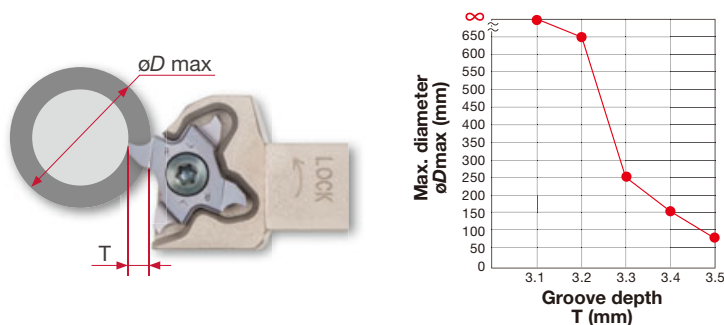


Dmax. parting-off




Machining next to shoulder



Minimum diameter for face grooving




	Minimum face diameter DAXN (mm)	Maximum groove depth CDX (mm)
TCF	6	3
TCL, TCS, TCG, TCP	65	3

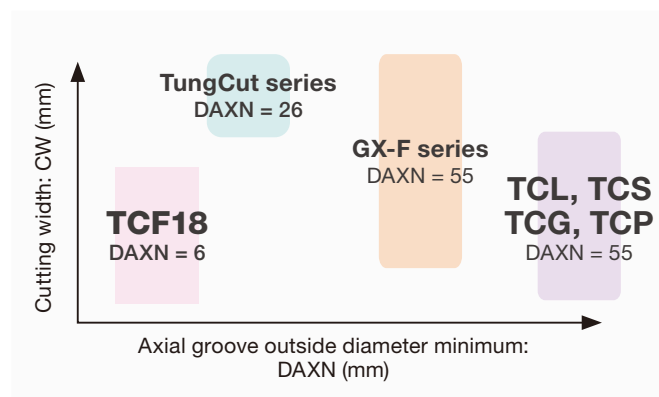

Threading

- 1 Excellent accessibility to the wall, minimize incomplete threads

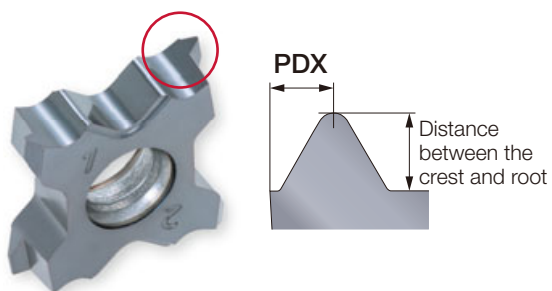


- 2 Side relief angle eliminating the need for shim adjustment as with the case for a 16ER laydown insert




- 3 High accessibility to the center lathe

TETRAMCUT
M16x1




Insert: TCT18R-60N-020

Conventional
M24x1




Insert: 16ER10ISO

- 4 The insert features a positive rake angle on the tool holder, allowing light cutting and accurate threading operations

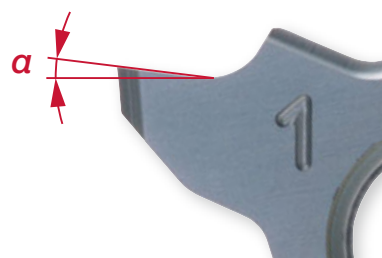


CUTTING PERFORMANCE

■ Tool rigidity

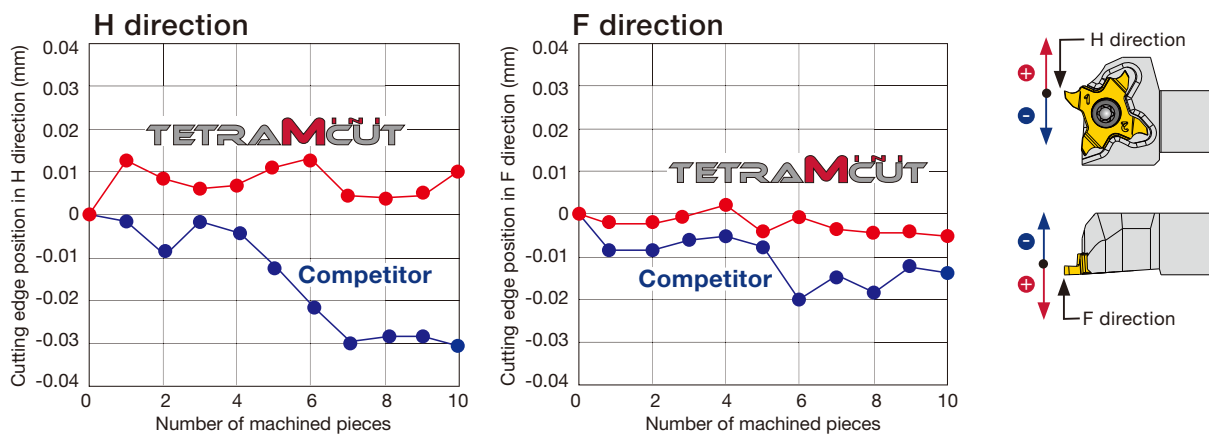

■ Tool life

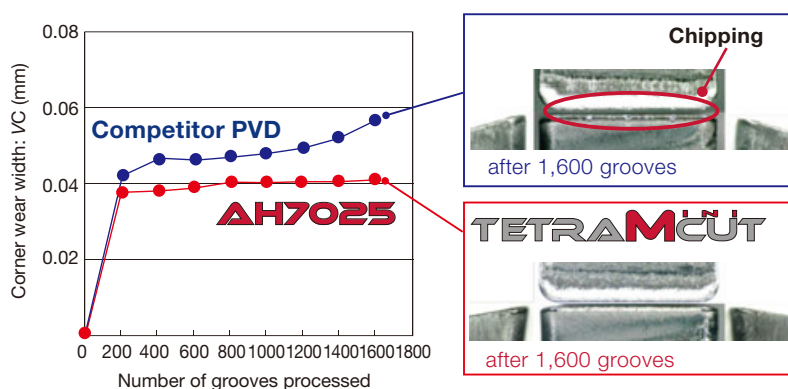

P	Toolholder	: STCR2525Z18
	Insert	: TCG18R200-020 AH7025
	Workpiece material	: SCM440 / 42CrMo4
	Cutting speed	: $V_c = 180$ m/min
	Feed	: $f = 0.07$ mm/rev
	Groove width	: 2 mm
	Groove depth	: 2.5 mm

■ Chip control

P With TCL18 style 3D chipbreaker


Toolholder : STCR2525Z18
Insert : TCL18R200-020 AH7025
Workpiece material : SCM415

Cutting speed: V_c (m/min)	150				
		0.03	0.05	0.07	0.1
Feed: f (mm/rev)					



P With TCS18 style 3D chipbreaker


Toolholder : STCR2525Z18
Insert : TCS18R200-020 AH7025
Workpiece material : SCM415

Cutting speed: V_c (m/min)	150				
		0.05	0.07	0.1	0.12
Feed: f (mm/rev)					




P With TCG18 style Ground-in chipbreaker

Toolholder : STCR2525Z18
Insert : TCG18R200-020 AH7025
Workpiece material : SCM415

Cutting speed: V_c (m/min)	150				
		0.03	0.05	0.07	0.1
Feed: f (mm/rev)					




Chipbreaker dimple position may be different depending on the groove width.
In widening, it is recommended that the chipbreaker dimple position is close to the widening pass.

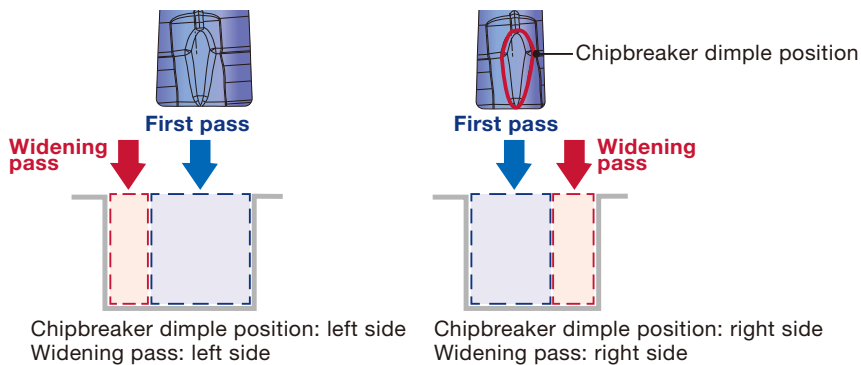

TUNGTURNJET


- Tube-less design streamlines tool setup
Through-coolant supply enables high productivity

Direct connection

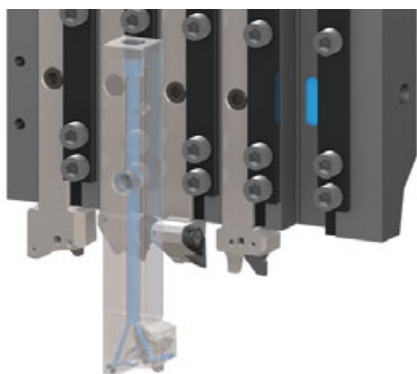

No need for coolant tube setup.
Eliminates chip entanglement on tubes
and streamlines tool replacements.

Coolant is supplied from the tool post
directly to the tools

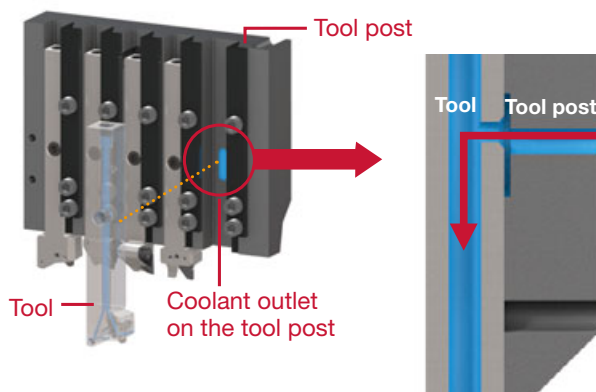

S Titanium alloy: External turning (Ti-6Al-4V)

Material : Ti-6Al-4V
Holder : STCR1212X18-CHP
Insert : TCP18R200F-010 SH7025
Cutting speed : $V_c = 100$ m/min
Feed rate : $f = 0.05$ mm/rev
Groove width : 2 mm
Groove depth : 2.5 mm
Coolant type : Oil


TETRAMCUT	TUNGTURNJET 7 MPa	TUNGTURNJET 1.5 MPa	External coolant at normal pressure (at 1.5 MPa)

MODULAR HEADS

QC12-STCR/L

MODUM^{INI}TURN

Modular head for external grooving and threading

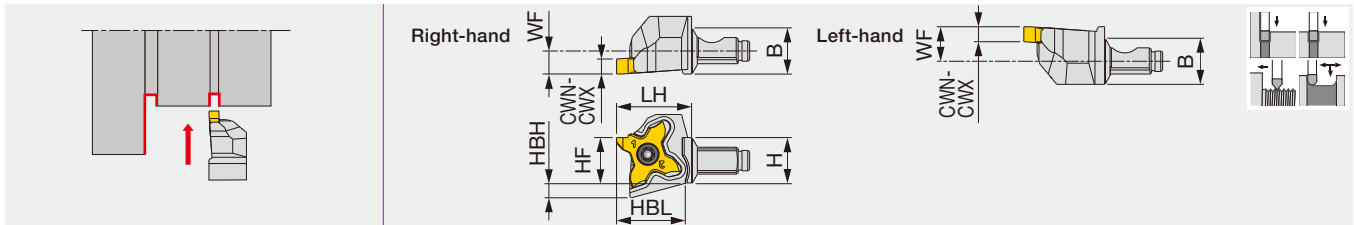

Designation	CWN	CWX	H	B	LH ⁽¹⁾	HF	HBH	HBL ⁽¹⁾	WF	Insert	Torque*	Shank
QC12-STCR/L18	0.33	3.18	12	12	19.5/21	12	3.9	17.9/18.3	6/9	TC*18R/L...	1.2	QC-12...

The right hand insert (R) is used for the right hand toolholders (R), and the left hand insert (L) is used for the left hand toolholders (L).


(1) The first value before "/" indicates for the right-hand holder and the second value after "/" for the left-hand holder.

Torque*: Recommended clamping torque (N·m)

QC12/16-STCR/L-CHP

MODUM^{INI}TURN

Modular head for external grooving and threading, with high pressure coolant capability

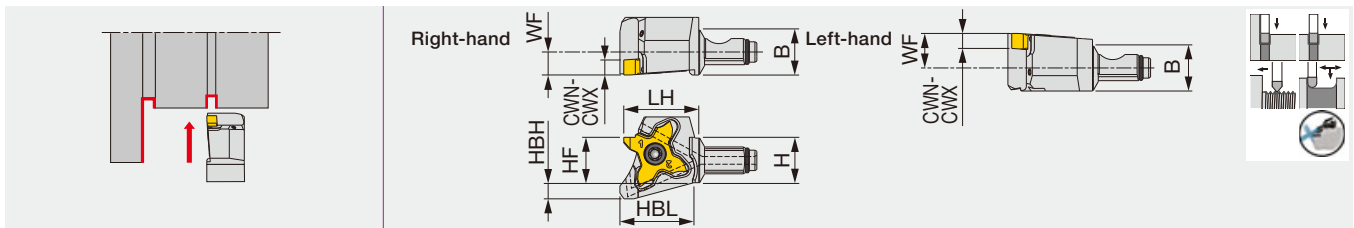

Designation	CWN	CWX	H	B	LH	HF	HBH	HBL	WF ⁽¹⁾	Insert	Torque*	Shank
QC12-STCR/L18-CHP	0.33	3.18	12	12	21	12	4.2	19.3	6/9	TC*18R/L...	1.2	QC-12...
QC16-STCR/L18-CHP	0.33	3.18	16	16	21	16	-	-	8/13	TC*18R/L...	1.2	QC-16...

The right hand insert (R) is used for the right hand toolholders (R), and the left hand insert (L) is used for the left hand toolholders (L).

(1) The first value before "/" indicates for the right-hand holder and the second value after "/" for the left-hand holder.

Torque*: Recommended clamping torque (N·m)


SPARE PARTS



Designation	Clamping screw	Wrench	O-ring
QC12-STCR18	CSTC-4L100DL	T-1008/5	-
QC12-STCL18	CSTC-4L100DR	T-1008/5	-
QC12-STCR18-CHP	CSTC-4L100DL	T-1008/5	ORSS-0454.5X1.0NBR70
QC12-STCL18-CHP	CSTC-4L100DR	T-1008/5	ORSS-0454.5X1.0NBR70
QC16-STCR18-CHP	CSTC-4L100DL	T-1008/5	ORSS-0757.5X1.0NBR70
QC16-STCL18-CHP	CSTC-4L100DR	T-1008/5	ORSS-0757.5X1.0NBR70

QC12-STCR/L-Y

Y-axis turning modular head for external grooving and threading

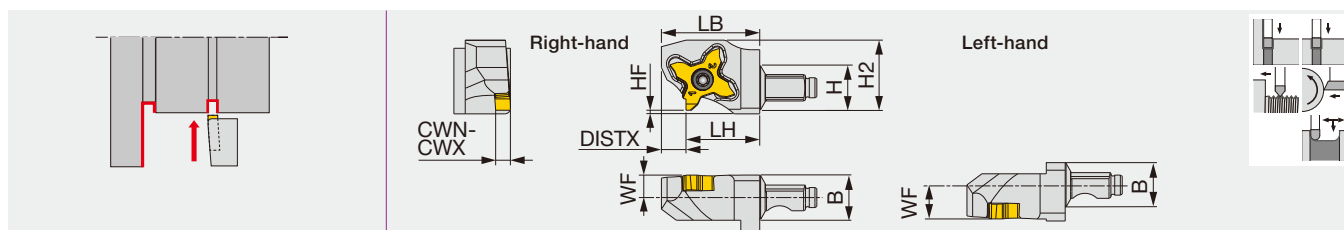

Designation	CWN	CWX	H	B	LH	HF	WF ⁽¹⁾	LB	H2	DISTX	Insert	Torque*	Shank
QC12-STCR/L18-Y	0.33	3.18	12	12	19.5	0	6/9	26	18.6	6.5	TC*18R/L...	1.2	QC-12...


The right hand insert (R) is used for the right hand toolholders (R), and the left hand insert (L) is used for the left hand toolholders (L).

(1) The first value before "/" indicates for the right-hand holder and the second value after "/" for the left-hand holder.

Torque*: Recommended clamping torque (N·m)

QC12/16-STCR/L-Y-CHP

Y-axis turning modular head for external grooving and threading, with high pressure coolant capability

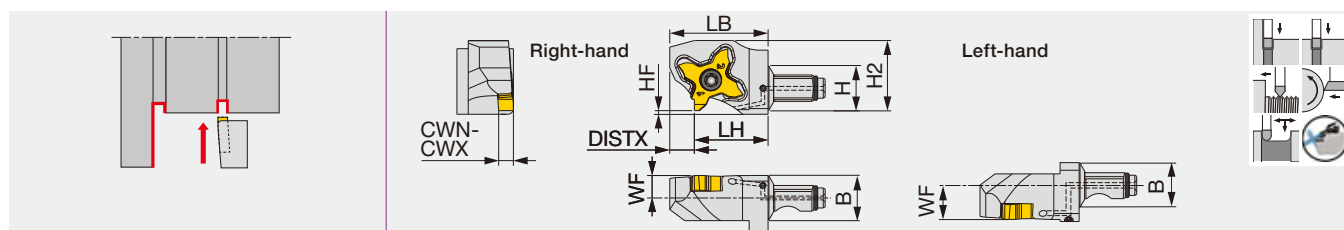

Designation	CWN	CWX	LH	HF	WF ⁽¹⁾	LB	H2	DISTX	Insert	Torque*	Shank
QC12-STCR/L18-Y-CHP	0.33	3.18	19.5	0	6/9	26	18.6	6.5	TC*18R/L...	1.2	QC-12...
QC16-STCR/L18-Y-CHP	0.33	3.18	21	0	8/13	27.5	18.6	6.5	TC*18R/L...	1.2	QC-16...

Through-coolant head

The right hand insert (R) is used for the right hand toolholders (R), and the left hand insert (L) is used for the left hand toolholders (L).

(1) The first value before "/" indicates for the right-hand holder and the second value after "/" for the left-hand holder.

Torque*: Recommended clamping torque (N·m)

SPARE PARTS




Designation	Clamping screw	Wrench	O-ring
QC12-STCR18-Y	CSTC-4L100DL	T-1008/5	-
QC12-STCL18-Y	CSTC-4L100DR	T-1008/5	-
QC12-STCR18...	CSTC-4L100DL	T-1008/5	ORSS-0454.5X1.0NBR70
QC12-STCL18...	CSTC-4L100DR	T-1008/5	ORSS-0454.5X1.0NBR70
QC16-STCR18...	CSTC-4L100DL	T-1008/5	ORSS-0757.5X1.0NBR70
QC16-STCL18...	CSTC-4L100DR	T-1008/5	ORSS-0757.5X1.0NBR70

SHANKS

QC-1212

MODUM^{INI}TURN

Shank for modular heads

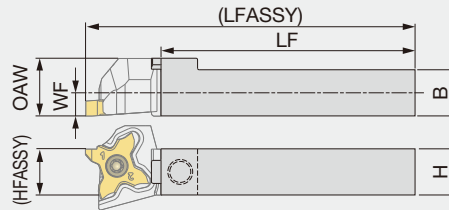

Designation	H	B	WFASSY	LF	OAW	HFASSY	LFASSY ⁽¹⁾	Torque*	Head
QC-1212F	12	12	0	65	15	12	85	3	QC12...
QC-1212X	12	12	0	100	15	12	120	3	QC12...

(1) The size is true when the modular head with LH = 19.5 mm is mounted.
Torque*: Recommended clamping torque (N·m)


QC-1212/1616-CHP

MODUM^{INI}TURN

Shank for modular heads, with high pressure coolant capability

Tube connection

Direct connection

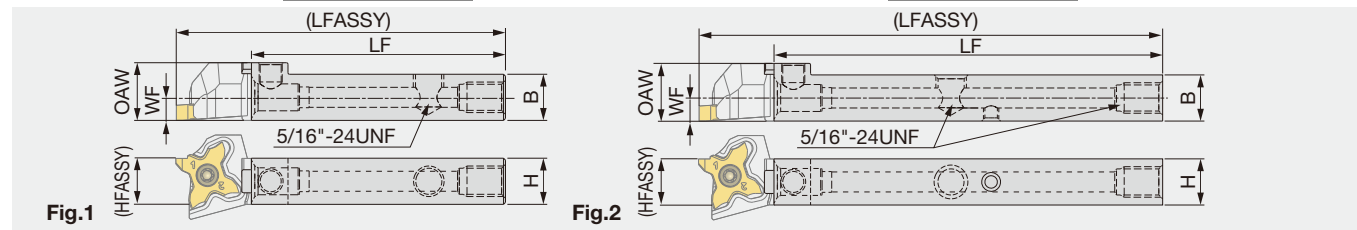

Designation	H	B	LF	WFASSY	OAW	HFASSY	LFASSY ⁽¹⁾	Torque*	Head	Fig.
QC-1212F-CHP	12	12	65	0	15	12	85	3	QC12...	1
QC-1212X-CHP ^(*)	12	12	100	0	15	12	120	3	QC12...	2
QC-1616X-CHP ^(*)	16	16	99	0	20	16	120	8.5	QC16...	2


Through-coolant shank
(*) : Compatible to the direct internal coolant supply system without the use of external coolant hose.
(1) The size is true when the modular head with LH = 19.5 mm is mounted.
Torque*: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamping screw	Wrench 1	Coolant plug	Wrench 2	DirectJet plug	Wrench 3
QC-1212*	SRM6X0.5-26977	P-3	-	-	-	-
QC-1212F-CHP	SRM6X0.5-26977	P-3	SR5/16UNF TL360	P-4	-	-
QC-1212X-CHP	SRM6X0.5-26977	P-3	SR5/16UNF TL360	P-4	SSHM4-6-TB	P-2
QC-1616X-CHP	SRM8X0.5	P-5	SR 5/16UNF TL360	P-4	SSHM4-6-TB	P-2

QC-1216/1620-F15-CHP

Stepped-head shank for modular heads, with high pressure coolant capability

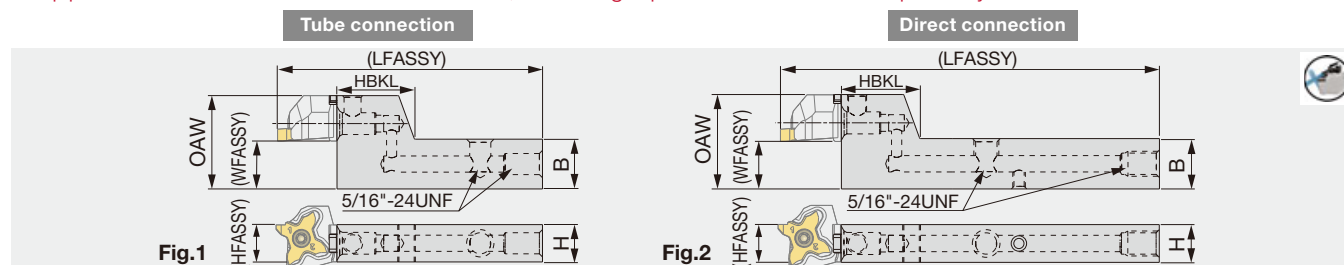

Designation	H	B	LF	OAW	WFASSY	HFASSY	LFASSY ⁽¹⁾	HBKL	Torque*	Head	Fig.
QC-1216F-F15-CHP	12	16	65	30	15	12	85	25	3	QC12...	1
QC-1216X-F15-CHP ⁽¹⁾	12	16	100	30	15	12	120	25	3	QC12...	2
QC-1620X-F15-CHP	16	20	99	35	15	16	120	30	8.5	QC16...	2

(*) : Compatible to the direct internal coolant supply system without the use of external coolant hose.

(1) The size is true when the modular head with LH = 19.5 mm is mounted.

Torque* : Recommended clamping torque (N·m)

SPARE PARTS


Designation	Clamping screw	Wrench	Coolant plug	Wrench	DirectJet plug	Wrench
QC-1216F-F15-CHP	SRM6X0.5-26977	P-3	SR5/16UNFTL360	P-4	-	-
QC-1216X-F15-CHP	SRM6X0.5-26977	P-3	SR5/16UNFTL360	P-4	SSHM4-6-TB	P-2
QC-1620X-F15-CHP	SRM8X0.5	P-5	SR5/16UNFTL360	P-4	SSHM4-6-TB	P-2

MODULAR HEADS

QR12-STCL-CHP

MODUM^{INI}TURN

Modular head for external grooving and threading, with high pressure coolant capability

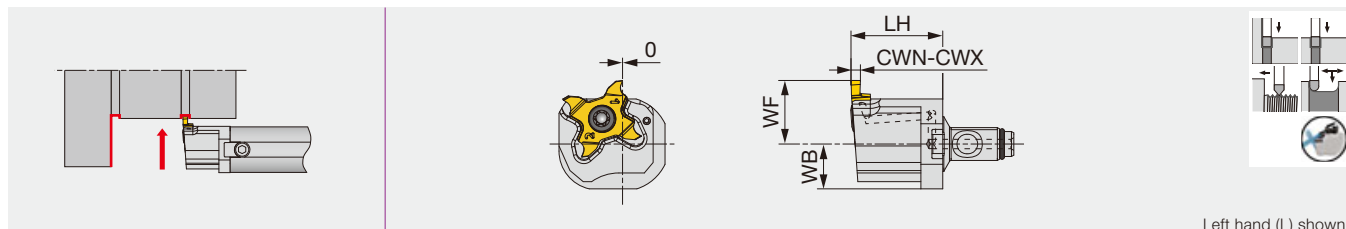

Designation	CWN	CWX	LH	WF	WB	Insert	Torque*	Shank
QR12E-STCL18-CHP	0.33	3.18	19.5	11.5	7	TC*18R...	1.2	A16*-QR12
QR12G-STCL18-CHP	0.33	3.18	19.5	13.5	8	TC*18R...	1.2	A19/20*-QR12

Use left-hand toolholders (L) with right-hand inserts (R).
Torque*: Recommended clamping torque (N-m)

SPARE PARTS


Designation	Clamping screw	Wrench	O-ring
QR12*-STCL18-CHP	CSTC-4L100DL	T-1008/5	ORSS-0454.5X1.0NBR70

SHANKS

A-QR12

MODUM^{INI}TURN

Round shank for modular heads, with high pressure coolant capability

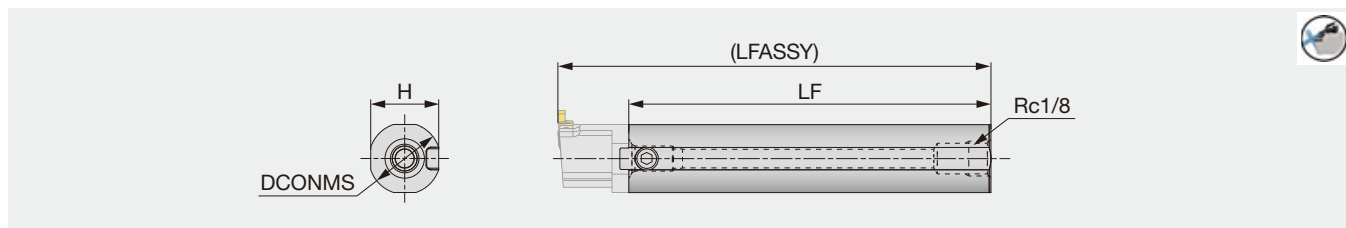

Designation	DCONMS	LF	H	LFASSY ⁽¹⁾	Torque*	Head
A16F-QR12	16	65	15	85	3	QR12C/E...
A16X-QR12	16	100	15	120	3	QR12C/E...
A19G-QR12	19.05	70	18	90	3	QR12D/G...
A19X-QR12	19.05	100	18	120	3	QR12D/G...
A20G-QR12	20	70	19	90	3	QR12D/G...
A20X-QR12	20	100	19	120	3	QR12D/G...

(1) The size is true when the modular head with LH = 19.5 mm is mounted.
Torque*: Recommended clamping torque (N-m)

SPARE PARTS

Designation	Clamping screw	Wrench 1	Wrench 2 (Optional)
A*-QR12	SRM6X0.5-26977	P-3	(P-3B)


When the screw cannot be accessed with a P-3 key due to little space between the adjacent tool, use P-3B key (sold separately) with the ball-head instead.

ACCESSORY

QC-12/16D28EXC

MODUM^{INI}TURN

Modular head holder for insert change

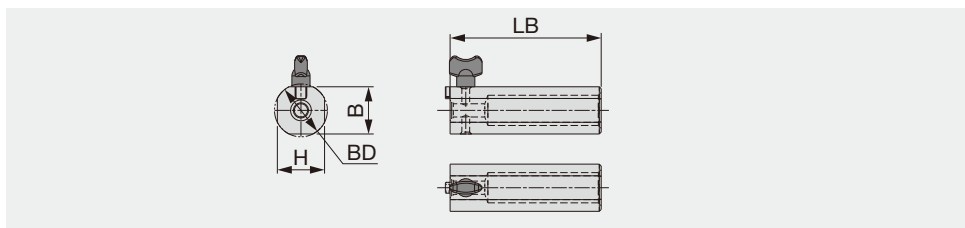

Designation	BD	LB	H	B	Head
QC-12D28EXC	28	80	25	25	QC12...
QC-16D28EXC	28	80	25	25	QC16...

Note: This is a dedicated modular-head holder designed to facilitate insert changes. Do not use this holder for machining as it may cause damages to tool, workpiece, machine, and possible human injury.

SPARE PARTS



Designation	Fixing screw
QC-12D28EXC	KNOBM5X10
QC-16D28EXC	KNOBM5X10



ModuMini-Turn modular heads are small. When it is difficult to change inserts while holding the modular head with fingers, use the dedicated holder to facilitate insert changes.

QC12/16-STOPPER

MODUM^{INI}TURN

Protective plug for shank




Fig. 1




Fig. 2

Designation	Fig.	Shank
QC12-STOPPER	1	QC-12...
QC16-STOPPER	2	QC-16...

SPARE PARTS



Designation	O-ring
QC12-STOPPER	ORSS-0454.5X1.0NBR70
QC16-STOPPER	ORSS-0757.5X1.0NBR70




Attach the plug to the shank to protect the coupling surface from chips, as well as prevent coolant leakage during machining

TOOLHOLDER

STCR/L-18

Precision grooving tools with uniquely shaped insert for swiss type machine and general lathes

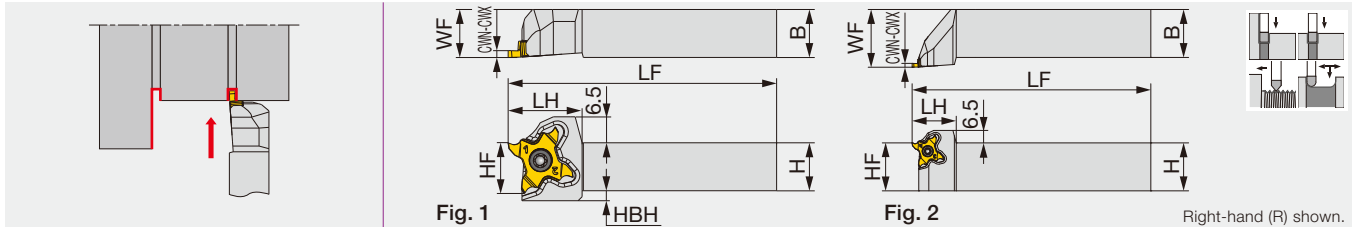

Designation	CWN	CWX	H	B	LF	LH	HF	WF	HBH	Insert	Torque*	Fig.
STCR/L1010X18	0.33	3.18	10	10	120	18.5	10	10	4.5	TC*18R/L...	1.2	1
STCR/L1212F18	0.33	3.18	12	12	85	18.5	12	12	2.5	TC*18R/L...	1.2	1
STCR/L1212X18	0.33	3.18	12	12	120	18.5	12	12	2.5	TC*18R/L...	1.2	1
STCR/L1616X18	0.33	3.18	16	16	120	18.5	16	16	-	TC*18R/L...	1.2	1
STCR/L2020H18	0.33	3.18	20	20	100	18.5	20	20	-	TC*18R/L...	1.2	1
STCR/L2020X18	0.33	3.18	20	20	120	23	20	25	-	TC*18R/L...	1.2	2
STCR/L2525Z18	0.33	3.18	25	25	135	23	25	30	-	TC*18R/L...	1.2	2


The right hand insert (R) is used for the right hand toolholders (R), and the left hand insert (L) is used for the left hand toolholders (L).

Torque*: Recommended clamping torque (N·m)

STCR/L-18-CHP

Direct connection

External grooving and threading toolholder, high pressure coolant compatible

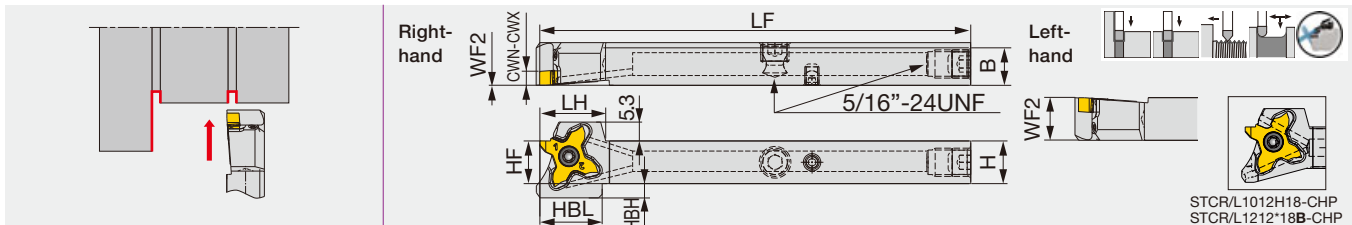

Designation	CWN	CWX	H	B	LF	LH	HBL	HF	WF2 ⁽¹⁾	HBH	Insert	Torque*
STCR/L1012H18-CHP	0.33	3.18	10	12	100	17.1	17.1	10	0/12	4	TC*18R/L...	1.2
STCR/L1212X18B-CHP	0.33	3.18	12	12	120	18.5	17.5	12	0/12	4	TC*18R/L...	1.2
STCR/L1616X18-CHP	0.33	3.18	16	16	120	18.5	-	16	0/16	0	TC*18R/L...	1.2

The right hand insert (R) is used for the right hand toolholders (R), and the left hand insert (L) is used for the left hand toolholders (L).

(1) The first value before "/" indicates for the right-hand holder and the second value after "/" for the left-hand holder.

Torque*: Recommended clamping torque (N·m)


SPARE PARTS

Designation	Clamping screw	Wrench	Coolant plug	Wrench	DirectJet plug	Wrench
STCR**18	CSTC-4L100DL	T-1008/5	-	-	-	-
STCL**18	CSTC-4L100DR	T-1008/5	-	-	-	-
STCL**18-CHP	CSTC-4L100DR	T-1008/5	SR5/16UNFTL360	P-4	SSHM4-6-TB	P-2
STCR**18-CHP	CSTC-4L100DL	T-1008/5	SR5/16UNFTL360	P-4	SSHM4-6-TB	P-2

STCR/L-18-CHP

Tube connection

External grooving and threading toolholder. High pressure coolant capability.

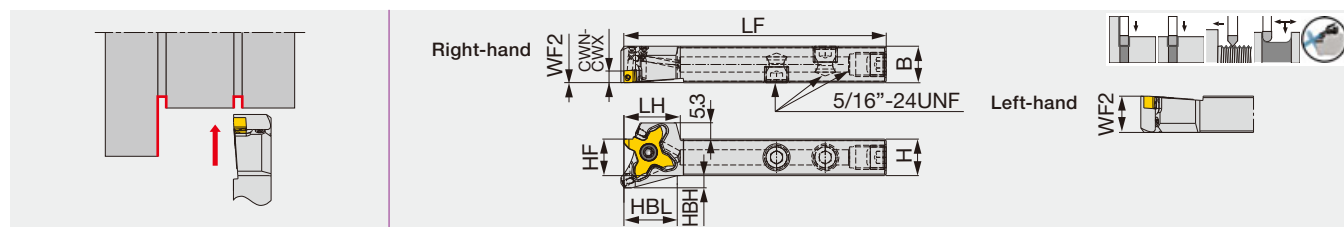

Designation	CWN	CWX	H	B	LF	LH	HBL	HF	WF2 ⁽¹⁾	HBH	Insert	Torque*
STCR/L1212F18B-CHP	0.33	3.18	12	12	85	18.5	17.5	12	0/12	4	TC*18R/L...	1.2

The right hand insert (R) is used for the right hand toolholders (R), and the left hand insert (L) is used for the left hand toolholders (L).


(1) The first value before "/" indicates for the right-hand holder and the second value after "/" for the left-hand holder.

Torque*: Recommended clamping torque (N·m)

STCR/L-18-CHP

Tube connection

Threading tool - for external threading with high pressure coolant capability

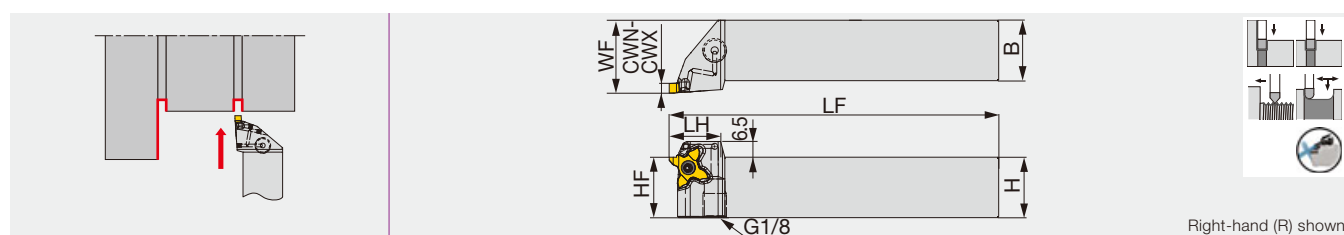

Designation	CWN	CWX	H	B	LF	LH	HBL	HF	WF	HBH	Insert	Torque*
STCR/L2020X18-CHP	0.33	3.18	20	20	120	23	-	20	25	-	TC*18R/L...	1.2
STCR/L2525Z18-CHP	0.33	3.18	25	25	135	23	-	25	30	-	TC*18R/L...	1.2

The right hand insert (R) is used for the right hand toolholders (R), and the left hand insert (L) is used for the left hand toolholders (L).


Torque*: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamping screw	Wrench	Coolant plug	Wrench
STCL**F18B-CHP	CSTC-4L100DR	T-1008/5	SR5/16UNFTL360	P-4
STCR**F18B-CHP	CSTC-4L100DL	T-1008/5	SR5/16UNFTL360	P-4
STCL**18-CHP	CSTC-4L100DR	T-1008/5	-	-
STCR**18-CHP	CSTC-4L100DL	T-1008/5	-	-

JS-STCL18

External grooving and threading toolholder with round shank, for Swiss lathes

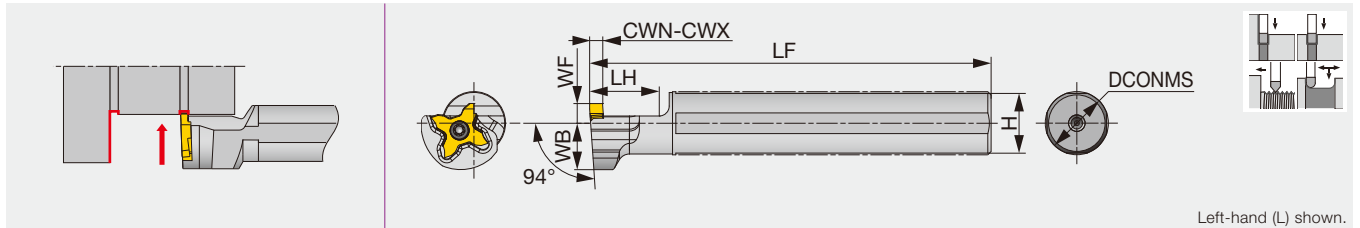


Designation	CWN	CWX	DCONMS	LF	LH	H	WB	WF	Insert	Torque*
JS14H-STCL18	0.33	3.18	14	100	20	13	14	6	TC*18R...	1.2
JS159F-STCL18	0.33	3.18	15.875	85	20	15	14	6	TC*18R...	1.2
JS16F-STCL18	0.33	3.18	16	85	20	15	14	6	TC*18R...	1.2
JS19G-STCL18	0.33	3.18	19.05	90	20	18	14	6	TC*18R...	1.2
JS19X-STCL18	0.33	3.18	19.05	120	20	18	14	6	TC*18R...	1.2
JS20G-STCL18	0.33	3.18	20	90	20	19	14	6	TC*18R...	1.2
JS20X-STCL18	0.33	3.18	20	120	20	19	14	6	TC*18R...	1.2
JS22X-STCL18	0.33	3.18	22	120	20	21	12.25	10	TC*18R...	1.2
JS25H-STCL18	0.33	3.18	25	100	20	24	12.25	10	TC*18R...	1.2
JS254X-STCL18	0.33	3.18	25.4	120	20	24	12.25	10	TC*18R...	1.2

The left hand toolholder (STCL...) is used with the right hand inserts (TC*18R...)
Torque*: Recommended clamping torque (N·m)

STCAR/L18-CHP

External grooving and threading adapter, with high pressure coolant capability

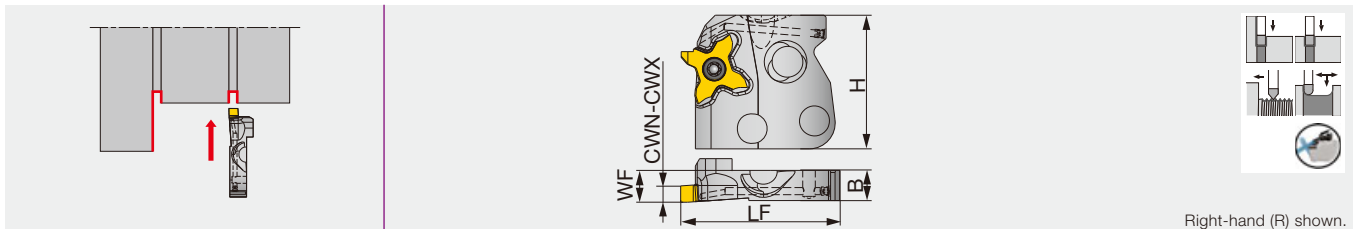

Designation	CWN	CWX	WF	H	LF	B	Insert	Torque*
STCAR/L18-CHP	0.33	3.18	7.5	33	38	7.2	TC*18R/L...	1.2

Use the right hand insert (R) with the right hand adapter (R). Use the left hand insert (L) with the left hand adapter (L).
Torque*: Recommended clamping torque (N·m)

SPARE PARTS




Designation	Clamping screw	Wrench
JS**STCL18	CSTC-4L100DL	T-1008/5
STCAR18-CHP	CSTC-4L100DR	T-1008/5
STCAR18-CHP	CSTC-4L100DL	T-1008/5

CHSR/L-CHP

Tube connection

Shank for adapter, with high pressure coolant capability

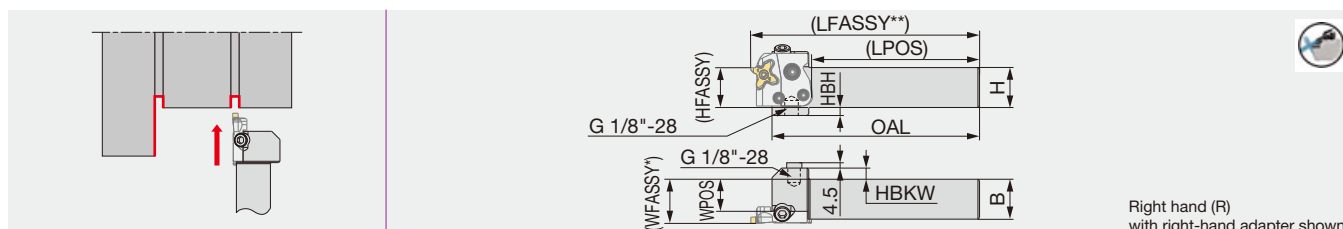

Designation	H	B	OAL	LPOS	WPOS	HBKW	HFASSY	HBH	Adapter (Option)	Torque*
CHSR/L2020-CHP	20	20	130	105.5	15.1	12	20	10	STCAR/L18-CHP	6.5
CHSR/L2525-CHP	25	25	130	105.5	20.1	7	25	5	STCAR/L18-CHP	6.5

WFASSY* : Shank (WPOS) + adapter (WF)

LFASSY** : Shank (LPOS) + adapter (LF)

Depending on the adapter type, the value of LFASSY or WFASSY may change.

Torque*: Recommended clamping torque (N·m)


Applicable for 30 MPa coolant

Please see P58 for instructions on installing and removing the adapter or the insert.

CHSR/L-CHP-MC

Direct connection

Shank for adapter, with high pressure coolant capability

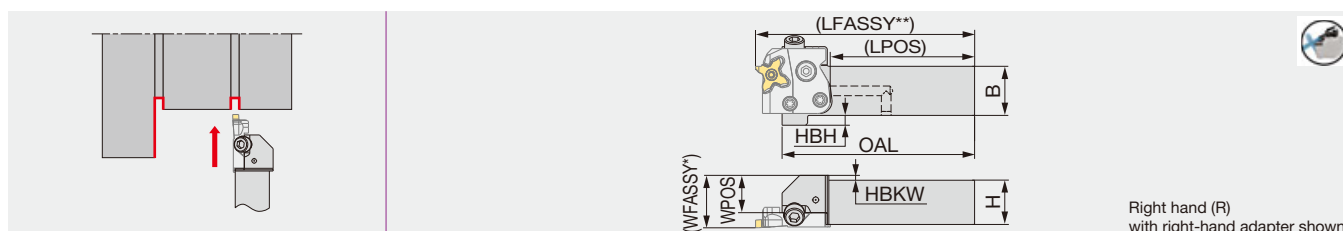

Designation	H	B	OAL	LPOS	WPOS	HBKW	HBH	Adapter (Option)	Torque*
CHSR/L2020-CHP-MC	20	20	98	73.5	14	6	10	STCAR/L18-CHP	6.5
CHSR/L2525-CHP-MC	25	25	98	73.5	19	-	5	STCAR/L18-CHP	6.5

WFASSY* : Shank (WPOS) + adapter (WF)

LFASSY** : Shank (LPOS) + adapter (LF)

Depending on the adapter type, the value of LFASSY or WFASSY may change.

Torque*: Recommended clamping torque (N·m)

Applicable for 30 MPa coolant

Please see P58 for instructions on installing and removing the adapter or the insert.

SPARE PARTS

Designation	Clamping screw 1	Wrench 1	Clamping screw 2	Clamping screw 3	Wrench 2	O-ring	Plug
CHSR/L*-CHP	SR M5-04451	T-20/5	SR M6X12DIN6912	SR M6X20-XT	HW5.0	OR 5X1N	PLUGG1/8ISO1179
CHSR/L*-CHP-MC	SR M5-04451	T-20/5	SR M6X12DIN6912	SR M6X20-XT	HW5.0	OR 5X1N	-

Recommended clamping torque (N·m)

Clamping screw	Torque (N·m)
SR M5-04451	2.5
SR M6X12DIN6912	6.5
SR M6X20-XT	6.5

Combination of adapter and shank


Shank	Adapter	
	STCAR18-CHP	STCAL18-CHP
CHSR*-CHP (-MC)	●	
CHSL*-CHP (-MC)		●
CHFVR*-CHP		●
CHFVL*-CHP	●	

● : Corresponding

CHFVR/L-CHP

Tube connection

Shank for perpendicularly-mounted adapter, with high pressure coolant capability

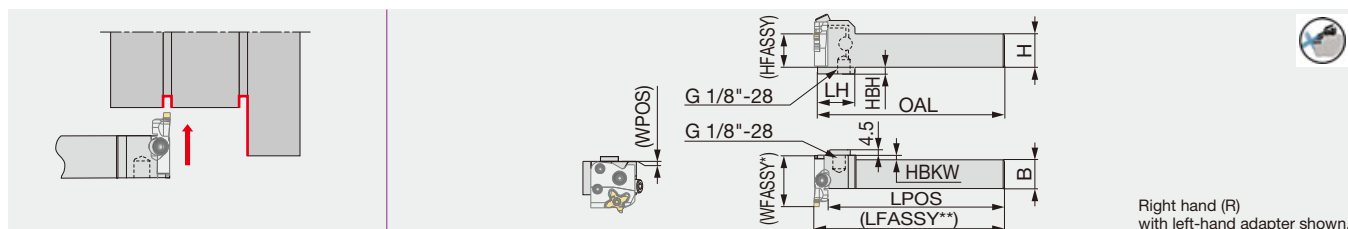

Designation	H	B	OAL	LH	LPOS	WPOS	HBKW	HFASSY	HBH	Adapter (Option)	Torque*
CHFVR/L2020-CHP	20	20	140	28	135.1	0.5	5	20	10	STCAL/R18-CHP	6.5
CHFVR/L2525-CHP	25	25	140	28	135.1	0.5	0	25	5	STCAL/R18-CHP	6.5

WFASSY* : Shank (WPOS) + adapter (LF)

LFASSY** : Shank (LPOS) + adapter (WF)

Depending on the adapter type, the value of LFASSY or WFASSY may change.

Torque*: Recommended clamping torque (N·m)

Applicable for 30 MPa coolant

Please see P58 for instructions on installing and removing the adapter or the insert.

SPARE PARTS

Designation	Clamping screw 1	Wrench 1	Clamping screw 2	Clamping screw 3	Wrench 2	O-ring	Plug
CHFVR/L...	SR M5-04451	T-20/5	SR M6X12DIN6912	SR M6X20-XT	HW5.0	OR 5X1N	PLUGG1/8ISO1179

Recommended clamping torque (N·m)

Clamping screw	Torque (N·m)
SR M5-04451	2.5
SR M6X12DIN6912	6.5
SR M6X20-XT	6.5

Combination of adapter and shank


Shank	Adapter	
	STCAR18-CHP	STCAL18-CHP
CHSR**-CHP (-MC)	●	
CHSL**-CHP (-MC)		●
CHFVR**-CHP		●
CHFVL**-CHP	●	

● : Corresponding

C*CHSN-CHP

Direct connection

Toolholder with TungCap connection, for adapter, with high pressure coolant capability

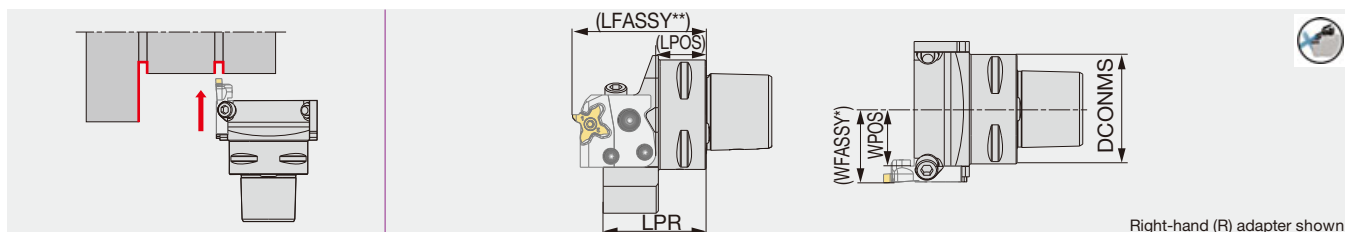

Right-hand (R) adapter shown.

Designation	DCONMS	LPR	LPOS	WPOS	Adapter (Option)	Torque*
C3CHSN19045-CHP	32	45	17.5	18.5	STCAR/L18-CHP	6.5
C4CHSN21047-CHP	40	46.5	21.5	21	STCAR/L18-CHP	6.5
C5CHSN26047-CHP	50	47	22.5	26	STCAR/L18-CHP	6.5
C6CHSN33050-CHP	63	50	24.5	32.5	STCAR/L18-CHP	6.5

WFASSY* : Toolholder (WPOS) + adapter (WF)

LFASSY** : Toolholder (LPOS) + adapter (LF)

Depending on the adapter type, the value of LFASSY or WFASSY may change.

Torque*: Recommended clamping torque (N·m)


Applicable for 30 MPa coolant

Please see P58 for instructions on installing and removing the adapter or the insert.

C*CHFVN-CHP

Direct connection

Toolholder with TungCap connection, for perpendicularly-mounted adapter, with high pressure coolant capability

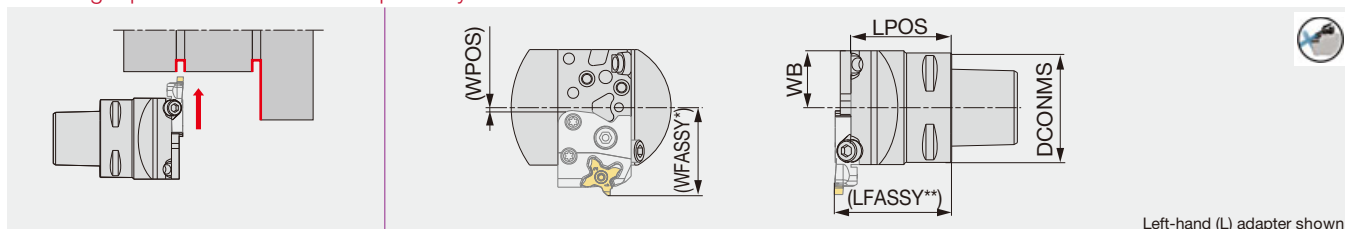

Left-hand (L) adapter shown.

Designation	DCONMS	LPOS	WB	WPOS	Adapter (Option)	Torque*
C3CHFVN26040-CHP	32	40	26	1.5	STCAR/L18-CHP	6.5
C4CHFVN26046-CHP	40	46	26	1.5	STCAR/L18-CHP	6.5
C5CHFVN26046-CHP	50	46	26	1.5	STCAR/L18-CHP	6.5
C6CHFVN33046-CHP	63	46	33	8.5	STCAR/L18-CHP	6.5

WFASSY* : Toolholder (WPOS) + adapter (LF)

LFASSY** : Toolholder (LPOS) + adapter (WF)

Depending on the adapter type, the value of LFASSY or WFASSY may change.

Torque*: Recommended clamping torque (N·m)

Applicable for 30 MPa coolant

Please see P58 for instructions on installing and removing the adapter or the insert.

SPARE PARTS


Designation	Clamping screw 1	Wrench 1	Clamping screw 2	Clamping screw 3	Wrench 2	O-ring
C*CH**N*-CHP	SR M5-04451	T-20/5	SR M6X12DIN6912	SR M6X20-XT	HW5.0	OR 5X1N

Recommended clamping torque (N·m)

Clamping screw	Torque (N·m)
SR M5-04451	2.5
SR M6X12DIN6912	6.5
SR M6X20-XT	6.5

JS-STCFL18

Face grooving toolholder with round shank

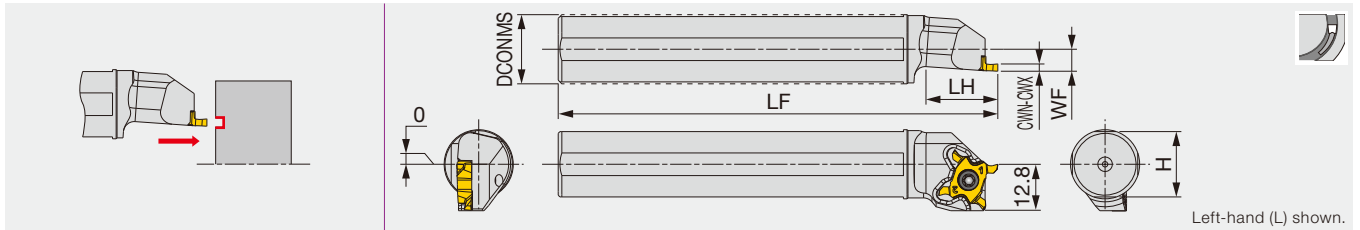


Designation	CWN	CWX	DCONMS	LF	LH	H	WF	Insert	Torque*
JS16F-STCFL18	0.5	2.5	16	85	20	15	6	TCF18L...	1.2
JS19G-STCFL18	0.5	2.5	19.05	90	20	18	6	TCF18L...	1.2
JS19X-STCFL18	0.5	2.5	19.05	120	20	18	6	TCF18L...	1.2
JS20G-STCFL18	0.5	2.5	20	90	20	19	6	TCF18L...	1.2
JS20X-STCFL18	0.5	2.5	20	120	20	19	6	TCF18L...	1.2
JS22X-STCFL18	0.5	2.5	22	120	20	21	6	TCF18L...	1.2
JS25H-STCFL18	0.5	2.5	25	100	20	24	6	TCF18L...	1.2
JS254X-STCFL18	0.5	2.5	25.4	120	20	24.5	6	TCF18L...	1.2

The left hand insert (L) is used for the left hand toolholders (L).
Torque*: Recommended clamping torque (N·m)

STCFVR-18

Face grooving toolholder with square shank, for Swiss lathes

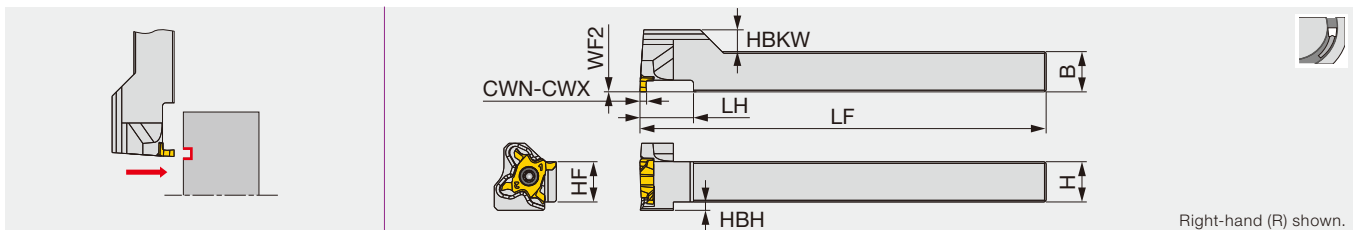

Designation	CWN	CWX	H	B	LF	LH	HF	WF2	HBKW	HBH	Insert	Torque*
STCFVR1010H18	0.5	2.5	10	10	100	12	10	0	8.5	4.5	TCF18L...	1.2
STCFVR1212F18	0.5	2.5	12	12	85	16	12	0	6.5	2.5	TCF18L...	1.2
STCFVR1212X18	0.5	2.5	12	12	120	16	12	0	6.5	2.5	TCF18L...	1.2
STCFVR1616X18	0.5	2.5	16	16	120	20	16	0	2.5	0	TCF18L...	1.2


The left hand insert (L) is used for the right hand toolholders (R).
Torque*: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamping screw	Wrench
JS**-STCFL18 / STCFVR**18	CSTC-4L100DR	T-1008/5

C-STCR/L-18-CHP

External grooving and threading toolholder, with high pressure coolant capability

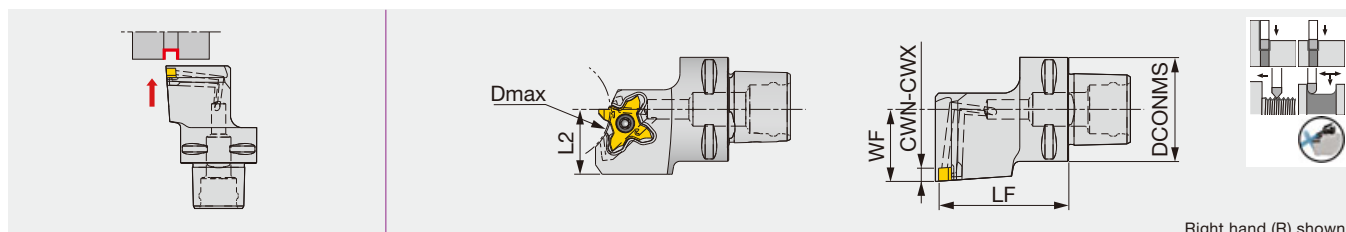

Right hand (R) shown.

Designation	CWN	CWX	DCONMS	LF	L2	WF	Dmax	Insert	Torque*
C3STCR/L22040-18-CHP	0.33	3	32	40	20	22	32	TC*18R/L...	1.2
C4STCR/L27050-18-CHP	0.33	3	40	50	25	27	75 ⁽¹⁾	TC*18R/L...	1.2

Applicable for 14 MPa coolant

Use the right hand insert (TC*18R...) with the right hand holder (STCR...). Use the left hand insert (TC*18L...) with the left hand holder (STCL...).

(1) The value for 3.5 mm groove depth. Dmax varies according to the grooving depth required. Please see P9 for more detail.


Torque*: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamping screw	Wrench
C*STCL*-18-CHP	CSTC-4L100DR	T-1008/5
C*STCR*-18-CHP	CSTC-4L100DL	T-1008/5

C-STCFL-18-CHP

External grooving and threading toolholder, with high pressure coolant capability

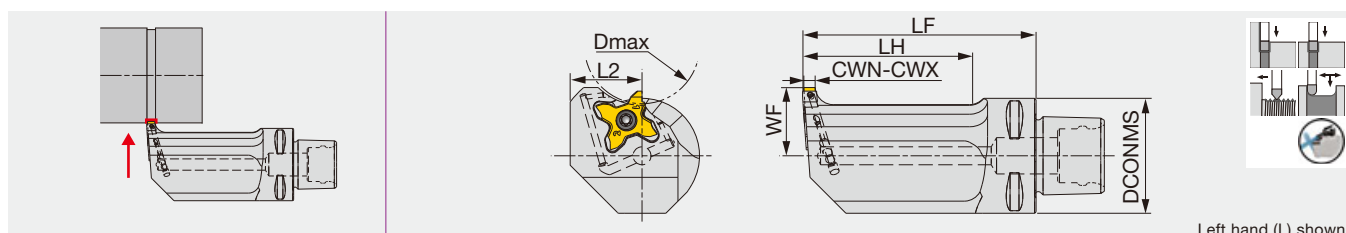

Left hand (L) shown.

Designation	CWN	CWX	DCONMS	LF	LH	L2	WF	Dmax	Insert	Torque*
C3STCFL18040-18-CHP	0.33	3	32	40	21.5	20	18	32	TC*18R...	1.2
C3STCFL18065-18-CHP	0.33	3	32	65	46.5	20	18	32	TC*18R...	1.2

Applicable for 14 MPa coolant

Use the right hand insert (TC*18R...) with the left hand holder (STCFL...).

Torque*: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamping screw	Wrench
C*STCL*-18-CHP	CSTC-4L100DR	T-1008/5
C*STCR*-18-CHP, C3STCFL*-18-CHP	CSTC-4L100DL	T-1008/5

STANDARD LINEUP OF TETRAMINI-CUT GROOVING INSERTS


Groove width CW (mm)	Corner rad. RE (mm)	TCL18R/L (P28)			TCS18R/L (P28)			TCG18R/L (P30)				TCP18R/L (P32)			TCP18R/L-F (P33)			TCF18L (P34)		
		AH8005	AH7025	AH6235	AH8005	AH7025	AH6235	AH8005	AH7025	AH6235	NS9530	AH725			SH7025	SH725		SH7025	SH725	
0.33	0.05											●			●	●				
0.43	0.05											●			●	●				
0.50	0.05											●			●	●		●	●	
0.75	0.05											●			●	●				
0.95	0.05											●			●	●				
1.00	0.05														●	●		●	●	
	0.1				●	●	●	●	●	●	●	●			●	●				
1.20	0.05														●	●				
	0.1				●	●	●	●	●	●		●			●	●				
1.25	0.05														●	●				
	0.1				●	●	●	●	●	●	●	●			●	●				
	0.2				●	●	●	●	●	●	●	●			●	●				
1.30	0.2				●	●	●	●	●	●										
1.40	0.1				●	●	●	●	●	●		●			●	●				
	0.2				●	●	●	●	●	●										
1.45	0.05														●	●				
	0.1				●	●	●	●	●	●		●								
	0.2							●	●	●	●									
1.50	0.05														●	●		●	●	
	0.1	●	●	●	●	●	●	●	●	●	●	●			●	●				
	0.2	●	●	●	●	●	●	●	●	●	●				●	●				
1.60	0.2				●	●	●	●	●	●										
1.70	0.2				●	●	●	●	●	●										
1.75	0.05																			
	0.1				●	●	●	●	●	●		●			●	●				
	0.2	●	●	●	●	●	●	●	●	●	●									
1.85	0.2				●	●	●	●	●	●	●									
1.95	0.2				●	●	●	●	●	●										
2.00	0.05														●	●		●	●	
	0.1	●	●	●	●	●	●	●	●	●	●	●			●	●				
	0.2	●	●	●	●	●	●	●	●	●	●									
2.25	0.2				●	●	●	●	●	●										
2.30	0.2				●	●	●	●	●	●	●									
2.50	0.1				●	●	●	●	●	●		●			●	●		●	●	
	0.2				●	●	●	●	●	●										
	0.3	●	●	●	●	●	●	●	●	●	●									
2.65	0.3				●	●	●	●	●	●	●									
2.80	0.3				●	●	●	●	●	●	●									
3.00	0.1	●	●	●	●	●	●	●	●	●	●	●			●	●				
	0.2	●	●	●	●	●	●	●	●	●										
	0.3	●	●	●	●	●	●	●	●	●	●									

For standard threading inserts of TetraMini-Cut, please see P36

● : New product
● : Line up

INSERT

TCL18R/L (3D chipbreaker, honed edge)



Right-hand (R) shown.

P	Steel	★	★	★
M	Stainless	★	★	★
K	Cast iron	★	★	★
N	Non-ferrous			
S	Superalloys	★	★	
H	Hard materials			

★ : First choice


Designation	Right hand	Left hand	CW±0.02	RE	Coated			CDX
					AH8005	AH7025	AH6235	
TCL18R150-010	✓		1.5	0.1	●	●	●	3.5
TCL18L150-010		✓	1.5	0.1	●	●	●	3.5
TCL18R150-020	✓		1.5	0.2	●	●	●	3.5
TCL18L150-020		✓	1.5	0.2	●	●	●	3.5
TCL18R175-020	✓		1.75	0.2	●	●	●	3.5
TCL18L175-020		✓	1.75	0.2	●	●	●	3.5
TCL18R200-010	✓		2	0.1	●	●	●	3.5
TCL18L200-010		✓	2	0.1	●	●	●	3.5
TCL18R200-020	✓		2	0.2	●	●	●	3.5
TCL18L200-020		✓	2	0.2	●	●	●	3.5
TCL18R250-030	✓		2.5	0.3	●	●	●	3.5
TCL18L250-030		✓	2.5	0.3	●	●	●	3.5
TCL18R300-010	✓		3	0.1	●	●	●	3.5
TCL18L300-010		✓	3	0.1	●	●	●	3.5
TCL18R300-020	✓		3	0.2	●	●	●	3.5
TCL18L300-020		✓	3	0.2	●	●	●	3.5
TCL18R300-030	✓		3	0.3	●	●	●	3.5
TCL18L300-030		✓	3	0.3	●	●	●	3.5

5 pieces per package

● : New product

● : Line up

TCS18R/L (3D chipbreaker, honed edge)



Right-hand (R) shown.

P	Steel	★	★	★
M	Stainless	★	★	★
K	Cast iron	★	★	★
N	Non-ferrous			
S	Superalloys	★	★	
H	Hard materials			

★ : First choice

Designation	Right hand	Left hand	CW±0.02	RE	Coated			CDX
					AH8005	AH7025	AH6235	
TCS18R100-010	✓		1	0.1	●	●	●	2
TCS18L100-010		✓	1	0.1	●	●	●	2
TCS18R120-010	✓		1.2	0.1	●	●	●	2
TCS18L120-010		✓	1.2	0.1	●	●	●	2

5 pieces per package

● : New product

● : Line up

P	Steel	★	★	★
M	Stainless	★	★	★
K	Cast iron	★	★	★
N	Non-ferrous			
S	Superalloys	★	★	
H	Hard materials			

★ : First choice

Designation	Right hand	Left hand	CW±0.02	RE	Coated			CDX
					AH8005	AH7025	AH6235	
TCS18R125-010	✓		1.25	0.1	●	●	●	2
TCS18L125-010		✓	1.25	0.1	●	●	●	2
TCS18R125-020	✓		1.25	0.2	●	●	●	2
TCS18L125-020		✓	1.25	0.2	●	●	●	2
TCS18R130-020	✓		1.3	0.2	●	●	●	3.5
TCS18L130-020		✓	1.3	0.2	●	●	●	3.5
TCS18R140-010	✓		1.4	0.1	●	●	●	3.5
TCS18L140-010		✓	1.4	0.1	●	●	●	3.5
TCS18R140-020	✓		1.4	0.2	●	●	●	3.5
TCS18L140-020		✓	1.4	0.2	●	●	●	3.5
TCS18R145-010	✓		1.45	0.1	●	●	●	3.5
TCS18L145-010		✓	1.45	0.1	●	●	●	3.5
TCS18R150-010	✓		1.5	0.1	●	●	●	3.5
TCS18L150-010		✓	1.5	0.1	●	●	●	3.5
TCS18R150-020	✓		1.5	0.2	●	●	●	3.5
TCS18L150-020		✓	1.5	0.2	●	●	●	3.5
TCS18R160-020	✓		1.6	0.2	●	●	●	3.5
TCS18L160-020		✓	1.6	0.2	●	●	●	3.5
TCS18R170-020	✓		1.7	0.2	●	●	●	3.5
TCS18L170-020		✓	1.7	0.2	●	●	●	3.5
TCS18R175-010	✓		1.75	0.1	●	●	●	3.5
TCS18L175-010		✓	1.75	0.1	●	●	●	3.5
TCS18R175-020	✓		1.75	0.2	●	●	●	3.5
TCS18L175-020		✓	1.75	0.2	●	●	●	3.5
TCS18R185-020	✓		1.85	0.2	●	●	●	3.5
TCS18L185-020		✓	1.85	0.2	●	●	●	3.5
TCS18R195-020	✓		1.95	0.2	●	●	●	3.5
TCS18L195-020		✓	1.95	0.2	●	●	●	3.5
TCS18R200-010	✓		2	0.1	●	●	●	3.5
TCS18L200-010		✓	2	0.1	●	●	●	3.5
TCS18R200-020	✓		2	0.2	●	●	●	3.5
TCS18L200-020		✓	2	0.2	●	●	●	3.5
TCS18R225-020	✓		2.25	0.2	●	●	●	3.5
TCS18L225-020		✓	2.25	0.2	●	●	●	3.5
TCS18R230-020	✓		2.3	0.2	●	●	●	3.5
TCS18L230-020		✓	2.3	0.2	●	●	●	3.5
TCS18R250-010	✓		2.5	0.1	●	●	●	3.5
TCS18L250-010		✓	2.5	0.1	●	●	●	3.5
TCS18R250-020	✓		2.5	0.2	●	●	●	3.5
TCS18L250-020		✓	2.5	0.2	●	●	●	3.5
TCS18R250-030	✓		2.5	0.3	●	●	●	3.5
TCS18L250-030		✓	2.5	0.3	●	●	●	3.5
TCS18R265-030	✓		2.65	0.3	●	●	●	3.5
TCS18L265-030		✓	2.65	0.3	●	●	●	3.5
TCS18R280-030	✓		2.8	0.3	●	●	●	3.5
TCS18L280-030		✓	2.8	0.3	●	●	●	3.5
TCS18R300-010	✓		3	0.1	●	●	●	3.5
TCS18L300-010		✓	3	0.1	●	●	●	3.5
TCS18R300-020	✓		3	0.2	●	●	●	3.5
TCS18L300-020		✓	3	0.2	●	●	●	3.5
TCS18R300-030	✓		3	0.3	●	●	●	3.5
TCS18L300-030		✓	3	0.3	●	●	●	3.5

5 pieces per package

● : New product

● : Line up

★ : First choice


5 pieces per package
● : New product
● : Line up

Right-hand (R) shown.

★ : First choice

5 pieces per package
● : New product
● : Line up

TCP18R/L (lightly honed edge)

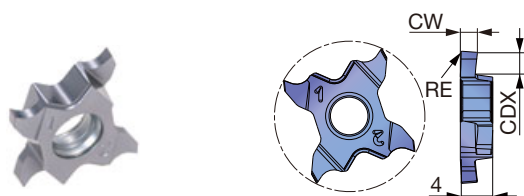

P	Steel	★			
M	Stainless	★			
K	Cast iron	★			
N	Non-ferrous				
S	Superalloys	★			
H	Hard materials				


★ : First choice

Designation	Right hand	Left hand	CW±0.02	RE	Coated		CDX
					AH725		
TCP18R033-005	✓		0.33	0.05	●		0.8
TCP18L033-005		✓	0.33	0.05	●		0.8
TCP18R043-005	✓		0.43	0.05	●		1.2
TCP18L043-005		✓	0.43	0.05	●		1.2
TCP18R050-005	✓		0.50	0.05	●		1.2
TCP18L050-005		✓	0.50	0.05	●		1.2
TCP18R075-005	✓		0.75	0.05	●		2
TCP18L075-005		✓	0.75	0.05	●		2
TCP18R095-005	✓		0.95	0.05	●		2
TCP18L095-005		✓	0.95	0.05	●		2
TCP18R100-010	✓		1	0.1	●		2
TCP18L100-010		✓	1	0.1	●		2
TCP18R120-010	✓		1.2	0.1	●		2
TCP18L120-010		✓	1.2	0.1	●		2
TCP18R125-010	✓		1.25	0.1	●		2
TCP18L125-010		✓	1.25	0.1	●		2
TCP18R140-010-35	✓		1.4	0.1	●		3.5
TCP18L140-010-35		✓	1.4	0.1	●		3.5
TCP18R145-010	✓		1.45	0.1	●		2
TCP18L145-010		✓	1.45	0.1	●		2
TCP18R145-010-35	✓		1.45	0.1	●		3.5
TCP18L145-010-35		✓	1.45	0.1	●		3.5
TCP18R150-010	✓		1.5	0.1	●		2
TCP18L150-010		✓	1.5	0.1	●		2
TCP18R150-010-35	✓		1.5	0.1	●		3.5
TCP18L150-010-35		✓	1.5	0.1	●		3.5
TCP18R175-010	✓		1.75	0.1	●		2
TCP18L175-010		✓	1.75	0.1	●		2
TCP18R175-010-35	✓		1.75	0.1	●		3.5
TCP18L175-010-35		✓	1.75	0.1	●		3.5
TCP18R200-010	✓		2	0.1	●		2.5
TCP18L200-010		✓	2	0.1	●		2.5
TCP18R200-010-35	✓		2	0.1	●		3.5
TCP18L200-010-35		✓	2	0.1	●		3.5
TCP18R250-010	✓		2.5	0.1	●		2.5
TCP18L250-010		✓	2.5	0.1	●		2.5
TCP18R250-010-35	✓		2.5	0.1	●		3.5
TCP18L250-010-35		✓	2.5	0.1	●		3.5
TCP18R300-010	✓		3	0.1	●		2.5
TCP18L300-010		✓	3	0.1	●		2.5
TCP18R300-010-35	✓		3	0.1	●		3.5
TCP18L300-010-35		✓	3	0.1	●		3.5

5 pieces per package

● : Line up

TCP18R/L-F (sharp edge)

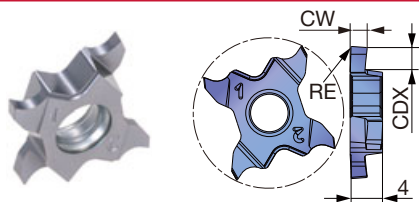

P	Steel	★	★
M	Stainless	★	★
K	Cast iron	★	★
N	Non-ferrous		
S	Superalloys	★	★
H	Hard materials		


★ : First choice

Designation	Right hand	Left hand	CW±0.02	RE	Coated		CDX
					SH7025	SH725	
TCP18R033F-005	✓		0.33	0.05	●	●	0.8
TCP18L033F-005		✓	0.33	0.05	●	●	0.8
TCP18R043F-005	✓		0.43	0.05	●	●	1.2
TCP18L043F-005		✓	0.43	0.05	●	●	1.2
TCP18R050F-005	✓		0.5	0.05	●	●	1.2
TCP18L050F-005		✓	0.5	0.05	●	●	1.2
TCP18R075F-005	✓		0.75	0.05	●	●	2
TCP18L075F-005		✓	0.75	0.05	●	●	2
TCP18R095F-005	✓		0.95	0.05	●	●	2
TCP18L095F-005		✓	0.95	0.05	●	●	2
TCP18R100F-005	✓		1	0.05	●	●	2
TCP18L100F-010		✓	1	0.1	●	●	2
TCP18R120F-005	✓		1.2	0.05	●	●	2
TCP18L120F-010		✓	1.2	0.1	●	●	2
TCP18R125F-005	✓		1.25	0.05	●	●	2
TCP18L125F-010		✓	1.25	0.1	●	●	2
TCP18R140F-010-35	✓		1.4	0.1	●	●	3.5
TCP18R145F-005-35	✓		1.45	0.05	●	●	3.5
TCP18R145F-010	✓		1.45	0.1	●	●	2
TCP18L145F-010		✓	1.45	0.1	●	●	2
TCP18R145F-010-35	✓		1.45	0.1	●	●	3.5
TCP18L145F-010-35		✓	1.45	0.1	●	●	3.5
TCP18R150F-005-35	✓		1.5	0.05	●	●	3.5
TCP18R150F-010	✓		1.5	0.1	●	●	2
TCP18L150F-010		✓	1.5	0.1	●	●	2
TCP18R150F-010-35	✓		1.5	0.1	●	●	3.5
TCP18L150F-010-35		✓	1.5	0.1	●	●	3.5
TCP18R175F-005-35	✓		1.75	0.05	●	●	3.5
TCP18R175F-010	✓		1.75	0.1	●	●	2
TCP18L175F-010		✓	1.75	0.1	●	●	2
TCP18R175F-010-35	✓		1.75	0.1	●	●	3.5
TCP18L175F-010-35		✓	1.75	0.1	●	●	3.5
TCP18R200F-005-35	✓		2	0.05	●	●	3.5
TCP18R200F-010	✓		2	0.1	●	●	2.5
TCP18L200F-010		✓	2	0.1	●	●	2.5
TCP18R200F-010-35	✓		2	0.1	●	●	3.5
TCP18L200F-010-35		✓	2	0.1	●	●	3.5
TCP18R250F-010	✓		2.5	0.1	●	●	2.5
TCP18L250F-010		✓	2.5	0.1	●	●	2.5
TCP18R250F-010-35	✓		2.5	0.1	●	●	3.5
TCP18L250F-010-35		✓	2.5	0.1	●	●	3.5
TCP18R300F-010	✓		3	0.1	●	●	2.5
TCP18L300F-010		✓	3	0.1	●	●	2.5
TCP18R300F-010-35	✓		3	0.1	●	●	3.5
TCP18L300F-010-35		✓	3	0.1	●	●	3.5

5 pieces per package

● : Line up

TCF18L (Face grooving, sharp edge)

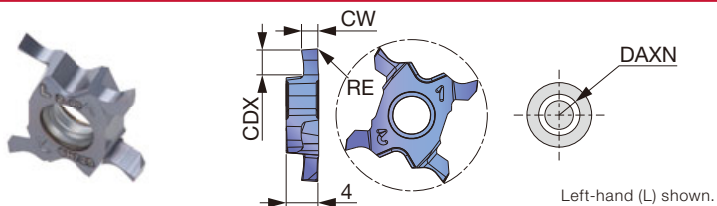

P	Steel	★	★		
M	Stainless	★	★		
K	Cast iron	★	★		
N	Non-ferrous				
S	Superalloys	★	★		
H	Hard materials				

★: First choice

[illegible]

5 pieces per package
●: Line up

STANDARD CUTTING CONDITIONS

TCL18R/L, TCS18R/L (3D chipbreaker), TCG18R/L (honed edge), TCG18R/L (Full R)

ISO	Workpiece materials	Grades	Cutting speed Vc (m/min)	Feed: f (mm/rev)		
				TCL18	TCS18	TCG18
P	Carbon steel S45C / C45, etc.	AH8005	100 - 300	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
		AH7025	100 - 200			
		AH6235	80 - 120			
		NS9530	120 - 250			
	Alloy steel SCM435 / 34CrMo4, etc.	AH8005	80 - 250	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
		AH7025	50 - 180			
		AH6235	50 - 100			
		NS9530	100 - 200			
M	Stainless steel SUS304 / X5CrNi18-9, etc.	AH8005	100 - 150	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
		AH7025	80 - 120			
		AH6235	50 - 120			
K	Grey cast iron FC250 / 250, etc.	AH8005	80 - 250	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
		AH7025	50 - 180			
		AH6235	50 - 100			
		NS9530	50 - 180			
	Ductile cast iron FCD400 / 400-15, etc.	AH8005	80 - 180	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
		AH7025	50 - 120			
S	Titanium alloys Ti-6Al-4V, etc.	AH6235	50 - 80	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
		NS9530	50 - 180			
	Superalloys Inconel718, etc.	AH8005	50 - 70	0.03 - 0.12	0.04 - 0.16	0.04 - 0.14
		AH7025	30 - 60			
		AH8005	40 - 60			
		AH7025	20 - 50			

TCP18R/L (lightly honed edge) / TCP18R/L-F (sharp edge)

ISO	Workpiece materials	Grades	Cutting speed Vc (m/min)	Feed f (mm/rev)
P	Carbon steel S45C / C45, etc.	SH7025	80 - 180	0.01 - 0.08
		AH725	80 - 180	0.03 - 0.1
	Alloy steel SCM435 / 34CrMo4, etc.	SH7025	80 - 180	0.01 - 0.08
		AH725	80 - 180	0.03 - 0.1
M	Stainless steel SUS304 / X5CrNi18-9, etc.	SH7025	50 - 120	0.01 - 0.08
		AH725	50 - 120	0.03 - 0.1
K	Grey cast iron FC250 / 250, etc.	AH725	50 - 180	0.03 - 0.1
		SH7025	50 - 180	0.01 - 0.08
	Ductile cast iron FCD400 / 400-15, etc.	AH725	50 - 180	0.03 - 0.1
		SH7025	50 - 180	0.01 - 0.08
S	Titanium alloys Ti-6Al-4V, etc.	SH7025	30 - 80	0.01 - 0.08
		AH725	30 - 80	0.03 - 0.1
	Superalloys Inconel718, etc.	SH7025	20 - 60	0.01 - 0.08
		AH725	20 - 60	0.03 - 0.1

TCF18L (Face grooving)


ISO	Workpiece materials	Grades	Cutting speed Vc (m/min)	Feed f (mm/rev)
P	Carbon steel S45C / C45, etc.	SH7025	30 - 100	0.01 - 0.04
	Alloy steel SCM435 / 34CrMo4, etc.	SH7025	30 - 100	0.01 - 0.04
M	Stainless steel SUS304 / X5CrNi18-9, etc.	SH7025	30 - 100	0.01 - 0.04
K	Grey cast iron FC250 / 250, etc.	SH7025	30 - 100	0.01 - 0.04
	Ductile cast iron FCD400 / 400-15, etc.	SH7025	30 - 100	0.01 - 0.04
S	Titanium alloys Ti-6Al-4V, etc.	SH7025	20 - 40	0.01 - 0.04
	Superalloys Inconel718, etc.	SH7025	10 - 30	0.01 - 0.04

Expanded product lineup

Thread type	Partial		Full profile				
	60° (P37)	55° (P37)	ISO (P36)	UN (P38)	W (P38)		UNJ (P39)
	ISO metric threads	Whitworth threads	ISO metric threads	Unified national threads series	Whitworth threads	British standard parallel pipe	Unified inch screw threads
	Unified national threads series		Coarse and fine	60° inch threads	British standard whitworth, British standard fine	55° inch thread	
	M, UN, UNC, UNF, UNEF, UNS	G, BSP, PF, BSPP	M	UN, UNR, UNC, UNRC, UNF, UNRF, UNEF, UNREF, UNS, UNRS	BSW, BSF, W	G, BSP, PF, BSPP	UNJ, UNJC, UNJF, UNEF, UNJS
TETRAMCUT Threading insert	●	●	●	●	●	●	●

INSERTS

TCT18FR/R-ISO (Full profile threading insert)

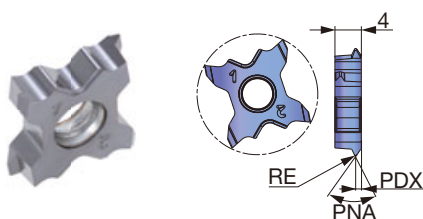

Right-hand (R) shown.


P Steel	★	★	★	
M Stainless	★	★	★	
K Cast iron	★	★	★	
N Non-ferrous				
S Superalloys	★	★	★	
H Hard materials				

★ : First choice

Designation	Right hand	RE	Coated				Pitch	PDX	PNA
			SH7025	SH725	AH725				
TCT18FR-05ISO	✓	0.06	●	●			0.5	0.35	60°
TCT18FR-07ISO	✓	0.09	●	●			0.7	0.45	60°
TCT18FR-075ISO	✓	0.09	●	●			0.75	0.5	60°
TCT18FR-08ISO	✓	0.1	●	●			0.8	0.5	60°
TCT18R-10ISO	✓	0.13			●		1	0.6	60°
TCT18R-125ISO	✓	0.17			●		1.25	0.7	60°
TCT18R-15ISO	✓	0.2			●		1.5	0.8	60°

5 pieces per package
● : Line up

TCT18FR/R/L (Threading insert)

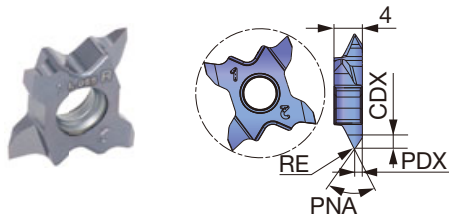

Right-hand (R) shown.

P	Steel	★	★	★
M	Stainless	★	★	★
K	Cast iron	★	★	★
N	Non-ferrous			
S	Superalloys	★	★	★
H	Hard materials			


★ : First choice

Designation	Right hand	Left hand	RE	Coated								Pitch min	Pitch max	PDX	CDX	PNA
				SH7025	SH725	AH725										
TCT18FR-60A-005	✓		0.05	●	●							0.4	1	0.6	0.99	60°
TCT18FR-60A-010	✓		0.1	●	●							1	2	1	1.63	60°
TCT18R-60N-010	✓		0.1			●						0.8	3	1.6	2.67	60°
TCT18L-60N-010		✓	0.1			●						0.8	3	1.6	2.67	60°
TCT18R-60N-020	✓		0.2			●						1.5	3	1.6	2.57	60°
TCT18L-60N-020		✓	0.2			●						1.5	3	1.6	2.57	60°


5 pieces per package

● : Line up

TCT18R/L-55 (Threading insert)



55° thread angle
(General purpose)

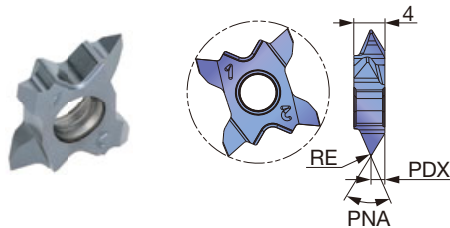

Right-hand (R) shown.

P	Steel	★		
M	Stainless	★		
K	Cast iron	★		
N	Non-ferrous			
S	Superalloys	★		
H	Hard materials			



★ : First choice

Designation	Right hand	Left hand	RE	Coated								TPI	PDX	PNA
				AH8015										
TCT18R-55N-010	✓		0.1	●								28 - 8	1.6	55°
TCT18L-55N-010		✓	0.1	●								28 - 8	1.6	55°
TCT18R-55N-020	✓		0.2	●								16 - 8	1.6	55°
TCT18L-55N-020		✓	0.2	●								16 - 8	1.6	55°

5 pieces per package

● : Line up

TCT18R-UNJ (Full profile threading insert)



Right-hand (R) shown.

P	Steel	★		
M	Stainless	★		
K	Cast iron	★		
N	Non-ferrous			
S	Superalloys	★		
H	Hard materials			

★ : First choice

Designation	Right hand	RE	Coated									TPI	PDX	PNA
			AH8015											
TCT18R-32UNJ	✓	0.13	●									32	0.5	60°
TCT18R-28UNJ	✓	0.15	●									28	0.55	60°

5 pieces per package



● : Line up

STANDARD CUTTING CONDITIONS



TCT18R/L / TCT18FR

ISO	Workpiece material	Hardness	Grade	Cutting speed Vc (m/min)
P	Steel / Alloy steel S45C, SCM440, etc. C45, 42CrMoS4, etc.	< 200HB	AH8015	80 - 180
			AH725	60 - 150
			SH7025	60 - 150
		> 200HB	AH8015	60 - 160
			AH725	60 - 150
			SH7025	60 - 150
M	Stainless steel SUS304, etc. X5CrNi18-9, etc.	-	AH8015	50 - 130
		-	AH725	50 - 80
		-	SH7025	50 - 80
K	Cast iron FC250, FC300, etc. 250, 300, etc.	-	AH8015	60 - 150
		-	AH725	50 - 100
		-	SH7025	50 - 100
S	Superalloys Ti-6Al-4V, Inconel718, etc.	-	AH8015	20 - 80
		-	AH725	20 - 80
		-	SH7025	20 - 80

Cautions when machining in guide bushing


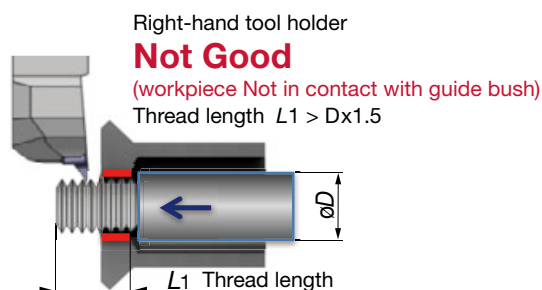
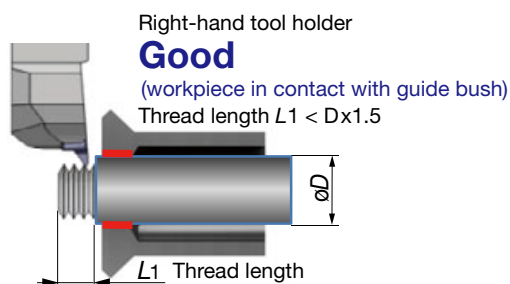


Threading operation following back-turning

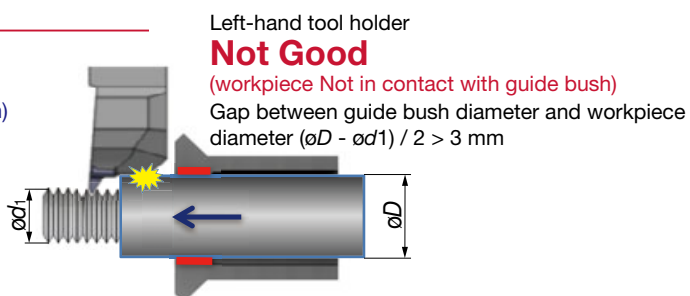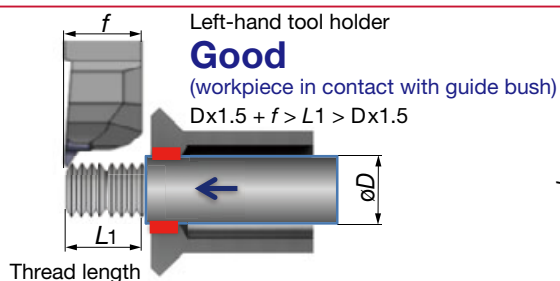


INNOVATIVE INSERTS

- Suitable for precision grooving or parting-off in general machining including small parts
- Two types of chipbreakers available for TC*27 inserts

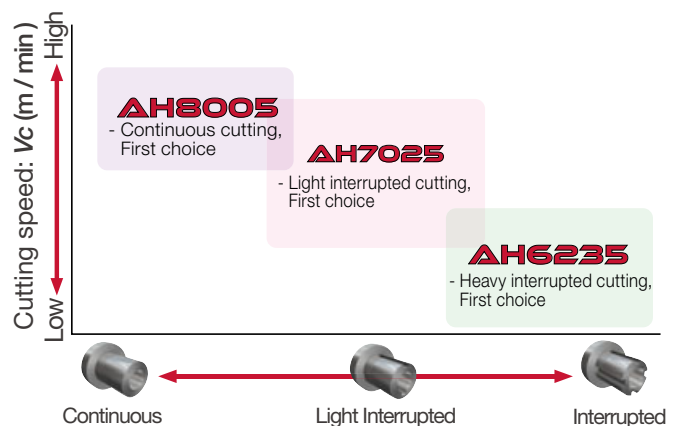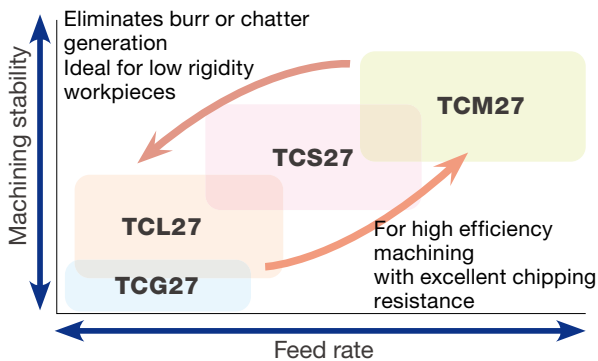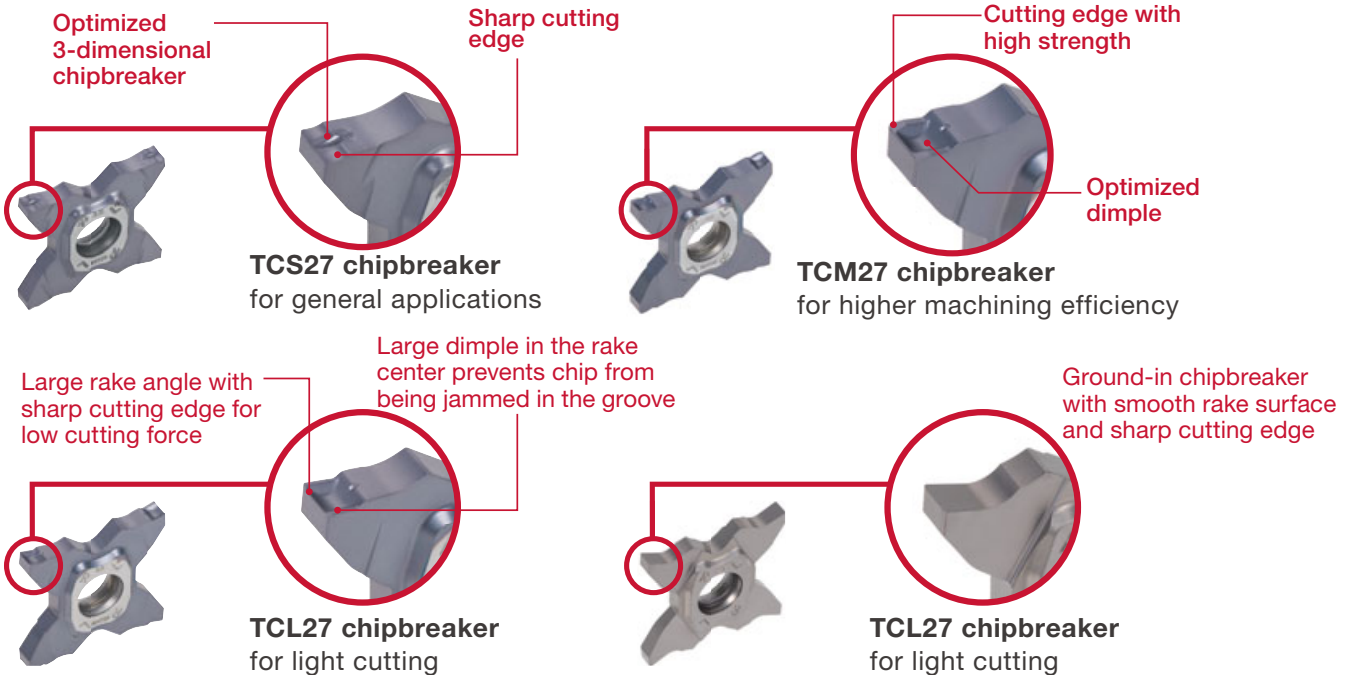


The same insert can be mounted on either the right- or left-hand holder

Insert can be clamped either from front or back side of the holder

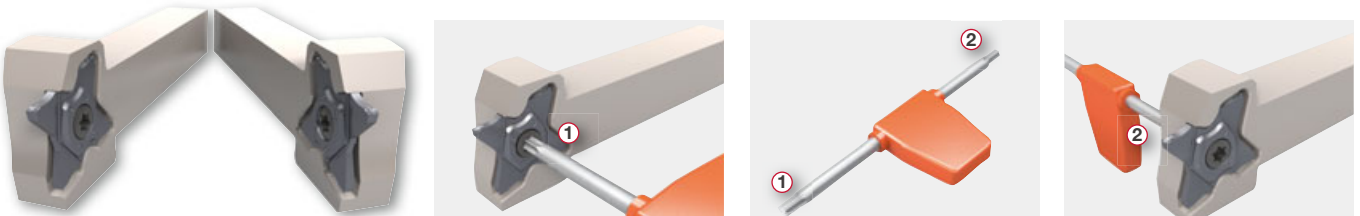


Indexing the insert

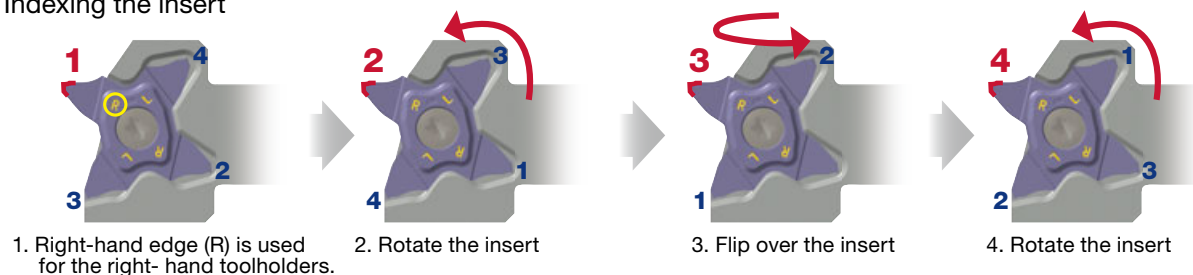

CUTTING PERFORMANCE

P With TCL27 style 3D chipbreaker
 Toolholder : STCL2525-27
 Insert : TCL27-200-020 AH7025
 Workpiece material: SCM415

Cutting speed: V_c (m/min)	150			
		0.05	0.07	0.1
				0.12
		Feed: f (mm/rev)		



P With TCS27 style 3D chipbreaker
 Toolholder : STCL2525-27
 Insert : TCS27-200-020 AH7025
 Workpiece material: SCM415

Cutting speed: V_c (m/min)	150			
		0.07	0.1	0.12
				0.15
		Feed: f (mm/rev)		




P With TCM27 style 3D chipbreaker
 Toolholder : STCL2525-27
 Insert : TCM27-200-020 AH7025
 Workpiece material: SCM415

Cutting speed: V_c (m/min)	150			
		0.1	0.12	0.15
				0.2
		Feed: f (mm/rev)		




P With TCG27 style Ground-in chipbreaker
 Toolholder : STCL2525-27
 Insert : TCG27-200-020 NS9530
 Workpiece material: SCM415

Cutting speed: V_c (m/min)	150			
		0.03	0.05	0.07
				0.1
		Feed: f (mm/rev)		



Benefits of using high pressure coolant

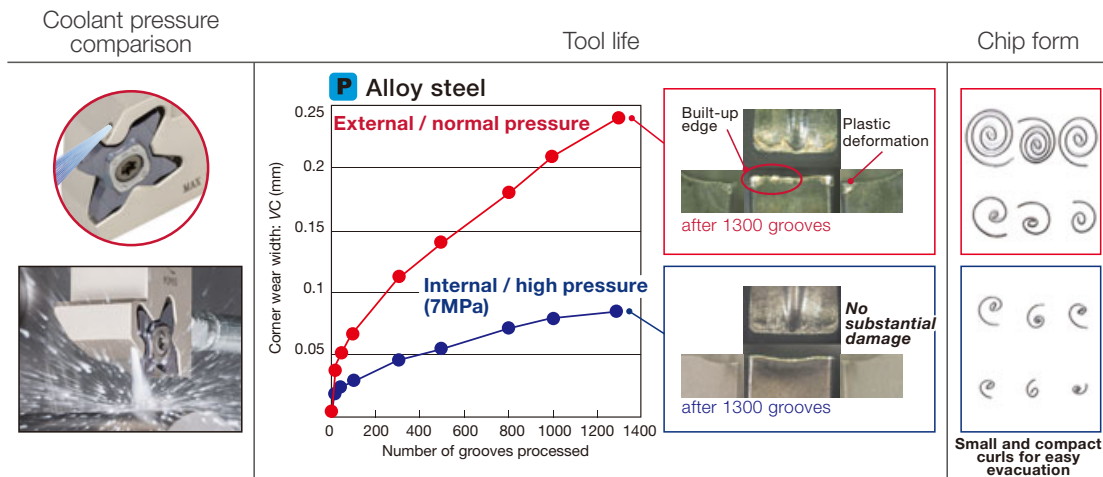

Toolholder : STCR2525-27-CHP
 Insert : TCS27-200-020 AH7025
 Workpiece material : SCM440 / 42CrMo4
 Cutting speed : $V_c = 180$ m/min
 Feed : $f = 0.12$ mm/rev
 Groove width : 2 mm
 Groove depth : 5 mm

CHP type toolholders for high-pressure coolant


The coolant is supplied to the cutting edge providing good chip control and long tool life.



TOOLHOLDER

STCR/L-27

External toolholders for grooving, parting

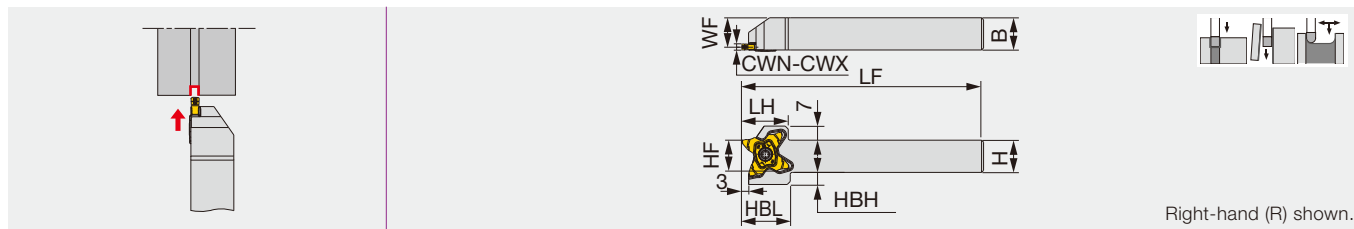


Designation	CWN	CWX	H	B	LF	LH	HBL	HF	WF	HBH	Insert	Torque*
STCR/L1010-27	0.5	3.18	10	10	120	23	24	10	8.5	9.5	TC*27...	2.5
STCR/L1212-27	0.5	3.18	12	12	120	23	24	12	10.5	8	TC*27...	2.5
STCR/L1616-27	0.5	3.18	16	16	120	23	24	16	14.5	6	TC*27...	2.5
STCR/L2020-27	0.5	3.18	20	20	120	23	24	20	18.5	2	TC*27...	2.5
STCR/L2525-27	0.5	3.18	25	25	135	23	-	25	23.5	-	TC*27...	2.5

Torque*: Recommended clamping torque (N·m)

STCR/L-27-CHP

Direct connection

Grooving and parting-off toolholder. High pressure coolant capability.

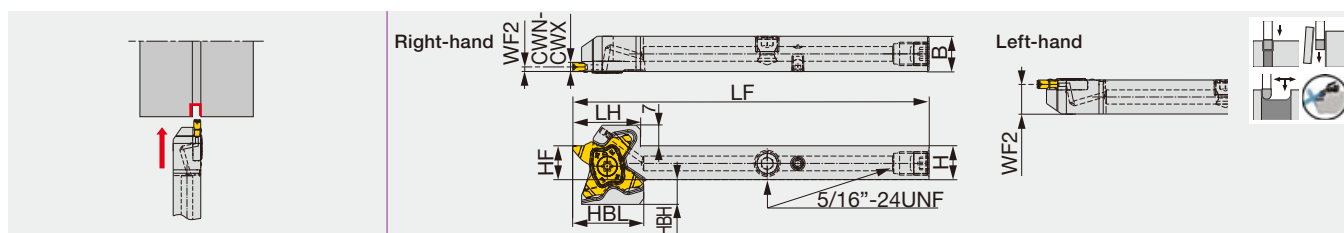


Designation	CWN	CWX	H	B	LF	LH	HF	WF2 ⁽¹⁾	HBH	HBL	Insert	Torque*
STCR/L1212-27-CHP	0.5	3.18	12	12	120	23	12	1.5/10.5	8	24	TC*27...	2.5

- Make sure to avoid tool interferences when used on Swiss machines
(1) The above WF2 value is valid when an insert width of CW=3 is mounted.
Torque*: Recommended clamping torque (N·m)

STCR/L-27-CHP

Tube connection

External grooving and parting toolholder, with high pressure coolant capability

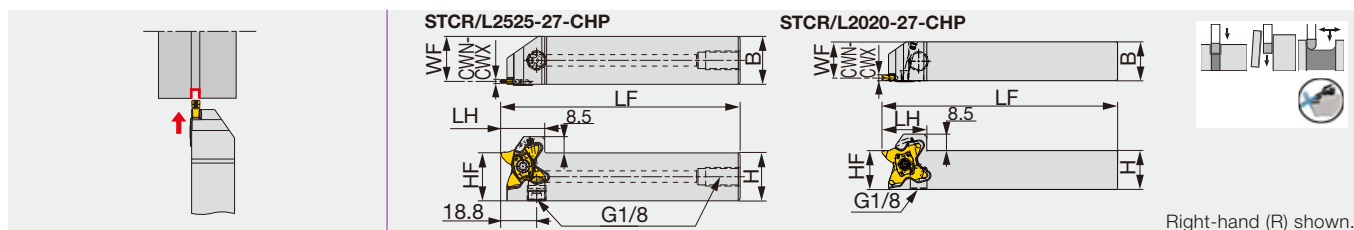

Designation	CWN	CWX	H	B	LF	LH	HF	WF	Insert	Torque*
STCR/L2020-27-CHP	0.5	3.18	20	20	120	23	20	18.5	TC*27...	2.5
STCR/L2525-27-CHP	0.5	3.18	25	25	125	23	25	23.5	TC*27...	2.5


Torque*: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Screw	Wrench	Coolant plug	Wrench	DirectJet plug	Wrench
STCR**27, STCR**27-CHP	SR16-212-01397L	T-2010/5	-	-	-	-
STCL**27, STCL**27-CHP	SR16-212-01397	T-2010/5	-	-	-	-
STCR1212-27-CHP	SR16-212-01397L	T-2010/5	SR5/16UNFTL360	P-4	SSH4-6-TB	P-2
STCL1212-27-CHP	SR16-212-01397	T-2010/5	SR5/16UNFTL360	P-4	SSH4-6-TB	P-2

STCAR/L27-CHP

External grooving and parting adapter, with high pressure coolant capability

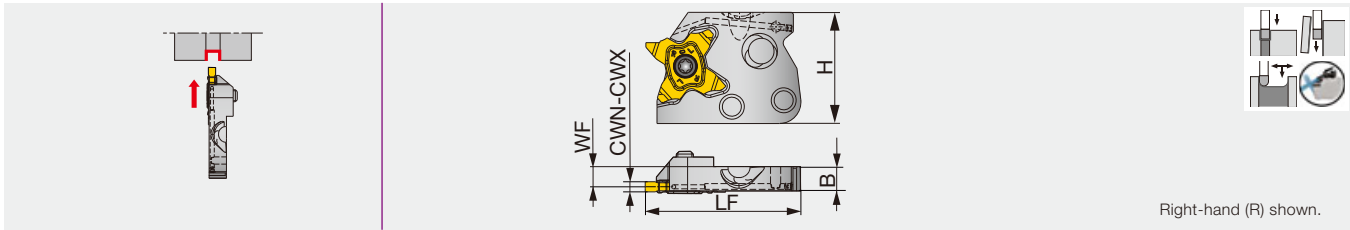

Right-hand (R) shown.

Designation	CWN	CWX	WF	H	LF	B	Insert	Torque*
STCAR/L27-CHP	0.5	3.18	6	33	46	7.2	TC*27...	2.5

Torque*: Recommended clamping torque (N·m)


SPARE PARTS

Designation	Screw	Wrench
STCAR27-CHP	SR16-212-01397L	T-2010/5
STCAL27-CHP	SR16-212-01397	T-2010/5

CHSR/L-CHP

Tube connection

Shank for adapter, with high pressure coolant capability

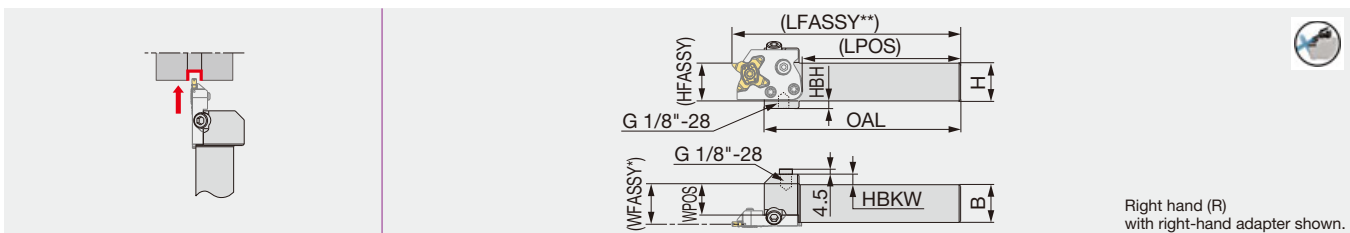

Right hand (R)
with right-hand adapter shown.

Designation	H	B	OAL	LPOS	WPOS	HBKW	HFASSY	HBH	Adapter (Option)	Torque*
CHSR/L2020-CHP	20	20	130	105.5	15.1	12	20	10	STCAR/L27-CHP	6.5
CHSR/L2525-CHP	25	25	130	105.5	20.1	7	25	5	STCAR/L27-CHP	6.5

WFASSY*: Shank (WPOS) + adapter (WF)

LFASSY*: Shank (LPOS) + adapter (LF)

Depending on the adapter type, the value of LFASSY or WFASSY may change.

Torque*: Recommended clamping torque (N·m)

Applicable for 30 MPa coolant

Please see P58 for instructions on installing and removing the adapter or the insert.

SPARE PARTS

Designation	Clamping screw 1	Wrench 1	Clamping screw 2	Clamping screw 3	Wrench 2	O-ring	Plug
CHSR/L*-CHP	SR M5-04451	T-20/5	SR M6X12DIN6912	SR M6X20-XT	HW5.0	OR 5X1N	PLUGG1/8ISO1179

Recommended clamping torque (N·m)

Clamping screw	Torque (N·m)
SR M5-04451	5
SR M6X12DIN6912	8.5
SR M6X20-XT	8.5

Combination of adapter and shank


Shank	Adapter	
	STCAR27-CHP	STCAL27-CHP
CHSR**-CHP (-MC)	●	
CHSL**-CHP (-MC)		●
CHFVR**-CHP		●
CHFVL**-CHP	●	

● : Corresponding

CHSR/L-CHP-MC

Direct connection

Shank for adapter, with high pressure coolant capability

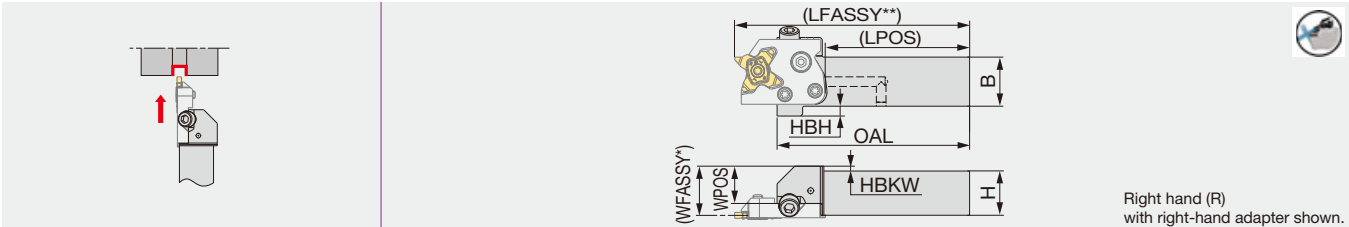

Designation	H	B	OAL	LPOS	WPOS	HBKW	HBH	Adapter (Option)	Torque*
CHSR/L2020-CHP-MC	20	20	98	73.5	14	6	10	STCAR/L27-CHP	6.5
CHSR/L2525-CHP-MC	25	25	98	73.5	19	-	5	STCAR/L27-CHP	6.5

WFASSY* : Shank (WPOS) + adapter (WF)
LFASSY** : Shank (LPOS) + adapter (LF)
Depending on the adapter type, the value of LFASSY or WFASSY may change.
Torque*: Recommended clamping torque (N·m)
Applicable for 30 MPa coolant
Please see P58 for instructions on installing and removing the adapter or the insert.

SPARE PARTS

Designation	Clamping screw 1	Wrench 1	Clamping screw 2	Clamping screw 3	Wrench 2	O-ring	Plug
CHSR/L*-CHP-MC	SR M5-04451	T-20/5	SR M6X12DIN6912	SR M6X20-XT	HW5.0	OR 5X1N	-

Recommended clamping torque (N·m)

Clamping screw	Torque (N·m)
SR M5-04451	5
SR M6X12DIN6912	8.5
SR M6X20-XT	8.5

Combination of adapter and shank


Shank	Adapter	
	STCAR27-CHP	STCAL27-CHP
CHSR**-CHP (-MC)	●	
CHSL**-CHP (-MC)		●
CHFVR**-CHP		●
CHFVL**-CHP	●	

● : Corresponding

CHFVR/L-CHP

Tube connection

Shank for perpendicularly-mounted adapter, with high pressure coolant capability

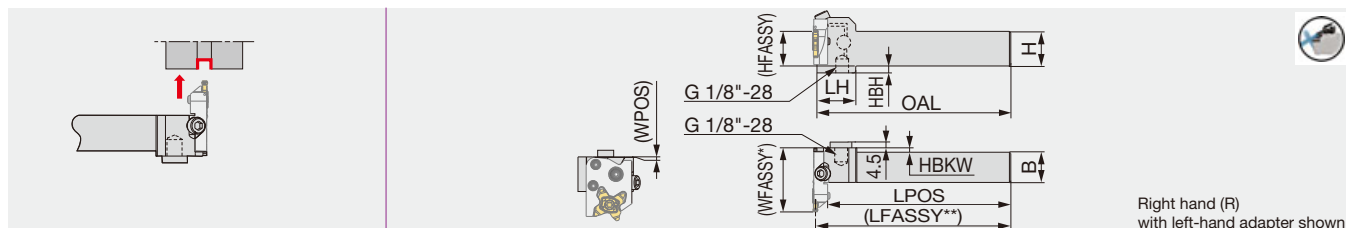

Designation	H	B	OAL	LH	LPOS	WPOS	HBKW	HFASSY	HBH	Adapter (Option)	Torque*
CHFVR/L2020-CHP	20	20	140	28	135.1	0.5	5	20	10	STCAL/R27-CHP	6.5
CHFVR/L2525-CHP	25	25	140	28	135.1	0.5	0	25	5	STCAL/R27-CHP	6.5

WFASSY* : Shank (WPOS) + adapter (LF)

LFASSY** : Shank (LPOS) + adapter (WF)

Depending on the adapter type, the value of LFASSY or WFASSY may change.

Torque*: Recommended clamping torque (N·m)

Applicable for 30 MPa coolant

Please see P58 for instructions on installing and removing the adapter or the insert.

SPARE PARTS

Designation	Clamping screw 1	Wrench 1	Clamping screw 2	Clamping screw 3	Wrench 2	O-ring	Plug
CHFVR/L...	SR M5-04451	T-20/5	SR M6X12DIN6912	SR M6X20-XT	HW5.0	OR 5X1N	PLUGG1/8ISO1179

Recommended clamping torque (N·m)

Clamping screw	Torque (N·m)
SR M5-04451	2.5
SR M6X12DIN6912	6.5
SR M6X20-XT	6.5

Combination of adapter and shank


Shank	Adapter	
	STCAR27-CHP	STCAL27-CHP
CHSR**-CHP (-MC)	●	
CHSL**-CHP (-MC)		●
CHFVR**-CHP		●
CHFVL**-CHP	●	

● : Corresponding

C*CHSN-CHP

Direct connection

Toolholder with TungCap connection, for adapter, with high pressure coolant capability

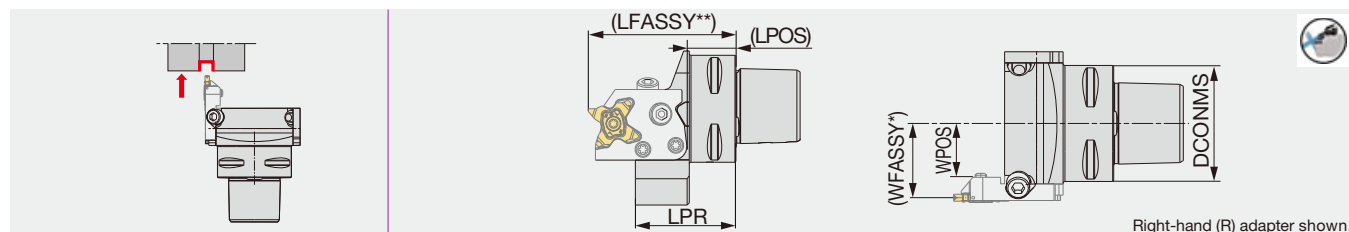

Designation	DCONMS	LPR	LPOS	WPOS	Adapter (Option)	Torque*
C3CHSN19045-CHP	32	45	17.5	18.5	STCAR/L27-CHP	6.5
C4CHSN21047-CHP	40	46.5	21.5	21	STCAR/L27-CHP	6.5
C5CHSN26047-CHP	50	47	22.5	26	STCAR/L27-CHP	6.5
C6CHSN33050-CHP	63	50	24.5	32.5	STCAR/L27-CHP	6.5

WFASSY* : Toolholder (WPOS) + adapter (WF)

LFASSY** : Toolholder (LPOS) + adapter (LF)

Depending on the adapter type, the value of LFASSY or WFASSY may change.

Torque*: Recommended clamping torque (N-m)


Applicable for 30 MPa coolant

Please see P58 for instructions on installing and removing the adapter or the insert.

C*CHFVN-CHP

Direct connection

Toolholder with TungCap connection, for perpendicularly-mounted adapter, with high pressure coolant capability

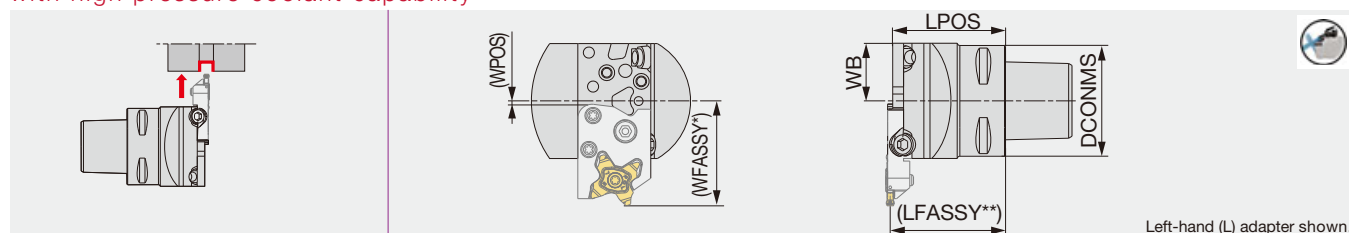

Designation	DCONMS	LPOS	WB	WPOS	Adapter (Option)	Torque*
C3CHFVN26040-CHP	32	40	26	1.5	STCAR/L27-CHP	6.5
C4CHFVN26046-CHP	40	46	26	1.5	STCAR/L27-CHP	6.5
C5CHFVN26046-CHP	50	46	26	1.5	STCAR/L27-CHP	6.5
C6CHFVN33046-CHP	63	46	33	8.5	STCAR/L27-CHP	6.5

WFASSY* : Toolholder (WPOS) + adapter (LF)

LFASSY** : Toolholder (LPOS) + adapter (WF)

Depending on the adapter type, the value of LFASSY or WFASSY may change.

Torque*: Recommended clamping torque (N-m)

Applicable for 30 MPa coolant

Please see P58 for instructions on installing and removing the adapter or the insert.

SPARE PARTS


Designation	Clamping screw 1	Wrench 1	Clamping screw 2	Clamping screw 3	Wrench 2	O-ring
C*CH**N**-CHP	SR M5-04451	T-20/5	SR M6X12DIN6912	SR M6X20-XT	HW5.0	OR 5X1N

Recommended clamping torque (N-m)

Clamping screw	Torque (N-m)
SR M5-04451	2.5
SR M6X12DIN6912	6.5
SR M6X20-XT	6.5

C-STCR/L-27-CHP

External grooving toolholder, with high pressure coolant capability

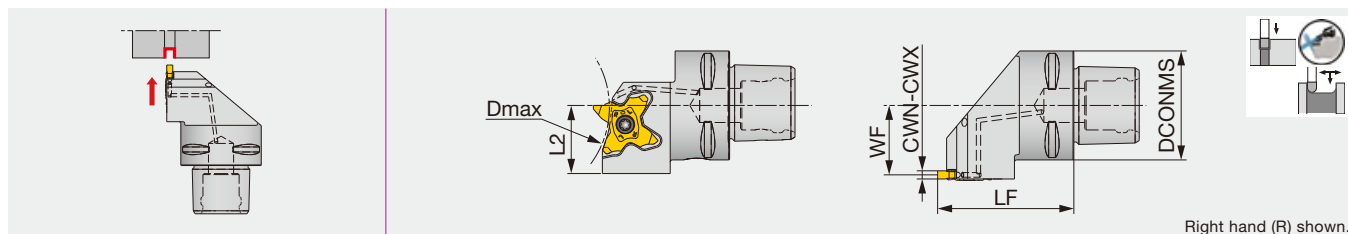

Right hand (R) shown.

Designation	CWN	CWX	DCONMS	LF	L2	WF	Dmax	Insert	Torque*
C4STCR/L27050-27-CHP	0.5	3.18	40	50	25	25.5	68 ⁽¹⁾	TC*27...	2.5


Applicable for 14 MPa coolant

(1) The value for 6.4 mm groove depth. Dmax varies according to the grooving depth required.

Torque*: Recommended clamping torque (N·m)

STCR/L-38

External grooving and parting toolholder

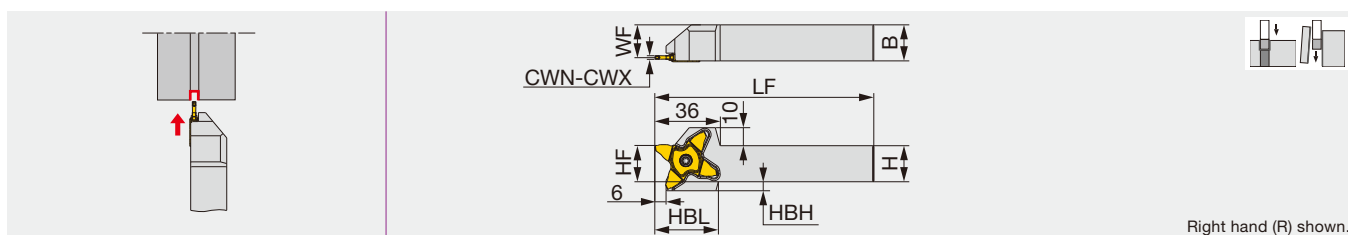

Right hand (R) shown.

Designation	CWN	CWX	H	B	LF	HF	WF	HBH	HBL	Insert	Torque*
STCR/L2020-38	1.5	4	20	20	120	20	18.1	5	35	TCL38...	2.5
STCR/L2525-38	1.5	4	25	25	135	25	23.1	-	-	TCL38...	2.5
STCR/L3232-38	1.5	4	32	32	135	32	30.1	-	-	TCL38...	2.5

Torque*: Recommended clamping torque (N·m)

SPARE PARTS




Designation	Screw	Wrench
C4STCR27050-27-CHP	SR16-212-01397L	T-2010/5
C4STCL27050-27-CHP	SR16-212-01397	T-2010/5
STCR...	SR16-212-01397L	T-2010/5
STCL...	SR16-212-01397	T-2010/5

STCR/L-38-CHP

Tube connection

External grooving and parting toolholder, with high pressure coolant capability

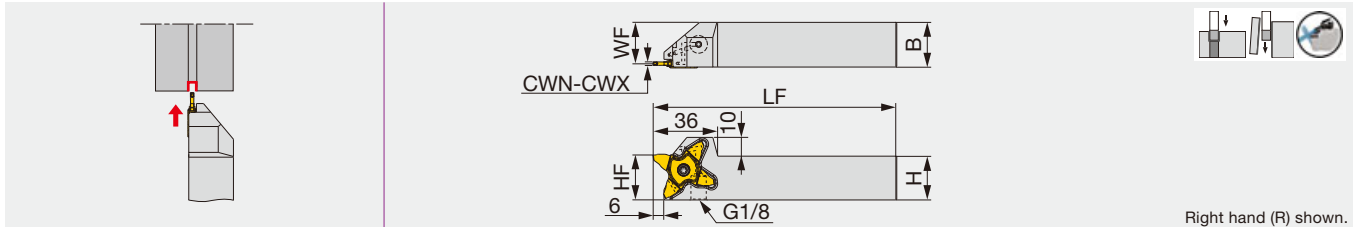

Designation	CWN	CWX	H	B	LF	HF	WF	Insert	Torque*
STCR/L2525-38-CHP	1.5	4	25	25	135	25	23.1	TCL38...	2.5


Torque*: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Screw	Wrench
C4STCR27050-27-CHP	SR16-212-01397L	T-2010/5
C4STCL27050-27-CHP	SR16-212-01397	T-2010/5

INSERTS

TCL27 (for grooving and parting off)

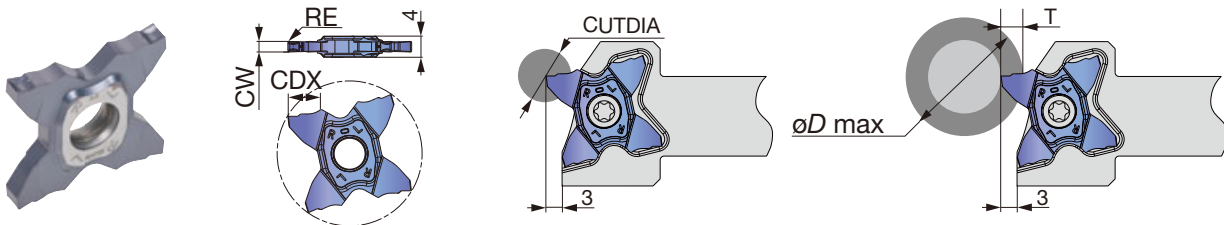

P	Steel	★	★	★	★
M	Stainless	★	★	★	★
K	Cast iron	★	★	★	★
N	Non-ferrous				
S	Superalloys	★	★		★
H	Hard materials				

★ : First choice


Designation	CW±0.02	RE	Coated				CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)									
			AH8005	AH7025	AH6235	AH725			T ≤ 3	T ≤ 3.5	T ≤ 4	T ≤ 4.5	T ≤ 5	T ≤ 5.5	T ≤ 5.7	T ≤ 6	T ≤ 6.2	T ≤ 6.4
TCL27-150-015	1.5	0.15	●	●	●	▲	5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCL27-200-020	2	0.2	●	●	●	▲	6.4	12.8	∞	600	280	180	130	105	85	60	50	30
TCL27-250-020	2.5	0.2	●	●	●	▲	6.4	12.8	∞	600	280	180	130	105	85	60	50	30
TCL27-300-020	3	0.2	●	●	●	▲	6.4	12.8	∞	600	280	180	135	105	95	85	78	55

5 pieces per package

●: Line up

▲: To be discontinued

TCS27 (for grooving and parting off)

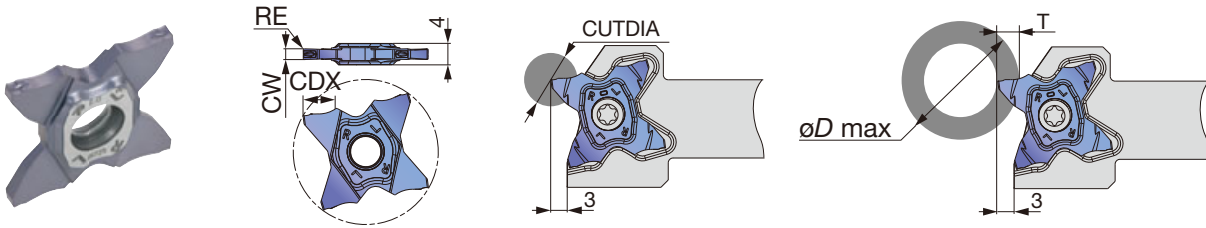

P	Steel	★	★	★	★
M	Stainless	★	★	★	★
K	Cast iron	★	★	★	★
N	Non-ferrous				
S	Superalloys	★	★		★
H	Hard materials				

★ : First choice


Designation	CW±0.02	RE	Coated				CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)											
			AH8005	AH7025	AH6235	AH725			T ≤ 1	T ≤ 2	T ≤ 3	T ≤ 3.5	T ≤ 4	T ≤ 4.5	T ≤ 5	T ≤ 5.5	T ≤ 5.7	T ≤ 6	T ≤ 6.2	T ≤ 6.4
TCS27-050-000	0.5	0	●	●	●	▲	1	2	∞	-	-	-	-	-	-	-	-	-	-	
TCS27-050-004	0.5	0.04	●	●	●	▲	2.5	5	∞	∞	-	-	-	-	-	-	-	-	-	
TCS27-075-010	0.75	0.1	●	●	●	▲	2.5	5	∞	∞	-	-	-	-	-	-	-	-	-	
TCS27-080-000	0.8	0	●	●	●	▲	1.6	3.2	∞	-	-	-	-	-	-	-	-	-	-	
TCS27-100-006	1	0.06	●	●	●	▲	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	
TCS27-100-010	1	0.1	●	●	●	▲	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	
TCS27-104-000	1.04	0	●	●	●	▲	2	4	∞	∞	-	-	-	-	-	-	-	-	-	
TCS27-120-000	1.2	0	●	●	●	▲	2	4	∞	∞	-	-	-	-	-	-	-	-	-	
TCS27-125-010	1.25	0.1	●	●	●	▲	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	
TCS27-125-020	1.25	0.2	●	●	●	▲	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	
TCS27-140-000	1.4	0	●	●	●	▲	2	4	∞	∞	-	-	-	-	-	-	-	-	-	
TCS27-147-000	1.47	0	●	●	●	▲	2.5	5	∞	∞	-	-	-	-	-	-	-	-	-	
TCS27-150-010	1.5	0.1	●	●	●	▲	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	
TCS27-150-020	1.5	0.2	●	●	●	▲	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	
TCS27-157-015	1.57	0.15	●	●	●	▲	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	
TCS27-170-010	1.7	0.1	●	●	●	▲	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	
TCS27-175-010	1.75	0.1	●	●	●	▲	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	
TCS27-175-020	1.75	0.2	●	●	●	▲	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	
TCS27-178-018	1.78	0.18	●	●	●	▲	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	
TCS27-185-020	1.85	0.2	●	●	●	▲	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	
TCS27-196-015	1.96	0.15	●	●	●	▲	3	6	∞	∞	∞	-	-	-	-	-	-	-	-	
TCS27-200-010	2	0.1	●	●	●	▲	6.4	12.8	∞	∞	∞	600	280	180	130	105	85	60	50	30
TCS27-200-020	2	0.2	●	●	●	▲	6.4	12.8	∞	∞	∞	600	280	180	130	105	85	60	50	30
TCS27-222-015	2.22	0.15	●	●	●	▲	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	
TCS27-230-020	2.3	0.2	●	●	●	▲	3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	
TCS27-239-015	2.39	0.15	●	●	●	▲	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCS27-247-020	2.47	0.2	●	●	●	▲	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCS27-250-010	2.5	0.1	●	●	●	▲	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCS27-250-030	2.5	0.3	●	●	●	▲	5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-
TCS27-270-010	2.7	0.1	●	●	●	▲	6.2	12.4	∞	∞	∞	600	280	180	135	105	95	85	78	-
TCS27-287-020	2.87	0.2	●	●	●	▲	6.2	12.4	∞	∞	∞	600	280	180	135	105	95	85	78	-
TCS27-300-000	3	0	●	●	●	▲	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55
TCS27-300-020	3	0.2	●	●	●	▲	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55
TCS27-300-030	3	0.3	●	●	●	▲	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55
TCS27-300-040	3	0.4	●	●	●	▲	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55
TCS27-315-015	3.15	0.15	●	●	●	▲	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	68
TCS27-318-020	3.18	0.2	●	●	●	▲	6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	68

5 pieces per package

●: Line up

▲: To be discontinued

TCS27-R/L (for parting off)

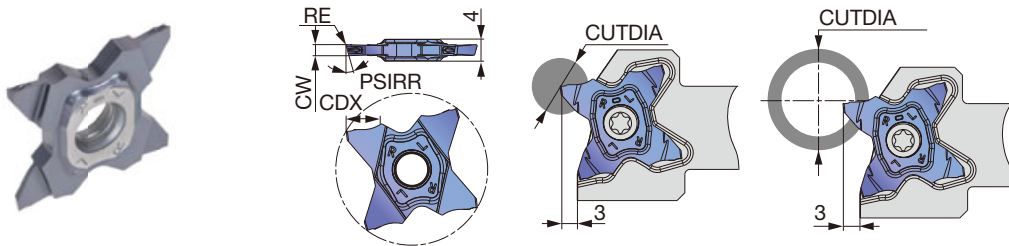

Right hand (R) shown.

P	Steel	★	★	★	★
M	Stainless	★	★	★	★
K	Cast iron	★	★	★	★
N	Non-ferrous				
S	Superalloys	★	★		★
H	Hard materials				

★ : First choice


Designation	Right hand	Left hand	CW±0.02	RE	Coated				CDX	PSIRL	PSIRR	Max. parting off dia. CUTDIA	
					AH8005	AH7025	AH6235	AH725				Solid bar	Tube
TCS27-100-15R	✓		1	0.06	●	●	●	▲	3.5	0°	15°	7	600
TCS27-100-15L		✓	1	0.06	●	●	●	▲	3.5	15°	0°	7	600
TCS27-150-6R	✓		1.5	0.06	●	●	●	▲	5.7	0°	6°	11.4	35
TCS27-150-6L		✓	1.5	0.06	●	●	●	▲	5.7	6°	0°	11.4	35
TCS27-150-15R	✓		1.5	0.06	●	●	●	▲	5.7	0°	15°	11.4	35
TCS27-150-15L		✓	1.5	0.06	●	●	●	▲	5.7	15°	0°	11.4	35
TCS27-200-6R	✓		2	0.1	●	●	●	▲	6.4	0°	6°	12.8	30
TCS27-200-6L		✓	2	0.1	●	●	●	▲	6.4	6°	0°	12.8	30
TCS27-200-15R	✓		2	0.1	●	●	●	▲	6.4	0°	15°	12.8	30
TCS27-200-15L		✓	2	0.1	●	●	●	▲	6.4	15°	0°	12.8	30

5 pieces per package

●: Line up

▲: To be discontinued

TCS27 (for grooving and profiling, full R)

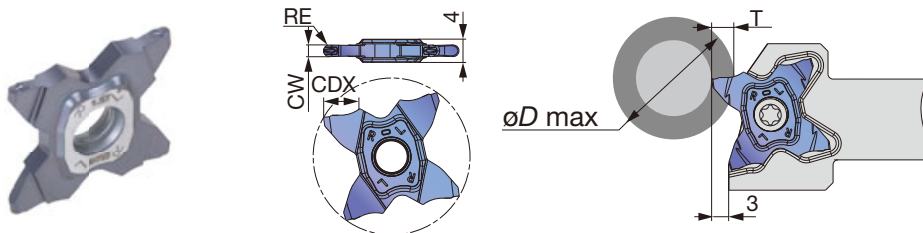

P	Steel	★	★	★	★
M	Stainless	★	★	★	★
K	Cast iron	★	★	★	★
N	Non-ferrous				
S	Superalloys	★	★		★
H	Hard materials				

★ : First choice


Designation	CW±0.02	RE	Coated				CDX	Relation of groove depth (T) and Max. diameter (øD max)									
			AH8005	AH7025	AH6235	AH725		T≤3	T≤3.5	T≤4	T≤4.5	T≤5	T≤5.5	T≤5.7	T≤6	T≤6.2	T≤6.4
TCS27-157-079	1.57	0.79	●	●	●	▲	3	∞	-	-	-	-	-	-	-	-	-
TCS27-200-100	2	1	●	●	●	▲	3	∞	-	-	-	-	-	-	-	-	-
TCS27-239-120	2.39	1.2	●	●	●	▲	5.7	∞	600	280	180	130	50	35	-	-	-
TCS27-300-150	3	1.5	●	●	●	▲	6.4	∞	600	280	180	135	105	95	85	78	55

5 pieces per package

●: Line up

▲: To be discontinued

TCM27 (for grooving and parting off)

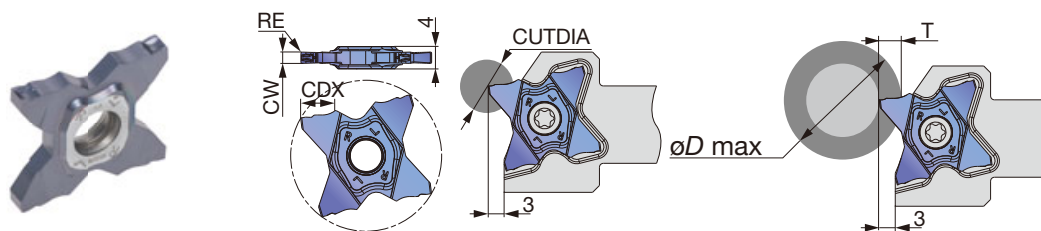

P	Steel	★	★	★	★
M	Stainless	★	★	★	★
K	Cast iron	★	★	★	★
N	Non-ferrous				
S	Superalloys	★	★		★
H	Hard materials				

★ : First choice


Designation	CW±0.02	RE	Coated				CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)									
			AH8005	AH7025	AH6235	AH725			T ≤ 3	T ≤ 3.5	T ≤ 4	T ≤ 4.5	T ≤ 5	T ≤ 5.5	T ≤ 5.7	T ≤ 6	T ≤ 6.2	T ≤ 6.4
TCM27-150-010	1.5	0.1	●	●	●	▲	5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-150-020	1.5	0.2	●	●	●	▲	5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-157-015	1.57	0.15	●	●	●	▲	3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-170-010	1.7	0.1	●	●	●	▲	3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-175-010	1.75	0.1	●	●	●	▲	3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-175-020	1.75	0.2	●	●	●	▲	3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-178-018	1.78	0.18	●	●	●	▲	3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-185-020	1.85	0.2	●	●	●	▲	3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-196-015	1.96	0.15	●	●	●	▲	3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-200-010	2	0.1	●	●	●	▲	6.4	12.8	∞	600	280	180	130	105	85	60	50	30
TCM27-200-020	2	0.2	●	●	●	▲	6.4	12.8	∞	600	280	180	130	105	85	60	50	30
TCM27-222-015	2.22	0.15	●	●	●	▲	3.5	7	∞	600	-	-	-	-	-	-	-	-
TCM27-230-020	2.3	0.2	●	●	●	▲	3.5	7	∞	600	-	-	-	-	-	-	-	-
TCM27-239-015	2.39	0.15	●	●	●	▲	5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-247-020	2.47	0.2	●	●	●	▲	5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-250-010	2.5	0.1	●	●	●	▲	5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-250-030	2.5	0.3	●	●	●	▲	5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-270-010	2.7	0.1	●	●	●	▲	6.2	12.4	∞	600	280	180	135	105	95	85	78	-
TCM27-287-020	2.87	0.2	●	●	●	▲	6.2	12.4	∞	600	280	180	135	105	95	85	78	-
TCM27-300-000	3	0	●	●	●	▲	6.4	12.8	∞	600	280	180	135	105	95	85	78	55
TCM27-300-020	3	0.2	●	●	●	▲	6.4	12.8	∞	600	280	180	135	105	95	85	78	55
TCM27-300-030	3	0.3	●	●	●	▲	6.4	12.8	∞	600	280	180	135	105	95	85	78	55
TCM27-300-040	3	0.4	●	●	●	●	6.4	12.8	∞	600	280	180	135	105	95	85	78	55
TCM27-315-015	3.15	0.15	●	●	●	●	6.4	12.8	∞	600	280	180	135	105	95	85	78	68
TCM27-318-020	3.18	0.2	●	●	●	●	6.4	12.8	∞	600	280	180	135	105	95	85	78	68

5 pieces per package

●: Line up

▲: To be discontinued

TCM27 (for grooving and profiling, full R)

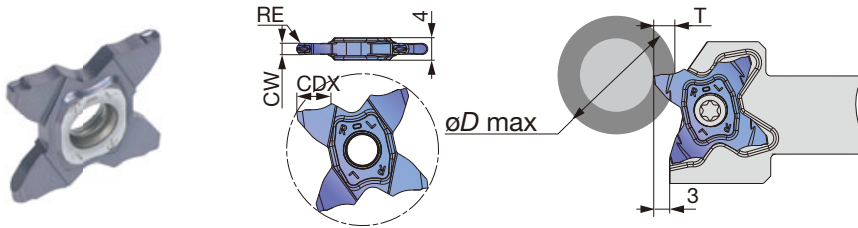

P	Steel	★	★	★	★
M	Stainless	★	★	★	★
K	Cast iron	★	★	★	★
N	Non-ferrous				
S	Superalloys	★	★		★
H	Hard materials				

★ : First choice


Designation	CW±0.02	RE	Coated				CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)									
			AH8005	AH7025	AH6235	AH725			T≤3	T≤3.5	T≤4	T≤4.5	T≤5	T≤5.5	T≤5.7	T≤6	T≤6.2	T≤6.4
TCM27-157-079	1.57	0.79	●	●	●	▲	3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-200-100	2	1	●	●	●	▲	3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-239-120	2.39	1.2	●	●	●	▲	5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-300-150	3	1.5	●	●	●	▲	6.4	12.8	∞	600	280	180	135	105	95	85	78	55

5 pieces per package

●: Line up

▲: To be discontinued

TCG27 (for grooving and parting off)

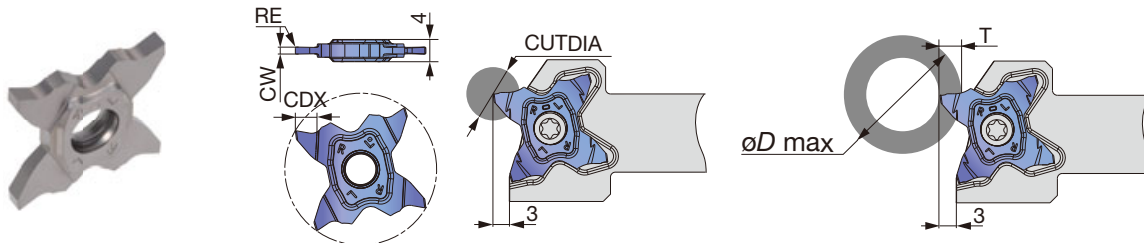

P	Steel	★		
M	Stainless			
K	Cast iron	★		
N	Non-ferrous			
S	Superalloys			
H	Hard materials			


★ : First choice

Designation	CW±0.02	RE	Cermet		CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)								
			NS9530				T≤3	T≤3.5	T≤4	T≤5	T≤5.5	T≤5.7	T≤6	T≤6.2	T≤6.4
TCG27-125-020	1.25	0.2	●		3.5	7	∞	600	-	-	-	-	-	-	-
TCG27-150-020	1.5	0.2	●		5.7	11.4	∞	600	280	130	50	35	-	-	-
TCG27-175-020	1.75	0.2	●		5.7	11.4	∞	600	280	130	50	35	-	-	-
TCG27-200-020	2	0.2	●		6.4	12.8	∞	600	280	130	105	85	60	50	30
TCG27-230-020	2.3	0.2	●		6.4	12.8	∞	600	280	130	105	85	60	50	30
TCG27-250-030	2.5	0.3	●		6.4	12.8	∞	600	280	130	105	85	60	50	30
TCG27-265-030	2.65	0.3	●		6.4	12.8	∞	600	280	130	105	85	60	50	30
TCG27-280-030	2.8	0.3	●		6.4	12.8	∞	600	280	130	105	95	85	78	55
TCG27-300-030	3	0.3	●		6.4	12.8	∞	600	280	135	105	95	85	78	55

5 pieces per package

●: Line up

TCL38

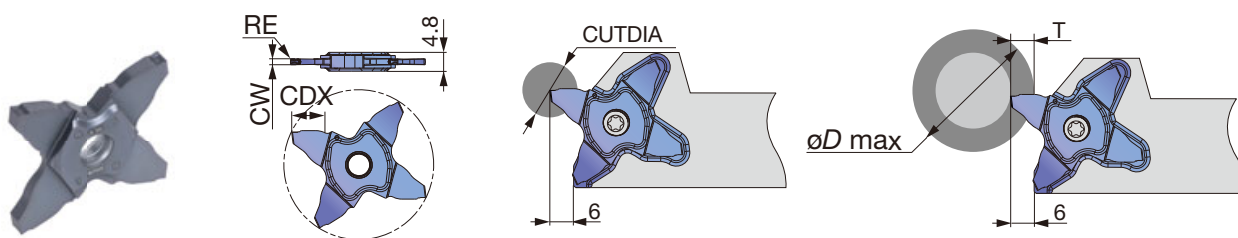

P	Steel	★
M	Stainless	★
K	Cast iron	★
N	Non-ferrous	
S	Superalloys	★
H	Hard materials	

★ : First choice

Designation	CW±0.02	RE	Coated AH7025	CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)					
						T ≤ 5	T ≤ 6	T ≤ 7	T ≤ 8	T ≤ 9	T ≤ 10
TCL38-150-020	1.5	0.2	●	9	18	∞	950	315	190	45	-
TCL38-200-020	2	0.2	●	9	18	∞	950	315	190	45	-
TCL38-300-020	3	0.2	●	10	20	∞	950	315	190	130	50
TCL38-400-030	4	0.3	●	10	20	∞	950	315	190	130	50

5 pieces per package

● : Line up

STANDARD CUTTING CONDITIONS

TCL27, TCS27, TCM27, TCG27, TCL38

ISO	Workpiece materials	Grades	Cutting speed V _c (m/min)	Feed: <i>f</i> (mm/rev)							Depth of cut for profiling (with full radius insert)
				Grooving, Parting off				Parting off (with hand)	Profiling (with full radius insert)		
				TCL	TCS	TCM	TCG	TCS	TCS	TCM	
P	Carbon steel S45C / C45, etc.	AH8005	100 - 300								0.5
		AH7025	100 - 200	0.03 - 0.12	0.05 - 0.15	0.05 - 0.25	0.03 - 0.1	0.04 - 0.12	0.05 - 0.1	0.05 - 0.15	
		AH6235	80 - 120								
		NS9530	120 - 250								
	Alloy steel SCM435 / 34CrMo4, etc.	AH8005	80 - 250								0.5
		AH7025	50 - 180	0.03 - 0.12	0.05 - 0.15	0.05 - 0.25	0.03 - 0.1	0.04 - 0.12	0.05 - 0.1	0.05 - 0.15	
		AH6235	50 - 100								
		NS9530	100 - 200								
M	Stainless steel SUS304 / X5CrNi18-9, etc.	AH8005	100 - 150								0.5
		AH7025	80 - 120	0.03 - 0.12	0.05 - 0.15	0.05 - 0.2	0.03 - 0.1	0.04 - 0.12	0.05 - 0.1	0.05 - 0.15	
		AH6235	50 - 120								
K	Grey cast iron FC250 / 250, etc.	AH8005	80 - 250								0.5
		AH7025	50 - 180	0.03 - 0.12	0.05 - 0.15	0.05 - 0.25	0.03 - 0.1	0.04 - 0.12	0.05 - 0.1	0.05 - 0.15	
		AH6235	50 - 100								
		NS9530	50 - 180								
	Ductile cast iron FCD400 / 400-15, etc.	AH8005	80 - 180								0.5
		AH7025	50 - 120	0.03 - 0.12	0.05 - 0.15	0.05 - 0.2	0.03 - 0.1	0.04 - 0.12	0.05 - 0.1	0.05 - 0.15	
		AH6235	50 - 80								
		NS9530	50 - 180								
S	Titanium alloys Ti-6Al-4V, etc.	AH8005	50 - 70	0.03 - 0.12	0.05 - 0.15	0.05 - 0.15	0.03 - 0.1	0.04 - 0.12	0.05 - 0.1	0.05 - 0.1	0.5
		AH7025	30 - 60								
	Superalloys Inconel718, etc.	AH8005	40 - 60	0.03 - 0.12	0.05 - 0.15	0.05 - 0.15	0.03 - 0.1	0.04 - 0.12	0.05 - 0.1	0.05 - 0.1	0.5
		AH7025	20 - 50								

■ Economical custom profile grooving tools with four wide cutting edges

Multiple production steps, conventionally required to form a complex profile, can be combined into a single process, enabling reduced cycle time and minimized downtime.


- Insert blanks in 3 different grooving widths: 10, 15 and 20 mm for TetraForce-Cut 27 type
- Custom shaped inserts can be requested based on customers part drawing specifications
- Smart clamping holder design for stable and robust mounting of wide grooving inserts
- High-pressure internal coolant toolholder: 20x20 mm, 25x25 mm



Blank for wide profile grooving

■ Smart insert clamping

- 1 The screw pushes the pin downward as tightened
- 2 The pin descends so that it pushes down the insert
- 3 Securely fix the insert in place by providing support at four points within the pocket, effectively preventing the screw from loosening due to cutting forces during machining

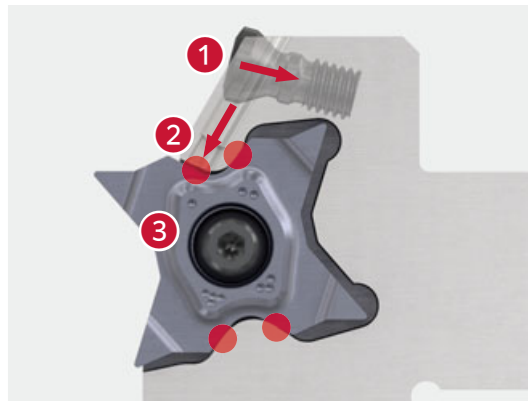

■ Reference for custom profile grooving inserts with wide cutting edges




TOOLHOLDER

STCR/L-27W-CHP

Tube connection

External profile grooving toolholder, with high pressure coolant capability

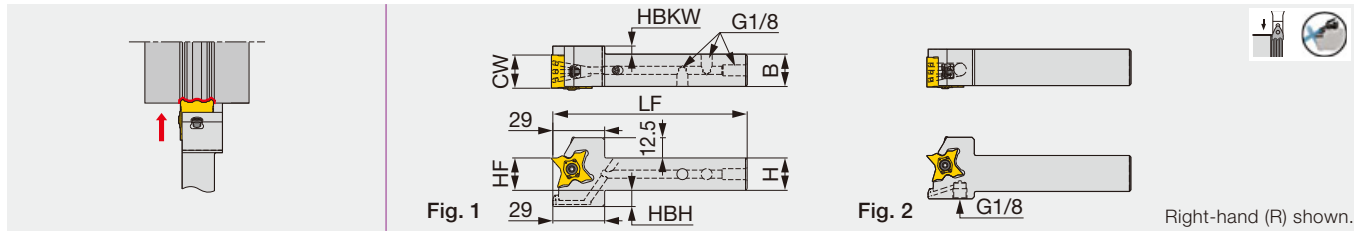

Designation	CW	H	B	LF	HF	HBH	HBKW	Insert	Torque*	Fig.
STCR/L2020-27W10-CHP	10.5	20	20	120	20	13	-	TCGB27W10	2.2	1
STCR/L2020-27W15-CHP	15.5	20	20	120	20	13	-	TCGB27W15	2.2	1
STCR/L2020-27W20-CHP	20.5	20	20	120	20	13	5	TCGB27W20	2.2	1
STCR/L2525-27W10-CHP	10.5	25	25	135	25	8	-	TCGB27W10	2.2	2
STCR/L2525-27W15-CHP	15.5	25	25	135	25	8	-	TCGB27W15	2.2	2
STCR/L2525-27W20-CHP	20.5	25	25	135	25	8	-	TCGB27W20	2.2	2


Torque*: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamping pin	Pin screw	Wrench 1	Clamping screw	Wrench 2	Coolant plug	Wrench 3
STCR/L2020-27W10-CHP	PIN-TQ-W-T	TS40F120A	T-15F	BH M4X0.7X16-D7	P-2.5	PLUGG1/8-6.5TL360	P-5
STCR/L2020-27W15-CHP	PIN-TQ-W-T	TS40F120A	T-15F	BH M4X0.7X20-D7	P-2.5	PLUGG1/8-6.5TL360	P-5
STCR/L2020-27W20-CHP	PIN-TQ-W-T	TS40F120A	T-15F	BH M4X0.7X23-D7	P-2.5	PLUGG1/8-6.5TL360	P-5
STCR/L2525-27W10-CHP	PIN-TQ-W-T	TS40F120A	T-15F	BH M4X0.7X16-D7	P-2.5	-	-
STCR/L2525-27W15-CHP	PIN-TQ-W-T	TS40F120A	T-15F	BH M4X0.7X20-D7	P-2.5	-	-
STCR/L2525-27W20-CHP	PIN-TQ-W-T	TS40F120A	T-15F	BH M4X0.7X23-D7	P-2.5	-	-

INSERT

TCGB27W (Blank for wide profile grooving)

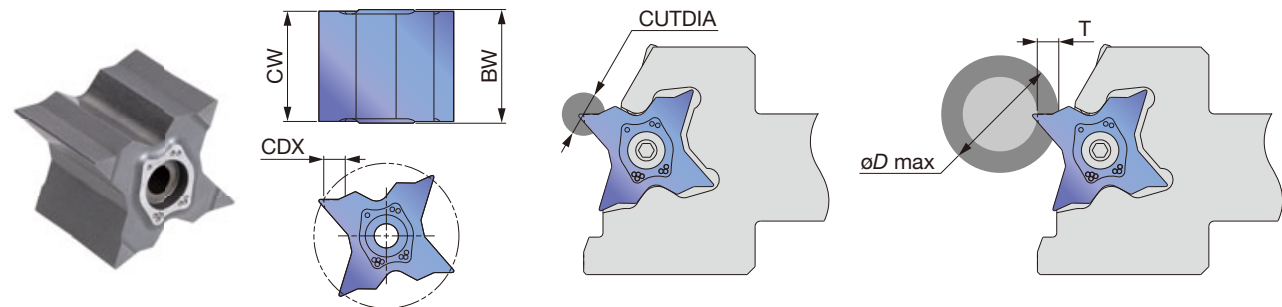

P	Steel	★
M	Stainless	★
K	Cast iron	★
N	Non-ferrous	★
S	Superalloys	
H	Hard materials	

★ : First choice

Designation	CW±0.1	BW	Uncoated TH10	CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)									
						T ≤ 3	T ≤ 3.5	T ≤ 4	T ≤ 4.5	T ≤ 5	T ≤ 5.5	T ≤ 5.7	T ≤ 6	T ≤ 6.2	T ≤ 6.4
TCGB27W10	10.5	11.1	●	6.4	12.8	∞	600	280	180	135	105	95	85	78	55
TCGB27W15	15.5	16.1	●	6.4	12.8	∞	600	280	180	135	105	95	85	78	55
TCGB27W20	20.5	21.1	●	6.4	12.8	∞	600	280	180	135	105	95	85	78	55


These are blanks (semi-finished products) for wide profile grooving inserts that can be tailored.

1 piece per package


● : Line up

INSTRUCTIONS FOR CHP BLADE ASSEMBLY/ DISASSEMBLY


Blade assembly




1 Remove all 4 screws and ensure the O rings are all in place.





2 Place the blade and tighten 2 bottom clamping screws.



3 Tighten the fixing screw in the center.



4 Place the long screw in the angular direction and tighten to clamp the insert.

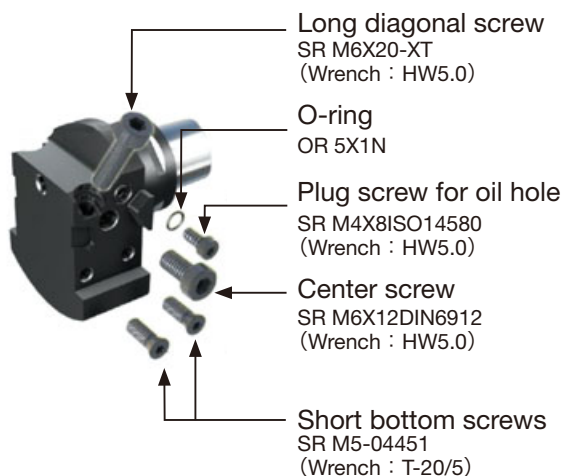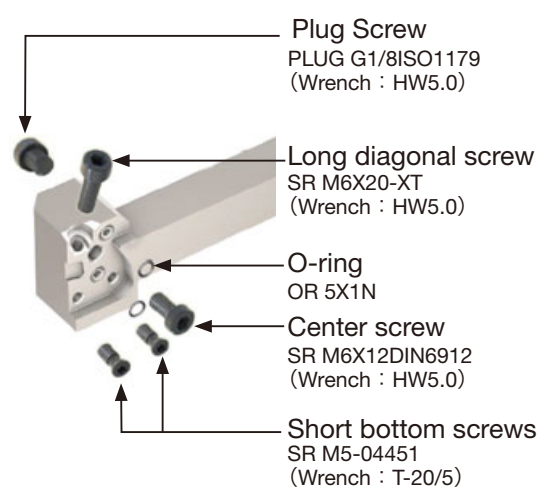

► All parts listed here are included in the tool holder.

PARTS FOR COOLANT HOSE

Connecting hose

Fig.1



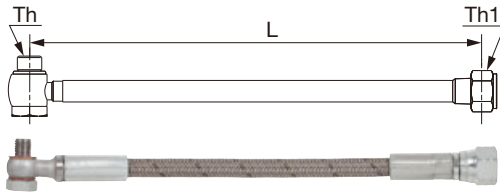


Fig.2

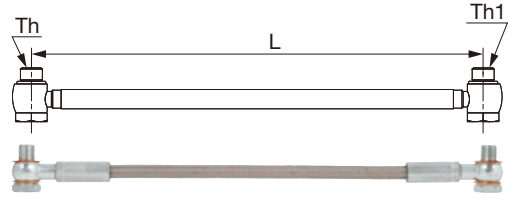

Designation	Length L	Screw		Max. pressure (MPa)	Fig.
		Th	Th1		
CHP-HOSE-G1/8-7/16-200BS	200	G1/8"-28 BSPP	7/16"-20 UNF	26	1
CHP-HOSE-G1/8-7/16-250BS	250	G1/8"-28 BSPP	7/16"-20 UNF	26	1
CHP-HOSE-5/16-7/16-200BS	200	5/16"-24UNF	7/16"-20 UNF	20	1
CHP-HOSE-5/16-G1/8-200BS	200	5/16"-24UNF	G1/8"-28 BSPP	20	1
CHP-HOSE-G1/8-G1/8-200BB	200	G1/8"-28 BSPP	G1/8"-28 BSPP	26	2
CHP-HOSE-G1/8-G1/8-250BB	250	G1/8"-28 BSPP	G1/8"-28 BSPP	26	2


Connector

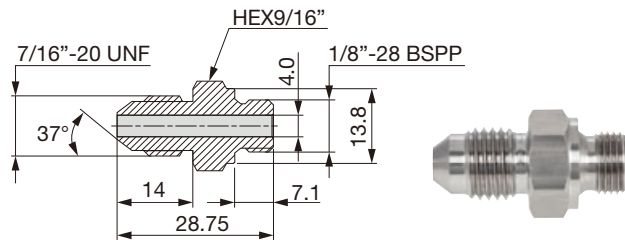

Designation


CHP-NIPPLE-G1/8-7/16UNF

Seal washer




Designation	øD	ød	W
CHP-COPPER-SEAL1/8	15	10	1
CHP-COPPER-SEAL5/16	11.9	8.15	1.35
CHP-COPPER-SEAL5/16-2.5	9.4	8	2.5

Connector elbow

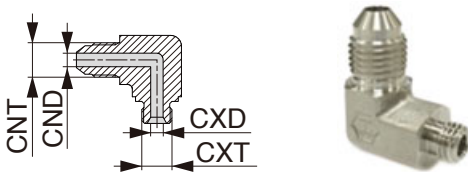


Designation

Designation	CNT	CND	CXT	CXD
CHP-ELBOW-90-G1/8-7/16UNF	7/16"-20 UNF	4.4	1/8"-28 BSPP	4
CHP-ELBOW-90-5/16-7/16UNF	7/16"-20 UNF	4.4	5/16"-24 UNF	4

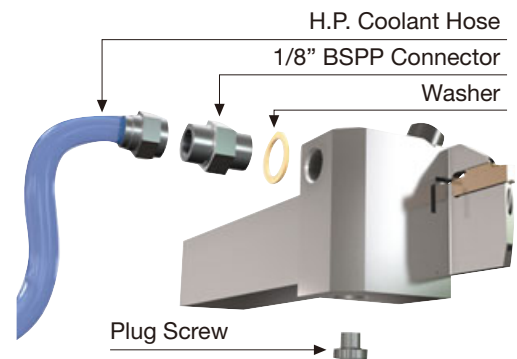

Connector for small lathe with seal washer

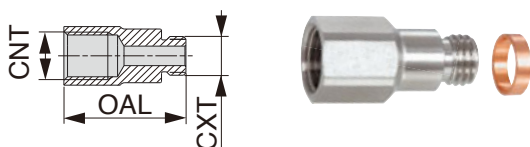


Designation

Designation	CNT	CXT	OAL
CHP-CONNECTOR5/16-G1/8	G1/8"-28 BSPP	5/16"-24 UNF	25
CHP-CONNECTOR-G1/8-R1/8	G1/8"-28 BSPP	R1/8"-28 BSPT	25

TETRAM^{INI}CUT / TETRA^{FORCE}CUT

Expedited delivery service for special grooving insert

Expedited delivery service for special grooving inserts is rendered under the following lead time and quantity terms. Please note that this service is applicable only for the order for an initial test batch; a repeat order is to be placed through the regular ordering process.

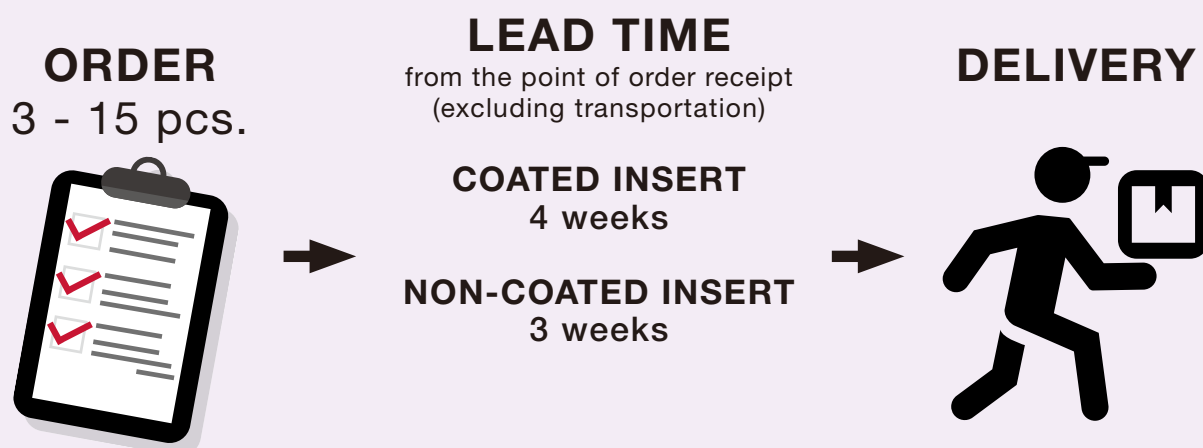

Will be updated in March 2025

TETRAM^{INI}CUT

18 size

Special width
& corner radii

With chamfer
edges



TETRA^{FORCE}CUT


27 size

Special width
& corner radii

With chamfer edges



SPECIAL WIDTH & CORNER RADII

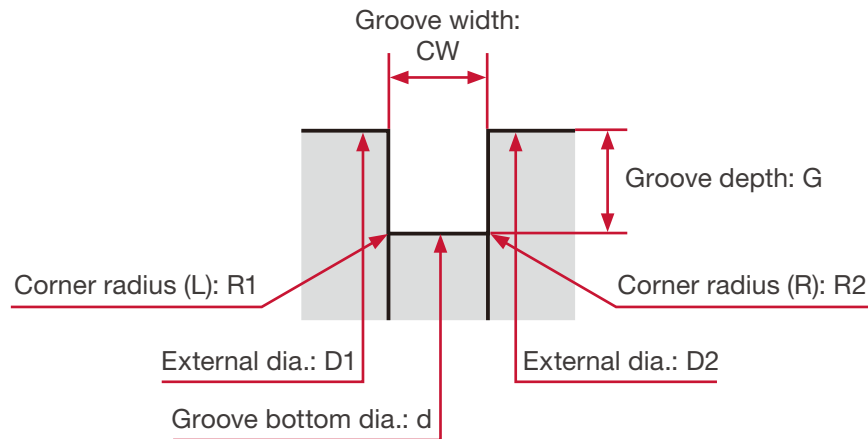

TETRAMCUT

Groove width (CW)	Max. groove depth (G)	Corner radii (R1 / R2)	Toolholder
0.33 ~ 0.49 mm	~ 1 mm	0 or 0.05 ~ CW/2 (Full radius is available)	STCR/L****-18
0.50 ~ 0.74 mm	~ 2 mm		
0.75 ~ 3.18 mm	~ 2.5 mm		


*Tolerances of the insert are based on the standard item.

TETRAFORCE

Groove width (CW)	Max. groove depth (G)	Corner radii (R1 / R2)	Toolholder
0.33 ~ 0.49 mm	~ 1 mm	0 or 0.05 ~ CW/2 (Full radius is available)	STCR/L****-27
0.50 ~ 0.99 mm	~ 2.5 mm		
1.0 ~ 1.49 mm	~ 3.5 mm		
1.50 ~ 1.99 mm	~ 5.7 mm		
2.00 ~ 3.18 mm	~ 6.4 mm		

*Tolerances of the insert are based on the standard item.

GROOVING & CHAMFERING

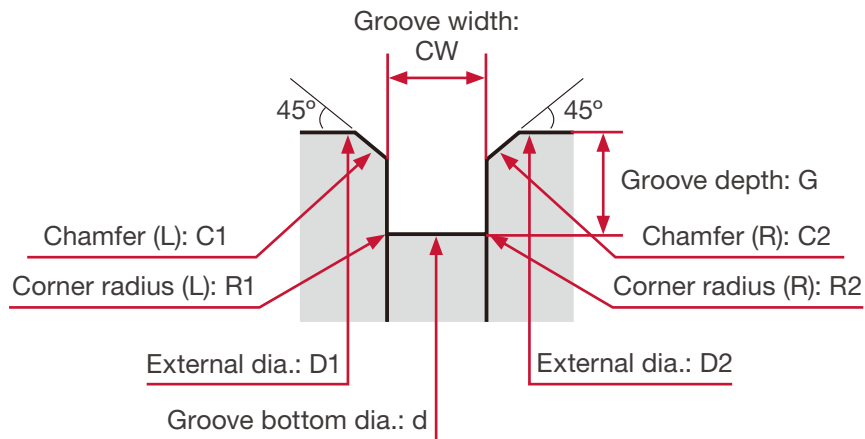

TETRAMCUT

Groove width + chamfer width (CW+2C)	Max. groove depth (G)	Corner radii (R1 / R2)	Toolholder
0.5 ~ 3.5 mm	0.50 ~ 2 mm	0 or 0.05 ~ CW/2 (Full radius is available)	STCR/L****-18

*Tolerances of the insert are based on the standard item.

Max. width of chamfer is 0.5 mm.

Some combinations of a groove width, depth, a corner radius(R), and chamfer may be unable to be manufactured.

TETRAFORCE

Groove width + chamfer width (CW+2C)	Max. groove depth (G)	Corner radii (R1 / R2)	Toolholder
0.5 ~ 3 mm	0.50 ~ 3 mm	0 or 0.05 ~ CW/2 (Full radius is available)	STCR/L****-27

*Tolerances of the insert are based on the standard item.

Max. width of chamfer is 0.5 mm.

Some combinations of a groove width, depth, a corner radius(R), and chamfer may be unable to be manufactured.

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy-NTK America Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloy.com/us

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy-NTK De Mexico S.A.

C. Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx

Tungaloy-NTK do Brasil Ltda.

Avd. Independência N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy-NTK Germany GmbH.

Katzbergstr. 3a
D-40764 Langenfeld, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.com/de

Tungaloy France s.a.s

Les Fjords
19 avenue de Norvège
91140 Villebon Sur Yvette, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.com/fr

Tungaloy Italia S.r.l.

Viale Sarca 336/Edificio 13
20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.com/it

Tungaloy Czech s.r.o.

Turanka 1583/115g,
627 00 Brno, Czech Republic
Phone: +420-532 123 391
www.tungaloy.com/cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
www.tungaloy.com/es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
Fax: +46-462119207
www.tungaloy.com/se

Tungaloy Rus, LLC

Andropova avenue, h.18/7,
11 floor, office 3, 115432,
Moscow, Russia
Phone: +7-499-683-01-80
Fax: +7-499-683-01-81
www.tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

Ul. Irysowa 1, 55-040 Bielany
Wroclawskie, Poland
Phone: +48 607 907 237
www.tungaloy.com/pl

Tungaloy-NTK UK Ltd.

Suite 3, Pioneer House, Mill Street,
Cannock, WS11 0EF, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu

Tungaloy Turkey

Serifali Mah.bayraktar Bulvari Kule Sk. No:26
34775 Umraniye / Istanbul / Turkey
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com/tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy.com/nl

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430, Samobor, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.com/hr

Tungaloy Cutting Tool (Shanghai) Co. Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.com/cn

Tungaloy Cutting Tools Taiwan Co. Ltd.

9F, No.293, Zhongyang Rd,
Xinzhuan Dist, New Taipei City,
24251 Taiwan
Phone: +886-2-8521-9986
Fax: +886-2-8521-8935
www.tungaloy.com/tw

Tungaloy-NTK Cutting Tool (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.com/th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #08-09 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/singapore

Tungaloy-NTK Vietnam LLC

3rd Floor, Licogi 13 Tower, 164 Khuat Duy
Tien, Nhan Chinh, Thanh Xuan District,
Hanoi, Vietnam
Phone: +84 24 63282086
www.tungaloy.com/vn

Tungaloy India Pvt. Ltd.

One International Center,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai 400013, India
Phone: +91-22-6124-8803
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

Unit 68 1470 Ferntree Gully Road
Knoxfield 3180 Victoria, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com/au

PT. Tungaloy Indonesia

Ruko Blok AA.10 No3&5, Grand Wisata,
Lembangjaya, Tambun Selatan, Bekasi,
17510 Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id



tungaloy.com

follow us at:

facebook.com/tungaloyjapan

twitter.com/tungaloyjapan

www.youtube.com/tungaloycorporation

Distributed by:



Tungaloy APP & SNS

FIND US ON THE CLOUD!
machiningcloud.com



AS9100 Certified
78006
2015.11.04
ISO 14001 Certified
EC97J1123
1997.11.26