

CONTENTS



General product information

[View](#)

Added products



CXMU, DXMU

Expansion of super economical **M class** with double-sided positive insert

[View](#)

TurnLine




MINIFORCETURN


www.tungaloy.com

Tungaloy Report No. 417-G

New chipbreaker for improved chip control
in small part machining

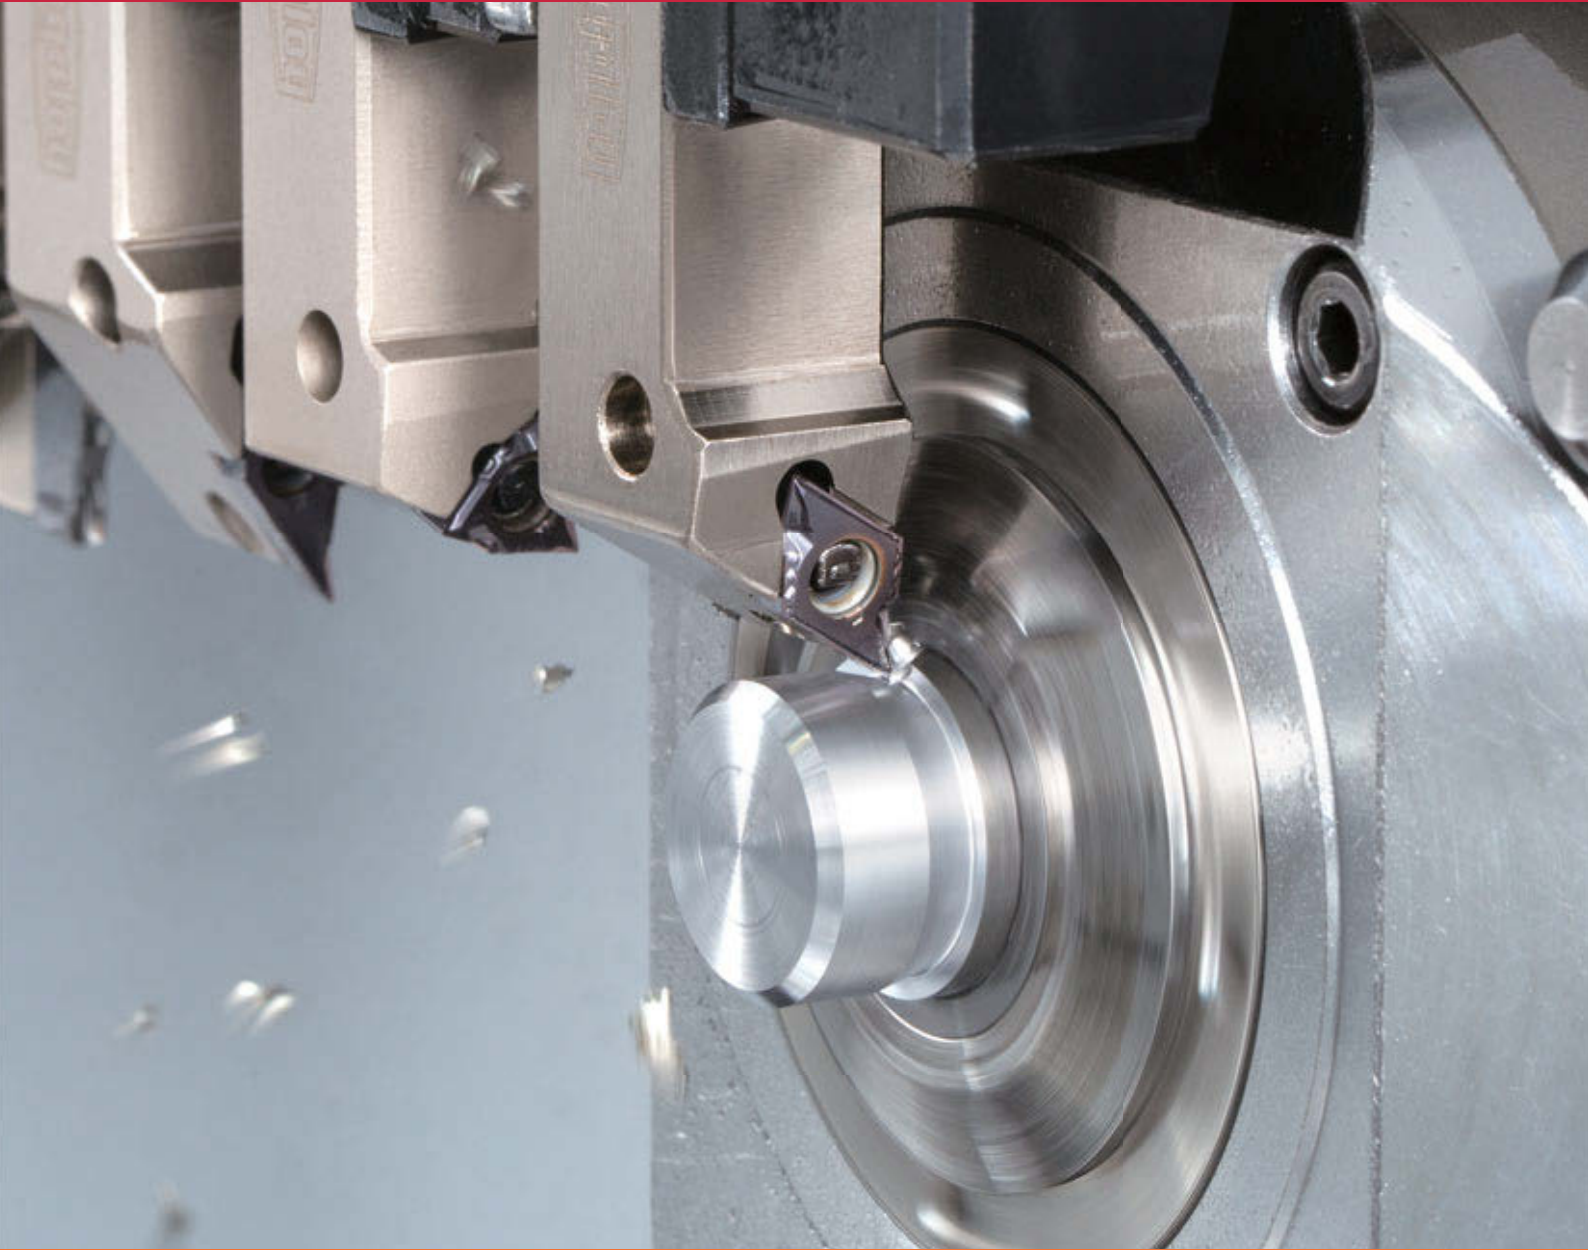

INDUSTRY 4.0
FEED the SPEED!

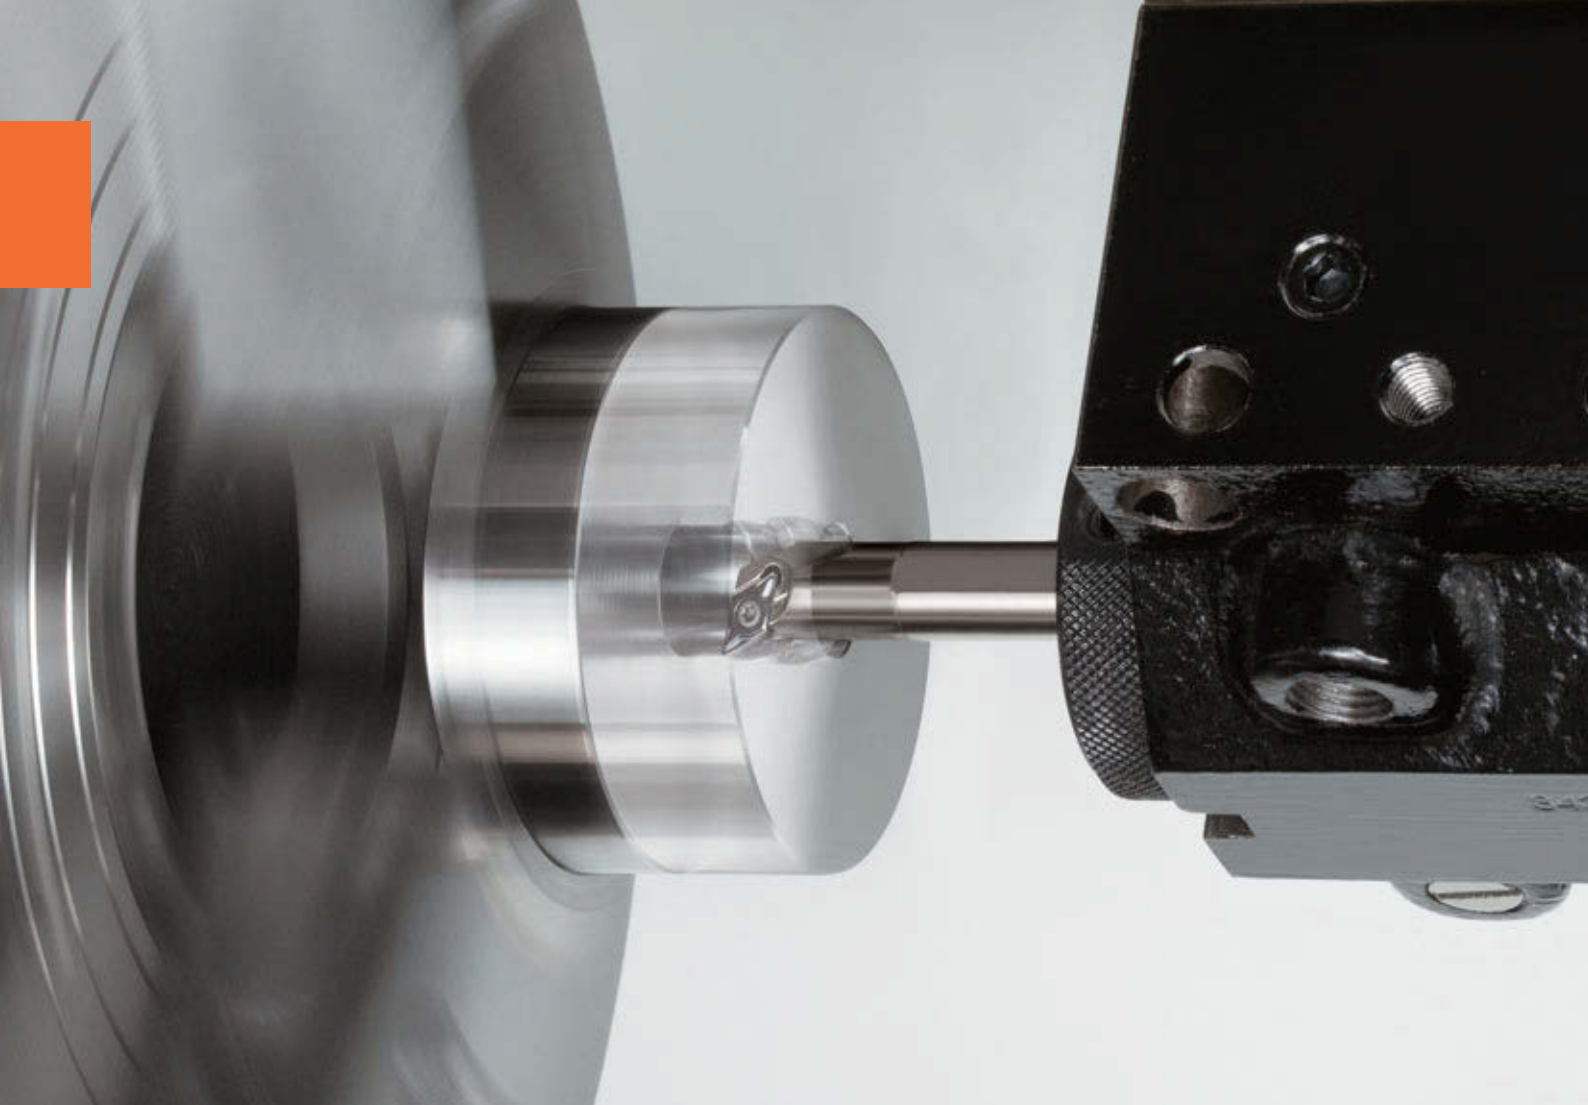

ACCELERATED MACHINING




Improved chip control with new chipbreaker
and AH8000 grade series

Economical double-sided positive insert


Innovative geometry and seat interface ensures stability and high performance

Inserts


WXGU0403.. 6 positive cutting edges

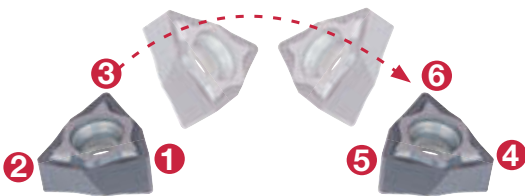

DXGU0703.. 4 positive cutting edges

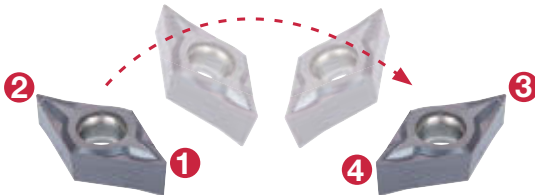

VXGU09T2.. 4 positive cutting edges

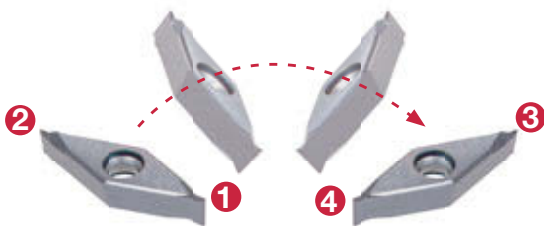


High rake angle


External turning




Internal turning



External turning



Internal turning




External turning



Toolholders

Dovetail clamping ensures secure insert retention



External turning

The JP holder screw is accessible from either side



Internal turning

Optimal design for smooth chip flow



Square shank holder lineup for general lathes

Square shank sizes 2020 and 2525 are available for OD turning

MINIF^oTURN



TURNINGA



ISOE^oTURN



Light cutting chipbreaker

New JS chipbreaker - features and benefits

- Provides excellent chip control in a wide range of applications
- A large inclination angle on the cutting edge ensures free cutting
- Excellent cutting edge integrity for smooth surface finishing


Note: Due to chipbreaker profile, max ap for face or ID turning is 1 mm



DXGU0703...-JS


CHIP CONTROL

P

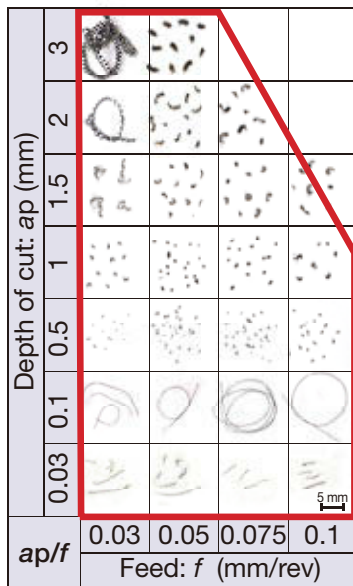

Workpiece : S45C / C45
 Insert : DXGU070302MFL-**JS** SH725
 Toolholder : JSDJ2XR1212X07
 Cutting speed : Vc = 100 m/min
 Coolant : Wet

M

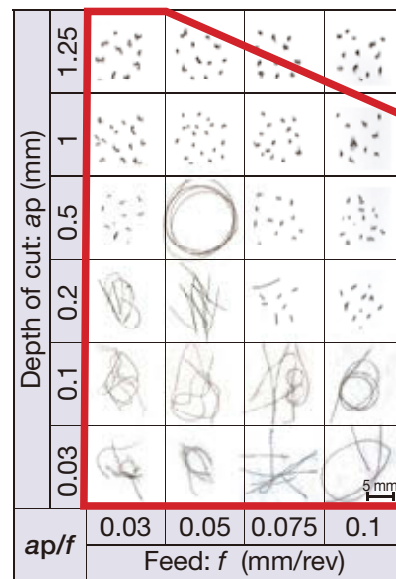


Workpiece : SUS316L
 Insert : DXGU070302MFL-**JS** SH725
 Toolholder : JSDJ2XR1212X07
 Cutting speed : Vc = 50 m/min
 Coolant : Wet

JS chipbreaker

New



WXGU0403.. DXGU0703.. VXGU0903..




- First choice chipbreaker for medium to finish cutting
- Excellent chip control
- Ideal for small part machining

PM

TS / JTS / TSW chipbreaker



WXGU0403.. DXGU0703..




- First choice chipbreaker for medium to finish cutting
- Excellent chip control
- Ideal for small part machining

PMK

SS / JSS chipbreaker



WXGU0403.. DXGU0703..





- General purpose chipbreaker with excellent chip control
- Recommended for stainless steel machining

MP

TSW chipbreaker (Wiper)



WXGU0403..



Offset: $L = 0.05 \text{ mm}$


Built-in wiper for better surface finish at high feed rates

PMK

JRP chipbreaker



DXGU0703.. VXGU09T2..



Sharp cutting edge and ground chipbreaker with excellent chip control


Chipbreakers for general purpose machining

WXGU0403.. - TS/SS/TSW

DXGU0703.. - TS/SS

Strong cutting edge for semi-finishing and finishing operations at medium to low feed rates

■ Application area

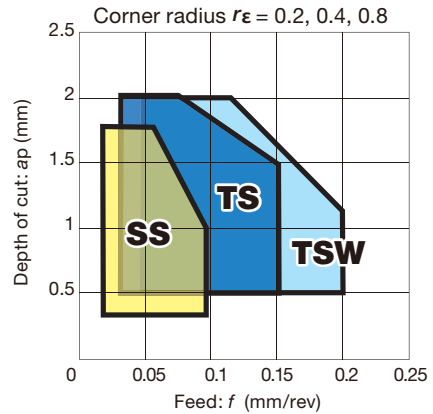

Chipbreakers for small part machining


WXGU0403.. - JTS/JSS/JS

DXGU0703.. - JRP/JTS/JSS/JS

VXGU09T2.. - JRP/JS

Extra sharp cutting edge used at low feeds for finishing operations. An excellent solution to reduce vibration.

■ Application areas

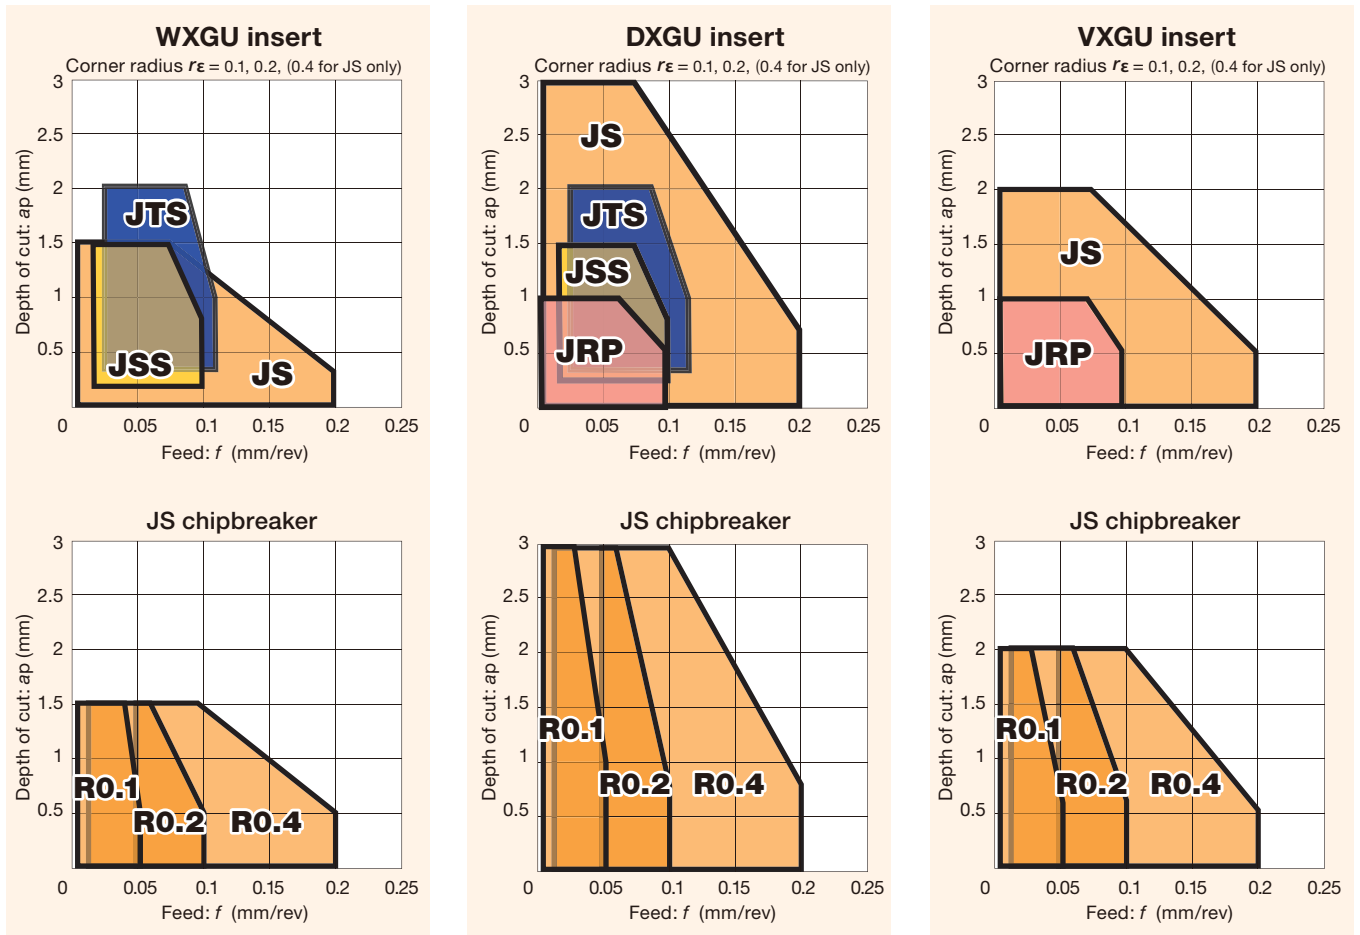

TUNG TJET Thru-coolant holder system



Jets of coolant are supplied through the holder to facilitate **Improved chip control and reduced machine downtime**



Eliminates chip re-cutting




External coolant supply
(at normal pressure)



High pressure coolant
(>7MPa)

Coolant supply both over and under the insert improves tool life and efficiency


- **Coolant jet over the insert**
Ensures stable chip control

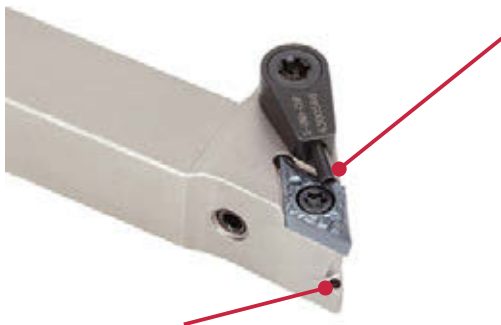

Coolant jet is directed close to the cutting point
Reduces crater and notch wear



External coolant supply
(at normal pressure)



High pressure coolant
(>7MPa)

Coolant jet under the insert
Reduces flank wear



External coolant supply
(at normal pressure)



High pressure coolant
(>7MPa)




Nozzle extends to ensure optimal coolant delivery

DIRECTTUNGJET system

Tubeless design streamlines tool setup Through-coolant supply enables high productivity

External coolant tube


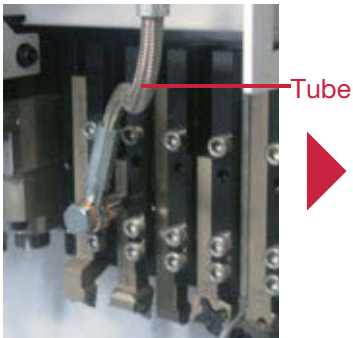


DirectTungJet system



No need for coolant tube setups. Eliminates chip entanglement on tubes and streamlines tool replacements.


Coolant is supplied from the tool post directly to the tools

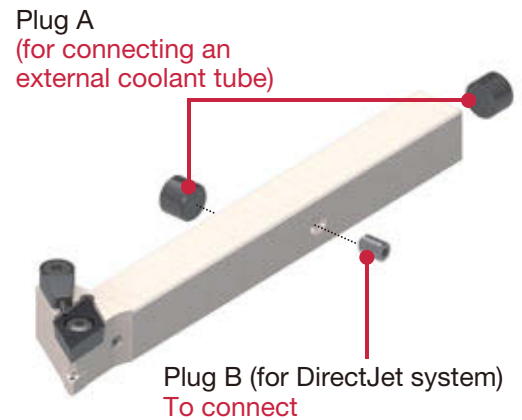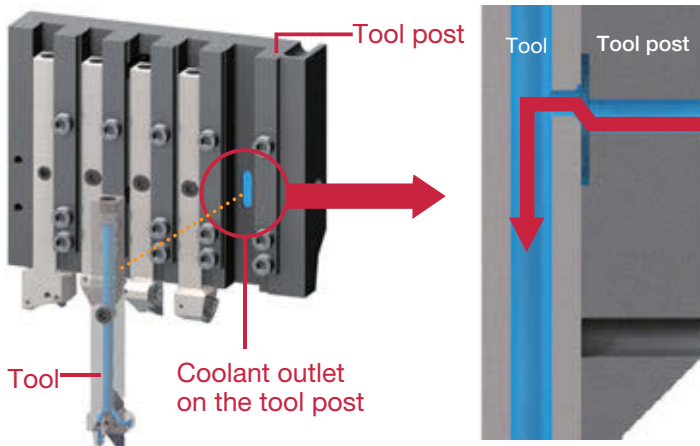

Use a non-coolant-through tool when coolant supply is not needed through the tool.

JSWL2XR/L

Screw-on toolholder without offset with 95° approach angle, for WXGU inserts

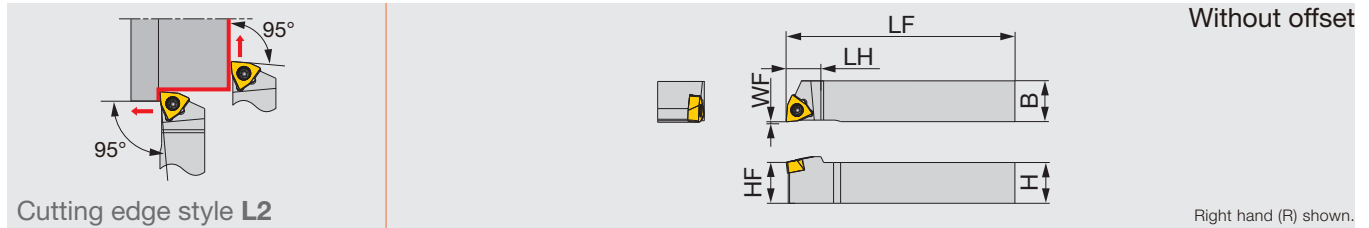

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JSWL2XR/L1010X04	10	10	120	11	10	0	0.2	WXGU0403**L/R...	0.9
JSWL2XR/L1212F04	12	12	85	11	12	0	0.2	WXGU0403**L/R...	0.9
JSWL2XR/L1212X04	12	12	120	11	12	0	0.2	WXGU0403**L/R...	0.9
JSWL2XR/L1616X04	16	16	120	13	16	0	0.2	WXGU0403**L/R...	0.9
JSWL2XR/L2020H04	20	20	100	13	20	0	0.2	WXGU0403**L/R...	0.9


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)

SPARE PARTS

Designation	Clamping screw	Wrench
JSWL2XR/L...	SR34-514	T-7F

JSWLXR/L

Screw-on toolholder without offset with 95° approach angle, for WXGU inserts

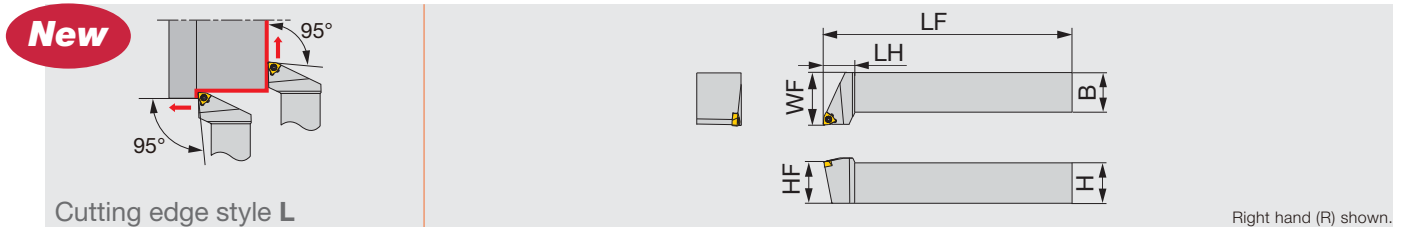

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JSWLXR/L2020K04	20	20	125	15	20	25	0.4	WXGU0403**L/R...	0.9
JSWLXR/L2525M04	25	25	150	19	25	32	0.4	WXGU0403**L/R...	0.9


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)

SPARE PARTS

Designation	Clamping screw	Wrench
JSWLXR/L...	SR34-514	T-7F

JPWL2XR/L

Lever lock type toolholder without offset with 95° approach angle, for WXGU inserts

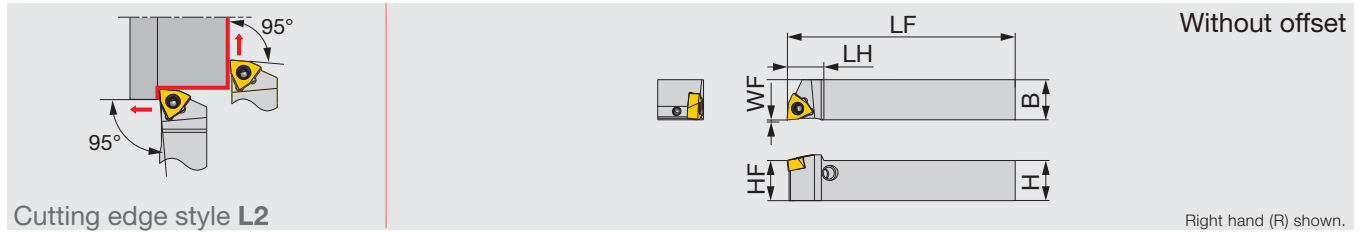

Cutting edge style L2

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JPWL2XR/L1010X04	10	10	120	11	10	0	0.2	WXGU0403**L/R...	0.9
JPWL2XR/L1212F04	12	12	85	11	12	0	0.2	WXGU0403**L/R...	0.9
JPWL2XR/L1212X04	12	12	120	11	12	0	0.2	WXGU0403**L/R...	0.9
JPWL2XR/L1616X04	16	16	120	13	16	0	0.2	WXGU0403**L/R...	0.9


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)

SPARE PARTS

Designation	Lever	Pin	Clamping screw	Wrench
JPWL2XR/L...	SLLV-2	SL-PI-2	SR10400611	HW2.0/5RED

JSWLXR-F

Screw-on stepped-head toolholder with 95° approach angle, for WXGU inserts

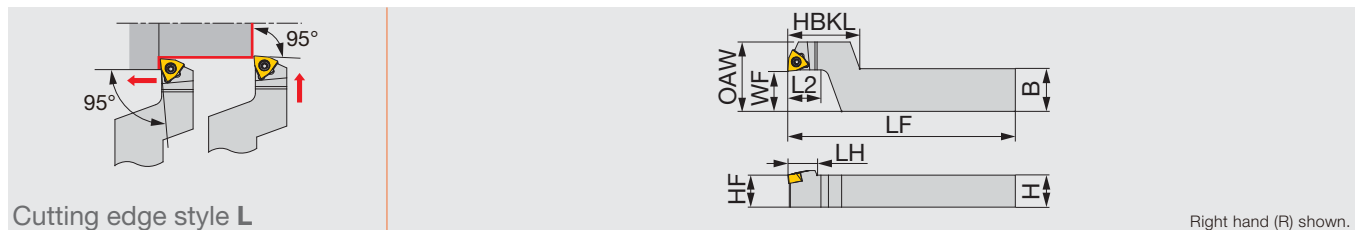

Cutting edge style L

Designation	H	B	LF	L2	HBKL	LH	HF	WF	OAW	RE**	Insert	Torque*
JSWLXR1016X04-F15	10	16	120	12	27	11	10	15	26	0.2	WXGU0403**L...	0.9
JSWLXR1216F04-F15	12	16	85	12	27	11	12	15	26	0.2	WXGU0403**L...	0.9
JSWLXR1216X04-F15	12	16	120	12	27	11	12	15	26	0.2	WXGU0403**L...	0.9
JSWLXR1620X04-F15	16	20	120	12	27	11	16	15	26	0.2	WXGU0403**L...	0.9


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L)

SPARE PARTS

Designation	Clamping screw	Wrench
JSWLXR**-F15	SR34-514	T-7F

JSWL2XR/L-CHP

Screw-on toolholder without offset with 95° approach angle, for WXGU inserts, with channels for high pressure coolant

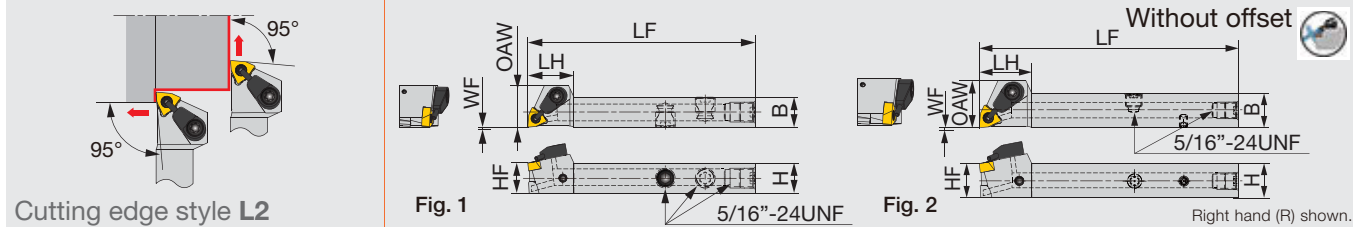

Designation	H	B	LF	LH	HF	WF	OAW	RE**	Insert	Torque*	Fig.
JSWL2XR/L1212F04-CHP	12	12	85	18	12	0	16.5	0.2	WXGU0403**L/R...	0.9	1
JSWL2XR1212X04-CHP	12	12	120	18.5	12	0	16.5	0.2	WXGU0403**L	0.9	2
JSWL2XR1616X04-CHP	16	16	120	18.5	16	0	16.5	0.2	WXGU0403**L	0.9	2


*Torque: Recommended torque (N·m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)

SPARE PARTS

Designation	Clamping screw	Coolant unit	Wrench
JSWL2XR**04-CHP	SR34-514	S-CU-CHP	T-7F

JSDJ2XR/L

Screw-on toolholder without offset with 93° approach angle, for DXGU inserts

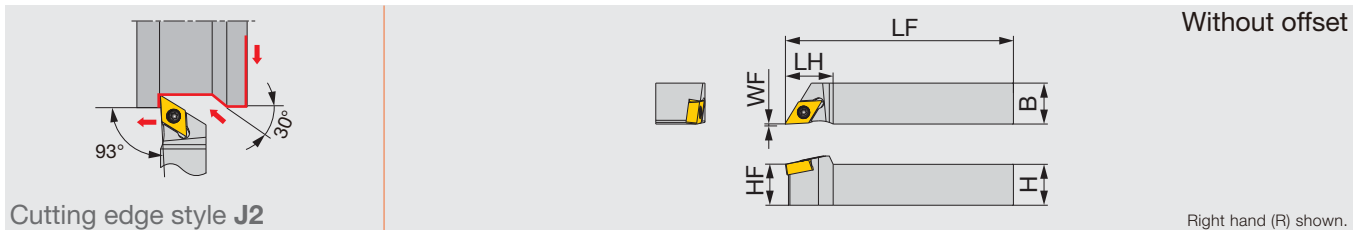

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JSDJ2XR/L1010X07	10	10	120	14	10	0	0.2	DXGU0703**L/R...	0.9
JSDJ2XR/L1212F07	12	12	85	14	12	0	0.2	DXGU0703**L/R...	0.9
JSDJ2XR/L1212X07	12	12	120	14	12	0	0.2	DXGU0703**L/R...	0.9
JSDJ2XR/L1616X07	16	16	120	18	16	0	0.2	DXGU0703**L/R...	0.9
JSDJ2XR/L2020H07	20	20	100	18	20	0	0.2	DXGU0703**L/R...	0.9

*Torque: Recommended torque (N·m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)


SPARE PARTS

Designation	Clamping screw	Wrench
JSDJ2XR/L...	SR34-514	T-7F


JSDJXR/L

Screw-on toolholder without offset with 93° approach angle, for DXGU inserts

New



Cutting edge style J

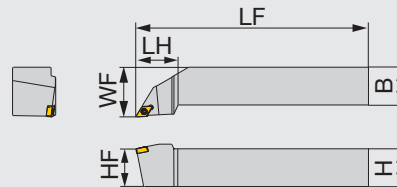

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JSDJXR/L2020K07	20	20	125	27	20	25	0.4	DXGU0703**L/R...	0.9
JSDJXR/L2525M07	25	25	150	27	25	32	0.4	DXGU0703**L/R...	0.9

*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)


SPARE PARTS




Designation	Clamping screw	Wrench
JSDJXR/L...	SR34-514	T-7F

JPDJ2XR/L

Lever lock type toolholder without offset with 93° approach angle, for DXGU inserts



Cutting edge style J2

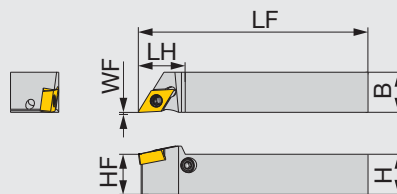

Without offset

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JPDJ2XR/L1010X07	10	10	120	14	10	0	0.2	DXGU0703**L/R...	0.9
JPDJ2XR/L1212F07	12	12	85	14	12	0	0.2	DXGU0703**L/R...	0.9
JPDJ2XR/L1212X07	12	12	120	14	12	0	0.2	DXGU0703**L/R...	0.9
JPDJ2XR/L1616X07	16	16	120	18	16	0	0.2	DXGU0703**L/R...	0.9

*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)


SPARE PARTS



Designation	Lever	Pin	Clamping screw	Wrench
JPDJ2XR/L...	SLLV-2	SL-PI-2	SR10400611	HW2.0/5RED

JSDJXR-F

Screw-on stepped-head toolholder with 93° approach angle, for DXGU inserts

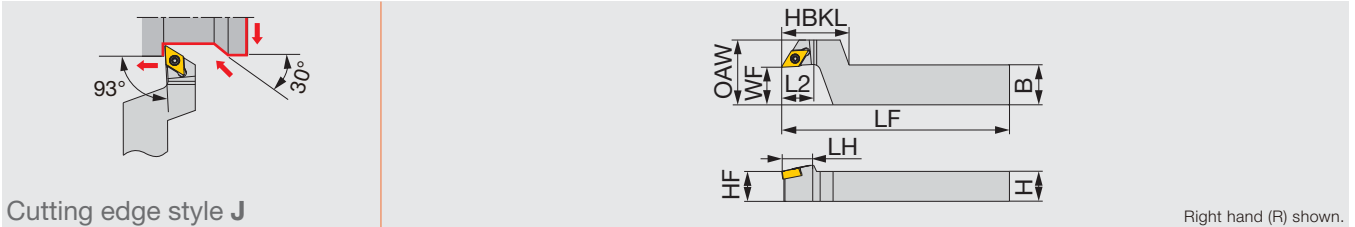

Designation	H	B	LF	L2	HBKL	LH	HF	WF	OAW	RE**	Insert	Torque*
JSDJXR1016X07-F15	10	16	120	12	27	14	10	15	26	0.2	DXGU0703**L...	0.9
JSDJXR1216F07-F15	12	16	85	12	27	14	12	15	26	0.2	DXGU0703**L...	0.9
JSDJXR1216X07-F15	12	16	120	12	27	14	12	15	26	0.2	DXGU0703**L...	0.9
JSDJXR1620X07-F15	16	20	120	12	27	14	16	15	26	0.2	DXGU0703**L...	0.9


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L)

SPARE PARTS

Designation	Clamping screw	Wrench
JSDJXR**-F15	SR34-514	T-7F

JSDJ2XR/L-CHP

Screw-on toolholder without offset with 93° approach angle, for DXGU inserts, with channels for high pressure coolant

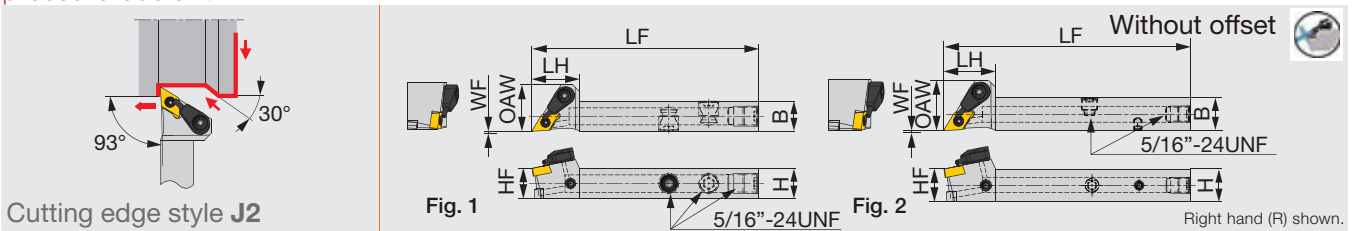

Designation	H	B	LF	LH	HF	W	OAW	RE**	Insert	Torque*	Fig.
JSDJ2XR/L1212F07-CHP	12	12	85	19	12	0	18.5	0.2	DXGU0703**L/R...	0.9	1
JSDJ2XR1212X07-CHP	12	12	120	19	12	0	18.5	0.2	DXGU0703**L	0.9	2
JSDJ2XR1616X07-CHP	16	16	120	19	16	0	18.5	0.2	DXGU0703**L	0.9	2


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand tool holder (R) for the left-hand insert (L). Use the left-hand tool holder (L) for the right-hand insert (R).

SPARE PARTS

Designation	Clamping screw	Coolant unit	Wrench
JSDJ2XR**07-CHP	SR34-514	S-CU-CHP	T-7F

JSVJ2XR/L

Screw-on toolholder without offset with 93° approach angle, for VXGU inserts

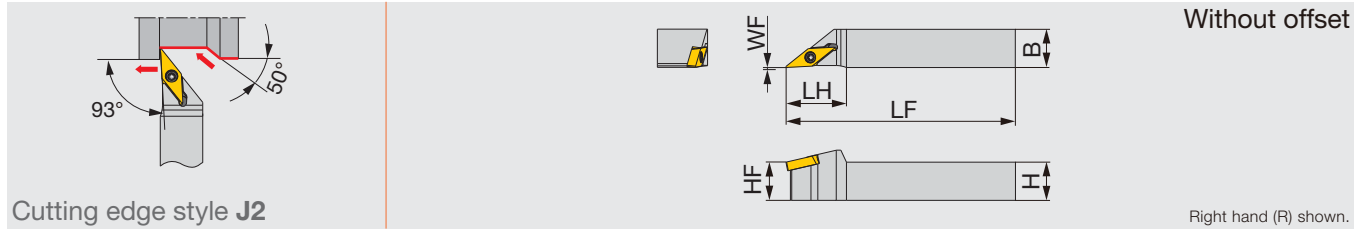

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JSVJ2XR/L1010X09	10	10	120	17	10	0	0.2	VXGU09T2**/L/R...	0.9
JSVJ2XR/L1212F09	12	12	85	19	12	0	0.2	VXGU09T2**/L/R...	0.9
JSVJ2XR/L1212X09	12	12	120	19	12	0	0.2	VXGU09T2**/L/R...	0.9
JSVJ2XR/L1616X09	16	16	120	19	16	0	0.2	VXGU09T2**/L/R...	0.9
JSVJ2XR/L2020H09	20	20	100	19	20	0	0.2	VXGU09T2**/L/R...	0.9


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)

SPARE PARTS

Designation	Clamping screw	Wrench
JSVJ2XR/L...	SR34-508	T-7F

JSVJXR/L

Screw-on toolholder without offset with 93° approach angle, for VXGU inserts

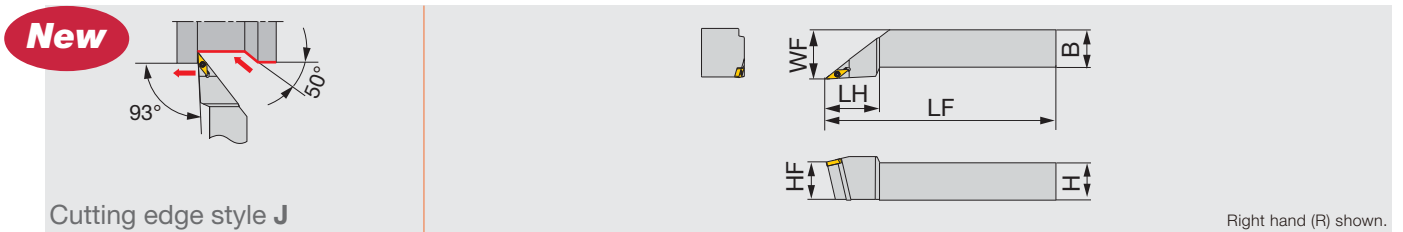

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JSVJXR/L2020K09	20	20	125	35	20	25	0.4	VXGU09T2**/L/R...	0.9
JSVJXR/L2525M09	25	25	150	35	25	32	0.4	VXGU09T2**/L/R...	0.9


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)

SPARE PARTS

Designation	Clamping screw	Wrench
JSVJXR/L...	SR34-508	T-7F

JPVJ2XR/L

Lever lock type toolholder without offset with 93° approach angle, for VXGU inserts

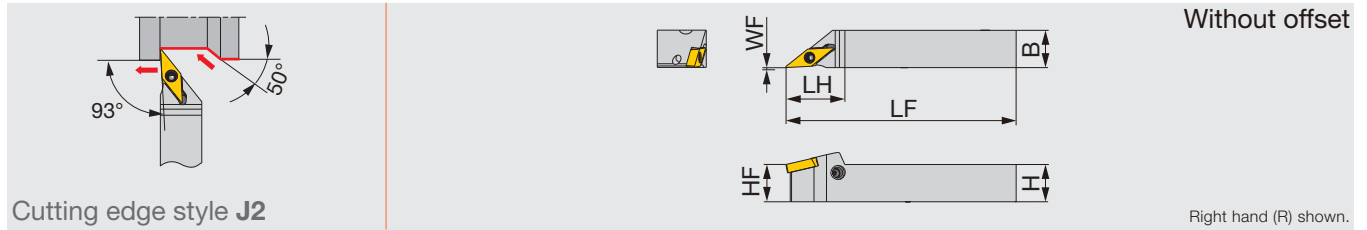

Cutting edge style **J2**

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JPVJ2XR/L1010X09	10	10	120	19	10	0	0.2	VXGU09T2**L/R...	0.9
JPVJ2XR/L1212F09	12	12	85	19	12	0	0.2	VXGU09T2**L/R...	0.9
JPVJ2XR/L1212X09	12	12	120	19	12	0	0.2	VXGU09T2**L/R...	0.9
JPVJ2XR/L1616X09	16	16	120	19	16	0	0.2	VXGU09T2**L/R...	0.9


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)

SPARE PARTS

Designation	Lever	Pin	Clamping screw	Wrench
JPVJ2XR/L...	SLLV-1	SL-PI-2	SR10400611	HW2.0/5RED

JSVJXR-F

Screw-on stepped-head toolholder with 93° approach angle, for VXGU inserts

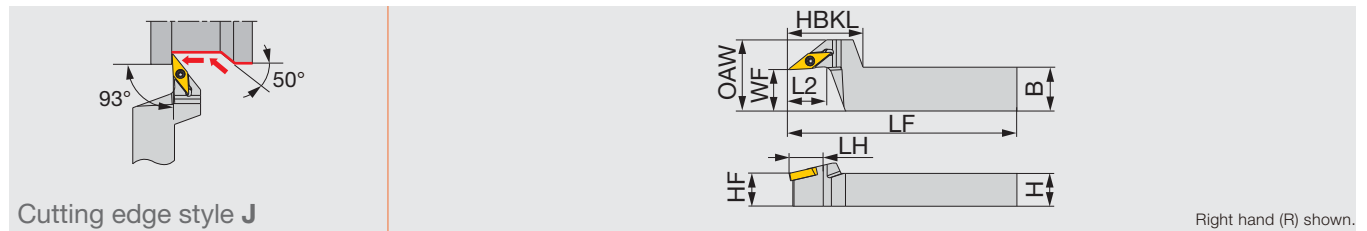

Cutting edge style **J**

Designation	H	B	LF	L2	HBKL	LH	HF	WF	OAW	RE**	Insert	Torque*
JSVJXR1016X09-F15	10	16	120	12	27	19	10	15	26	0.2	VXGU09T2**L...	0.9
JSVJXR1216F09-F15	12	16	85	12	27	19	12	15	26	0.2	VXGU09T2**L...	0.9
JSVJXR1216X09-F15	12	16	120	12	27	19	12	15	26	0.2	VXGU09T2**L...	0.9
JSVJXR1620X09-F15	16	20	120	12	27	19	16	15	26	0.2	VXGU09T2**L...	0.9


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L)

SPARE PARTS

Designation	Clamping screw	Wrench
JSVJXR**-F15	SR34-508	T-7F

JSVJ2XR/L-CHP

Screw-on toolholder without offset with 93° approach angle, for VXGU inserts, with coolant nozzle for high pressure

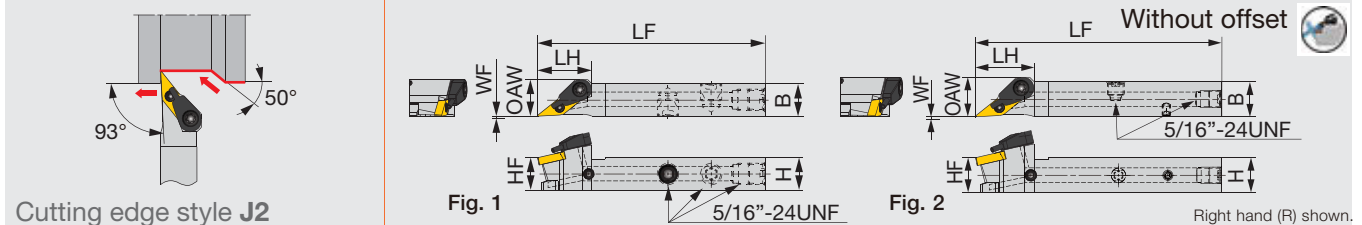

Designation	H	B	LF	LH	HF	WF	OAW	RE**	Insert	Torque*	Fig.
JSVJ2XR/L1212F09-CHP	12	12	85	20	12	0	13.5	0.2	VXGU09T2**L/R...	0.9	1
JSVJ2XR1212X09-CHP	12	12	120	19.5	12	0	13.4	0.2	VXGU09T2**L	0.9	2
JSVJ2XR1616X09-CHP	16	16	120	19.5	16	0	16	0.2	VXGU09T2**L	0.9	2


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right-hand toolholder (R) for the left-hand insert (L). Use the left-hand toolholder (L) for the right-hand insert (R)

SPARE PARTS

Designation	Clamping screw	Coolant unit	Wrench
JSVJ2XR**F09-CHP	SR34-508	S-CU-CHP	T-7F

JS-SDUXL

Screw-on toolholder with 93° approach angle, for DXGU inserts

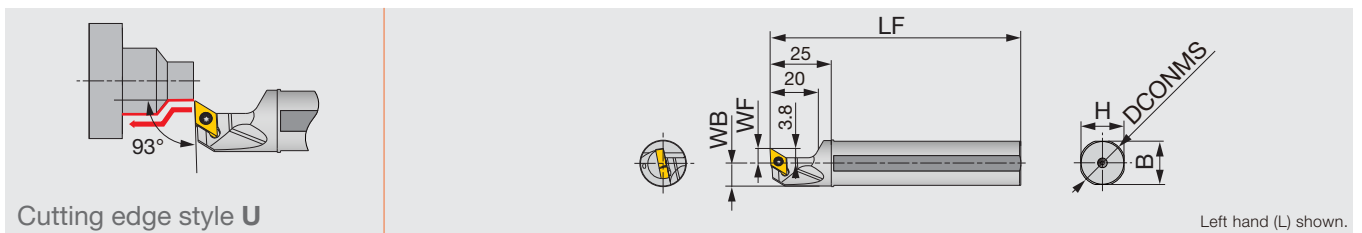

Designation	DCONMS	WF	LF	H	B	WB	RE**	Insert	Torque*
JS14H-SDUXL07	14	6	100	13	13	6.75	0.2	DXGU0703**L...	0.9
JS159F-SDUXL07	15.875	6	85	15	15	7.687	0.2	DXGU0703**L...	0.9
JS16F-SDUXL07	16	6	85	15	15	7.75	0.2	DXGU0703**L...	0.9
JS19G-SDUXL07	19.05	6	90	18	18	9.275	0.2	DXGU0703**L...	0.9
JS19X-SDUXL07	19.05	6	120	18	18	9.275	0.2	DXGU0703**L...	0.9
JS20G-SDUXL07	20	6	90	19	19	9.75	0.2	DXGU0703**L...	0.9
JS20X-SDUXL07	20	6	120	19	19	9.75	0.2	DXGU0703**L...	0.9
JS22X-SDUXL07	22	10	120	21	21	10.75	0.2	DXGU0703**L...	0.9
JS25H-SDUXL07	25	10	100	24	24	12.25	0.2	DXGU0703**L...	0.9
JS254X-SDUXL07	25.4	10	120	24	24	12.45	0.2	DXGU0703**L...	0.9


*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the left-hand toolholder (L) for the left-hand insert (L)

SPARE PARTS

Designation	Clamping screw	Wrench
JS**-SDUXL07	SR34-514	T-7F

JS-SVUXL

Screw-on toolholder with 93° approach angle, for VXGU inserts

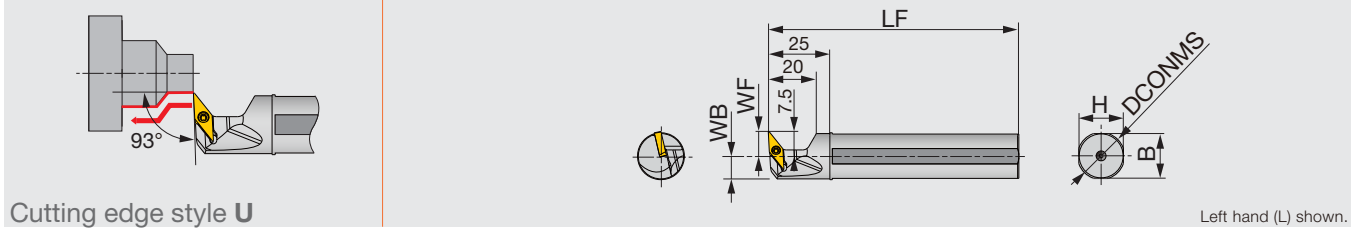

Cutting edge style U

Designation	DCONMS	WF	LF	H	B	WB	RE**	Insert	Torque*
JS159F-SVUXL09	15.875	10	85	15	15	7.7	0.2	VXGU09T2**L...	0.9
JS16F-SVUXL09	16	10	85	15	15	7.7	0.2	VXGU09T2**L...	0.9
JS19G-SVUXL09	19.05	10	90	18	18	9.2	0.2	VXGU09T2**L...	0.9
JS19X-SVUXL09	19.05	10	120	18	18	9.2	0.2	VXGU09T2**L...	0.9
JS20G-SVUXL09	20	10	90	19	19	9.7	0.2	VXGU09T2**L...	0.9
JS20X-SVUXL09	20	10	120	19	19	9.7	0.2	VXGU09T2**L...	0.9
JS22X-SVUXL09	22	10	120	21	21	10.7	0.2	VXGU09T2**L...	0.9
JS25H-SVUXL09	25	10	100	24	24	12.2	0.2	VXGU09T2**L...	0.9
JS254X-SVUXL09	25.4	10	120	24	24	12.4	0.2	VXGU09T2**L...	0.9

*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the left-hand toolholder (L) for the left-hand insert (L)

SPARE PARTS

Designation	Clamping screw	Wrench
JS**-SVUXL09	SR34-508	T-7F

CUTTING PERFORMANCE

● Excellent chatter stability

MINIFURN
TUNGALOY


Depth of cut: ap (mm)	2.0	OK	OK	OK	OK
	1.5	OK	OK	OK	OK
	1.0	OK	OK	OK	OK
	0.5	OK	OK	OK	OK
ap/f		0.05	0.10	0.15	0.20
Feed: f (mm/rev)					

Workpiece : S45C / C45
 Insert : WXGU040304L-TS AH725
 Toolholder : A12M-SWLXR04-D140
 Cutting speed : $V_c = 150$ m/min
 Overhang length : 36 mm (L/D = 3)
 Coolant : Wet (internal supply)


ISO positive insert

Depth of cut: ap (mm)	2.0	OK	OK	OK	OK
	1.5	OK	OK	OK	OK
	1.0	OK	OK	OK	OK
	0.5	OK	OK	OK	OK
ap/f		0.05	0.10	0.15	0.20
Feed: f (mm/rev)					

CHIP CONTROL

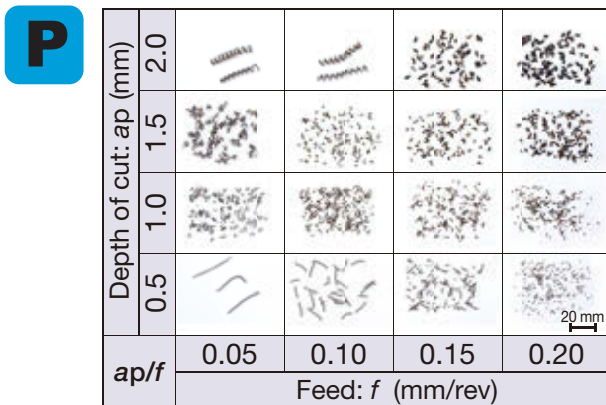


Workpiece : S45C / C45
 Insert : WXGU040304L-TS AH725
 Toolholder : A12M-SWLXR04-D140
 Cutting speed : $V_c = 150$ m/min
 Boring depth : H = 36 mm (L/D = 3)
 Coolant : Wet (internal supply)

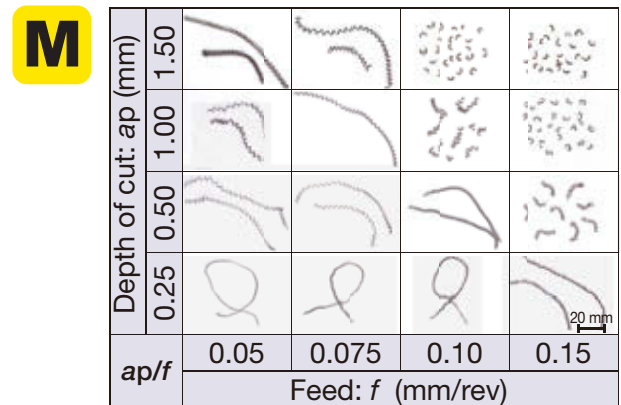

Workpiece : SUS304 / X5CrNi18-9
 Insert : WXGU040304L-SS AH725
 Toolholder : E12Q-SWLXR04-D140
 Cutting speed : $V_c = 150$ m/min
 Boring depth : H = 60 mm (L/D = 5)
 Coolant : Wet (internal supply)


WIPER PERFORMANCE

Workpiece : S45C / C45
 Insert : WXGU040304L-TSW
 CCMT09T304-**(Without wiper)
 Toolholder : E16R-SWLXR04-D180
 Cutting speed : $V_c = 150$ m/min
 Depth of cut : ap = 0.5 mm
 Hole depth : H = 48 mm (L/D = 3)
 Coolant : Wet (internal supply)

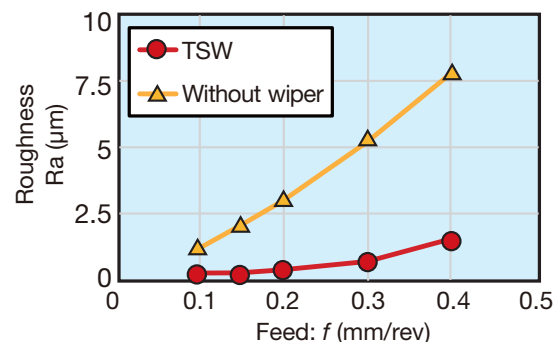

A/E-SWLXR/L

For trigon insert with 6 edges

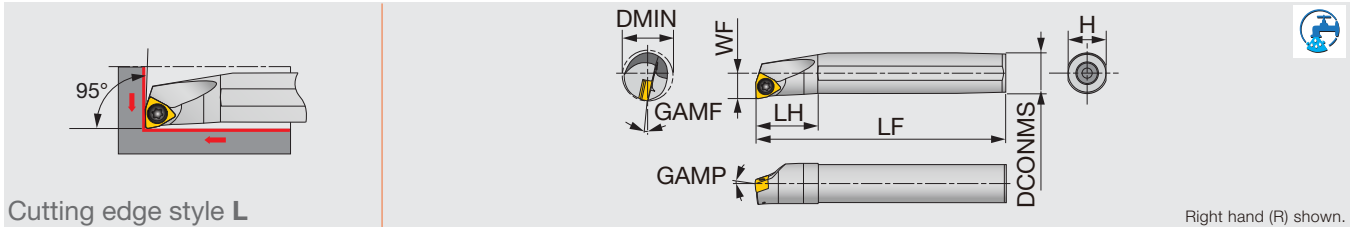

Cutting edge style L

Right hand (R) shown.

Designation	Material	DMIN	DCONMS	WF	LF	LH	H	GAMP	GAMF	RE**	Insert	Torque*
A10K-SWLXR/L04-D120	STEEL	12	10	6	125	20	9	-10	-16	0.4	WXGU0403**L/R...	0.9
A12M-SWLXR/L04-D140	STEEL	14	12	7	150	24	11	-10	-14	0.4	WXGU0403**L/R...	0.9
A16Q-SWLXR/L04-D180	STEEL	18	16	9	180	32	15	-10	-11	0.4	WXGU0403**L/R...	0.9
A20R-SWLXR/L04-D220	STEEL	22	20	11	200	36	18	-10	-10	0.4	WXGU0403**L/R...	0.9
E10M-SWLXR/L04-D120	CARBIDE	12	10	6	150	25	9	-10	-16	0.4	WXGU0403**L/R...	0.9
E12Q-SWLXR/L04-D140	CARBIDE	14	12	7	180	27	11	-10	-14	0.4	WXGU0403**L/R...	0.9
E16R-SWLXR/L04-D180	CARBIDE	18	16	9	200	32	15	-10	-11	0.4	WXGU0403**L/R...	0.9
E20S-SWLXR/L04-D220	CARBIDE	22	20	11	250	36	18	-10	-10	0.4	WXGU0403**L/R...	0.9

*Torque: Recommended torque (N·m) for clamping **RE: The holder measurements are true with this insert radius

Note: Use the right hand toolholder (R) for the left hand insert (L). Use the left hand toolholder (L) for the right hand insert (R)

SPARE PARTS



Designation	Clamping screw	Wrench
A/E**-SWLXR/L...	SR34-514	T-7F

- 1 Use the right hand toolholder (R) for the left hand insert (L)
- 2 Use the left hand toolholder (L) for the right hand insert (R)




1 Right hand toolholder with left hand insert shown



2 Left hand toolholder with right hand insert shown

A/E-SDXXR/L

For 55° rhombic insert with 4 edges

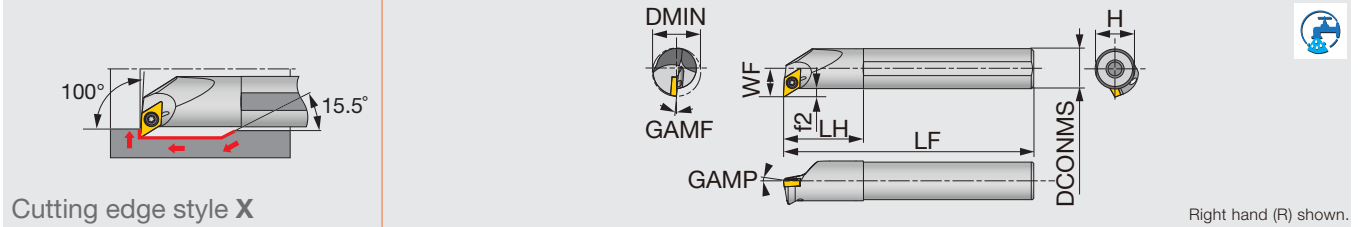

Right hand (R) shown.

Designation	Material	DMIN	DCONMS	WF	LF	LH	H	f2	GAMP	GAMF	RE**	Insert	Torque*
A10K-SDXXR/L07-D130	STEEL	13	10	7.6	125	20	9	2.6	-14	-16	0.4	DXGU0703**L/R...	0.9
A12M-SDXXR/L07-D160	STEEL	16	12	8.6	150	24	11	2.6	-14	-14	0.4	DXGU0703**L/R...	0.9
A16Q-SDXXR/L07-D200	STEEL	20	16	10.6	180	32	15	2.6	-13	-13	0.4	DXGU0703**L/R...	0.9
A20R-SDXXR/L07-D240	STEEL	24	20	12.6	200	36	18	2.6	-13	-12	0.4	DXGU0703**L/R...	0.9
E10M-SDXXR/L07-D130	CARBIDE	13	10	7.6	150	25	9	2.6	-14	-16	0.4	DXGU0703**L/R...	0.9
E12Q-SDXXR/L07-D160	CARBIDE	16	12	8.6	180	27	11	2.6	-14	-14	0.4	DXGU0703**L/R...	0.9
E16R-SDXXR/L07-D200	CARBIDE	20	16	10.6	200	32	15	2.6	-13	-13	0.4	DXGU0703**L/R...	0.9
E20S-SDXXR/L07-D240	CARBIDE	24	20	12.6	250	36	18	2.6	-13	-12	0.4	DXGU0703**L/R...	0.9

*Torque: Recommended torque (N-m) for clamping **RE: The holder measurements are true with this insert radius

Note: Use the right hand toolholder (R) for the left hand insert (L). Use the left hand toolholder (L) for the right hand insert (R)

SPARE PARTS

Designation	Clamping screw	Wrench
A/E**-SDXXR/L...	SR34-514	T-7F

- 1 Use the right hand toolholder (R) for the left hand insert (L)
- 2 Use the left hand toolholder (L) for the right hand insert (R)




1 Right hand toolholder with left hand insert shown



2 Left hand toolholder with right hand insert shown

A/E-SDZXR/L

For 55° rhombic insert with 4 edges

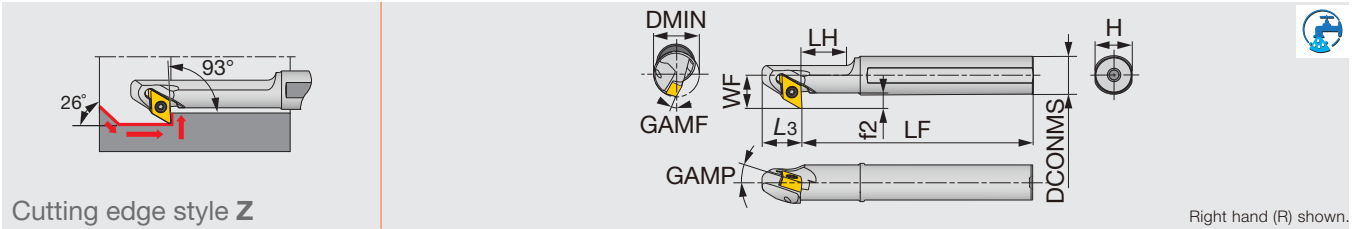

Right hand (R) shown.

Designation	Material	DMIN	DCONMS	WF	LF	LH	L3	H	f2	GAMP	GAMF	RE**	Insert	Torque*
A12M-SDZXR/L07-D140	STEEL	14	12	10.5	150	30	13	11	4.5	-10	-14	0.4	DXGU0703**R/L...	0.9
A16Q-SDZXR/L07-D160	STEEL	16	16	12.5	180	35	13	15	4.5	-10	-12.5	0.4	DXGU0703**R/L...	0.9
A20R-SDZXR/L07-D200	STEEL	20	20	14.5	200	40	13	18	4.5	-10	-10.5	0.4	DXGU0703**R/L...	0.9
E12Q-SDZXR/L07-D180	CARBIDE	18	12	10.5	180	-	13	11	4.5	-11	-11	0.4	DXGU0703**R/L...	0.9
E16R-SDZXR/L07-D220	CARBIDE	22	16	12.5	200	-	13	15	4.5	-11	-9	0.4	DXGU0703**R/L...	0.9

*Torque: Recommended torque (N·m) for clamping **RE: The holder measurements are true with this insert radius
 Note: Use the right hand toolholder (R) for the right hand insert (R). Use the left hand toolholder (L) for the left hand insert (L)

SPARE PARTS

Designation	Clamping screw	Wrench
A/E**-SDZXR/L...	SR34-514	T-7F

- ① Right hand toolholders (R) are used with right hand inserts (R)
- ② Left hand toolholders (L) are used with left hand inserts (L)



① Right hand toolholder with right hand insert shown



② Left hand toolholder with left hand insert shown

MARKING



Insert hand is identified on the flank side

- : Continuous cutting
- ◐ : Light interrupted cutting
- ⊛ : Heavy interrupted cutting

TurnLine - Insert

POSITIVE TYPE
DOUBLE-SIDED



Trigon, 80°
with hole

	P	M	K	N	S	H
Steel	●	●	●	●	●	●
Stainless	●	●	●	●	●	●
Cast iron	●	●	●	●	●	●
Non-ferrous	●	●	●	●	●	●
Superalloys	●	●	●	●	●	●
Hard materials	●	●	●	●	●	●

Application	Chipbreaker	Designation	Corner radius	Coated		Coated cermet		Cermet		Carbide	
				AH725	SH725	GT9530		NS9530		KS05F	
Finishing to medium cutting (Sharp edge)		JS WXGU040301MFR-JS	<0.1*	●							
		WXGU040301MFL-JS	<0.1*	●							
		WXGU040302MFR-JS	<0.2*	●							
		WXGU040302MFL-JS	<0.2*	●							
		WXGU040304MFR-JS	<0.4*	●							
		WXGU040304MFL-JS	<0.4*	●							
Finishing to medium cutting (Sharp edge)		JTS WXGU040301MFR-JTS	<0.1*	●							
		WXGU040301MFL-JTS	<0.1*	●							
		WXGU040302MFR-JTS	<0.2*	●							
		WXGU040302MFL-JTS	<0.2*	●							
Finishing to medium cutting		JTS WXGU040301MR-JTS	<0.1*	●							
		WXGU040301ML-JTS	<0.1*	●							
		WXGU040302MR-JTS	<0.2*	●							
		WXGU040302ML-JTS	<0.2*	●							
Finishing (Low cutting force) (Sharp edge)		JSS WXGU040301MFR-JSS	<0.1*	●							
		WXGU040301MFL-JSS	<0.1*	●							
		WXGU040302MFR-JSS	<0.2*	●							
		WXGU040302MFL-JSS	<0.2*	●							
Finishing (Low cutting force)		JSS WXGU040301MR-JSS	<0.1*	●							
		WXGU040301ML-JSS	<0.1*	●							
		WXGU040302MR-JSS	<0.2*	●							
		WXGU040302ML-JSS	<0.2*	●							

* Corner radius has minus tolerance

- : Line up
- : New

TurnLine - Insert

- : Continuous cutting
- ◐ : Light interrupted cutting
- ✱ : Heavy interrupted cutting

POSITIVE TYPE
DOUBLE-SIDED



Trigon, 80°
with hole

P	Steel	●	●					●	●												
M	Stainless	●	●					●	●												
K	Cast iron	●						●	●												
N	Non-ferrous																				
S	Superalloys	●																			
H	Hard materials																				

Application	Chipbreaker	Designation	Corner radius	Coated			Coated cermet			Cermet			Carbide									
				AH725	AH8015	SH725	GT9530			NS9530			KS05F									
Finishing to medium cutting		TS WXGU040302R-TS	0.2	●	●		●			●			●									
		WXGU040302L-TS	0.2	●	●		●			●			●									
		WXGU040304R-TS	0.4	●	●		●			●			●									
		WXGU040304L-TS	0.4	●	●		●			●			●									
		WXGU040308R-TS	0.8	●	●		●			●			●									
		WXGU040308L-TS	0.8	●	●		●			●			●									
Finishing (Wiper)		TSW WXGU040304R-TSW	0.4	●	●		●			●												
		WXGU040304L-TSW	0.4	●	●		●			●												
		WXGU040308R-TSW	0.8	●	●		●			●												
		WXGU040308L-TSW	0.8	●	●		●			●												
Finishing (Low cutting force)		SS WXGU040302R-SS	0.2	●	●		●			●			●									
		WXGU040302L-SS	0.2	●	●		●			●			●									
		WXGU040304R-SS	0.4	●	●		●			●			●									
		WXGU040304L-SS	0.4	●	●		●			●			●									

* Corner radius has minus tolerance

- : Line up
- : New

- : Continuous cutting
- ◐ : Light interrupted cutting
- ⦿ : Heavy interrupted cutting




TurnLine - Insert

POSITIVE TYPE



Rhombic, 55° with hole

Material	Coated	Coated cermet	Cermet	Carbide
P Steel	●	◐	◐	◐
M Stainless	◐	◐	◐	◐
K Cast iron	◐	◐	◐	◐
N Non-ferrous	●	◐	◐	◐
S Superalloys	●	◐	◐	◐
H Hard materials	◐	◐	◐	◐

Application		Chipbreaker	Designation	Corner radius	Coated	Coated cermet	Cermet	Carbide
					AH725 New AH8015	GT9530	NS9530	KS05F
Finishing (Low cutting force)		JSS	DXGU070301MR-JSS	<0.1*	●			
			DXGU070301ML-JSS	<0.1*	●			
			DXGU070302MR-JSS	<0.2*	●			
			DXGU070302ML-JSS	<0.2*	●			
Finishing to medium cutting		TS	DXGU070302R-TS	0.2	● ●	●	●	●
			DXGU070302L-TS	0.2	● ●	●	●	●
			DXGU070304R-TS	0.4	● ●	●	●	●
			DXGU070304L-TS	0.4	● ●	●	●	●
			DXGU070308R-TS	0.8	● ●	●	●	●
			DXGU070308L-TS	0.8	● ●	●	●	●
Finishing (Low cutting force)		SS	DXGU070302R-SS	0.2	● ●	●	●	●
			DXGU070302L-SS	0.2	● ●	●	●	●
			DXGU070304R-SS	0.4	● ●	●	●	●
			DXGU070304L-SS	0.4	● ●	●	●	●

* Corner radius has minus tolerance

- : Line up
- : New

STANDARD CUTTING CONDITIONS

FOR INTERNAL TURNING

ISO	Workpiece material	Grade			Cutting speed Vc (m/min)	Depth of cut ap (mm)	Feed f (mm/rev)
		First choice	For surface finish	For wear resistance (High speed)			
P	Low carbon steel SS400, S25C, etc. E275A, C25, etc.	AH725	-	-	50 - 180	0.3 - 2	0.08 - 0.3
		-	-	AH8015	50 - 200	0.3 - 2	0.08 - 0.3
		-	NS9530	-	80 - 250	0.3 - 2	0.08 - 0.3
		-	GT9530	-	80 - 300	0.3 - 2	0.08 - 0.3
	Carbon steel S45C, S55C, etc. C45, C55, etc.	AH725	-	-	50 - 180	0.3 - 2	0.08 - 0.3
		-	-	AH8015	50 - 200	0.3 - 2	0.08 - 0.3
		-	NS9530	-	80 - 250	0.3 - 2	0.08 - 0.3
	Low alloy steel SCM415, etc. 18CrMo4, etc.	-	GT9530	-	80 - 300	0.3 - 2	0.08 - 0.3
		AH725	-	-	50 - 180	0.3 - 2	0.08 - 0.3
		-	-	AH8015	50 - 200	0.3 - 2	0.08 - 0.3
	Alloy steel SCM440, SCr420, etc. 42CrMo4, 20Cr4, etc.	-	NS9530	-	80 - 250	0.3 - 2	0.08 - 0.3
		-	GT9530	-	80 - 300	0.3 - 2	0.08 - 0.3
AH725		-	-	50 - 180	0.3 - 2	0.08 - 0.3	
M	Stainless steel (Austenitic) SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-3, etc.	AH8015	-	-	50 - 150	0.3 - 2	0.08 - 0.3
		AH8015	-	-	50 - 150	0.3 - 2	0.08 - 0.3
		AH8015	-	-	50 - 150	0.3 - 2	0.08 - 0.3
K	Grey cast iron FC250, etc. 250, etc.	AH725	-	-	50 - 180	0.3 - 2	0.08 - 0.3
		-	-	AH8015	50 - 200	0.3 - 2	0.08 - 0.3
		-	NS9530	-	80 - 250	0.3 - 2	0.08 - 0.3
	Ductile cast iron FCD700, etc. 600-3, etc.	-	GT9530	-	80 - 300	0.3 - 2	0.08 - 0.3
		AH725	-	-	50 - 180	0.3 - 2	0.08 - 0.3
		-	-	AH8015	50 - 200	0.3 - 2	0.08 - 0.3
N	Non ferrous Metal Aluminum alloy, etc.	-	NS9530	-	80 - 250	0.3 - 2	0.08 - 0.3
		-	GT9530	-	80 - 300	0.3 - 2	0.08 - 0.3
S	Heat-resistant alloys Titanium alloys, etc.	AH8015	-	-	20 - 80	0.3 - 2	0.08 - 0.3
		AH8015	-	-	20 - 80	0.3 - 2	0.08 - 0.3

GRADES

AH725**P M K****PREMIUMTEC**
TUNGALOY

- Versatile PVD coated grade suitable for a wide range of work materials
- Demonstrates a balanced resistance to wear and fracture

New**AH8015****P M K S****PREMIUMTEC**
TUNGALOY

- PVD coated grade with a balanced resistance to wear and fracture
- First choice for stainless steel and heat-resistant superalloys

SH725**P M K**

- PVD coating grade most suited for sharp cutting edges
- Suitable for machining of small and precision parts

GT9530**P K****PREMIUMTEC**
TUNGALOY

- Coated cermet grade with PremiumTec treatment for exceptional wear resistance
- Provides remarkable performance in high-speed finishing of steel

NS9530**P K****PREMIUMTEC**
TUNGALOY





- General-purpose cermet grade with incredible fracture and wear resistance.
- Ensures long tool life and excellent surface finishing of steel

KS05F**N**









- Sub-micron grain cemented carbide with balanced wear and impact resistance
- Homogeneous fine-grained structure provides excellent resistance to wear, fracture, and built-up edge

PRACTICAL EXAMPLES

External turning

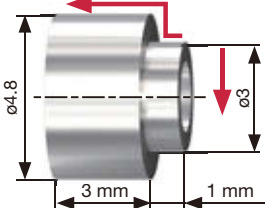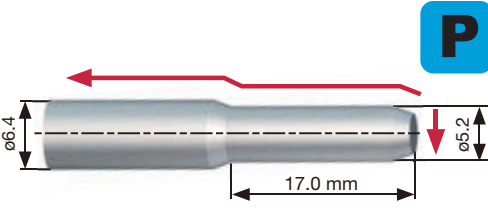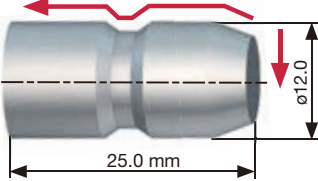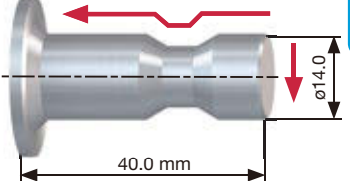		Shaft	Shaft
Workpiece		Shaft	Shaft
Toolholder		JSDJ2XR1212X07	JSWL2XR1212X04
Insert		DXGU070301MFL-JS	WXGU040302L-TS
Grade		SH725	AH725
Workpiece material		SUS316 / X5CrNiMo17-12-3	S45C / C45
Cutting conditions			
Cutting speed: V_c (m/min)		61	66 - 80
Feed : f (mm/rev)		0.02	0.15
Depth of cut : ap (mm)		0.12	0.6
Machining		External	External
Coolant		Wet	Wet
Results		 <p>Tool life 1.3 times!</p> <p>MiniForceTurn improved chip control, while the SH725 grade increased tool life by 1.3x.</p>	 <p>Number of parts machined 3 times!</p> <p>Double-sided MiniForceTurn insert machined 3x more parts per insert than the competitor's single-sided insert, due to extended tool life and increased number of cutting edges. Cost-per-edge was also reduced.</p>
Workpiece		Shaft	Shaft
Toolholder		JSDJ2XR1212X07	JSVJ2XR1212X09
Insert		DXGU070301ML-JSS	VXGU09T202MFLE-JRP
Grade		AH725	SH725
Workpiece material		Alloy steels	Low carbon steel (cold drawn)
Cutting conditions			
Cutting speed: V_c (m/min)		66 - 80	170
Feed : f (mm/rev)		0.15	0.03
Depth of cut : ap (mm)		0.6	0.2
Machining		External	External
Coolant		Wet	Wet
Results		 <p>Number of parts machined Doubled!</p> <p>Double-sided MiniForceTurn insert machined 2x as many number of parts.</p>	 <p>Tool life 2.4 times!</p> <p>A combination of JRP chipbreaker and SH725 grade provided high wear resistance and improved surface finishing, extending tool life by 2.4x over the competitor's insert.</p>

Internal turning

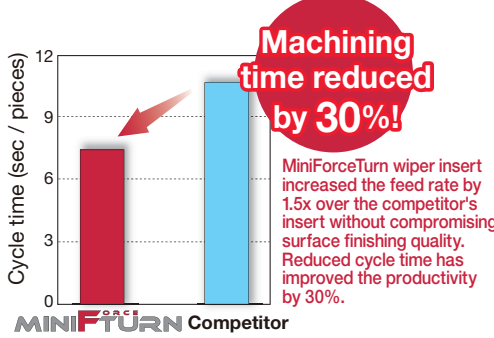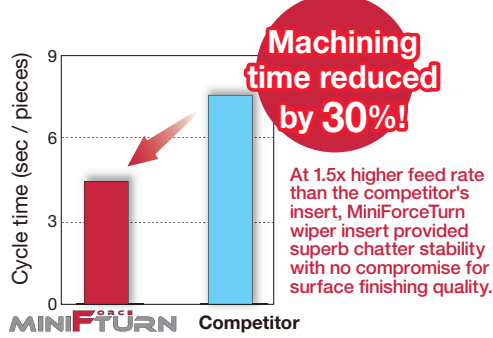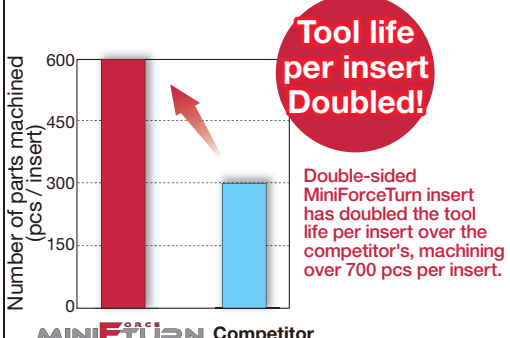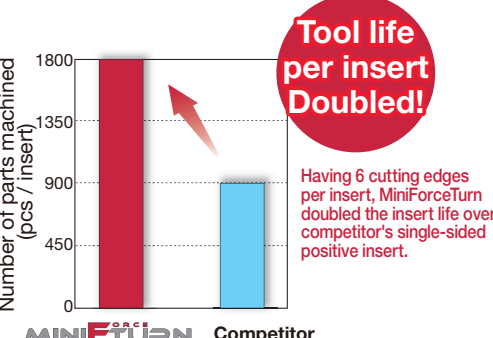Workpiece		Machine Parts	Machine Parts
Toolholder		A16Q-SWLXR04-D180	E12Q-SWLXR04-D140
Insert		WXGU040304L-TSW	WXGU040304L-TSW
Grade		AH725	GT9530
Workpiece material		S45C / C45	SCM435 / 34CrMo4
		 P	 P
Cutting conditions	Cutting speed: V_c (m/min)	160	200
	Feed : f (mm/rev)	0.10 → 0.15	0.10 → 0.15
	Depth of cut : ap (mm)	0.5	0.2
	Machining	Internal Turning (continuous cutting)	Internal Turning (continuous cutting)
	Coolant	Wet	Wet
Results		 Machining time reduced by 30%! MiniForceTurn wiper insert increased the feed rate by 1.5x over the competitor's insert without compromising surface finishing quality. Reduced cycle time has improved the productivity by 30%.	 Machining time reduced by 30%! At 1.5x higher feed rate than the competitor's insert, MiniForceTurn wiper insert provided superb chatter stability with no compromise for surface finishing quality.
		MINIFUTURE Competitor	MINIFUTURE Competitor
Workpiece		Machine Parts	Machine Parts
Toolholder		A10K-SWLXR04-D120	A10K-SDXXR07-D130
Insert		WXGU040302L-SS	DXGU070304L-TS
Grade		KS05F	KS05F
Workpiece material		CAC406 / Bronze casting	A5056 (Al - Mg)
		 N	 N
Cutting conditions	Cutting speed: V_c (m/min)	70	200
	Feed : f (mm/rev)	0.1	0.1
	Depth of cut : ap (mm)	1.0	1.0
	Machining	Internal Turning (continuous cutting)	Internal Turning (continuous cutting)
	Coolant	Wet	Wet
Results		 Tool life per insert Doubled! Double-sided MiniForceTurn insert has doubled the tool life per insert over the competitor's, machining over 700 pcs per insert.	 Tool life per insert Doubled! Having 6 cutting edges per insert, MiniForceTurn doubled the insert life over competitor's single-sided positive insert.
		MINIFUTURE Competitor	MINIFUTURE Competitor

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima, 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy America, Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloyamerica.com

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.co.jp/ca

Tungaloy de Mexico S.A.

C Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.co.jp/mx

Tungaloy do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy Germany GmbH

An der Alten Ziegelei 1
D-40789 Monheim, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.de

Tungaloy France S.A.S.

ZA Courtaboeuf - Le Rio
1 rue de la Terre de feu
F-91952 Courtaboeuf Cedex, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
Fax: +34 93 876 2798
www.tungaloy.es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
www.tungaloy.se

Tungaloy Rus, LLC

Andropova avenue, h.18/7,
11 floor, office 3, 115432,
Moscow, Russia
Phone: +7-499-683-01-80
Fax: +7-499-683-01-81
www.tungaloy.co.jp/ru

Tungaloy East LLC

620075, Russian Federation, Sverdlovsk
Region, Ekaterinburg, Mamina-Sibiryaka str.,
bldg. 101, room 202
Phone: +7-343-286-48-23/24
Fax: +7-912-284-91-69
www.tungaloy.co.jp/ru

Tungaloy Polska Sp. z o.o.

ul. Genewska 24
03-963 Warszawa, Poland
Phone: +48-22-617-0890
Fax: +48-22-617-0890
www.tungaloy.co.jp/pl

Tungaloy U.K. Ltd

The Technology Centre,
Wolverhampton Science Park
Glaisher Drive, Wolverhampton
West Midlands WV10 9RU, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.co.jp/uk
salesinfo@tungaloyuk.co.uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.co.jp/hu
info@tungaloytools.hu

Tungaloy Turkey

Dudullu, OSB 4. Cad No:4
34776 Umraniye Istanbul, TURKEY
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com.tr
info@tungaloy.com.tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy-benelux.com

Tungaloy Croatia

Josipa Kozarca 4
10432 Bregana, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.hr

Tungaloy Cutting Tool (Shanghai) Co.,Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.co.jp/tcts

Tungaloy Cutting Tool (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.co.th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.co.jp/tspl

Tungaloy Vietnam

LE 04-38, Lexington Residence
67 Mai Chi Tho, Dist. 2,
Ho Chi Minh City, Vietnam
Phone: +84-8-37406660
Fax: +84-8-37406662
www.tungaloy.co.jp/tspl

Tungaloy India Pvt. Ltd.

Indiabulls Finance Centre,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai -400013, India
Phone: +91-22-6124-8804
Fax: +91-22-6124-8899
www.tungaloy.co.jp/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.co.jp/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.co.jp/my

Tungaloy Australia Pty Ltd

PO Box 2232, Rowville,
Victoria 3178, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com.au

PT. Tungaloy Indonesia

Kompleks Grand Wisata Block AA-10 No.3-5
Cibitung
Bekasi 17510, Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.co.jp/id



www.tungaloy.com

follow us at:
facebook.com/tungaloyjapan
twitter.com/tungaloyjapan

To see this product in action visit:

Tung-TV

www.youtube.com/tungaloycorporation

Distributed by:



DOWNLOAD
Dr. Carbide App



FIND US ON THE CLOUD!
machiningcloud.com



Available on the
App Store



GET IT ON
Google play



AS9100 Certified
78006
2015.11.04
ISO14001 Certified
EC97J1123
1997.11.26

MINI**F**ORCE TURN

Tungaloy Report No. 417S1-G

Expansion of super economical **M class**
with **double-sided positive insert**





For more information


New geometry of CXMU insert and expansion of DXMU inserts

Super economical M class double-sided positive insert

New

CXMU insert


- 4 edges, rhombic 80°
- Chipbreaker: TS

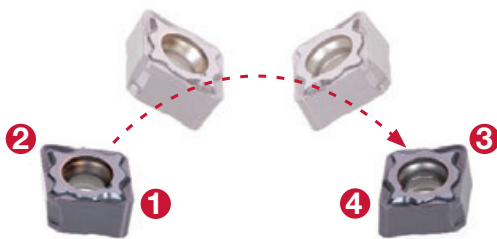

New

DXMU insert


- 4 edges, rhombic 55°
- Chipbreaker: TS

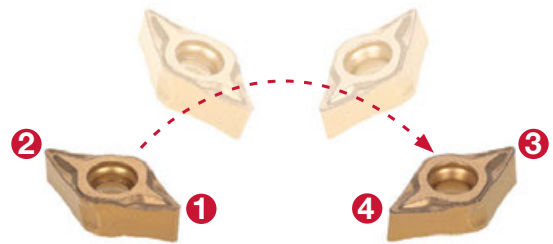

APPLICATION AREA

TS chipbreaker

- First choice chipbreaker for medium to finish cutting
- Excellent chip control
- Ideal for small part machining

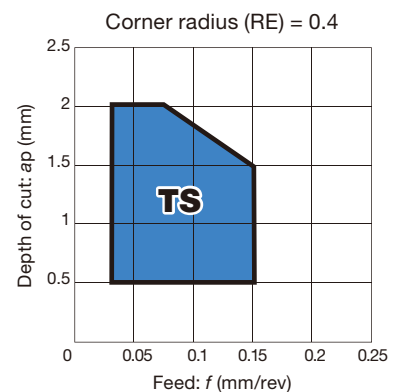

CHIP CONTROL

P

Depth of cut: ap (mm)	2				
	1.5				
	1				
	0.5				
ap/f	0.05	0.1	0.15	0.2	
Feed: f (mm/rev)					

Workpiece : S45C / C45
 Insert : CXMU060304L-TS T9215
 Toolholder : A12M-SCLXR06-D140
 Cutting speed : $V_c = 150$ m/min
 Boring depth : $H = 36$ mm (L/D = 3)
 Coolant : Wet (internal supply)

M


Depth of cut: ap (mm)	1.5				
	1				
	0.5				
	0.25				
ap/f	0.05	0.075	0.1	0.15	
Feed: f (mm/rev)					

Workpiece : SUS304 / X5CrNi18-9
 Insert : CXMU060304L-TS AH8015
 Toolholder : A12M-SCLXR06-D140
 Cutting speed : $V_c = 80$ m/min
 Boring depth : $H = 36$ mm (L/D = 3)
 Coolant : Wet (internal supply)

GRADES

Grade	Recommended workpiece material	Feature
PREMIUMTEC New T9215	P M K	- Well-balanced between wear and chipping resistance - First choice for steel - High versatility for a wide range of applications
PREMIUMTEC New T9225	P	- First choice for roughing to medium cutting - High fracture resistance
PREMIUMTEC AH8015	P M K S	- PVD coated grade with a balanced resistance to wear and fracture - First choice for stainless steel and heat-resistant superalloys
PREMIUMTEC AH725	P M K	- Versatile PVD coated grade suitable for a wide range of work materials - Demonstrates a balanced resistance to wear and fracture


TOOL LIFE

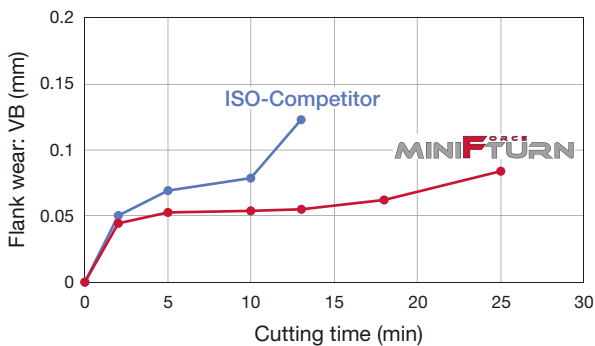


P Insert : DXMU070304L-TS T9215 (**MiniForce-Turn**)
 DCMT070204 type Competitor's PVD-P15 grade (ISO)
 Toolholder : A20R-SDXXR07-D240 (**MiniForce-Turn**)
 A20R-SDUCR11-D270 (ISO)
 Workpiece material : SCM440 / 42CrMo4
 Cutting speed : $V_c = 250$ m/min
 Feed : $f = 0.1$ mm/rev
 Depth of cut : $a_p = 1$ mm
 Coolant : Wet

New M class MiniForce-Turn and latest CVD grade T9215 provides high productivity and high wear resistance compared to competitor's ISO positive PVD grade insert.

Low cutting force machining with high rake angle

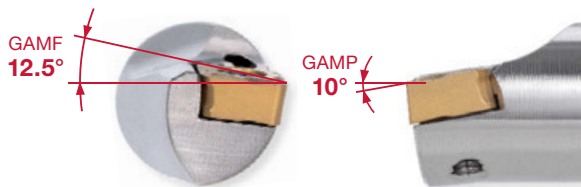

MINIForce-TURN
A12M-SCLXR06-D140

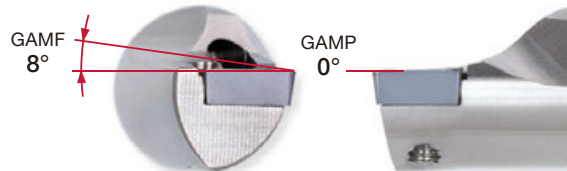

Conventional
A12M-SCLCR06-D140

CUTTING PERFORMANCE

Excellent chatter stability

Workpiece : S45C / C45
 Insert : CXMU060304L-TS AH725
 Toolholder : A12M-SCLXR06-D140
 Cutting speed : $V_c = 150$ m/min
 Overhang length : 36 mm ($L/D = 3$)
 Coolant : Wet (internal supply)

MINIForce-TURN

Depth of cut a_p (mm)	2	OK	OK	OK	OK
	1.5	OK	OK	OK	OK
	1	OK	OK	OK	OK
	0.5	OK	OK	OK	OK
a_p/f	0.05	0.1	0.15	0.2	
Feed: f (mm/rev)					

=


ISO positive insert, M class

Depth of cut a_p (mm)	2	OK	OK	OK	OK
	1.5	OK	OK	OK	OK
	1	OK	OK	OK	OK
	0.5	OK	OK	OK	OK
a_p/f	0.05	0.1	0.15	0.2	
Feed: f (mm/rev)					

New

A/E-SCLXR/L

Screw-on boring bar, for CXMU inserts

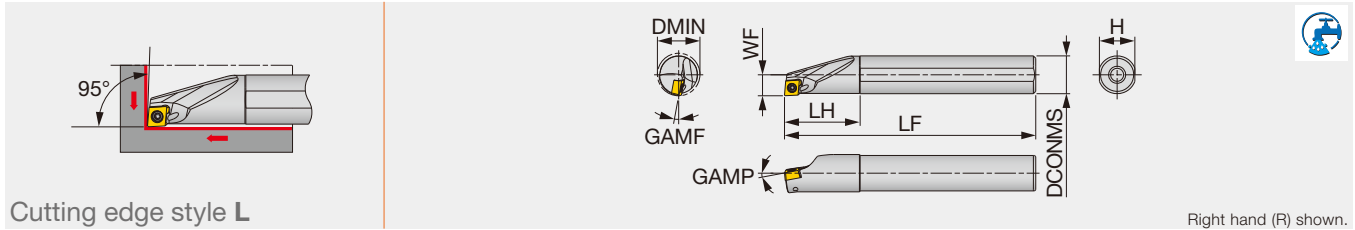

Right hand (R) shown.

Designation	Material	DMIN	DCONMS	WF	LF	LH	H	GAMP	GAMF	RE**	Insert	Torque*
A10K-SCLXR/L06-D120	Steel	12	10	6	125	20	9	-10°	-14.5°	0.4	CXMU0603**L/R...	0.9
A12M-SCLXR/L06-D140	Steel	14	12	7	150	24	11	-10°	-12.5°	0.4	CXMU0603**L/R...	0.9
A16Q-SCLXR/L06-D180	Steel	18	16	9	180	32	15	-10°	-9.5°	0.4	CXMU0603**L/R...	0.9
A20R-SCLXR/L06-D220	Steel	22	20	11	200	36	18	-10°	-8°	0.4	CXMU0603**L/R...	0.9
E10M-SCLXR/L06-D120	Carbide	12	10	6	150	25	9	-10°	-14.5°	0.4	CXMU0603**L/R...	0.9
E12Q-SCLXR/L06-D140	Carbide	14	12	7	180	27	11	-10°	-12.5°	0.4	CXMU0603**L/R...	0.9
E16R-SCLXR/L06-D180	Carbide	18	16	9	200	32	15	-10°	-9.5°	0.4	CXMU0603**L/R...	0.9
E20S-SCLXR/L06-D220	Carbide	22	20	11	250	36	18	-10°	-8°	0.4	CXMU0603**L/R...	0.9

*Torque: Recommended clamping torque (N-m) **RE: Standard corner radius
Use right-hand toolholders (R) with left-hand inserts (L); and left-hand toolholders (L) with right-hand inserts (R).

SPARE PARTS

Designation	Clamping screw	Wrench
A/E**SCLXR/L...	SR34-514	T-7F

- 1 Use the right hand toolholder (R) for the left hand insert (L)
- 2 Use the left hand toolholder (L) for the right hand insert (R)



1 Right hand toolholder with left hand insert shown



2 Left hand toolholder with right hand insert shown


MARKING



Insert hand is identified on the flank side

A/E-SDXXR/L

Screw-on boring bar, for DXMU/DXGU inserts

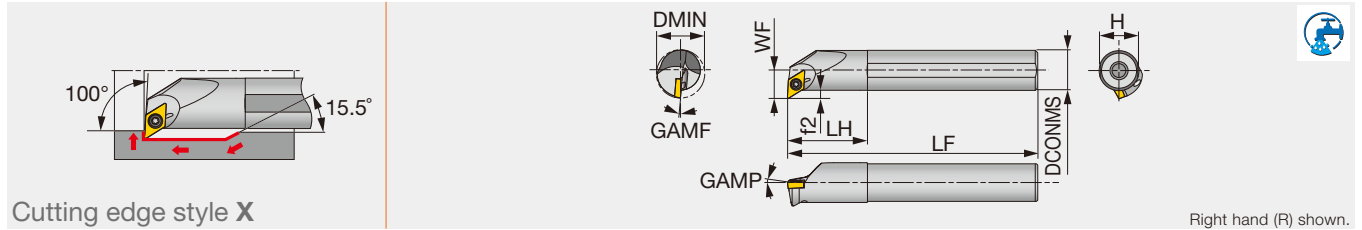

Cutting edge style X

Right hand (R) shown.

Designation	Material	DMIN	DCONMS	WF	LF	LH	H	f2	GAMP	GAMF	RE**	Insert	Torque*
A10K-SDXXR/L07-D130	Steel	13	10	7.6	125	20	9	2.6	-14°	-16°	0.4	DXMU/DXGU0703**L/R...	0.9
A12M-SDXXR/L07-D160	Steel	16	12	8.6	150	24	11	2.6	-14°	-14°	0.4	DXMU/DXGU0703**L/R...	0.9
A16Q-SDXXR/L07-D200	Steel	20	16	10.6	180	32	15	2.6	-13°	-13°	0.4	DXMU/DXGU0703**L/R...	0.9
A20R-SDXXR/L07-D240	Steel	24	20	12.6	200	36	18	2.6	-13°	-12°	0.4	DXMU/DXGU0703**L/R...	0.9
E10M-SDXXR/L07-D130	Carbide	13	10	7.6	150	25	9	2.6	-14°	-16°	0.4	DXMU/DXGU0703**L/R...	0.9
E12Q-SDXXR/L07-D160	Carbide	16	12	8.6	180	27	11	2.6	-14°	-14°	0.4	DXMU/DXGU0703**L/R...	0.9
E16R-SDXXR/L07-D200	Carbide	20	16	10.6	200	32	15	2.6	-13°	-13°	0.4	DXMU/DXGU0703**L/R...	0.9
E20S-SDXXR/L07-D240	Carbide	24	20	12.6	250	36	18	2.6	-13°	-12°	0.4	DXMU/DXGU0703**L/R...	0.9

*Torque: Recommended clamping torque (N-m) **RE : Standard corner radius

Use right-hand toolholders (R) with left-hand inserts (L); and left-hand toolholders (L) with right-hand inserts (R)

SPARE PARTS

Designation	Clamping screw	Wrench
A/E**-SDXXR/L...	SR34-514	T-7F

- 1 Use the right hand toolholder (R) for the left hand insert (L)
- 2 Use the left hand toolholder (L) for the right hand insert (R)




1 Right hand toolholder with left hand insert shown



2 Left hand toolholder with right hand insert shown

A/E-SDZXR/L

Screw-on boring bar, for DXMU/DXGU inserts

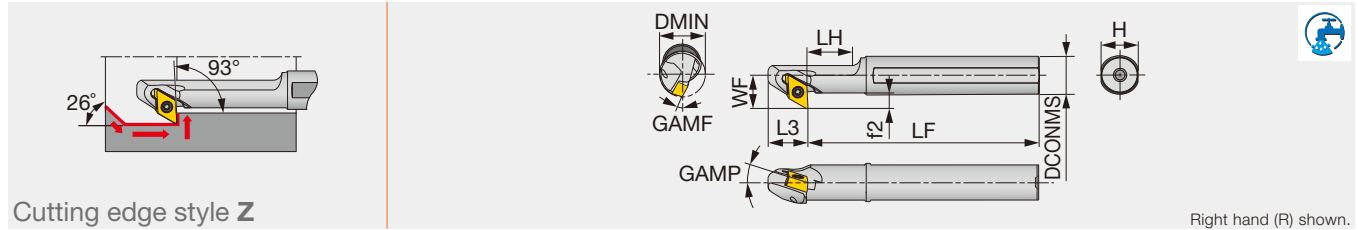

Cutting edge style Z

Right hand (R) shown.

Designation	Material	DMIN	DCONMS	WF	LF	LH	L3	H	f2	GAMP	GAMF	RE**	Insert	Torque*
A12M-SDZXR/L07-D140	Steel	14	12	10.5	150	30	13	11	4.5	-10°	-14°	0.4	DXMU/DXGU0703**R/L...	0.9
A16Q-SDZXR/L07-D160	Steel	16	16	12.5	180	35	13	15	4.5	-10°	-12.5°	0.4	DXMU/DXGU0703**R/L...	0.9
A20R-SDZXR/L07-D200	Steel	20	20	14.5	200	40	13	18	4.5	-10°	-10.5°	0.4	DXMU/DXGU0703**R/L...	0.9
E12Q-SDZXR/L07-D180	Carbide	18	12	10.5	180	-	13	11	4.5	-11°	-11°	0.4	DXMU/DXGU0703**R/L...	0.9
E16R-SDZXR/L07-D220	Carbide	22	16	12.5	200	-	13	15	4.5	-11°	-9°	0.4	DXMU/DXGU0703**R/L...	0.9

*Torque: Recommended clamping torque (N·m) **RE : Standard corner radius
Use right-hand toolholders (R) with right-hand inserts (R); and left-hand toolholders (L) with left-hand inserts (L).

SPARE PARTS

Designation	Clamping screw	Wrench
A/E**-SDZXR/L...	SR34-514	T-7F

- ① Right hand toolholders (R) are used with right hand inserts (R)
- ② Left hand toolholders (L) are used with left hand inserts (L)



① Right hand toolholder with right hand insert shown



② Left hand toolholder with left hand insert shown

Insert POSITIVE TYPE / DOUBLE SIDED


- : Continuous cutting
- ◐ : Light interrupted cutting
- ✱ : Heavy interrupted cutting


CX



Rhombic, 80° with hole

Material	Coated	T9215	T9225	AH8015	AH725	Application															
P Steel	● ◐ ✱	●	●	●	●																
M Stainless	● ◐	●	●	●	●																
K Cast iron	● ◐	●	●	●	●																
N Non-ferrous	●	●	●	●	●																
S Superalloy	●	●	●	●	●																
H Hard material	●	●	●	●	●																



Application	Chipbreaker	Designation	Coated				Dimension (mm)			
			T9215	T9225	AH8015	AH725	RE	IC	S	D1
Finishing to medium cutting 	TS	CXMU060302R-TS	●	●	●	●	0.2	6.35	3.18	2.7
		CXMU060302L-TS	●	●	●	●	0.2	6.35	3.18	2.7
		CXMU060304R-TS	●	●	●	●	0.4	6.35	3.18	2.7
		CXMU060304L-TS	●	●	●	●	0.4	6.35	3.18	2.7
		CXMU060308R-TS	●	●	●	●	0.8	6.35	3.18	2.7
		CXMU060308L-TS	●	●	●	●	0.8	6.35	3.18	2.7


DX



Rhombic, 55° with hole

Material	Coated	T9215	T9225	AH8015	AH725	Application															
P Steel	● ◐ ✱	●	●	●	●																
M Stainless	● ◐	●	●	●	●																
K Cast iron	● ◐	●	●	●	●																
N Non-ferrous	●	●	●	●	●																
S Superalloy	●	●	●	●	●																
H Hard material	●	●	●	●	●																



Application	Chipbreaker	Designation	Coated				Dimension (mm)			
			T9215	T9225	AH8015	AH725	RE	IC	S	D1
Finishing to medium cutting 	TS	DXMU070302R-TS	●	●	●	●	0.2	6.35	3.18	2.7
		DXMU070302L-TS	●	●	●	●	0.2	6.35	3.18	2.7
		DXMU070304R-TS	●	●	●	●	0.4	6.35	3.18	2.7
		DXMU070304L-TS	●	●	●	●	0.4	6.35	3.18	2.7
		DXMU070308R-TS	●	●	●	●	0.8	6.35	3.18	2.7
		DXMU070308L-TS	●	●	●	●	0.8	6.35	3.18	2.7

● : New product

STANDARD CUTTING CONDITIONS FOR INTERNAL TURNING

ISO	Workpiece material	Grade		Cutting speed Vc (m/min)	Depth of cut ap (mm)	Feed f (mm/rev)
		First choice	Second choice			
P	Low carbon steel / Low alloy steel	T9215	-	120 - 350	0.3 - 2	0.08 - 0.3
		T9225	-	100 - 300	0.3 - 2	0.08 - 0.3
		AH8015	-	50 - 200	0.3 - 2	0.08 - 0.3
		-	AH725	50 - 180	0.3 - 2	0.08 - 0.3
		-	NS9530	80 - 250	0.3 - 2	0.08 - 0.3
		-	GT9530	80 - 300	0.3 - 2	0.08 - 0.3
	Carbon steel / Alloy steel	T9215	-	80 - 350	0.3 - 2	0.08 - 0.3
		T9225	-	80 - 300	0.3 - 2	0.08 - 0.3
		AH8015	-	50 - 200	0.3 - 2	0.08 - 0.3
		-	AH725	50 - 180	0.3 - 2	0.08 - 0.3
		-	NS9530	80 - 250	0.3 - 2	0.08 - 0.3
		-	GT9530	80 - 300	0.3 - 2	0.08 - 0.3
M	Stainless steel (Austenitic)	AH8015	-	50 - 150	0.3 - 2	0.08 - 0.3
		-	AH725	50 - 150	0.3 - 2	0.08 - 0.3
		-	T9215	50 - 200	0.3 - 2	0.08 - 0.3
	Stainless steel (Martensitic and ferritic)	AH8015	-	50 - 150	0.3 - 2	0.08 - 0.3
		-	AH725	50 - 150	0.3 - 2	0.08 - 0.3
		-	T9215	50 - 200	0.3 - 2	0.08 - 0.3
Stainless steel (Precipitation hardening)	AH8015	-	50 - 150	0.3 - 2	0.08 - 0.3	
	-	AH725	50 - 150	0.3 - 2	0.08 - 0.3	
	-	T9215	50 - 200	0.3 - 2	0.08 - 0.3	
K	Grey cast iron	T9215	-	100 - 350	0.3 - 2	0.08 - 0.3
		T9225	-	100 - 350	0.3 - 2	0.08 - 0.3
		-	AH8015	50 - 200	0.3 - 2	0.08 - 0.3
		-	AH725	50 - 180	0.3 - 2	0.08 - 0.3
		-	NS9530	80 - 250	0.3 - 2	0.08 - 0.3
		-	GT9530	80 - 300	0.3 - 2	0.08 - 0.3
	Ductile cast iron	T9215	-	100 - 350	0.3 - 2	0.08 - 0.3
		T9225	-	100 - 350	0.3 - 2	0.08 - 0.3
		-	AH8015	50 - 200	0.3 - 2	0.08 - 0.3
		-	AH725	50 - 180	0.3 - 2	0.08 - 0.3
		-	NS9530	80 - 250	0.3 - 2	0.08 - 0.3
		-	GT9530	80 - 300	0.3 - 2	0.08 - 0.3
N	Aluminum alloys	KS05F	-	100 - 300	0.3 - 2	0.08 - 0.3
	Copper alloys	KS05F	-	100 - 300	0.3 - 2	0.08 - 0.3
S	Titanium alloys	AH8015	-	20 - 80	0.3 - 2	0.08 - 0.3
	Nickel-based alloys	AH8015	-	20 - 80	0.3 - 2	0.08 - 0.3
H	Hardened steel	BXA20	-	50 - 220	0.12 - 0.8	0.1 - 0.3
		-	BXA10	50 - 220	0.12 - 0.8	0.1 - 0.3



www.tungaloy.com
follow us at:
facebook.com/tungaloyjapan
twitter.com/tungaloyjapan
www.youtube.com/tungaloycorporation



AS9100 Certified
78006
2015.11.04
ISO 14001 Certified
EC97J1123
1997.11.26

Distributed by:



FIND US ON THE CLOUD!
machingcloud.com

