



Multifunctional counterboring tool


TCB

Tungaloy Report No. 512-G

Multifunctional counterboring tool to improve your productivity





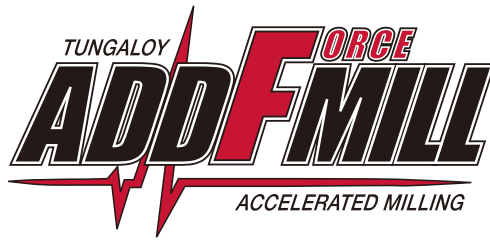

TCB



Multifunctional tool with a broad lineup to **improve your production efficiency**

Versatile counter boring cutter with superior chip control

- Cutter diameter: 10 - 59 mm
- Optimized flute design for effective chip evacuation during counter boring for screw heads



■ Features

1 Flexible lineup of cutter bodies

Monoblock type


Tool diameters: DC = 10 - 43 mm



Extremely stiff tool body design optimized for counter boring operation for bolt heads

Cartridge type

Tool diameters: DC = 26 - 59 mm



Shim plates


Shim plates in various sizes are available for cutter diameter adjustments.

Cartridge

Economical solution to minimize tool inventory. The cutter body is protected from damages even when the insert or cartridge is fractured during machining. Simply replace with a new cartridge, and the cutter is good to continue.



2 Provides a 90° flat surface

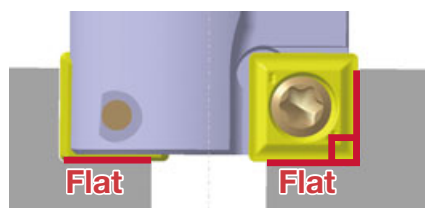

3 Excellent chip control



SP*P/SP*M-CG

Optimized for boring operations
Efficient for a wide range of cutting depths and materials

TCB
Chips from
counter boring



Competitor's endmill
Chips from
counter boring




4 Enhanced insert line up

Now offering Tungaloy's unique X-tolerance inserts for closer dimensional requirements!

Inserts designation	Tolerance range	Tool diameter deviation range upon insert exchange	Corner radius			
			SPMP/SPMM		SPXP/SPXM	
			ø10 - 13	ø14 - 59	ø10 - 19	ø20 - 59
SPMP/SPMM	±0.08 - ±0.13	±0.16 - ±0.26	R0.4	R0.4, 0.8	-	-
New SPXP/SPXM	±0.04	±0.08	-	-	R0.4	R0.8


5 The latest coating grade for long insert tool life

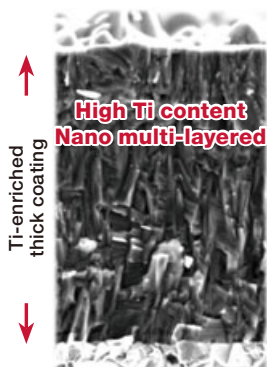

New

AH6225 P M K S H

- New coated carbide grade consisted of a thick Ti-rich coating layer combined with dedicated carbide substrate.
- Increased wear and chipping resistance thanks to extremely hard coating layer and nanomultilayer coating.

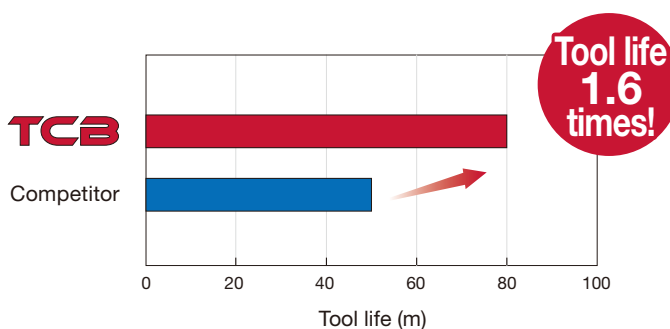


Boring endmill : TCB180F25
Insert : SPMP831-CG AH6225
Workpiece material : Carbon steel
Cutting speed : $V_c = 150$ m/min
Feed : $f = 0.2$ mm/rev
Drilling depth : $H = 15$ mm
Pre hole diameter : ø10 mm
Coolant : Wet (External)
Machine : NC lathe

AH6225 provided 1.6 times tool life increase thanks to its latest coating technology.

TCB


Counter boring endmill, monoblock type

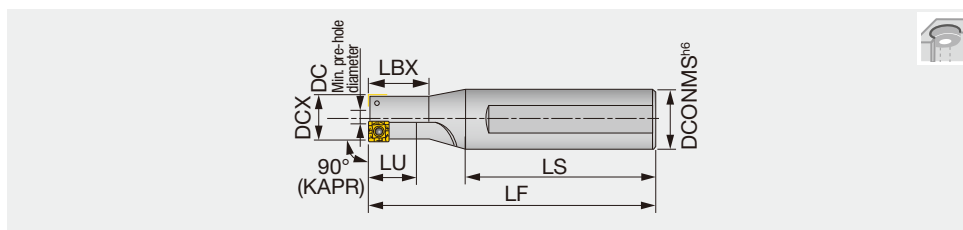

Designation	DCX	CICT	DC	LU	LBX	LF	LS	DCONMS	Insert
TCB100F16	10	1	2.8	13	17	86	60	16	SP*P771...
TCB110F16	11	1	2.8	14	18.7	87	60	16	SP*P771...
TCB120F20	12	1	3.6	15	20.5	89	60	20	SP*P771...
TCB130F20	13	2	4.5	16	22.2	91	60	20	SP*P771...
TCB-140	14	1	4	11	18	117	80	25	SP*P831...
TCB140F25	14	2	5.5	18	24	113	80	25	SP*P771...
TCB150F25	15	2	6.5	19	25.7	114	80	25	SP*P771...
TCB160F25	16	2	7.5	20	27.5	116	80	25	SP*P771...
TCB170F25	17	2	6.6	13	21	114	80	25	SP*P831...
TCB175F25	17.5	2	7.1	14	22	115	80	25	SP*P831...
TCB180F25	18	2	7.5	15	23	116	80	25	SP*P831...
TCB190F25	19	2	8.5	15	24	118	80	25	SP*P831...
TCB-200	20	2	8.2	16	25	120	80	25	SP*P042...
TCB200F25	20	2	8.2	16	25	120	80	25	SP*P042...
TCB210F25	21	2	9	17	26	122	80	25	SP*P042...
TCB220F25	22	2	10	18	28	124	80	25	SP*P042...
TCB-230	23	2	11	19	29	126	80	25	SP*P042...
TCB230F25	23	2	11	19	29	126	80	25	SP*P042...
TCB240F25	24	2	12	20	-	128	80	25	SP*P042...
TCB250F25	25	2	13	25	-	130	80	25	SP*P042...
TCB-260	26	2	14	21	33	132	80	32	SP*P042...
TCB-290	29	2	14	23	36	138	80	32	SP*M322...
TCB-320	32	2	16.9	40	-	144	80	32	SP*M322...
TCB-350	35	2	14	43	-	150	80	32	SP*M432...
TCB-390	39	2	17.9	48	-	158	80	32	SP*M432...
TCB-430	43	2	21.7	53	-	171	85	42	SP*M432...

Tool diameter tolerance	Applicable tolerance range of hole diameter
+0.2 / 0	+0.3 / 0

Counter boring dimensions of bolt hole



Thread size	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27
øD (mm)	11	14	17.5	20	23	26	29	32	35	39	43
H (mm)	6.5	8.6	10.8	13	15.2	17.5	19.5	21.5	23.5	25.5	29
ød (mm)	6	9	11	14	16	18	20	22	24	26	30
Applicable tool	TCB110	TCB140	TCB175	TCB200	TCB230	TCB260	TCB290	TCB320	TCB350	TCB390	TCB430

SPARE PARTS




Designation	Clamping screw	Wrench
TCB100... - TCB160...	CSTB-2L040	T-6D
TCB-140...	CSTB-2.2S	T-7D
TCB170... - TCB190...	CSTB-2.2	T-7D
TCB200... - TCB260...	CSTA-NO3	T-9D
TCB-290 - TCB-320	CSTA-NO5	T-9D
TCB-350 - TCB-430	CSTA-4	T-15D

Recommended clamping torque: CSTB-2L040 = 0.7 N·m, CSTB-2.2S / CSTB-2.2 = 1 N·m, CSTA-NO3 / CSTA-NO5 = 2.3 N·m, CSTA-4 = 3.5 N·m

TCB

Counter boring endmill, cartridge type

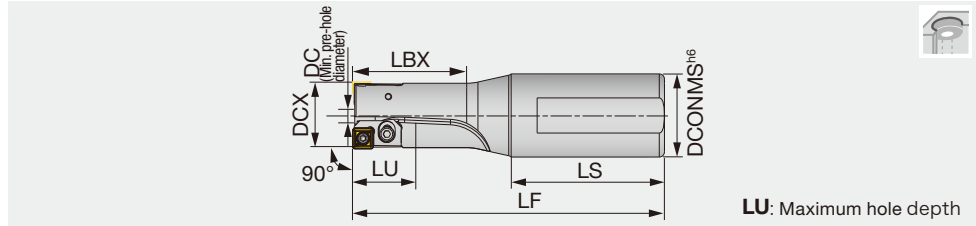


Body Designation	Cartridge set Designation	DCX	DCONMS	DC	LU	LS	LBX	LF	WT(kg)	Shim plate Designation	Shim plate Thickness	Insert
TCB260-290F32	TCB04CA-26-29	26	32	13.2	40	59	43	120	0.6	-	-	SP*P042...
TCB260-290F32	TCB04CA-26-29	27	32	14.2	40	59	43	120	0.6	AP16050	0.5	SP*P042...
TCB260-290F32	TCB04CA-26-29	28	32	15.2	40	59	43	120	0.6	AP16100	1	SP*P042...
TCB260-290F32	TCB04CA-26-29	29	32	16.2	40	59	43	120	0.6	AP16150	1.5	SP*P042...
TCB300-340F32	TCB32CA-30-39	30	32	14.2	45	59	55	130	0.6	-	-	SP*M322...
TCB300-340F32	TCB32CA-30-39	31	32	15.2	45	59	55	130	0.6	AP16050	0.5	SP*M322...
TCB300-340F32	TCB32CA-30-39	32	32	16.2	45	59	55	130	0.6	AP16100	1	SP*M322...
TCB300-340F32	TCB32CA-30-39	33	32	17.2	45	59	55	130	0.6	AP16150	1.5	SP*M322...
TCB300-340F32	TCB32CA-30-39	34	32	18.2	45	59	55	130	0.6	AP16200	2	SP*M322...
TCB350-390F32	TCB32CA-30-39	35	32	19	50	59	70	140	0.7	-	-	SP*M322...
TCB350-390F32	TCB32CA-30-39	36	32	20	50	59	70	140	0.7	AP16050	0.5	SP*M322...
TCB350-390F32	TCB32CA-30-39	37	32	21	50	59	70	140	0.7	AP16100	1	SP*M322...
TCB350-390F32	TCB32CA-30-39	38	32	22	50	59	70	140	0.7	AP16150	1.5	SP*M322...
TCB350-390F32	TCB32CA-30-39	39	32	23	50	59	70	140	0.7	AP16200	2	SP*M322...
TCB400-440F32	TCB43CA-40-59	40	32	18	55	59	80	150	1	-	-	SP*M432...
TCB400-440F32	TCB43CA-40-59	41	32	19	55	59	80	150	1	AP21050	0.5	SP*M432...
TCB400-440F32	TCB43CA-40-59	42	32	20	55	59	80	150	1	AP21100	1	SP*M432...
TCB400-440F32	TCB43CA-40-59	43	32	21	55	59	80	150	1	AP21150	1.5	SP*M432...
TCB400-440F32	TCB43CA-40-59	44	32	22	55	59	80	150	1	AP21200	2	SP*M432...
TCB450-490F32	TCB43CA-40-59	45	32	23	65	59	90	160	1.2	-	-	SP*M432...
TCB450-490F32	TCB43CA-40-59	46	32	24	65	59	90	160	1.2	AP21050	0.5	SP*M432...
TCB450-490F32	TCB43CA-40-59	47	32	25	65	59	90	160	1.2	AP21100	1	SP*M432...
TCB450-490F32	TCB43CA-40-59	48	32	26	65	59	90	160	1.2	AP21150	1.5	SP*M432...
TCB450-490F32	TCB43CA-40-59	49	32	27	65	59	90	160	1.2	AP21200	2	SP*M432...
TCB500-540F32	TCB43CA-40-59	50	32	28	70	59	97	165	1.5	-	-	SP*M432...
TCB500-540F32	TCB43CA-40-59	51	32	29	70	59	97	165	1.5	AP21050	0.5	SP*M432...
TCB500-540F32	TCB43CA-40-59	52	32	30	70	59	97	165	1.5	AP21100	1	SP*M432...
TCB500-540F32	TCB43CA-40-59	53	32	31	70	59	97	165	1.5	AP21150	1.5	SP*M432...
TCB500-540F32	TCB43CA-40-59	54	32	32	70	59	97	165	1.5	AP21200	2	SP*M432...
TCB550-590F32	TCB43CA-40-59	55	32	33	75	59	105	175	1.9	-	-	SP*M432...
TCB550-590F32	TCB43CA-40-59	56	32	34	75	59	105	175	1.9	AP21050	0.5	SP*M432...
TCB550-590F32	TCB43CA-40-59	57	32	35	75	59	105	175	1.9	AP21100	1	SP*M432...
TCB550-590F32	TCB43CA-40-59	58	32	36	75	59	105	175	1.9	AP21150	1.5	SP*M432...
TCB550-590F32	TCB43CA-40-59	59	32	37	75	59	105	175	1.9	AP21200	2	SP*M432...

The cartridge sets and shim plates are included.

Tool diameter tolerance	Applicable tolerance range of hole diameter
+0.2 / 0	+0.3 / 0

Counter boring dimensions of bolt hole



Thread size	M16	M18	M20	M22	M24	M27	M30	M33	M36
øD (mm)	26	29	32	35	39	43	48	54	58
H (mm)	17.5	19.5	21.5	23.5	25.5	29	32	35	38
ød (mm)	18	20	22	24	26	30	33	36	39
Applicable tool	TCB260	TCB290	TCB320	TCB350	TCB390	TCB430	TCB480	TCB540	TCB580

Body SPARE PARTS




Designation	Cartridge screw	Shim plate	Shim plate	Shim plate	Shim plate	Wrench for cartridge	Washer
TCB260-290F32	CM3×0.5×6	AP16050	AP16100	AP16150		P-2.5	3.2X6X0.5
TCB300-340F32	CM3×0.5×6	AP16050	AP16100	AP16150	AP16200	P-2.5	3.2X6X0.5
TCB350-390F32	CM3×0.5×6	AP16050	AP16100	AP16150	AP16200	P-2.5	3.2X6X0.5
TCB400-440F32	CM4×0.7×10	AP21050	AP21100	AP21150	AP21200	P-3	4.3X8X0.5
TCB450-490F32	CM4×0.7×10	AP21050	AP21100	AP21150	AP21200	P-3	4.3X8X0.5
TCB500-540F32	CM4×0.7×10	AP21050	AP21100	AP21150	AP21200	P-3	4.3X8X0.5
TCB550-590F32	CM4×0.7×10	AP21050	AP21100	AP21150	AP21200	P-3	4.3X8X0.5

Cartridge set SPARE PARTS



Designation	Insert screw	Wrench
TCB04CA-26-29	CSTA-NO3	T-9D
TCB32CA-30-39	CSTA-NO5	T-9D
TCB32CA-30-39	CSTA-NO5	T-9D
TCB43CA-40-59	CSTA-4	T-15D
TCB43CA-40-59	CSTA-4	T-15D
TCB43CA-40-59	CSTA-4	T-15D
TCB43CA-40-59	CSTA-4	T-15D

Recommended clamping torque: CSTA-NO3 / CSTA-NO5 = 2.3 N·m, CSTA-4 = 3.5 N·m



Fine adjustment shim plates (sold separately)

SPARE PARTS

Designation	Thickness
AP16005	0.05
AP16020	0.2
AP21005	0.05
AP21020	0.2

Cautions in preparing the cartridge type cutter

- Firmly press the cartridge in the arrowed direction while tightening the screw to install the cartridge on the cutter body. (Fig.1)
- Ensure that the shim plates thickness are always the same on both sides to equalize the tool diameter.
- Ensure to locate the shim plate fit within the cartridge pocket. (Fig.2)
- Use thin shim plates (not included) for fine diameter adjustments in $\phi 0.1$ mm increments.
- When using multiple shim plates in one pocket for a diameter adjustment, always use the thinnest shim plates at the bottom to prevent them from dislocating during machining. (Fig.3)
- Ensure that the top shim is always in contact with the rim of the cartridge pocket to prevent it from dislocation during machining. (Fig.4)



Fig.1



Fig.2





Fig.3




Fig.4

CUSTOM-BUILT TOOL SERVICE

Tungaloy also designs and fabricates semi-standard or tailor-made tools with the **TCB** inserts according to the desired tool specifications. Contact your Tungaloy representative for further details.

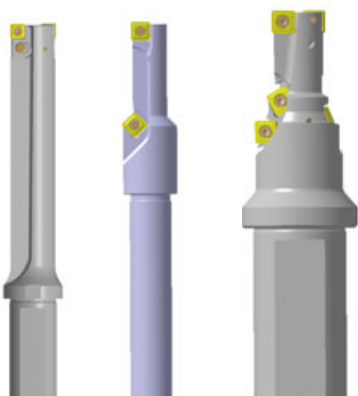


Drilling + Boring




■ INSERT


SPMP/SPMM



SPMP/SPMM-CG



SPXP/SPXM-CG

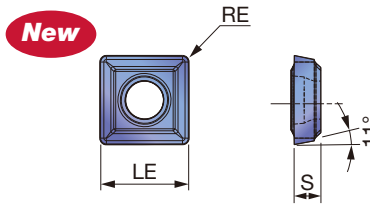

P	Steel	☆	★	
M	Stainless	☆	★	
K	Cast iron	☆	★	
N	Non-ferrous	☆	☆	
S	Superalloys	☆	☆	
H	Hard materials	☆	☆	

★ : First choice
☆ : Second choice

[illegible]

● : New product
● : Line up

STANDARD CUTTING CONDITIONS

Counter boring

ISO	Workpiece material	Hardness	Cutting speed Vc (m/min)	Feed : f (mm/rev)	
				ø10 - 12 (z = 1)	ø13 - 59 (z = 2)
P	Carbon steel	- 300 HB	80 - 200	0.03 - 0.08	0.1 - 0.3
M	Stainless steel	- 200 HB	80 - 150	0.03 - 0.05	0.06 - 0.15
K	Grey cast iron	150 - 250 HB	80 - 200	0.05 - 0.1	0.1 - 0.4
N	Non-ferrous	-	100 - 300	0.05 - 0.2	0.1 - 0.4
S	Superalloys	- 40 HRC	50 - 80	0.03 - 0.05	0.06 - 0.15
H	Hard materials	- 50 HRC	50 - 80	0.03 - 0.05	0.06 - 0.15

Milling


ISO	Workpiece material	Hardness	Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)
P	Carbon steel	- 300 HB	80 - 200	0.05 - 0.15
M	Stainless steel	- 200 HB	80 - 150	0.05 - 0.1
K	Grey cast iron	150 - 250 HB	80 - 200	0.05 - 0.2
N	Non-ferrous	-	100 - 300	0.1 - 0.2
S	Superalloys	- 40 HRC	50 - 80	0.05 - 0.08
H	Hard materials	- 50 HRC	50 - 80	0.05 - 0.08

Internal boring (With one cutting edge)

ISO	Workpiece material	Hardness	Cutting speed Vc (m/min)	Depth of cut ap (mm)	Feed : f (mm/rev)
P	Carbon steel	- 300 HB	80 - 200	0.5 -	0.05 - 0.15
M	Stainless steel	- 200 HB	80 - 150	0.5 -	0.05 - 0.1
K	Grey cast iron	150 - 250 HB	80 - 200	0.5 -	0.05 - 0.2
N	Non-ferrous	-	100 - 300	0.5 -	0.1 - 0.2
S	Superalloys	- 40 HRC	50 - 80	0.5 -	0.05 - 0.08
H	Hard materials	- 50 HRC	50 - 80	0.5 -	0.05 - 0.08


APPLICATION

Monoblock type

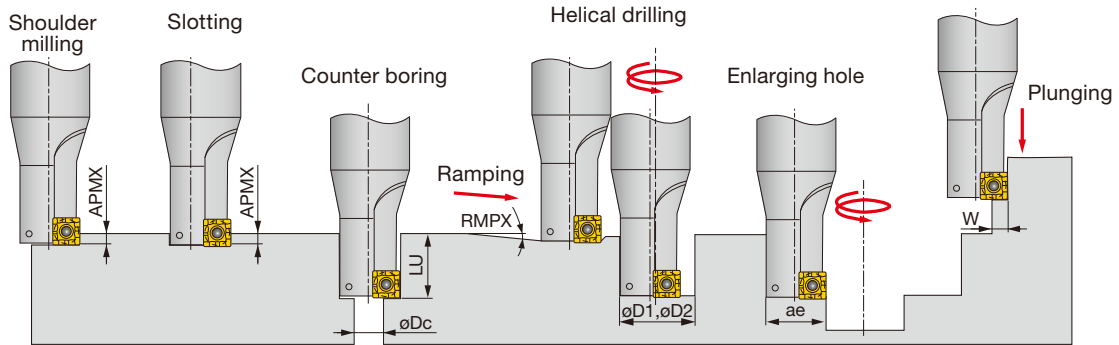


Designation	Tool dia. DCX	Max. depth of cut APMX	Max. counter boring depth LU	Min. pre-hole diameter øDc	Max. ramping angle RMPX	Max. cutting width in plunging W	Min. machinable hole dia. øD1	Max. machinable hole dia. øD2	Max. cutting width in enlarging hole ae
TCB100F16	10	4	13	2.8	-	4	-	-	-
TCB110F16	11	4	14	2.8	2.1°	4	12	20	10
TCB120F20	12	4	15	3.6	2.1°	4	14	22	11
TCB130F20	13	4	16	4.5	2.1°	4	17	24	12
TCB-140	14	5	11	4	3°	5	20	25	13
TCB140F25	14	4	18	5.5	1.9°	4	19	26	13
TCB150F25	15	4	19	6.5	1.6°	4	21	28	14
TCB160F25	16	4	20	7.5	1.3°	4	23	30	15
TCB170F25	17	5	13	6.6	2.5°	5	25	32	16
TCB175F25	17.5	5	14	7.1	2.2°	5	25.5	33	16.5
TCB180F25	18	5	15	7.5	2°	5	26	34	17
TCB190F25	19	5	15	8.5	1.5°	5	27	36	18
TCB-200	20	6	16	8.2	3°	6	29	38	19
TCB200F25	20	6	16	8.2	3°	6	29	38	19
TCB210F25	21	6	17	9	2.5°	6	30	40	20
TCB220F25	22	6	18	10	2°	6	31	42	21
TCB-230	23	6	19	11	3°	6	32	44	22
TCB230F25	23	6	19	11	3°	6	32	44	22
TCB240F25	24	6	20	12	1.3°	6	33	46	23
TCB250F25	25	6	25	13	1.1°	6	34	48	24
TCB-260	26	6	21	14	1°	6	35	50	25
TCB-290	29	8	23	14	3°	8	37	56	28
TCB-320	32	8	40	16.9	2.5°	8	40	62	31
TCB-350	35	10	43	14	2.5°	10	45	68	34
TCB-390	39	10	48	17.9	2°	10	49	76	38
TCB-430	43	10	53	21.7	1.5°	10	53	84	42

The insert can be used for a maximum 2 indexings.
(full 4 indexing for a plunging application.)




Cautions in shouldering operation

The cutter is design so that the insert provides 1° taper relief on the periphery. The wall, therefore, will be 89° when milled.







APPLICATION

Cartridge type

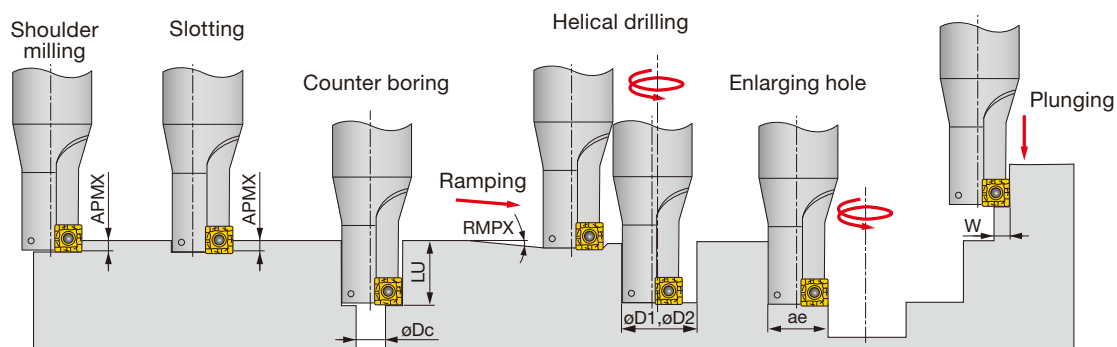

Designation	Tool dia. DCX	Max. depth of cut APMX	Max. counter boring depth LU	Min. pre-hole diameter ϕDc	Max. ramping angle RMPX	Max. cutting width in plunging W	Min. machinable hole dia. $\phi D1$	Max. machinable hole dia. $\phi D2$	Max. cutting width in enlarging hole ae
TCB260-290F32	26	6	40	13.2	-	6	-	-	25
TCB260-290F32	27	6	40	14.2	-	6	-	-	26
TCB260-290F32	28	6	40	15.2	-	6	-	-	27
TCB260-290F32	29	6	40	16.2	-	6	-	-	28
TCB300-340F32	30	8	45	14.2	-	8	-	-	29
TCB300-340F32	31	8	45	15.2	-	8	-	-	30
TCB300-340F32	32	8	45	16.2	-	8	-	-	31
TCB300-340F32	33	8	45	17.2	-	8	-	-	32
TCB300-340F32	34	8	45	18.2	-	8	-	-	33
TCB350-390F32	35	8	50	19	-	8	-	-	34
TCB350-390F32	36	8	50	20	-	8	-	-	35
TCB350-390F32	37	8	50	21	-	8	-	-	36
TCB350-390F32	38	8	50	22	-	8	-	-	37
TCB350-390F32	39	8	50	23	-	8	-	-	38
TCB400-440F32	40	10	55	18	-	10	-	-	39
TCB400-440F32	41	10	55	19	-	10	-	-	40
TCB400-440F32	42	10	55	20	-	10	-	-	41
TCB400-440F32	43	10	55	21	-	10	-	-	42
TCB400-440F32	44	10	55	22	-	10	-	-	43
TCB450-490F32	45	10	65	23	-	10	-	-	44
TCB450-490F32	46	10	65	24	-	10	-	-	45
TCB450-490F32	47	10	65	25	-	10	-	-	46
TCB450-490F32	48	10	65	26	-	10	-	-	47
TCB450-490F32	49	10	65	27	-	10	-	-	48
TCB500-540F32	50	10	70	28	-	10	-	-	49
TCB500-540F32	51	10	70	29	-	10	-	-	50
TCB500-540F32	52	10	70	30	-	10	-	-	51
TCB500-540F32	53	10	70	31	-	10	-	-	52
TCB500-540F32	54	10	70	32	-	10	-	-	53
TCB550-590F32	55	10	75	33	-	10	-	-	54
TCB550-590F32	56	10	75	34	-	10	-	-	55
TCB550-590F32	57	10	75	35	-	10	-	-	56
TCB550-590F32	58	10	75	36	-	10	-	-	57
TCB550-590F32	59	10	75	37	-	10	-	-	58

PRACTICAL EXAMPLES

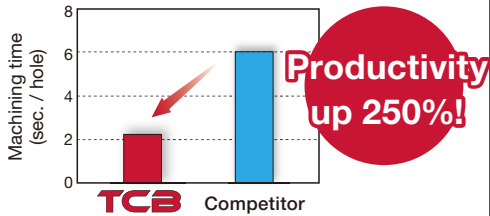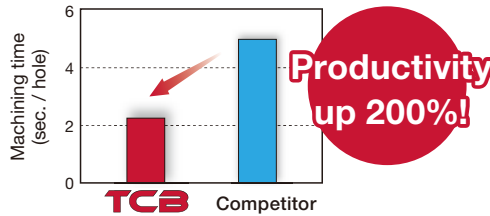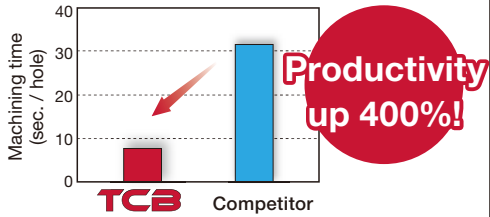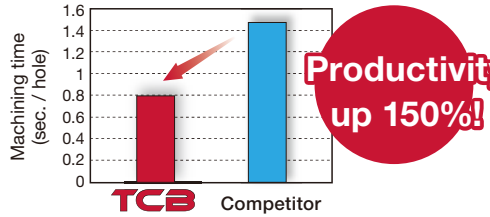Workpiece type		Con-rods	Valve
Drill		TCB170F25	TCB240F25
Insert		SPMP831-CG	SPXP042ER-CG
Grade		AH6225	AH6225
Workpiece material		S55C / C55	FC250 / 250
		 P	 K
Cutting conditions	Cutting speed : V_c (m/min)	160	180
	Feed : f (mm/rev)	0.2	0.3
	Feed speed : V_f (mm/min)	600	720
	Drilling depth : H (mm)	24	30
	Machining application	Boring	Boring
	Machine	Dedicated machine	Horizontal M/C, BT50
	Coolant	Wet	Wet
Results		 The customer was using an indexable drill to bore a cast hole. Counter boring with a TCB cutter significantly decreased machining time.	 The customer was using a cutter with one effective cutting edge to make counter bore holes. Counter boring with a TCB cutter significantly shorten the machining time.
Workpiece type		Bearing	Machining parts
Drill		TCB-320	TCB140F20
Insert		SPMM322ER-CG	SPXP771-CG
Grade		AH6225	AH6225
Workpiece material		S45C / C45	S50C / C50
		 P	 P
Cutting conditions	Cutting speed : V_c (m/min)	150	150
	Feed : f (mm/rev)	0.25	0.13
	Feed speed : V_f (mm/min)	375	444
	Drilling depth : H (mm)	40	6
	Machining application	Boring	Boring
	Machine	NC lathe	Vertical M/C
	Coolant	Wet	Wet
Results		 Competitor's turning tool required five passes to expand the hole. TCB finished the same operation in just one pass.	 The customer was peck milling with a solid carbide tool to facilitate smooth chip removal. Thanks to the new CG style chipbreaker's excellent chip guidance, peck milling was no longer needed, thus significantly reduced the machining time.

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy-NTK America Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloy.com/us

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5799
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy-NTK De Mexico S.A.

C. Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx

Tungaloy-NTK do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy-NTK Germany GmbH.

Katzbergstr. 3a
D-40764 Langenfeld, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.com/de

Tungaloy France s.a.s

Les Fjords
19 avenue de Norvège
91140 Villebon Sur Yvette, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.com/fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.com/it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.com/cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
www.tungaloy.com/es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
Fax: +46-462119207
www.tungaloy.com/se

Tungaloy Rus, LLC

Andropova avenue, h.18/7,
11 floor, office 3, 115432,
Moscow, Russia
Phone: +7-499-683-01-80
Fax: +7-499-683-01-81
www.tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

Ul. Irysowa 1, 55-040 Bielany
Wroclawskie, Poland
Phone: +48 607 907 237
www.tungaloy.com/pl

Tungaloy-NTK UK Ltd.

Suite 3, Pioneer House, Mill Street,
Cannock, WS11 0EF, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu

Tungaloy Turkey

Serifali Mah.bayraktar Bulvari Kule Sk. No:26
34775 Umraniye / Istanbul / Turkey
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com/tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy.com/nl

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430, Samobor, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.com/hr

Tungaloy Cutting Tool (Shanghai) Co. Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.com/cn

Tungaloy Cutting Tools Taiwan Co. Ltd.

9F, No.293, Zhongyang Rd,
Xinzhuan Dist, New Taipei City,
24251 Taiwan
Phone: +886-2-8521-9986
Fax: +886-2-8521-8935
www.tungaloy.com/tw

Tungaloy-NTK Cutting Tool (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.com/th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/singapore

Tungaloy-NTK Vietnam LLC

3rd Floor, Licogi 13 Tower, 164 Khuat Duy
Tien, Nhan Chinh, Thanh Xuan District,
Hanoi, Vietnam
Phone: +84 24 63282086
www.tungaloy.com/vn

Tungaloy India Pvt. Ltd.

One International Center,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai 400013, India
Phone: +91-22-6124-8803
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

Unit 68 1470 Ferntree Gully Road
Knoxfield 3180 Victoria, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com/au

PT. Tungaloy Indonesia

Ruko Blok AA.10 No3&5, Grand Wisata,
Lembangjaya, Tambun Selatan, Bekasi,
17510 Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id



tungaloy.com

follow us at:

facebook.com/tungaloyjapan

twitter.com/tungaloyjapan

www.youtube.com/tungaloycorporation

Distributed by:



Tungaloy APP & SNS

FIND US ON THE CLOUD!
machiningcloud.com



AS9100 Certified
78006
2015.11.04
ISO 14001 Certified
EC97J1123
1997.11.26