

High feed milling cutter

ADD^DFEED / DOFEED




For more information

Tungaloy Report No. 545-G

Ultimate high feed milling cutter series for maximum productivity





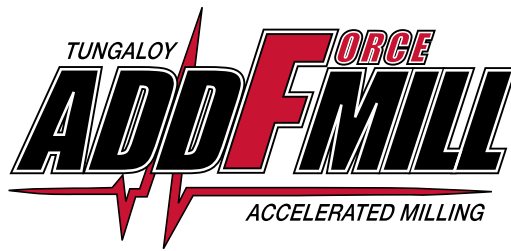

ADD^oD FEED / DO FEED



High-feed cutters reduce machining time in
a wide range of applications

Complete high feed milling solutions

New ADD^oFEED Insert size 02



Max. depth of cut: 0.5 mm
Tool diameter: ø8 - ø25 mm

- ✓ Tool diameters as small as **8 mm**
- ✓ **Highly reliable design**
- ✓ Perfect option for **replacing solid end mills**

P.8 - 13

DOFEED Insert size 03



Max. depth of cut: 0.9 mm (UER), 1 mm (ZER)
Tool diameter: ø16 - ø50 mm

- ✓ **Close pitch cutter design** for high productivity
- ✓ **Extensive lineup** for various applications
- ✓ **New UER inserts with small approach angle** for long tool life

P.14 - 25

DOFEED Insert size 06



Max. depth of cut: 1.5 mm
Tool diameter: ø32 - ø200 mm

- ✓ **Close pitch cutter design** for high productivity
- ✓ Tool diameters available for up to 200 mm, ideal for **rough milling of medium- and large-sized components**
- ✓ **Wiper inserts** for improved surface roughness

P.26 - 31

Tool diameters and number of teeth for each insert size

Insert size	Max. depth of cut (mm)	Workpiece material	Tool diameter (mm), Number of teeth																							
			ø8	ø10	ø12	ø16	ø18	ø20	ø22	ø25	ø28	ø30	ø32	ø35	ø40	ø50	ø52	ø63	ø66	ø80	ø100	ø125	ø160	ø200		
02	0.5	P M K S H	1	2	2	4 3		5 4		7 6																
03	0.9 (UER) 1 (ZER)	P M K S H				2	2	4 3	4 3	5 4	5 4	5 4	5 6	5 6	5 6	5 8										
06	1.5	P M K S H											2	2	3	4 5	4 5	4 6	4 6	5 8	6	8	10	12		

Features for DoFeed series

■ Cutter body design for maximum productivity

Extremely stiff body design with a large core




Close pitch cutter design for increased productivity

■ Inserts per diameter density comparisons:
DoFeed series vs competitor's high feed cutter


Tool diameter (mm)	ADDFEED	DOFEED 03	DOFEED 06	Competitor
ø16	4	2	-	2
ø25	7	5	-	4
ø50	-	8	5	4

■ Reliable and economical inserts

Economical double-sided inserts with four cutting edges

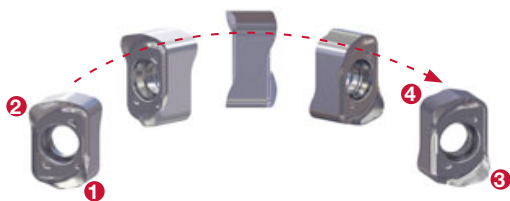


Thick insert design for increased reliability

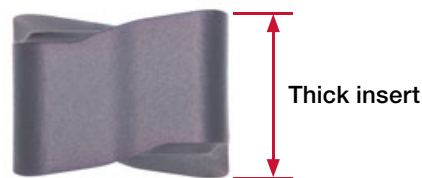

■ Soft cutting geometry with superior chip control

■ Comparison of spindle load

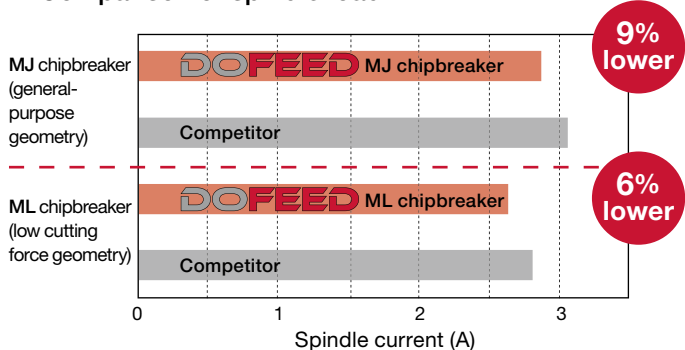

Provides stable, high productivity due to the excellent chip evacuation

Forms compact chips



P Cutter : EXN03R025M25.0-05 (ø25 mm, CICT = 5)
 Insert : LNMU0303ZER-MJ / ML AH725
 Workpiece material : S55C / C55
 Cutting speed : $V_c = 250$ m/min
 Feed per tooth : $f_z = 0.5$ mm/t
 Depth of cut : $a_p = 0.5$ mm
 Width of cut : $a_e = 25$ mm (Slot milling)
 Coolant : Dry
 Machine : Vertical M/C, BT40

Note: Test cut using a single insert

	DOFEED	Competitor
Chip shapes		
Shoulder surfaces after grooving operations		

GRADES

Addition of AH3225 grade for enhanced insert grade lineup


Grades with long tool life for a wide range of materials

New

AH3225

P M

- Nano multi-layer coating technology with three major properties for optimal cutting edge integrity
- Increased resistance to wear, fracture, oxidation, built-up edge, and delamination

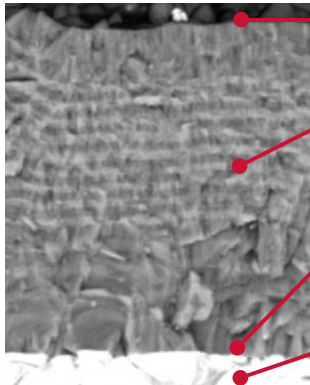

Resistance to built-up edge

The coating surface prevents built-up edge

Resistance to wear, oxidation, and fracture

Multi-layered coating is designed to resist wear and oxidation, while preventing micro-cracks from propagating in the coating layer for improved resistance to edge chipping

Strong coating / substrate adhesion

Coating is optimized for strong adhesion property with substrate to maintain strong cutting edge integrity

Carbide substrate

High resistance to fracture

PREMIUMTEC

AH120 **K**

- Exceptionally wear resistant in cast iron machining

AH8015 **P K H**

- High wear and chipping resistance and minimized built up edge due to nano multi-layered AlTiN coating with high Al content
- Well-suited for difficult materials of 45 - 55 HRc




AH8005 **H**

- High wear and chipping resistance and minimized built-up edge due to nano multi-layered AlTiN coating with high Al content
- Ideal for hardened steel of 55HRc and above

AH130 **M S**

- High chipping resistance
- Ideal for titanium alloy machining

APPLICATION AREAS

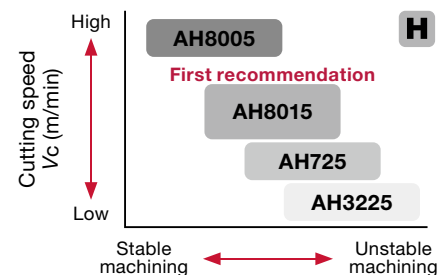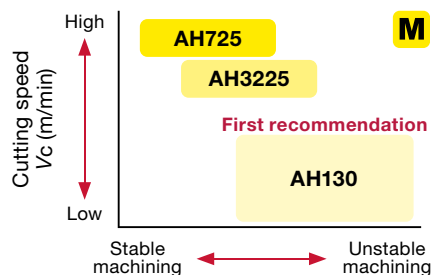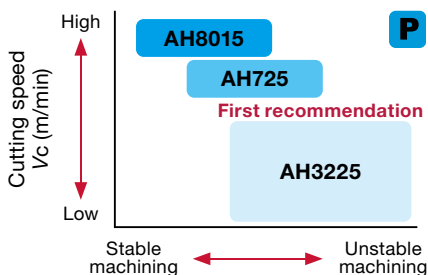


CUTTING PERFORMANCE

Grade: AH3225


P S55C / C55 (190HB)

Insert size 02

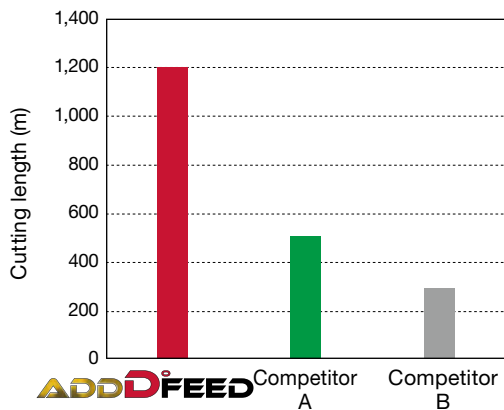


Cutter : EXN02R012M12.0-02 (ø12 mm, CICT = 2)
 Insert : LNMU0202ZER-MM
 Overhang length : 30 mm
 Cutting speed : $V_c = 250$ m/min
 Feed per tooth : $f_z = 0.6$ mm/t
 Depth of cut : $a_p = 0.4$ mm
 Width of cut : $a_e = 9.8$ mm
 Coolant : Dry
 Machine : Vertical M/C, BT40

Insert size 03

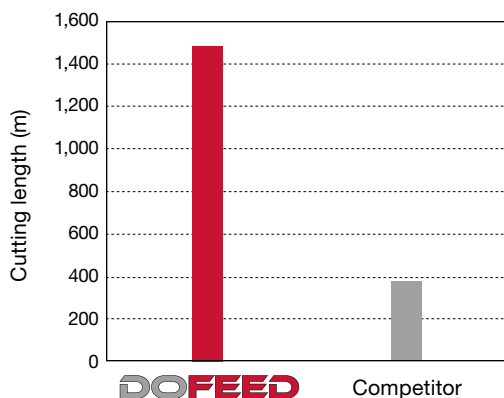


Cutter : EXN03R025M25.0-05-C (ø25 mm, CICT = 5)
 Insert : LNMU0303ZER-MJ
 Cutting speed : $V_c = 200$ m/min
 Feed per tooth : $f_z = 1$ mm/t
 Depth of cut : $a_p = 0.6$ mm
 Width of cut : $a_e = 15$ mm
 Coolant : Dry
 Machine : Vertical M/C, BT50

Insert size 06

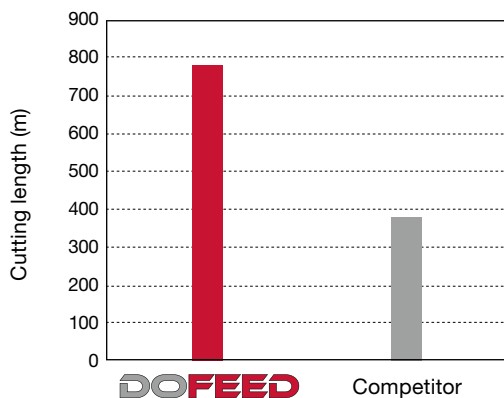

Cutter : TXN06R050M22.0E05 (ø50 mm, CICT = 5)
 Insert : LNMU06X5ZER-MJ
 Cutting speed : $V_c = 150$ m/min
 Feed per tooth : $f_z = 1$ mm/t
 Depth of cut : $a_p = 1$ mm
 Width of cut : $a_e = 35$ mm
 Coolant : Dry
 Machine : Vertical M/C, BT50

First choice for cutter diameters $\varnothing 8$ - $\varnothing 16$ mm

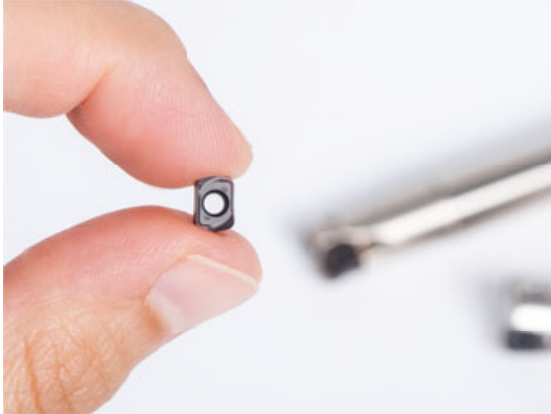


High reliability

Three features of the insert design increase reliability of the small inserts, providing process security


1. Thick insert

Insert with thickest possible design to prevent insert fracture.




2. Thick insert support

Sustains massive cutting loads generated during high feed machining.



3. Fine screw threads

Shallow-pitched fine threads prevent screw from self-loosening due to higher number of threads in contact.

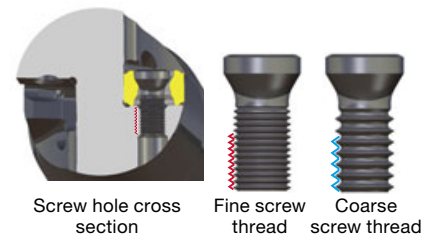

Use AddDoFeed for solid end mill to control chatter

Endmilling applications prone to chatter	ADD ^o FEED will...
Long overhang ($\geq 4 \times D$), Grooving	✓ Control chatter thanks to high feed insert geometry ✓ Increase productivity thanks to controlled chatter ✓ Stabilize machining and increase tool life ✓ Reduced tool costs and streamlined tool management thanks to indexable tooling
Corner radius with multiple edge contacts	



Chatter comparison: AddDoFeed vs. solid endmill



ADD^oFEED




Competitor Solid endmill

Cutter	: $\varnothing 12$ mm long type, CICT = 2 (Competitor: $\varnothing 12$ mm, CICT = 4)
Overhang length	: 50 mm
Cutting speed	: $V_c = 200$ m/min (Competitor: 120 m/min)
Feed per tooth	: $f_z = 1.2$ mm/t (Competitor: 0.05 mm/t)
Feed speed	: $V_f = 12,740$ mm/min (Competitor: 640 mm/min)
Depth of cut	: $a_p = 0.25$ mm (Competitor: 5 mm)
Width of cut	: $a_e = 12$ mm
Metal removal rate	: $Q = 38$ cm ³ /min


CUTTING PERFORMANCE

M SUS304 / X5CrNi18-9 (190HB)

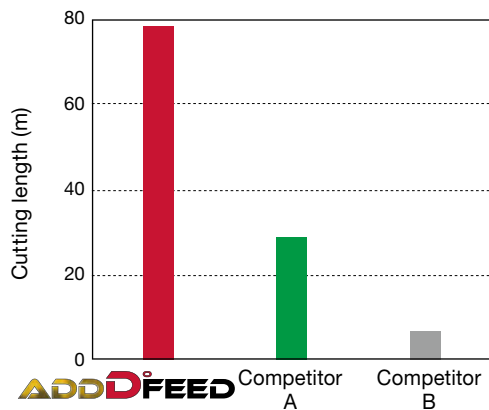

Cutter : EXN02R012M12.0-02 (ø12 mm, CICT = 2)
 Insert : LNMU0202ZER-MM AH130
 Tool overhang : 30 mm
 Cutting speed : $V_c = 180$ m/min
 Feed per tooth : $f_z = 0.3$ mm/t
 Depth of cut : $a_p = 0.3$ mm
 Width of cut : $a_e = 9.8$ mm
 Coolant : Wet
 Machine : Vertical M/C, BT40


H SKD61 / X40CrMoV5-1 (52HRC)

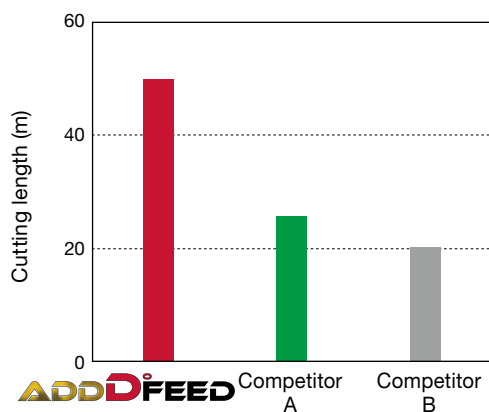

Cutter : EXN02R012M12.0-02 (ø12 mm, CICT = 2)
 Insert : LNMU0202ZER-MM AH8015
 Tool overhang : 30 mm
 Cutting speed : $V_c = 120$ m/min
 Feed per tooth : $f_z = 0.5$ mm/t
 Depth of cut : $a_p = 0.3$ mm
 Width of cut : $a_e = 9.8$ mm
 Coolant : Dry
 Machine : Vertical M/C, BT40

APPLICATION


P

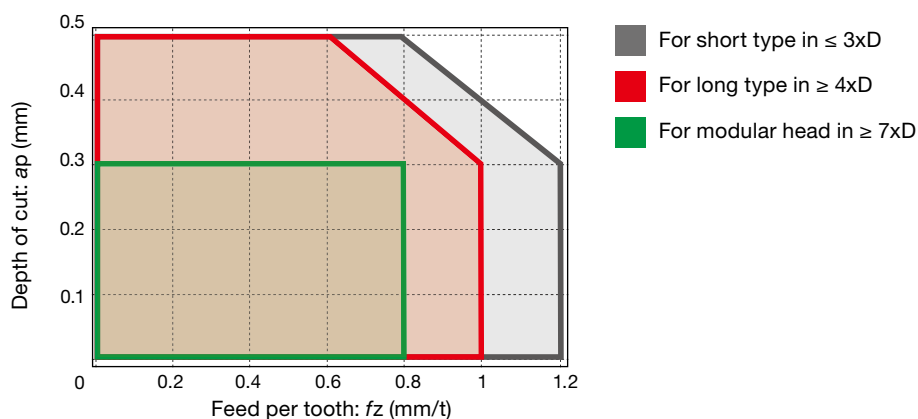

EXN02

High feed endmill, shank type, for 4-corner double sided inserts

GAMP = +6°, GAMF = +5° ~ +11°

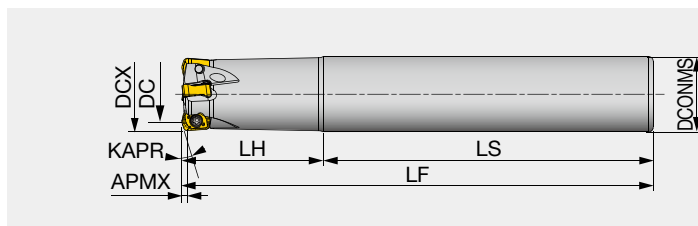

Designation	APMX	DCX	CICT	DC	DCONMS	LF	LH	LS	KAPR	WT(kg)	Air hole	Insert
EXN02R008M08.0-01	0.5	8	1	3.95	8	75	16	59	17°	0.02	With	LNMU02...
EXN02R008M08.0-01L	0.5	8	1	3.95	8	90	31	59	17°	0.03	With	LNMU02...
EXN02R010M10.0-02	0.5	10	2	5.85	10	80	20	60	17°	0.04	With	LNMU02...
EXN02R010M10.0-02L	0.5	10	2	5.85	10	100	40	60	17°	0.05	With	LNMU02...
EXN02R012M12.0-02	0.5	12	2	7.8	12	80	20	60	17°	0.06	With	LNMU02...
EXN02R012M12.0-02L	0.5	12	2	7.8	12	110	50	60	17°	0.08	With	LNMU02...
EXN02R016M16.0-04	0.5	16	4	11.8	16	100	30	70	17°	0.14	With	LNMU02...
EXN02R016M16.0-03L	0.5	16	3	11.8	16	120	50	70	17°	0.17	With	LNMU02...
EXN02R020M20.0-04L	0.5	20	4	15.8	20	160	80	80	17°	0.32	With	LNMU02...
EXN02R020M20.0-05	0.5	20	5	15.8	20	130	50	80	17°	0.27	With	LNMU02...
EXN02R025M25.0-07	0.5	25	7	20.8	25	140	60	80	17°	0.46	With	LNMU02...
EXN02R025M25.0-06L	0.5	25	6	20.8	25	180	100	80	17°	0.57	With	LNMU02...

SPARE PARTS




Designation	Clamping screw	Wrench
EXN02R008...	CSPB-1.8FL3.6	IP-6DB
EXN02R010...	CSPB-1.8FL4.3	IP-6DB
EXN02R012...	CSPB-1.8FL4.3	IP-6DB
EXN02R016...	CSPB-1.8FL4.3	IP-6DB
EXN02R020...	CSPB-1.8FL4.3	IP-6DB
EXN02R025...	CSPB-1.8FL4.3	IP-6DB

Tool diameter tolerance	
Tool diameter	0 / -0.4

*Recommended clamping torque (N·m): CSPB-1.8FL3.6, CSPB-1.8FL4.3 = 0.5

GAMP = +6°, GAMF = +5° ~ +11°

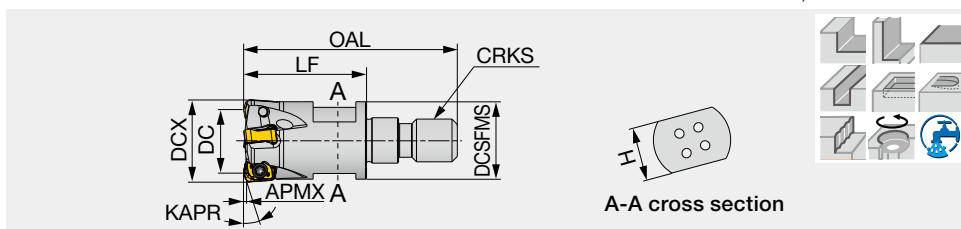

Designation	APMX	DCX	CICT	DC	DCSFMS	OAL	LF	H	KAPR	CRKS	WT(kg)	Air hole	Insert
HXN02R008MM06-01	0.5	8	1	3.95	9.5	33.5	19	7	17°	M6	0.01	With	LNMU02...
HXN02R010MM06-02	0.5	10	2	5.85	9.5	31.5	17	7	17°	M6	0.01	With	LNMU02...
HXN02R012MM06-02	0.5	12	2	7.8	10	31.5	17	7	17°	M6	0.01	With	LNMU02...
HXN02R016MM08-04	0.5	16	4	11.8	14.5	40	23	10	17°	M8	0.03	With	LNMU02...
HXN02R020MM10-05	0.5	20	5	15.8	17.8	49	30	15	17°	M10	0.06	With	LNMU02...
HXN02R025MM12-07	0.5	25	7	20.8	23	52	30	17	17°	M12	0.1	With	LNMU02...




Designation	Clamping screw	Wrench
HXN02R008...	CSPB-1.8FL3.6	IP-6DB
HXN02R010...	CSPB-1.8FL4.3	IP-6DB
HXN02R012...	CSPB-1.8FL4.3	IP-6DB
HXN02R016...	CSPB-1.8FL4.3	IP-6DB
HXN02R020...	CSPB-1.8FL4.3	IP-6DB
HXN02R025...	CSPB-1.8FL4.3	IP-6DB

Tool diameter tolerance	
Tool diameter	0 / -0.4

*Recommended clamping torque (N·m): CSPB-1.8FL3.6, CSPB-1.8FL4.3 = 0.5

INSERT

LNMU02-MM (for general purpose)



P	Steel		★	☆					
M	Stainless	★		☆					
K	Cast iron		☆	★					
N	Non-ferrous								
S	Superalloy	★		★					
H	Hard materials		☆	★					

★ : First choice
☆ : Second choice


Designation	RE	APMX	Coated										LE	IC	S
			AH130	AH3225	AH8015										
			LNMU0202ZER-MM	0.9	0.5	●	●	●							

● : Line up

STANDARD CUTTING CONDITIONS

ISO	Workpiece materials		Hardness	Priority	Grades	Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)
P	Carbon steels S45C, S55C, etc. C45, C55, etc.		- 300HB	First choice	AH3225	100 - 300	0.2 - 1.2
			- 300HB	For wear resistance	AH8015	100 - 300	0.2 - 1.2
	Alloy steels SCM440, SCr415, etc. 42CrMo4, etc.		- 300HB	First choice	AH3225	100 - 300	0.2 - 1.2
			- 300HB	For wear resistance	AH8015	100 - 300	0.2 - 1.2
	Prehardened steels NAK80, PX5, etc.		30 - 40HRC	First choice	AH8015	100 - 200	0.2 - 0.8
			30 - 40HRC	For impact resistance	AH3225	100 - 200	0.2 - 0.8
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.		- 200HB	First choice	AH130	100 - 150	0.2 - 0.8
K	Gray cast irons FC250, FC300, etc. 250, 300, etc.		150 - 250HB	First choice	AH8015	100 - 300	0.2 - 1.2
			150 - 250HB	For impact resistance	AH3225	100 - 300	0.2 - 1.2
	Ductile cast irons FCD400, etc. 400-15, 600-3, etc.		150 - 250HB	First choice	AH8015	80 - 200	0.2 - 1.2
			150 - 250HB	For impact resistance	AH3225	80 - 200	0.2 - 1.2
S	Titanium alloy Ti-6Al-4V, etc.		- 40HRC	First choice	AH130	30 - 60	0.2 - 0.7
			- 40HRC	For wear resistance	AH8015	30 - 60	0.2 - 0.7
	Heat-resistant alloy Inconel, Hastelloy, etc.		- 40HRC	First choice	AH8015	20 - 50	0.1 - 0.3
			- 40HRC	For impact resistance	AH3225	20 - 50	0.1 - 0.3
H	Hardened steel	SKD61, etc. X40CrMoV5-1, etc.	40 - 50HRC	First choice	AH8015	80 - 150	0.1 - 0.5
			40 - 50HRC	For impact resistance	AH3225	80 - 150	0.1 - 0.5
		SKD11, etc. X153CrMoV12, etc.	50~60HRC	First choice	AH8015	50 - 70	0.1 - 0.3

APPLICATION RANGE

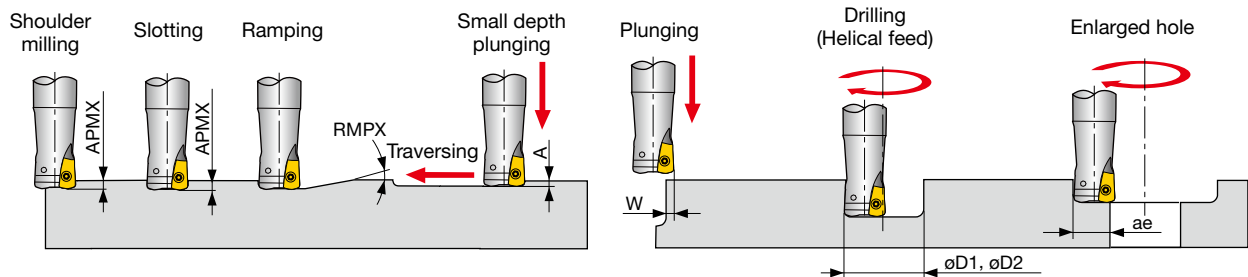


Designation	DCX	Max. depth of cut APMX	Max. ramping angle RMPX	Max. plunging depth A	Max. cutting width in plunging W	Min. machinable hole dia. øD1	Max. machinable hole dia. øD2	Max. cutting width in enlarged hole ae
E/HXN02R008...	8	0.5	0.5	0.03	2	11.5	13.2	5.87
E/HXN02R010...	10	0.5	2.8	0.15	2	13.8	17	7.82
E/HXN02R012...	12	0.5	1.9	0.15	2	17.8	21	9.81
E/HXN02R016...	16	0.5	1.2	0.15	2	25.8	29	13.8
E/HXN02R020...	20	0.5	0.88	0.15	2	33.8	37	17.8
E/HXN02M025...	25	0.5	0.66	0.15	2	43.8	47	22.8

Tool dia.: DCX (mm), Number of revolutions: n (min ⁻¹), Feed speed: V_f (mm/min), Max. depth of cut: a_p = 0.5 mm, Number of teeth: CICT															
$\varnothing 8$, CICT = 1		$\varnothing 10$, CICT = 2		$\varnothing 12$, CICT = 2		$\varnothing 16$			$\varnothing 20$			$\varnothing 25$			
n	V_f	n	V_f	n	V_f	n	V_f		n	V_f		n	V_f		
							CICT = 3	CICT = 4		CICT = 4	CICT = 5		CICT = 6	CICT = 7	
7,960	6,370	6,370	10,200	5,310	8,500	3,980	9,560	12,740	3,180	10,180	12,720	2,550	12,240	14,280	
Vc = 200 m/min, fz = 0.8 mm/t															
7,960	6,370	6,370	10,200	5,310	8,500	3,980	9,560	12,740	3,180	10,180	12,720	2,550	12,240	14,280	
Vc = 200 m/min, fz = 0.8 mm/t															
5,970	2,990	4,780	4,780	3,980	3,980	2,990	4,490	5,980	2,390	4,780	5,980	1,910	5,730	6,690	
Vc = 150 m/min, fz = 0.5 mm/t															
4,780	2,390	3,820	3,820	3,190	3,190	2,390	3,590	4,780	1,910	3,820	4,780	1,530	4,590	5,360	
Vc = 120 m/min, fz = 0.5 mm/t															
7,960	6,370	6,370	10,200	5,310	8,500	3,980	9,560	12,740	3,180	10,180	12,720	2,550	12,240	14,280	
Vc = 200 m/min, fz = 0.8 mm/t															
5,970	4,780	4,780	7,650	3,980	6,370	2,990	7,180	9,570	2,390	7,650	9,560	1,530	7,350	8,570	
Vc = 150 m/min, fz = 0.8 mm/t															
1,590	800	1,270	1,270	1,060	1,060	800	1,200	1,600	640	1,280	1,600	510	1,530	1,790	
Vc = 40 m/min, fz = 0.5 mm/t															
1,190	240	1,000	400	800	320	600	360	480	480	390	480	380	460	540	
Vc = 30 m/min, fz = 0.2 mm/t															
4,780	1,440	3,820	2,300	3,190	1,920	2,390	2,160	2,870	1,910	2,300	2,870	1,530	2,760	3,220	
Vc = 120 m/min, fz = 0.3 mm/t															
2,390	480	1,910	770	1,590	640	1,190	720	960	950	760	950	760	920	1,070	
Vc = 60 m/min, fz = 0.2 mm/t															

TOOL GEOMETRY ON PROGRAMMING

When programming for CAM, the tool should be considered as a radius cutter. Usually, the corner radius should be set as $R = 1$ mm. If a larger radius is used, overcutting will occur. The following table shows the amount left uncut (t_1) and overcut (t_2).

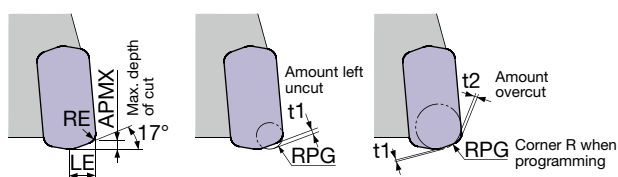

Max. depth of cut APMX (mm)	Corner radius RE (mm)	LE (mm)	Corner R when programming RPG	Amount left uncut t_1 (mm)	Amount overcut t_2 (mm)
0.5	0.9	2	0.5	0.38	0
0.5	0.9	2	0.8	0.31	0
0.5	0.9	2	1	0.26	0
0.5	0.9	2	1.5	0.14	0.08

*Recommended


Insert size 03

Popular DoFeed 03 series now offers UER inserts with small approach angle for higher performance

Two different types of inserts fit the same cutter body

New

LNMU0303UER insert
for long tool life and reduced vibration

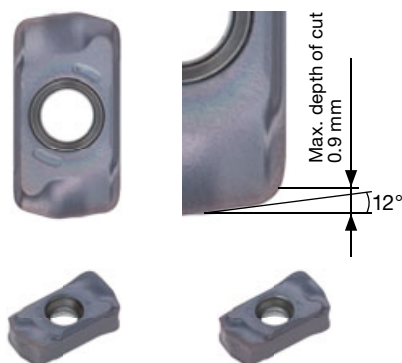

MJ Chipbreaker
- General machining
- Ideal for machining steel, cast iron, and hardened steel

ML Chipbreaker
- Low cutting force
- Suitable for machining steel, stainless steel, and difficult-to-cut materials

LNMGU0303ZER insert
for low cutting forces



MJ Chipbreaker
General machining

ML Chipbreaker
Low cutting force

MS Chipbreaker
For stainless steel

MH Chipbreaker
Robust cutting edges

UER insert


Approach angle	Benefits	Applications
12°	Extended tool life	Work materials; Hardened steel, stainless steel, and heat-resistant alloys
	Controlled chatter	Machining with long overhang

ZER insert

Approach angle	Benefits	Applications
17°	Low cutting forces	Low rigidity, machines and components
	No chip re-cutting	Pocketing or slotting

Tool life comparison in SUS630

M

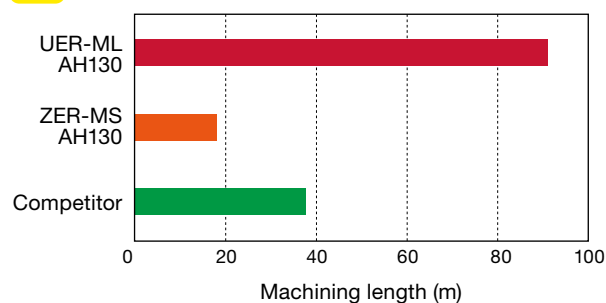


Tool dia. : $\phi 20$ mm, CICT = 1
Cutting speed : $V_c = 150$ m/min

UER inserts create thin chips and extend tool life especially during machining of difficult materials.

Cutting force comparison in S50C

P

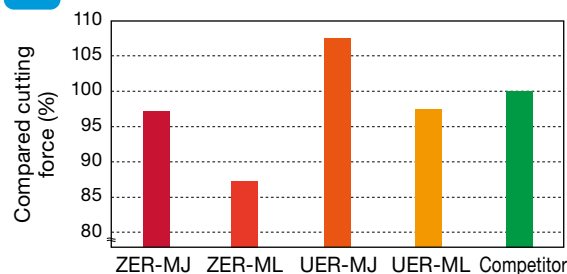


Feed per tooth : $f_z = 0.8$ mm/t
Depth of cut : $a_p = 0.5$ mm


ZER inserts reduce cutting forces by as much as 10% over the competitors.

CHIPBREAKERS


MJ General machining




ML Low cutting force




MS For stainless steel



MH Robust cutting edges




Chipbreaker characteristics

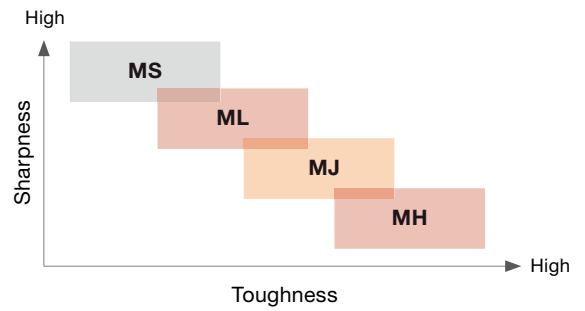


Available in 3 body types (E/HXN03)

Premium body / Center-through coolant

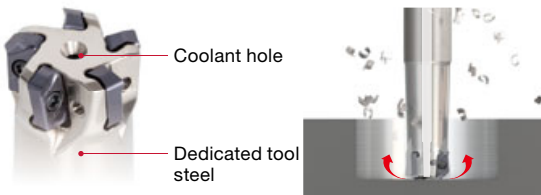


- Effectively evacuates chips
- Most suitable for pocket milling




Premium body / Optimal coolant supply




- Coolant goes to the edge directly for effective cooling
- Suitable for the machining of difficult-to-cut materials or small-width cutting



ECO body

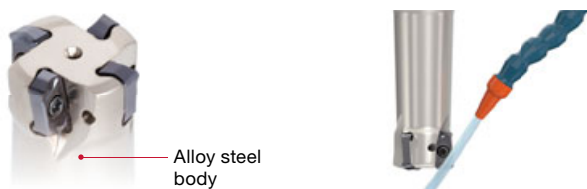

- High-economical bodies due to no coolant-hole




Insert size 03

TXN03

High feed mill, for 4-corner double sided inserts

GAMP = +6°, GAMF = +12° ~ 13°

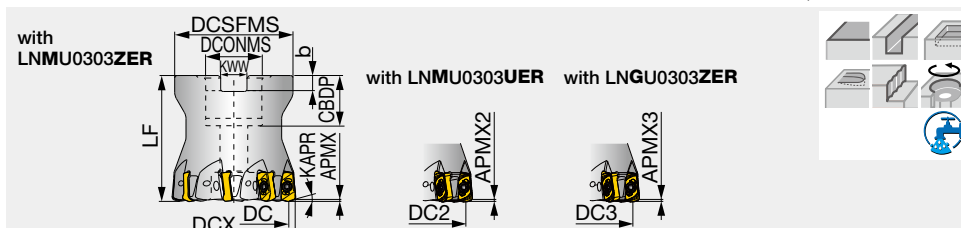

Designation	APMX	APMX2	APMX3	DCX	CICT	DC	DC2	DC3	DCSFMS	DCONMS	CDBP	LF	b	KWW	KAPR	KAPR2*	KAPR3*	WT(kg)	Air hole	Insert
TXN03R040M16.0E05	1	0.9	1	40	5	33.6	32.8	33.7	35	16	18	40	5.6	8.4	17°	12°	17°	0.2	With	LN*U03...
TXN03R040M16.0E06	1	0.9	1	40	6	33.6	32.8	33.7	35	16	18	40	5.6	8.4	17°	12°	17°	0.2	With	LN*U03...
TXN03R050M22.0E05	1	0.9	1	50	5	43.6	42.8	43.7	47	22	20	50	6.3	10.4	17°	12°	17°	0.5	With	LN*U03...
TXN03R050M22.0E08	1	0.9	1	50	8	43.6	42.8	43.7	47	22	20	50	6.3	10.4	17°	12°	17°	0.5	With	LN*U03...
TXN03R050M22.2-08	1	0.9	1	50	8	43.6	42.8	43.7	47	22.225	20	50	5	8	17°	12°	17°	0.5	With	LN*U03...

*KAPR2 : with LNMU0303UER

*KAPR3 : with LNGU0303ZER

SPARE PARTS

Designation	Clamping screw	Lubricant	Shell locking bolt	Wrench
TXN03R04...	CSPB-2.5L080	M-1000	CM8X30H	IP-8D
TXN03R05...	CSPB-2.5L080	M-1000	CM10X30H	IP-8D

Tool diameter tolerance


Tool diameter	0 / -0.45
---------------	-----------

*Recommended clamping torque (N·m): CSPB-2.5L080 = 1.3

EXN03

High feed endmill, shank type, with center through coolant hole, for 4-corner double sided inserts

GAMP = +6°, GAMF = +5° ~ +11°

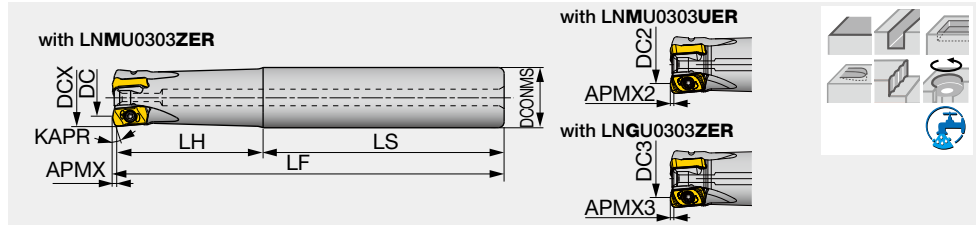

Designation	APMX	APMX2	APMX3	DCX	CICT	DC	DC2	DC3	DCONMS	LF	LH	LS	KAPR	KAPR2°	KAPR3°	WT(kg)	Air hole	Insert
EXN03R016M16.0-02 ⁽¹⁾	1	0.9	1	16	2	9.6	8.8	9.8	16	100	30	70	15°	10°	15°	0.2	With	LN*U03...
EXN03R016M16.0-02L ⁽¹⁾	1	0.9	1	16	2	9.6	8.8	9.8	16	150	50	100	15°	10°	15°	0.2	With	LN*U03...
EXN03R018M16.0-02 ⁽¹⁾	1	0.9	1	18	2	11.5	10.7	11.7	16	100	30	70	17°	12°	17°	0.2	With	LN*U03...
EXN03R018M16.0-02L ⁽¹⁾	1	0.9	1	18	2	11.5	10.7	11.7	16	150	25	125	17°	12°	17°	0.2	With	LN*U03...
EXN03R020M20.0-03 ⁽²⁾	1	0.9	1	20	3	13.5	12.7	13.6	20	130	50	80	17°	12°	17°	0.3	With	LN*U03...
EXN03R020M20.0-03L ⁽²⁾	1	0.9	1	20	3	13.5	12.7	13.6	20	160	80	80	17°	12°	17°	0.3	With	LN*U03...
EXN03R020M20.0-04 ⁽¹⁾	1	0.9	1	20	4	13.5	12.7	13.6	20	130	50	80	17°	12°	17°	0.3	With	LN*U03...
EXN03R022M20.0-03 ⁽²⁾	1	0.9	1	22	3	15.5	14.7	15.6	20	130	50	80	17°	12°	17°	0.3	With	LN*U03...
EXN03R022M20.0-03L ⁽²⁾	1	0.9	1	22	3	15.5	14.7	15.6	20	160	30	130	17°	12°	17°	0.4	With	LN*U03...
EXN03R022M20.0-04 ⁽¹⁾	1	0.9	1	22	4	15.5	14.7	15.6	20	130	50	80	17°	12°	17°	0.3	With	LN*U03...
EXN03R025M25.0-04 ⁽²⁾	1	0.9	1	25	4	18.5	17.7	18.6	25	140	60	80	17°	12°	17°	0.5	With	LN*U03...
EXN03R025M25.0-04L ⁽²⁾	1	0.9	1	25	4	18.5	17.7	18.6	25	180	100	80	17°	12°	17°	0.6	With	LN*U03...
EXN03R025M25.0-05 ⁽¹⁾	1	0.9	1	25	5	18.5	17.7	18.6	25	140	60	80	17°	12°	17°	0.5	With	LN*U03...
EXN03R028M25.0-04 ⁽²⁾	1	0.9	1	28	4	21.5	20.7	21.6	25	140	60	80	17°	12°	17°	0.5	With	LN*U03...
EXN03R028M25.0-04L ⁽²⁾	1	0.9	1	28	4	21.5	20.7	21.6	25	180	35	145	17°	12°	17°	0.7	With	LN*U03...
EXN03R028M25.0-05 ⁽²⁾	1	0.9	1	28	5	21.5	20.7	21.6	25	140	60	80	17°	12°	17°	0.5	With	LN*U03...
EXN03R030M32.0-04 ⁽²⁾	1	0.9	1	30	4	23.5	22.7	23.6	32	150	70	80	17°	12°	17°	0.8	With	LN*U03...
EXN03R030M32.0-04L ⁽²⁾	1	0.9	1	30	4	23.5	22.7	23.6	32	200	120	80	17°	12°	17°	0.9	With	LN*U03...
EXN03R030M32.0-05 ⁽²⁾	1	0.9	1	30	5	23.5	22.7	23.6	32	150	70	80	17°	12°	17°	0.8	With	LN*U03...
EXN03R032M32.0-05 ⁽²⁾	1	0.9	1	32	5	25.5	24.7	25.6	32	150	70	80	17°	12°	17°	0.8	With	LN*U03...
EXN03R032M32.0-05L ⁽²⁾	1	0.9	1	32	5	25.5	24.7	25.6	32	200	120	80	17°	12°	17°	1.1	With	LN*U03...
EXN03R032M32.0-06 ⁽¹⁾	1	0.9	1	32	6	25.5	24.7	25.6	32	150	70	80	17°	12°	17°	0.9	With	LN*U03...
EXN03R035M32.0-05 ⁽²⁾	1	0.9	1	35	5	28.5	27.7	28.6	32	150	35	115	17°	12°	17°	0.9	With	LN*U03...
EXN03R035M32.0-05L ⁽²⁾	1	0.9	1	35	5	28.5	27.7	28.6	32	200	35	165	17°	12°	17°	1.2	With	LN*U03...
EXN03R035M32.0-06 ⁽²⁾	1	0.9	1	35	6	28.5	27.7	28.6	32	150	35	115	17°	12°	17°	0.9	With	LN*U03...

*KAPR2 : with LNMU0303UER

*KAPR3 : with LNGU0303ZER

Clamping screws used for (1) and (2) above are different. See below for the part codes.

SPARE PARTS



Designation	Clamping screw	Lubricant	Wrench	Tool diameter tolerance	
EXN03...	(1) CSPB-2.5 (2) CSPB-2.5L080	M-1000	IP-8D	Tool diameter	0 / -0.45


*Recommended clamping torque (N·m): CSPB-2.5/CSPB-2.5L080 = 1.3

Insert size 03

EXN03-C

High feed endmill, shank type, with coolant directly to the tool tips, for 4-corner double sided inserts

GAMP = +6°, GAMF = +5° ~ +11°

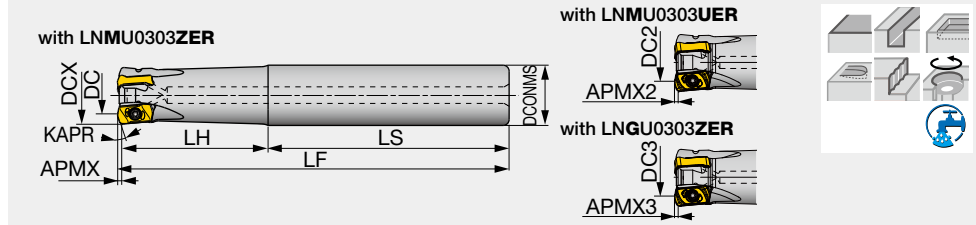

Designation	APMX	APMX2	APMX3	DCX	CICT	DC	DC2	DC3	DCONMS	LF	LH	LS	KAPR	KAPR2*	KAPR3*	WT(kg)	Air hole	Insert
EXN03R016M16.0-02-C ⁽¹⁾	1	0.9	1	16	2	9.6	8.8	9.8	16	100	30	70	15°	10°	15°	0.2	With LN*U03...	
EXN03R016M16.0-02L-C ⁽¹⁾	1	0.9	1	16	2	9.6	8.8	9.8	16	150	50	100	15°	10°	15°	0.2	With LN*U03...	
EXN03R020M20.0-03-C ⁽²⁾	1	0.9	1	20	3	13.5	12.7	13.6	20	130	50	80	17°	12°	17°	0.3	With LN*U03...	
EXN03R020M20.0-03L-C ⁽²⁾	1	0.9	1	20	3	13.5	12.7	13.6	20	160	80	80	17°	12°	17°	0.3	With LN*U03...	
EXN03R020M20.0-04-C ⁽¹⁾	1	0.9	1	20	4	13.5	12.7	13.6	20	130	50	80	17°	12°	17°	0.3	With LN*U03...	
EXN03R025M25.0-04-C ⁽²⁾	1	0.9	1	25	4	18.5	17.7	18.6	25	140	60	80	17°	12°	17°	0.5	With LN*U03...	
EXN03R025M25.0-04L-C ⁽²⁾	1	0.9	1	25	4	18.5	17.7	18.6	25	180	100	80	17°	12°	17°	0.6	With LN*U03...	
EXN03R025M25.0-05-C ⁽¹⁾	1	0.9	1	25	5	18.5	17.7	18.6	25	140	60	80	17°	12°	17°	0.5	With LN*U03...	
EXN03R032M32.0-05-C ⁽²⁾	1	0.9	1	32	5	25.5	24.7	25.6	32	150	70	80	17°	12°	17°	0.8	With LN*U03...	
EXN03R032M32.0-05L-C ⁽²⁾	1	0.9	1	32	5	25.5	24.7	25.6	32	200	120	80	17°	12°	17°	1.1	With LN*U03...	
EXN03R032M32.0-06-C ⁽¹⁾	1	0.9	1	32	6	25.5	24.7	25.6	32	150	70	80	17°	12°	17°	0.8	With LN*U03...	
EXN03R040M32.0-06-C ⁽²⁾	1	0.9	1	40	6	33.6	32.8	33.7	32	150	45	105	17°	12°	17°	1	With LN*U03...	
EXN03R040M32.0-06L-C ⁽²⁾	1	0.9	1	40	6	33.6	32.8	33.7	32	220	45	175	17°	12°	17°	1.4	With LN*U03...	

*KAPR2 : with LNMU0303UER

*KAPR3 : with LNGU0303ZER

Clamping screws used for (1) and (2) above are different. See below for the part codes.

SPARE PARTS


Designation	Clamping screw	Lubricant	Wrench	Tool diameter tolerance	
EXN03...	(1) CSPB-2.5 (2) CSPB-2.5L080	M-1000	IP-8D	Tool diameter	0 / -0.45

*Recommended clamping torque (N·m): CSPB-2.5/CSPB-2.5L080 = 1.3

EXN03-N

High feed endmill (Eco), shank type, for double sided inserts

GAMP = +6°, GAMF = +5° ~ +11°

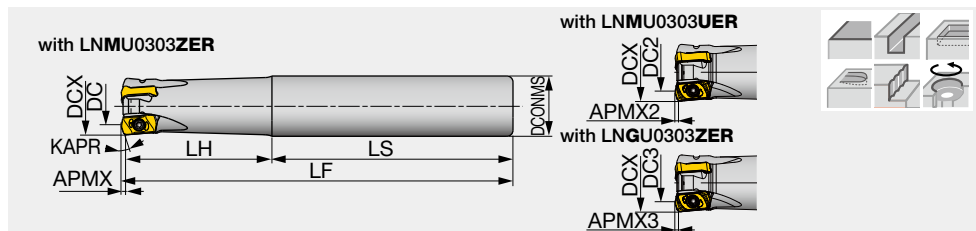

Designation	APMX	APMX2	APMX3	DCX	CICT	DC	DC2	DC3	DCONMS	LF	LH	LS	KAPR	KAPR2*	KAPR3*	WT(kg)	Air hole	Insert
EXN03R016M16.0-02N ⁽¹⁾	1	0.9	1	16	2	9.6	8.8	9.8	16	100	30	70	15°	10°	15°	0.2	Without LN*U03...	
EXN03R020M20.0-03N ⁽²⁾	1	0.9	1	20	3	13.5	12.7	13.6	20	130	50	80	17°	12°	17°	0.3	Without LN*U03...	
EXN03R025M25.0-04N ⁽²⁾	1	0.9	1	25	4	18.5	17.7	18.6	25	140	60	80	17°	12°	17°	0.5	Without LN*U03...	
EXN03R032M32.0-05N ⁽²⁾	1	0.9	1	32	5	25.5	24.7	25.6	32	150	70	80	17°	12°	17°	0.8	Without LN*U03...	

*KAPR2 : with LNMU0303UER

*KAPR3 : with LNGU0303ZER

Clamping screws used for (1) and (2) above are different. See below for the part codes.


SPARE PARTS

Designation	Clamping screw	Lubricant	Wrench	Tool diameter tolerance	
EXN03...	(1) CSPB-2.5 (2) CSPB-2.5L080	M-1000	IP-8D	Tool diameter	0 / -0.45

*Recommended clamping torque (N·m): CSPB-2.5/CSPB-2.5L080 = 1.3

HXN03

High feed endmill, modular type (TungFlex)

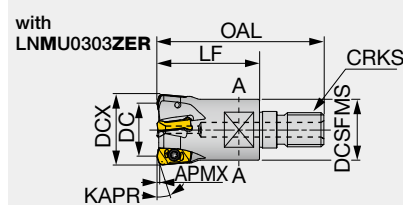

with LNMU0303ZER

with LNMU0303ZER

with LNMU0303ZER

with LNMU0303ZER

with LNMU0303ZER

GAMP= +6°, GAMF= +5° ~ +11°

A-A cross section

Designation	APMX	APMX2	APMX3	DCX	CICT	DC	DC2	DC3	OAL	LF	H	DCSFMS	KAPR	KAPR2*	KAPR3*	CRKS	WT(kg)	Air hole	Insert
HXN03R016MM08-02 ⁽¹⁾	1	0.9	1	16	2	9.6	8.8	9.8	42	25	10	12.8	15°	10°	15°	M8	0.03	With LN*U03...	
HXN03R018MM08-02 ⁽¹⁾	1	0.9	1	18	2	11.5	10.7	11.7	42	25	10	14.5	17°	12°	17°	M8	0.04	With LN*U03...	
HXN03R020MM10-03 ⁽²⁾	1	0.9	1	20	3	13.5	12.7	13.6	49	30	15	17.8	17°	12°	17°	M10	0.06	With LN*U03...	
HXN03R020MM10-04 ⁽¹⁾	1	0.9	1	20	4	13.5	12.7	13.6	49	30	15	17.8	17°	12°	17°	M10	0.06	With LN*U03...	
HXN03R022MM10-03 ⁽²⁾	1	0.9	1	22	3	15.5	14.7	15.6	49	30	15	17.8	17°	12°	17°	M10	0.06	With LN*U03...	
HXN03R022MM10-04 ⁽¹⁾	1	0.9	1	22	4	15.5	14.7	15.6	49	30	15	17.8	17°	12°	17°	M10	0.07	With LN*U03...	
HXN03R025MM12-04 ⁽²⁾	1	0.9	1	25	4	18.5	17.7	18.6	57	35	17	20.8	17°	12°	17°	M12	0.1	With LN*U03...	
HXN03R025MM12-05 ⁽¹⁾	1	0.9	1	25	5	18.5	17.7	18.6	57	35	17	20.8	17°	12°	17°	M12	0.11	With LN*U03...	
HXN03R028MM12-04 ⁽²⁾	1	0.9	1	28	4	21.5	20.7	21.6	57	35	17	23	17°	12°	17°	M12	0.12	With LN*U03...	
HXN03R028MM12-05 ⁽²⁾	1	0.9	1	28	5	21.5	20.7	21.6	57	35	17	23	17°	12°	17°	M12	0.12	With LN*U03...	
HXN03R030MM16-04 ⁽²⁾	1	0.9	1	30	4	23.5	22.7	23.6	63	40	22	28.8	17°	12°	17°	M16	0.19	With LN*U03...	
HXN03R030MM16-05 ⁽²⁾	1	0.9	1	30	5	23.5	22.7	23.6	63	40	22	28.8	17°	12°	17°	M16	0.2	With LN*U03...	
HXN03R032MM16-05 ⁽²⁾	1	0.9	1	32	5	25.5	24.7	25.6	63	40	22	28.8	17°	12°	17°	M16	0.2	With LN*U03...	
HXN03R032MM16-06 ⁽¹⁾	1	0.9	1	32	6	25.5	24.7	25.6	63	40	22	28.8	17°	12°	17°	M16	0.21	With LN*U03...	

*KAPR2 : with LNMU0303UER

*KAPR3 : with LNMU0303ZER

Clamping screws used for (1) and (2) above are different. See below for the part codes.

SPARE PARTS




Designation	Clamping screw	Lubricant	Wrench	Tool diameter tolerance	
HXN03...	(1) CSPB-2.5 (2) CSPB-2.5L080	M-1000	IP-8D	Tool diameter	0 / -0.45

*Recommended clamping torque (N·m): CSPB-2.5/CSPB-2.5L080 = 1.3

Insert size 03

HXN03-C

High feed endmill, modular type, with coolant directly to the tool tips (TungFlex)

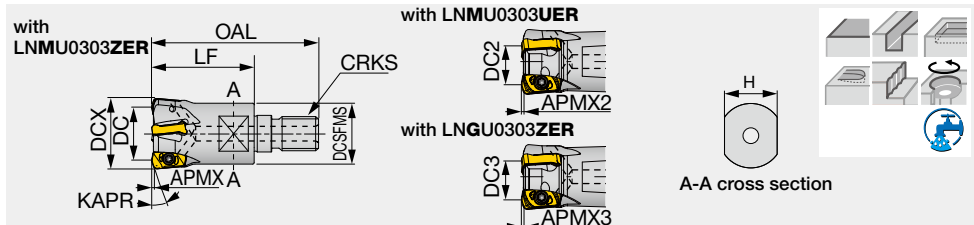

Designation	APMX	APMX2	APMX3	DCX	CICT	DC	DC2	DC3	OAL	LF	H	DCSFMS	KAPR	KAPR2*	KAPR3*	CRKS	WT(kg)	Air hole	Insert
HXN03R016MM08-02-C ⁽¹⁾	1	0.9	1	16	2	9.6	8.8	9.8	42	25	10	12.8	15°	10°	15°	M8	0.03	With LN*U03...	
HXN03R020MM10-03-C ⁽²⁾	1	0.9	1	20	3	13.5	12.7	13.6	49	30	15	17.8	17°	12°	17°	M10	0.06	With LN*U03...	
HXN03R020MM10-04-C ⁽¹⁾	1	0.9	1	20	4	13.5	12.7	13.6	49	30	15	17.8	17°	12°	17°	M10	0.06	With LN*U03...	
HXN03R025MM12-04-C ⁽²⁾	1	0.9	1	25	4	18.5	17.7	18.6	57	35	17	20.8	17°	12°	17°	M12	0.1	With LN*U03...	
HXN03R025MM12-05-C ⁽¹⁾	1	0.9	1	25	5	18.5	17.7	18.6	57	35	17	20.8	17°	12°	17°	M12	0.1	With LN*U03...	
HXN03R032MM16-05-C ⁽²⁾	1	0.9	1	32	5	25.5	24.7	25.6	63	40	22	28.8	17°	12°	17°	M16	0.2	With LN*U03...	
HXN03R032MM16-06-C ⁽¹⁾	1	0.9	1	32	6	25.5	24.7	25.6	63	40	22	28.8	17°	12°	17°	M16	0.2	With LN*U03...	
HXN03R040MM16-06-C ⁽²⁾	1	0.9	1	40	6	33.6	32.8	33.7	63	40	22	28.8	17°	12°	17°	M16	0.27	With LN*U03...	

*KAPR2 : with LNMU0303UER

*KAPR3 : with LNGU0303ZER

Clamping screws used for (1) and (2) above are different. See below for the part codes.

SPARE PARTS




Designation	Clamping screw	Lubricant	Wrench	Tool diameter tolerance	
HXN03...	(1) CSPB-2.5 (2) CSPB-2.5L080	M-1000	IP-8D	Tool diameter	0 / -0.45


*Recommended clamping torque (N·m): CSPB-2.5/CSPB-2.5L080 = 1.3

■ INSERT


LNMU03ZER-MJ (for general purpose)

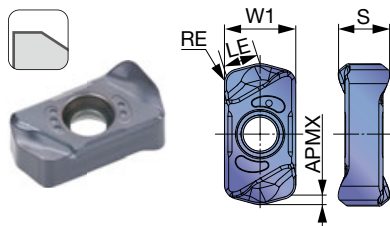


LNMU03ZER-ML (for low cutting force)

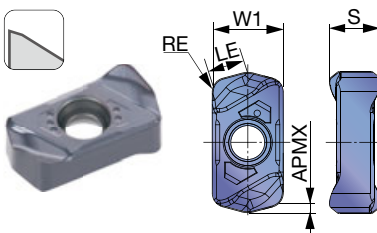


LNMU03ZER-MS (for stainless steel)

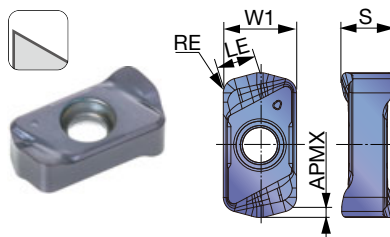


LNGU03ZER-MH (Robust cutting edges)

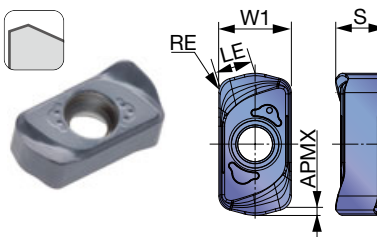

LNMU03UER-MJ (for general purpose, low approach angle)

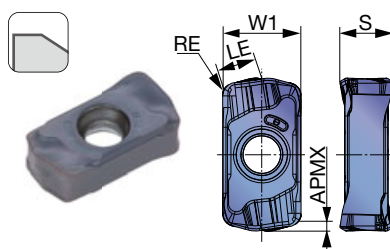

LNMU03UER-ML (for low cutting force, low approach angle)

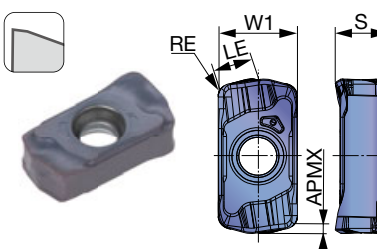

P	Steel		★					
M	Stainless	★	☆					
K	Cast iron		☆	★	☆			
N	Non-ferrous							
S	Titanium	★	☆					
S	Inconel			☆		★		
H	Hard materials			☆		★	☆	

★ : First choice
☆ : Second choice

Designation	RE	APMX	Coated						LE	W1	S
			AH130	AH3225	AH725	AH120	AH8015	AH8005			
LNMU0303ZER-MJ	1.2	1	●	●	●	●	●		3.2	6	4.3
LNMU0303ZER-ML	1.2	1	●	●	●		●		3.2	6	4.3
LNMU0303ZER-MS	1.2	1	●	●					3.2	6	4.3
LNGU0303ZER-MH	1.2	1					●	●	3.2	6	4.3
LNMU0303UER-MJ	1	0.9	●	●			●		3.1	6	4.1
LNMU0303UER-ML	1	0.9	●	●			●		3.1	6	4.1

● : New product
● : Line up

STANDARD CUTTING CONDITIONS


ZER type

ISO	Workpiece materials	Hardness	Priority	Grade	Chip-breaker	Cutting speed Vc (m/min)	Feed per tooth: fz (mm/t)									
							Tool dia.: DCX (mm)			Plunging						
							ø16, CICT = 2		ø18, CICT = 2		ø20					

- When chips stay in the cutting zone during slotting or pocketing, use air blast to remove chips from the work area

- Tool overhang length must be as short as possible to avoid chatter. When the tool overhang length is long, decrease the number of revolutions and feed

APPLICATION RANGE

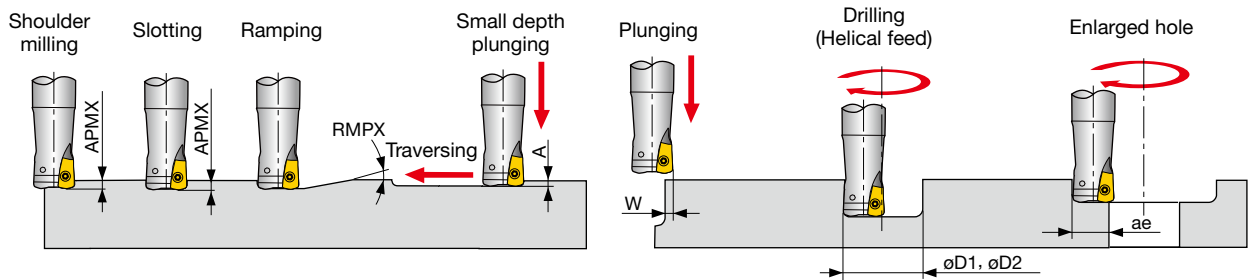


Designation	DCX	Max. depth of cut	Max. ramping angle		Max. plunging depth	Max. cutting width in plunging		Min. machinable hole dia.		Max. machinable hole dia.	Max. cutting width in enlarged hole
			APMX	RMPX		W		øD1			
		MJ/ML/MS	MH	A	MJ/ML/MS	MH	MJ/ML/MS	MH	øD2	ae	
E/HXN03R016M...	16	1	2.1	1.7	0.3	3.5	3	22	23	30	12.5
E/HXN03R018M...	18	1	1.7	1.6	0.3	3.5	3	26	27	34	14.5
E/HXN03R020M...	20	1	1.4	1.3	0.3	3.5	3	30	31	38	16.5
E/HXN03R022M...	22	1	1.2	1.1	0.3	3.5	3	34	35	42	18.5
E/HXN03R025M...	25	1	1.0	0.9	0.3	3.5	3	40	41	48	21.5
E/HXN03R028M...	28	1	0.8	0.8	0.3	3.5	3	46	46	54	24.5
E/HXN03R030M...	30	1	0.7	0.7	0.3	3.5	3	50	50	58	26.5
E/HXN03R032M...	32	1	0.7	0.7	0.3	3.5	3	54	54	62	28.5
EXN03R035M...	35	1	0.6	0.6	0.3	3.5	3	60	60	68	31.5
E/H/TXN03R040M...	40	1	0.5	0.5	0.3	3.5	3	70	70	78	36.5
TXN03R050M...	50	1	0.4	0.4	0.3	3.5	3	90	90	98	46.5

Note: For DCX above ø33 mm, slot milling, ramping or contouring is not recommended as chips may be re-cut

ø22			ø25			ø28			ø30			ø32			ø35			ø40			ø50		
n	Vf		n	Vf		n	Vf		n	Vf		n	Vf		n	Vf		n	Vf		n	Vf	
	CICT=3	CICT=4		CICT=4	CICT=5		CICT=4	CICT=5		CICT=4	CICT=5		CICT=5	CICT=6		CICT=5	CICT=6		CICT=5	CICT=6		CICT=5	CICT=6
2,890	6,940	9,250	2,550	8,160	10,180	2,270	7,280	9,100	2,120	8,480	10,600	1,990	9,950	11,940	1,820	9,100	10,920	1,590	7,950	9,540	1,270	6,350	10,160
Vc = 200 m/min, fz = 1.0 mm/t																							
2,890	6,940	9,250	2,550	8,160	10,180	2,270	7,280	9,100	2,120	8,480	10,600	1,990	9,950	11,940	1,820	9,100	10,920	1,590	7,950	9,540	1,270	6,350	10,160
Vc = 200 m/min, fz = 1.0 mm/t																							
2,170	4,560	6,080	1,910	5,350	6,690	1,710	4,790	5,990	1,590	4,450	5,570	1,490	5,220	6,260	1,360	4,760	5,710	1,190	4,170	5,000	950	3,330	5,320
Vc = 150 m/min, fz = 0.7 mm/t																							
2,170	4,560	6,080	1,910	5,350	6,690	1,710	4,790	5,990	1,590	4,450	5,570	1,490	5,220	6,260	1,360	4,760	5,710	1,190	4,170	5,000	950	3,330	5,320
Vc = 150 m/min, fz = 0.7 mm/t																							
3,180	4,770	6,360	1,530	3,060	3,820	1,360	2,720	3,400	1,270	2,540	3,180	1,190	2,980	3,570	1,090	2,720	3,270	960	2,400	2,880	760	1,900	2,280
Vc = 120 m/min, fz = 0.5 mm/t																							
1,740	1,570	2,090	1,530	1,840	2,300	1,370	1,640	2,060	1,270	1,520	1,910	1,190	1,790	2,140	1,090	1,640	1,960	960	1,440	1,730	760	1,140	1,820
Vc = 120 m/min, fz = 0.3 mm/t																							
1,450	870	1,160	1,270	1,020	1,270	1,140	910	1,140	1,060	850	1,060	1,000	1,000	1,200	910	910	1,090	800	800	960	640	640	1,020
Vc = 100 m/min, fz = 0.2 mm/t																							
2,890	6,940	9,250	2,550	8,160	10,180	2,270	7,280	9,100	2,120	8,480	10,600	1,990	9,950	11,940	1,820	9,100	10,920	1,590	7,950	9,540	1,270	6,350	10,160
Vc = 200 m/min, fz = 1.0 mm/t																							
2,170	5,210	6,940	1,910	6,110	7,640	1,710	5,460	6,820	1,590	6,360	7,950	1,490	7,450	8,940	1,360	6,800	8,160	1,190	5,950	7,140	950	4,750	5,700
Vc = 150 m/min, fz = 1.0 mm/t																							
580	700	930	510	820	1,020	450	730	910	420	840	1,050	400	1,000	1,200	360	900	1,080	320	800	960	250	630	1,000
Vc = 40 m/min, fz = 0.5 mm/t																							
430	260	340	380	230	290	340	200	260	320	260	320	300	300	360	270	270	320	240	240	290	190	190	300
Vc = 30 m/min, fz = 0.2 mm/t																							
1,740	1,570	2,090	1,530	1,840	2,300	1,360	1,630	2,040	1,270	1,520	1,910	1,190	1,790	2,140	1,090	1,640	1,960	950	1,430	1,710	760	1,140	1,820
Vc = 120 m/min, fz = 0.3 mm/t																							
1,160	700	930	1,020	820	1,020	910	730	910	850	680	850	800	800	960	730	730	880	640	640	770	510	510	820
Vc = 80 m/min, fz = 0.2mm/t																							
870	310	420	760	300	380	680	270	340	640	260	320	600	300	360	550	230	340	480	240	280	380	200	300
Vc = 60 m/min, fz = 0.1 mm/t																							
870	160	210	760	150	190																		

of the workpiece. When setting the conditions, start from half of the values of the standard cutting conditions and then increase the value gradually while making sure the machine is running normally

When programming for CAM, the tool should be considered as a radius cutter. Usually, the corner radius should be set as $R = 1.5 \text{ mm}$. If a larger radius is used, overcutting will occur. The following table shows the amount left uncut (t1) and overcut (t2).

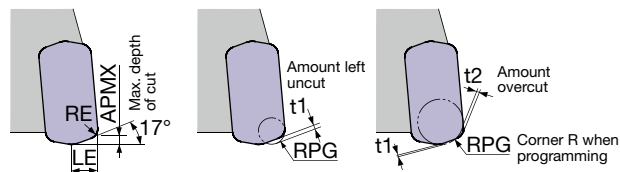

Max. depth of cut APMX (mm)	Corner radius RE (mm)	LE (mm)	Corner R when programming RPG	Amount left uncut t1 (mm)	Amount overcut t2 (mm)
1	1.2	3	1	0.6	-
1	1.2	3	1.5	0.5	-
1	1.2	3	2	0.25	0.08
1	1.2	3	2.5	0.14	0.26

Max. depth of cut APMX (mm)	Corner radius RE (mm)	LE (mm)	Corner R when programming RPG	Amount left uncut t1 (mm)	Amount overcut t2 (mm)
1	1.2	3	1	0.45	-
1	1.2	3	1.5	0.35	-
1	1.2	3	2	0.2	0.1
1	1.2	3	2.5	0.08	0.29

tungaloy.com 23

Insert size 03

STANDARD CUTTING CONDITIONS


UER type

ISO	Workpiece material	Hardness	Priority	Grade	Chip-breaker	Cutting speed Vc (m/min)	Feed per tooth: fz (mm/t)			Plunging	Tool dia.: DCX (mm)								
							Tool dia.: DCX (mm)				ø16, CICT = 2		ø18, CICT = 2		ø20				
							ø16 - ø22	ø25 - ø50			n	Vf	n	Vf	n	Vf			
P	Carbon steels S45C, S55C, etc. C45, C55, etc.	- 300HB	First choice Low resistance	AH3225	MJ ML	100 - 300	0.5 - 1.2	0.5 - 1.5	0.1	3,980	7,960	3,540	7,080	3,180	Vc = 200 m/min, fz = 1 mm/t	9,540	12,720		
	Alloy steels SCM440, SCr415, etc.	- 300HB	First choice Low resistance	AH3225	MJ ML	100 - 300	0.5 - 1.2	0.5 - 1.5	0.1	3,980	7,960	3,540	7,080	3,180	Vc = 200 m/min, fz = 1 mm/t	9,540	12,720		
	Prehardened steels NAK80, PX5, etc.	30 - 40HRC	First choice for impact resistance	AH8015 AH3225	MJ MJ	100 - 200	0.5 - 1	0.5 - 1	0.1	2,980	4,770	2,650	4,240	2,390	Vc = 150 m/min, fz = 0.8 mm/t	5,740	7,650		
M	Stainless steels SUS304, X5CrNi18-9, etc.	- 200HB	First choice for impact resistance	AH130	ML MJ	80 - 150	0.3 - 1	0.3 - 1	0.1	2,390	2,870	2,120	2,550	1,910	Vc = 120 m/min, fz = 0.6 mm/t	3,440	4,590		
	Precipitation hardening stainless steels SUS630, X5CrNiCuNb16-4, etc.	28HRC -	First choice for impact resistance	AH130	ML MJ	80 - 150	0.3 - 0.8	0.3 - 0.8	0.1	2,390	2,390	2,120	2,120	1,910	Vc = 120 m/min, fz = 0.5 mm/t	2,870	3,820		
		40HRC -	First choice for impact resistance	AH130	ML MJ	80 - 120	0.3 - 0.5	0.3 - 0.5	0.1	1,990	1,600	1,770	1,420	1,590	Vc = 100 m/min, fz = 0.4 mm/t	1,910	2,550		
K	Gray cast irons FC250, GG25, 250, etc.	150 - 250HB	First choice for impact resistance	AH8015 AH3225	MJ MJ	100 - 300	0.5 - 1.2	0.5 - 1.5	0.1	3,980	7,960	3,540	7,080	3,180	Vc = 200 m/min, fz = 1 mm/t	9,540	12,720		
	Ductile cast irons FCD400, etc.	150 - 250HB	First choice for impact resistance	AH8015 AH3225	MJ MJ	80 - 200	0.5 - 1.2	0.5 - 1.5	0.1	2,980	5,960	2,650	5,300	2,390	Vc = 150 m/min, fz = 1 mm/t	7,170	9,560		
	Titanium alloy Ti-6Al-4V, etc.	- 40HRC	First choice for wear resistance	AH130 AH8015	MJ MJ	30 - 60	0.3 - 0.8	0.3 - 0.8	0.08	800	960	710	860	640	Vc = 40 m/min, fz = 0.6 mm/t	1,160	1,540		
S	Heat-resistant alloy Inconel, Hastelloy, etc.	- 40HRC	First choice for impact resistance	AH8015	ML MJ	20 - 50	0.2 - 0.5	0.2 - 0.5	0.05	600	360	530	320	480	Vc = 30 m/min, fz = 0.3 mm/t	440	580		
	Hot mold steel SKD61, X40CrMoV5-1, etc.	40 - 50HRC	First choice for impact resistance	AH8015 AH3225	MJ MJ	80 - 150	0.1 - 0.5	0.1 - 0.5	0.05	2,390	1,440	2,120	1,280	1,910	Vc = 120 m/min, fz = 0.3 mm/t	1,720	2,300		
	Hot mold steel of D.T.C materials DAC**, DH**, DIEVER, etc	40 - 50HRC	First choice for impact resistance	AH8015 AH3225	MJ MJ	50 - 100	0.1 - 0.5	0.1 - 0.5	0.05	1,590	960	1,410	850	1,270	Vc = 80 m/min, fz = 0.3 mm/t	1,150	1,530		
H	Cold mold steels SKD11, X153CrMoV12, etc.	50 - 60HRC	First choice	AH8005	MJ	50 - 70	0.1 - 0.3	0.1 - 0.3	0.03	1,190	480	1,060	430	950	Vc = 60 m/min, fz = 0.2 mm/t	570	760		

- When chips stay in the cutting zone during slotting or pocketing, use air blast to remove chips from the work area

- Tool overhang length must be as short as possible to avoid chatter. When the tool overhang length is long, decrease the number of revolutions and feed

APPLICATION RANGE

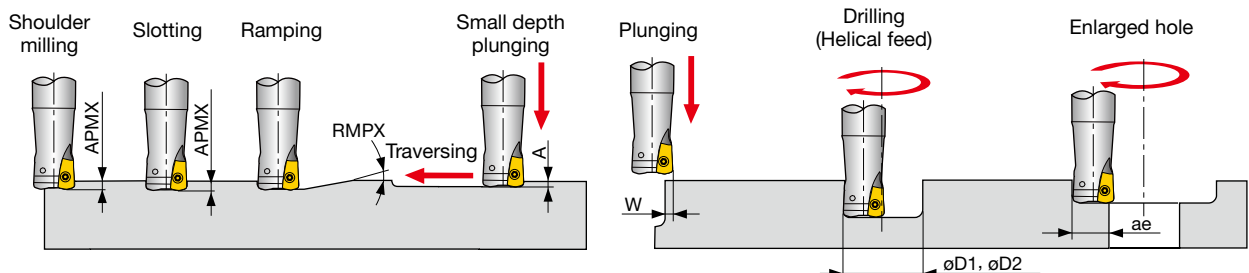

Designation	DCX	Max. depth of cut APMX	Max. ramping angle RMPX	Max. plunging depth A	Max. cutting width in plunging W	Min. machinable hole dia. øD1	Max. machinable hole dia. øD2	Max. cutting width in enlarged hole ae
E/HXN03R016M...	16	0.9	Not possible	Not possible	3.8	Not possible	Not possible	12.2
E/HXN03R018M...	18	0.9	1.7°	0.27	3.8	26	34	14.2
E/HXN03R020M...	20	0.9	1.4°	0.27	3.8	30	38	16.2
E/HXN03R022M...	22	0.9	1.2°	0.27	3.8	34	42	18.2
E/HXN03R025M...	25	0.9	1°	0.27	3.8	40	48	21.2
E/HXN03R028M...	28	0.9	0.8°	0.27	3.8	46	54	24.2
E/HXN03R030M...	30	0.9	0.7°	0.27	3.8	50	58	26.2
E/HXN03R032M...	32	0.9	0.7°	0.27	3.8	54	62	28.2
EXN03R035M...	35	0.9	0.6°	0.27	3.8	60	68	31.2
E/H/TXN03R040M...	40	0.9	0.5°	0.27	3.8	70	78	36.2
TXN03R050M...	50	0.9	0.4°	0.27	3.8	90	98	46.2


Note: For DCX above ø33 mm, slot milling, ramping or contouring is not recommended as chips may be re-cut

ø22			ø25			ø28			ø30			ø32			ø35			ø40			ø50		
n	Vf		n	Vf		n	Vf		n	Vf		n	Vf		n	Vf		n	Vf		n	Vf	
	CICT=3	CICT=4		CICT=4	CICT=5		CICT=4	CICT=5		CICT=4	CICT=5		CICT=5	CICT=6		CICT=5	CICT=6		CICT=5	CICT=6		CICT=5	CICT=6
2,890	8,670	11,560	2,550	10,200	12,750	2,270	9,080	11,350	2,120	8,480	10,600	1,990	9,950	11,940	1,820	9,100	10,920	1,590	7,950	9,540	1,270	6,350	10,160
Vc = 200 m/min, fz = 1 mm/t																							
2,890	8,670	11,560	2,550	10,200	12,750	2,270	9,080	11,350	2,120	8,480	10,600	1,990	9,950	11,940	1,820	9,100	10,920	1,590	7,950	9,540	1,270	6,350	10,160
Vc = 200 m/min, fz = 1 mm/t																							
2,170	5,210	6,950	1,910	6,120	7,640	1,710	5,480	6,840	1,590	5,090	6,360	1,490	5,960	7,160	1,360	5,440	6,530	1,190	4,760	5,720	950	3,800	6,080
Vc = 150 m/min, fz = 0.8 mm/t																							
1,740	3,140	4,180	1,530	3,680	4,590	1,360	3,270	4,080	1,270	3,050	3,810	1,190	3,570	4,290	1,090	3,270	3,930	950	2,850	3,420	760	2,280	3,650
Vc = 120 m/min, fz = 0.6 mm/t																							
1,740	2,610	3,480	1,530	3,060	3,830	1,360	2,720	3,400	1,270	2,540	3,180	1,190	2,980	3,570	1,090	2,730	3,270	950	2,380	2,850	760	1,900	3,040
Vc = 120 m/min, fz = 0.5 mm/t																							
1,450	1,740	2,320	1,270	2,040	2,540	1,140	1,830	2,280	1,060	1,700	2,120	990	1,980	2,380	910	1,820	2,190	800	1,600	1,920	640	1,280	2,050
Vc = 100 m/min, fz = 0.4 mm/t																							
2,890	8,670	11,560	2,550	10,200	12,750	2,270	9,080	11,350	2,120	8,480	10,600	1,990	9,950	11,940	1,820	9,100	10,920	1,590	7,950	9,540	1,270	6,350	10,160
Vc = 200 m/min, fz = 1 mm/t																							
2,170	6,510	8,680	1,910	7,640	9,550	1,710	6,840	8,550	1,590	6,360	7,950	1,490	7,450	8,940	1,360	6,800	8,160	1,190	5,950	7,140	950	4,750	7,600
Vc = 150 m/min, fz = 1 mm/t																							
580	1,050	1,400	510	1,230	1,530	450	1,080	1,350	420	1,010	1,260	400	1,200	1,440	360	1,080	1,300	320	960	1,160	250	750	1,200
Vc = 40 m/min, fz = 0.6 mm/t																							
430	390	520	380	460	570	340	410	510	320	390	480	300	450	540	270	410	490	240	360	440	190	290	460
Vc = 30 m/min, fz = 0.3 mm/t																							
1,740	1,570	2,090	1,530	1,840	2,300	1,360	1,640	2,040	1,270	1,530	1,910	1,190	1,790	2,150	1,090	1,640	1,970	950	1,430	1,710	760	1,140	1,830
Vc = 120 m/min, fz = 0.3 mm/t																							
1,160	1,050	1,400	1,020	1,230	1,530	910	1,100	1,370	850	1,020	1,280	800	1,200	1,440	730	1,100	1,320	640	960	1,160	510	770	1,230
Vc = 80 m/min, fz = 0.3 mm/t																							
870	530	700	760	610	760	680	550	680	640	520	640	600	600	720	550	550	660	480	480	580	380	380	610
Vc = 60 m/min, fz = 0.2 mm/t																							

- The above table shows the conditions for standard shank type cutters. When using long shank type cutters, the number of teeth may be different.
- Cutting conditions are generally limited by the rigidity and power of the machine and the

rigidity of the workpiece. When setting the conditions, start from half of the values of the standard cutting conditions and then increase the value gradually while making sure the machine is running normally

When programming for CAM, the tool should be considered as a radius cutter. Usually, the corner radius should be set as $R = 1.5 \text{ mm}$. If a larger radius is used, overcutting will occur. The following table shows the amount left uncut (t1) and overcut (t2).

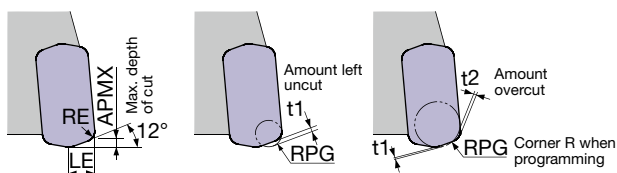

Max. depth of cut APMX (mm)	Corner radius RE (mm)	LE (mm)	Corner R when programming RPG	Amount left uncut t1 (mm)	Amount overcut t2 (mm)
0.9	1	3.5	1	0.48	-
0.9	1	3.5	1.5	0.39	-
0.9	1	3.5	2	0.3	0.12
0.9	1	3.5	2.5	0.21	0.31

*Recommended

Insert size 06

For machining of medium- and large-sized components

Ultimate solution to typical machining challenges in exotic materials such as low productivity and short tool life

An ideal high feed cutter for machining exotic materials, DoFeed features small entry angle that, when combined with wiper inserts, provides **improved machining efficiency and tool life without compromising surface finishing quality**.



W Wiper insert




P M K S H

2 cutting edges

- To be mixed with other geometries
- The main cutting edge of the wiper has the same profile as with other chipbreaker geometry. This enables superior surface finish while maintaining the feed rate

■ The effect of wiper insert

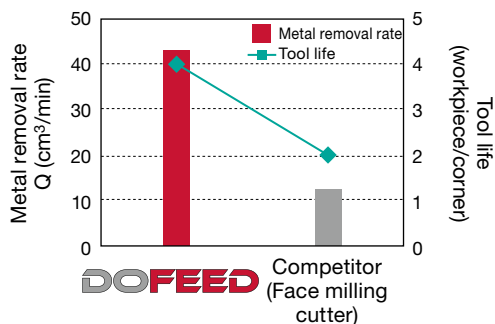

S

Cutter

: TXN06R063M22.0E06 (ø63 mm, CICT = 6)
(Competitor: Face milling cutter)

Insert

: LNMU06X5ZER-ML

Grade

: LNU06X5ZER-W (Competitor: Square, positive)
: AH130 (ML), AH725 (W), (Competitor: PVD, S30)

Workpiece material

: Titanium alloy (43HRC)

Cutting speed

: $V_c = 38$ m/min (Competitor: 25 m/min)

Feed per tooth

: $f_z = 0.64$ mm/t (Competitor: 0.15 mm/t)

Feed speed

: $V_f = 735$ m/min (Competitor: 115 m/min)

Depth of cut

: $a_p = 1.25$ mm (Competitor: 2.5 mm)

Width of cut

: $a_e = 45$ mm

Coolant


: Wet (External coolant)

CUTTING PERFORMANCE

P S55C / C55

Comparison of surface finish


Excellent surface finish!

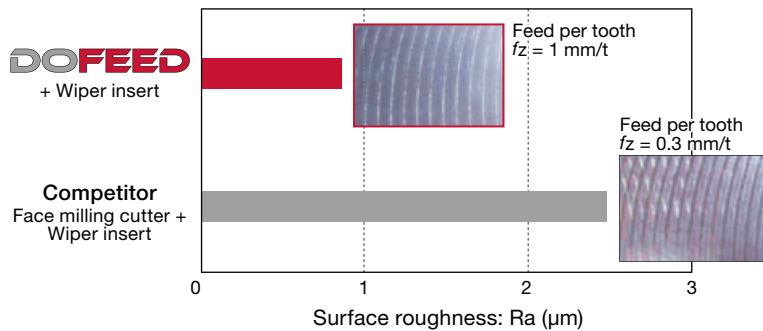

Wiper insert
LNGU06X5ZER-W

Comparison of metal removal rate

Tripled metal removal rate!

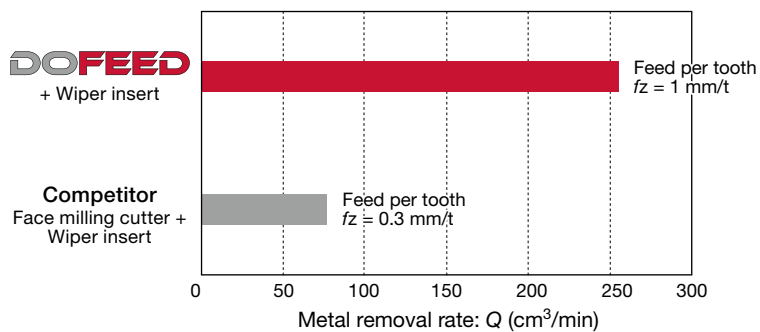






Cutter : TXN06R080M31.7-05
 Insert : LNMU06X5ZER-ML AH725 x 3 inserts
 : LNGU06X5ZER-W AH725 x 2 inserts
 Cutting speed : $V_c = 150 \text{ m/min}$
 Depth of cut : $a_p = 1.5 \text{ mm}$
 Width of cut : $a_e = 60 \text{ mm}$
 Coolant : Dry
 Machine : Vertical M/C, BT50

Insert size 06

TXN06

High feed mill, for 4-corner double sided inserts

GAMP = +10°, GAMF = +2° ~ +6°



Designation	APMX	DCX	CICT	DC1	DC2	DCSFMS	LF	DCONMS	CBDP	KWW	b	WT (kg)	Air hole	Insert	Fig.
TXN06R050M22.0E04	1.5	50	4	37.6	36.9	47	50	22	20	10.4	6.3	0.4	with	LN*U06...	1
TXN06R050M22.0E05	1.5	50	5	37.6	36.9	47	50	22	20	10.4	6.3	0.4	with	LN*U06...	1
TXN06R050M22.2-04	1.5	50	4	37.6	36.9	47	50	22.225	20	8	5	0.4	with	LN*U06...	1
TXN06R050M22.2-05	1.5	50	5	37.6	36.9	47	50	22.225	20	8	5	0.4	with	LN*U06...	1
TXN06R052M22.0E04	1.5	52	4	39.6	38.9	49	50	22	20	10.4	6.3	0.5	with	LN*U06...	1
TXN06R052M22.0E05	1.5	52	5	39.6	38.9	49	50	22	20	10.4	6.3	0.5	with	LN*U06...	1
TXN06R063M22.0E04	1.5	63	4	50.6	49.8	59	50	22	20	10.4	6.3	0.8	with	LN*U06...	1
TXN06R063M22.0E06	1.5	63	6	50.6	49.8	59	50	22	20	10.4	6.3	0.8	with	LN*U06...	1
TXN06R063M22.2-04	1.5	63	4	50.6	49.8	59	50	22.225	20	8	5	0.8	with	LN*U06...	1
TXN06R063M22.2-06	1.5	63	6	50.6	49.8	59	50	22.225	20	8	5	0.8	with	LN*U06...	1
TXN06R066M27.0E04	1.5	66	4	53.6	52.8	63	50	27	22	12.4	7	0.8	with	LN*U06...	1
TXN06R066M27.0E06	1.5	66	6	53.6	52.8	63	50	27	22	12.4	7	0.8	with	LN*U06...	1
TXN06R080M27.0E05	1.5	80	5	67.6	66.8	76	63	27	22	12.4	7	1.6	with	LN*U06...	1
TXN06R080M27.0EE05	1.5	80	5	67.6	66.8	60	63	27	22	12.4	7	1.2	with	LN*U06...	1
TXN06R080M27.0E08	1.5	80	8	67.6	66.8	76	63	27	22	12.4	7	1.6	with	LN*U06...	1
TXN06R080M27.0EE08	1.5	80	8	67.6	66.8	60	63	27	22	12.4	7	1.2	with	LN*U06...	1
TXN06R080M31.7-05	1.5	80	5	67.6	66.8	76	63	31.75	32	12.7	8	1.6	with	LN*U06...	1
TXN06R080M31.7-08	1.5	80	8	67.6	66.8	76	63	31.75	32	12.7	8	1.6	with	LN*U06...	1
TXN06R100M31.7-06	1.5	100	6	87.6	86.8	96	63	31.75	32	12.7	8	2.2	with	LN*U06...	1
TXN06R100M32.0E06	1.5	100	6	87.6	86.8	96	63	32	25	14.4	8	2.2	with	LN*U06...	1
TXN06R125M38.1-08	1.5	125	8	112.6	111.8	100	63	38.1	43	15.9	10	3	with	LN*U06...	1
TXN06R125M40.0E08	1.5	125	8	112.6	111.8	100	63	40	37	16.4	9	3	with	LN*U06...	1
TXN06R160M40.0E10	1.5	160	10	147.6	146.8	100	63	40	37	16.4	9	5	with	LN*U06...	1
TXN06R160M50.8-10	1.5	160	10	147.6	146.8	100	63	50.8	46	19	11	4.6	with	LN*U06...	1
TXN06R200M47.6-12	1.5	200	12	187.6	186.8	130	63	47.625	38	25.4	14	7.7	without	LN*U06...	2
TXN06R200M60.0E12	1.5	200	12	187.6	186.8	130	63	60	38	25.7	14	7.2	without	LN*U06...	3

SPARE PARTS

Designation	Clamping screw	Grip	Lubricant	Shell locking bolt 1	Shell locking bolt 2	Torx bit
TXN06R050M22.0...	CSPB-5	H-TB2W	M-1000	-	FSHM10-40H	BLD IP20/S7
TXN06R050M22.2-04	CSPB-5	H-TB2W	M-1000	-	CM10-30H	BLD IP20/S7
TXN06R050M22.2-05, TXN06R052M22.0...	CSPB-5	H-TB2W	M-1000	-	FSHM10-40H	BLD IP20/S7
TXN06R063M...	CSPB-5	H-TB2W	M-1000	-	CM10X30H	BLD IP20/S7
TXN06R066,080M27.0...	CSPB-5	H-TB2W	M-1000	-	CM12X30H	BLD IP20/S7
TXN06R080,100M31.7...	CSPB-5	H-TB2W	M-1000	-	CM16X40H	BLD IP20/S7
TXN06R125M...	CSPB-5	H-TB2W	M-1000	TMBA-M20H	-	BLD IP20/S7
TXN06R160M40.0...	CSPB-5	H-TB2W	M-1000	TMBA-M20H	-	BLD IP20/M7
TXN06R160M50.8...	CSPB-5	H-TB2W	M-1000	TMBA-M24H	-	BLD IP20/M7
TXN06R200M...	CSPB-5	H-TB2W	M-1000	-	-	BLD IP20/M7

*Recommended clamping torque (N·m): CSPB-5=5


Tool diameter tolerance

Tool diameter	0 / -0.55
---------------	-----------

EXN06

High feed endmill, shank type, for 4-corner double sided inserts

GAMP = +10°, GAMF = -2° ~ +6°

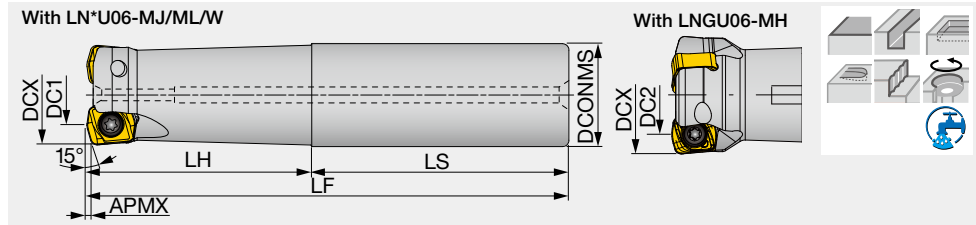

Designation	APMX	DCX	CICT	DC1	DC2	DCONMS	LF	LH	LS	WT (kg)	Air hole	Insert
EXN06R032M32.0-02	1.5	32	2	19.7	19.1	32	150	70	80	0.8	with	LN*U06...
EXN06R032M32.0-02L	1.5	32	2	19.7	19.1	32	200	120	80	1.1	with	LN*U06...
EXN06R035M32.0-02	1.5	35	2	22.7	22	32	150	45	105	0.9	with	LN*U06...
EXN06R035M32.0-02L	1.5	35	2	22.7	22	32	200	45	155	1.2	with	LN*U06...
EXN06R040M32.0-03	1.5	40	3	27.7	27	32	150	45	105	0.9	with	LN*U06...
EXN06R040M32.0-03L	1.5	40	3	27.7	27	32	220	45	175	1.3	with	LN*U06...

SPARE PARTS


Designation	Clamping screw	Lubricant	Wrench
EXN06	CSPB-5	M-1000	IP-20D

*Recommended clamping torque (N·m): CSPB-5=5


Tool diameter tolerance	
Tool diameter	0 / -0.55

INSERT


LNMU06-MJ (for general purpose)

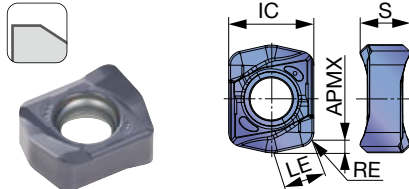


LNMU06-ML (for low cutting force)

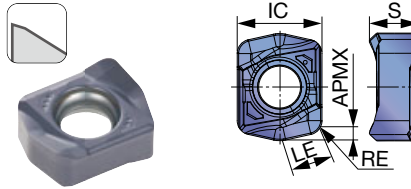

LNGU06-MH (Robust cutting edges)

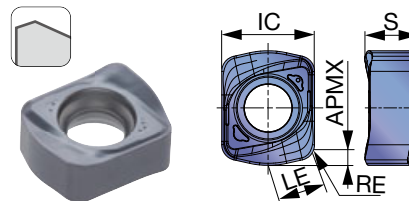

LNMU06-W (Wiper, 2 cutting edge)

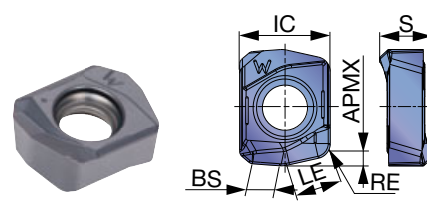

P Steel	★	☆				
M Stainless	★	☆				
K Cast iron		☆	☆	★		
N Non-ferrous						
S Superalloys	★	☆	☆	★		
H Hard materials			☆	★	☆	

★ : First choice
☆ : Second choice

Designation	RE	APMX	Coated						LE	IC	S	BS
			AH130	AH3225	AH725	AH120	AH8015	AH8005				
LNLMU06X5ZER-MJ	2	1.5	●	●	●	●	●		6	12	7	-
LNLMU06X5ZER-ML	2	1.5	●	●	●	●	●		6	12	7	-
LNGU06X5ZER-MH	2	1.5					●	●	6	12	7	-
LNGU06X5ZER-W	2	1.5		●					6	12	7	3.6

- When wiper insert (-W) is used, the value of feed per rev. (mm/rev) must be less than 3.6 mm x n. for keeping this value, the number of wiper insert (n) and feed per tooth (mm/tooth) should be adjusted
- Wiper insert (-W) can be used just for face milling. It's not suitable for ramping or pocket milling

● : New product
● : Line up


STANDARD CUTTING CONDITIONS

ISO	Workpiece materials	Hardness	Priority	Grade	Chip-breaker	Cutting speed Vc (m/min)	Feed per tooth: fz (mm/t)		Plunging					
							Tool dia.: DCX (mm)	Plunging	ø32, CICT = 2		ø35, CICT = 2		ø40, CICT = 3	
									n	Vf	n	Vf	n	Vf
P	Carbon steels S45C, S55C, etc. C45, C55, etc.	- 300HB	First choice	AH3225	MJ	100 - 300	0.5 - 1.5	0.15	1,990	3,980	1,820	3,640	1,590	4,770
	Alloy steels SCM440, SCr415, etc.	- 300HB	First choice	AH3225	MJ	100 - 200	0.5 - 1.5	0.15	1,990	3,980	1,820	3,640	1,590	4,770
	Prehardened steels NAK80, PX5, etc.	30 - 40HRC	First choice	AH3225	MJ	100 - 200	0.5 - 1.2	0.15	1,490	2,380	1,360	2,180	1,190	2,860
		30 - 40HRC	for wear resistance	AH8015	MJ	100 - 200	0.5 - 1.5	0.15	1,490	2,980	1,360	2,720	1,190	3,570
M	Stainless steels SUS304, X5CrNi18-9, etc.	- 200HB	First choice	AH130	ML	80 - 150	0.3 - 0.8	0.1	1,190	1,430	1,090	1,310	950	1,710
	Precipitation hardening stainless steels SUS630, X5CrNiCuNb16-4, etc.	28HRC-(H1150)	First choice	AH130	ML	80 - 150	0.2 - 0.5	0.1	1,190	710	1,090	650	960	860
		40HRC - (H900)	First choice	AH130	ML	80 - 120	0.1 - 0.3	0.1	1,000	400	910	360	800	480
		40HRC - (H900)	for impact resistance	AH130	MJ	80 - 120	0.1 - 0.3	0.1	1,000	400	910	360	800	480
K	Gray cast irons FC250, GG25, 250, etc.	150 - 250HB	First choice	AH120	MJ	100 - 300	0.5 - 1.5	0.15	1,990	3,980	1,820	3,640	1,590	4,770
		150 - 250HB	First choice	AH120	MJ	80 - 200	0.5 - 1.5	0.15	1,490	2,980	1,360	2,720	1,190	3,570
S	Titanium alloy Ti-6Al-4V, etc.	- 40HRC	First choice	AH130	ML	30 - 60	0.3 - 0.7	0.08	400	400	360	360	320	480
	Heat-resistant alloy Inconel, Hastelloy, etc.	- 40HRC	for impact resistance	AH130	MJ	30 - 60	0.3 - 0.7	0.08	400	400	360	360	320	480
		- 40HRC	for impact resistance	AH725	ML	20 - 50	0.1 - 0.3	0.05	300	120	270	110	240	140
H	Hot mold steel SKD61, X40CrMoV5-1, etc.	40 - 55HRC	First choice	AH8015	MH	80 - 150	0.1 - 0.5	0.05	1,190	710	1,090	650	950	850
	Hot mold steel of D.T.C materials DAC**, DH**, DIEVER, etc.	40 - 55HRC	Low resistance	AH8015	MJ	80 - 150	0.1 - 0.3	0.05	800	320	730	290	640	380
		40 - 55HRC	First choice	AH8015	MJ	50-100	0.1 - 0.3	0.05	800	320	730	290	640	380
		40 - 55HRC	for impact resistance	AH8015	MH	50-100	0.1 - 0.5	0.05	800	320	730	290	640	380
	Cold mold steels SKD11, X153CrMoV12, etc.	55 - 60HRC	First choice	AH8005	MH	50 - 70	0.05 - 0.3	0.03	600	120	550	110	480	140

- The above table shows the conditions for standard shank type cutters. When using long shank type cutters, the number of teeth may be different.
- Cutting conditions are generally limited by the rigidity and power of the machine

and the rigidity of the workpiece. When setting the conditions, start from half of the values of the standard cutting conditions and then increase the value gradually while making sure the machine is running normally

APPLICATION RANGE

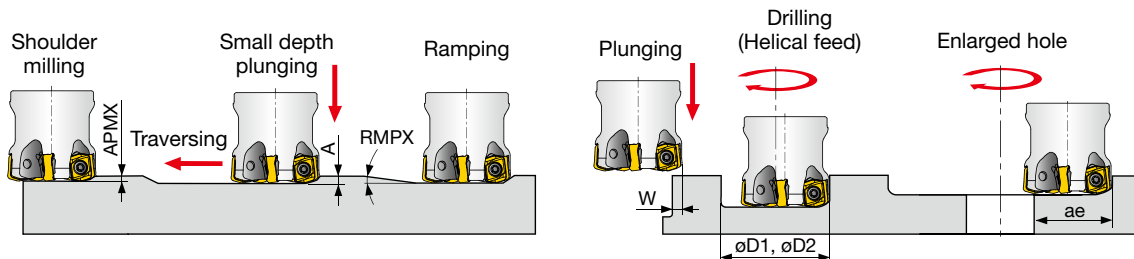


Designation	DCX	Max. depth of cut	Max. ramping angle		Max. plunging depth		Max. cutting width in plunging	Min. machinable hole dia.	Max. machinable hole dia.	Max. cutting width in enlarged hole
		APMX	RMPX		A		W	øD1	øD2	ae
			MJ/ML	MH	MJ/ML	MH				
EXN06R032M...	32	1.5	2	1.4	0.5	0.4	6	47	59	25
EXN06R035M...	35	1.5	1.7	1.1	0.5	0.4	6	53	65	28
EXN06R040M...	40	1.5	1.3	0.8	0.5	0.4	6	63	75	33
TXN06R050M...	50	1.5	0.9	0.7	0.5	0.4	6	83	95	43
TXN06R052M...	52	1.5	0.8	0.6	0.5	0.4	6	87	99	45
TXN06R063M...	63	1.5	0.6	0.5	0.5	0.4	6	109	121	56
TXN06R066M...	66	1.5	0.5	0.5	0.5	0.4	6	115	127	59
TXN06R080M...	80	1.5	0.5	0.3	0.5	0.4	6	143	155	73
TXN06R100M...	100	1.5	0.34	0.25	0.5	0.4	6	183	195	93
TXN06R125M...	120	1.5	0.26	0.2	0.5	0.4	6	233	245	118
TXN06R160M...	160	1.5	0.2	0.15	0.5	0.4	6	303	315	153
TXN06R200M...	200	1.5	0.15	0.11	0.5	0.4	6	383	395	193

Note: For DCX above 100 mm, slot milling, ramping or contouring is not recommended as chips may be re-cut.

Tool dia.: DCX (mm), Number of revolutions: n (min ⁻¹), Feed speed: V_f (mm/min), Max. depth of cut: $a_p = 1.5$ mm, Number of teeth: CICT																	
$\phi 50$			$\phi 63$			$\phi 80$			$\phi 100$, CICT = 6		$\phi 125$, CICT = 8		$\phi 160$, CICT = 10		$\phi 200$, CICT = 12		
n	V_f		n	V_f		n	V_f		n	V_f	n	V_f	n	V_f	n	V_f	
	CICT = 4	CICT = 5		CICT = 4	CICT = 6		CICT = 5	CICT = 8									
1,270	5,080	6,350	1,010	4,040	6,060	800	4,000	6,400	640	3,820	510	4,080	400	3,980	320	3,820	
							$V_c = 200$ m/min, $f_z = 1.0$ mm/t										
1,270	5,080	6,350	1,010	4,040	6,060	800	4,000	6,400	640	3,820	510	4,080	400	3,980	320	3,820	
							$V_c = 200$ m/min, $f_z = 1.0$ mm/t										
950	3,040	3,800	760	2,430	3,650	600	2,400	3,840	480	2,290	380	2,450	300	2,390	240	2,290	
							$V_c = 150$ m/min, $f_z = 0.8$ mm/t										
950	3,800	4,750	760	3,040	4,560	600	3,000	4,800	480	2,880	380	3,040	300	3,000	240	2,880	
							$V_c = 150$ m/min, $f_z = 1.0$ mm/t										
760	1,820	2,280	610	1,470	2,200	480	1,440	2,300	380	1,380	310	1,470	240	1,430	190	1,380	
							$V_c = 120$ m/min, $f_z = 0.6$ mm/t										
760	910	1,140	610	730	1,100	480	720	1,150	380	680	310	740	240	720	190	680	
							$V_c = 120$ m/min, $f_z = 0.3$ mm/t										
640	510	640	510	410	610	400	400	640	320	380	260	420	200	400	160	380	
							$V_c = 100$ m/min, $f_z = 0.2$ mm/t										
1,270	5,080	6,350	1,010	4,040	6,060	800	4,000	6,400	640	3,820	510	4,080	400	3,980	320	3,820	
							$V_c = 200$ m/min, $f_z = 1.0$ mm/t										
950	3,800	4,750	760	3,040	4,560	600	3,000	4,800	480	2,870	380	3,060	300	2,990	240	2,870	
							$V_c = 150$ m/min, $f_z = 1.0$ mm/t										
250	500	630	200	400	600	160	400	640	130	380	100	410	80	400	60	380	
							$V_c = 40$ m/min, $f_z = 0.5$ mm/t										
190	150	190	150	120	180	120	120	190	100	120	80	120	60	120	50	120	
							$V_c = 30$ m/min, $f_z = 0.2$ mm/t										
760	910	1,140	610	730	1,100	480	720	1,150	380	680	310	740	240	720	190	680	
							$V_c = 120$ m/min, $f_z = 0.3$ mm/t										
510	410	510	400	320	480	320	320	510	250	300	200	320	160	320	130	310	
							$V_c = 80$ m/min, $f_z = 0.2$ mm/t										
380	150	190	300	120	180	240	120	190	190	110	150	120	120	120	100	120	
							$V_c = 60$ m/min, $f_z = 0.1$ mm/t										
380	75	95	300	60	90	240	60	95	190	55	150	60	120	60	100	60	
							$V_c = 60$ m/min, $f_z = 0.05$ mm/t										

TOOL GEOMETRY ON PROGRAMMING

When programming for CAM, the tool should be considered as a radius cutter. Usually, the corner radius should be set as $R = 3$ mm. If a larger radius is used, overcutting will occur. The following table shows the amount left uncut (t_1) and overcut (t_2).

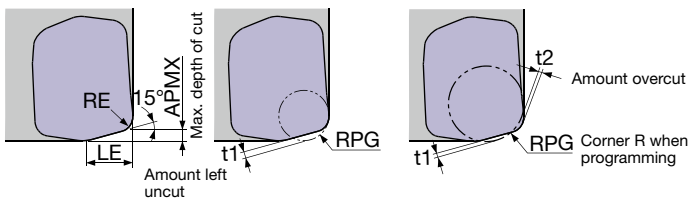

LNMU06...

Max. depth of cut APMX (mm)	Corner radius RE (mm)	LE (mm)	Corner R when programming RPG	Amount left uncut t_1 (mm)	Amount overcut t_2 (mm)
1.5	2	6	2	1	-
			3	0.77	-
			4	0.54	0.26


LNGU06...MH

Max. depth of cut APMX (mm)	Corner radius RE (mm)	LE (mm)	Corner R when programming RPG	Amount left uncut t_1 (mm)	Amount overcut t_2 (mm)
1.5	2	6	2	0.9	-
			3	0.66	-
			4	0.41	0.26

Note: Each value in table is calculated theoretically at the maximum condition.

BT50-FM

Shell mill holder, long type (BT)

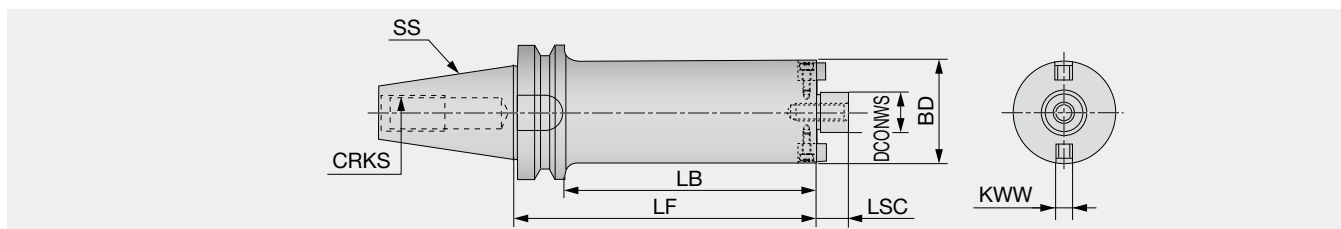


Designation	SS	DCONWS	BD	LSC	LF	LB	CRKS	KWW	WT(kg)
BT50-FMC22-138-47	50	22	47	18	138	100	M24	10	5.2
BT50-FMC22-188-47	50	22	47	18	188	150	M24	10	5.9
BT50-FMC22-243-47	50	22	47	18	243	205	M24	10	6.5
BT50-FMC22-293-47	50	22	47	18	293	255	M24	10	7.2
BT50-FMC22-178-59	50	22	59	18	178	140	M24	10	6.8
BT50-FMC22-238-59	50	22	59	18	238	200	M24	10	8
BT50-FMC22-308-59	50	22	59	18	308	270	M24	10	9.5
BT50-FMC22-373-59	50	22	59	18	373	335	M24	10	10.9
BT50-FMA31.75-215-76	50	31.75	76	30	215	177	M24	12.7	10
BT50-FMA31.75-295-76	50	31.75	76	30	295	257	M24	12.7	12.9
BT50-FMA31.75-375-76	50	31.75	76	30	375	337	M24	12.7	15.8
BT50-FMA31.75-275-96	50	31.75	96	30	275	237	M24	12.7	16.8
BT50-FMA31.75-375-96	50	31.75	96	30	375	337	M24	12.7	23

Option: Wrench for collet

DIN69871-SEM

Shell mill holder with coolant hole, long type (DIN69871)

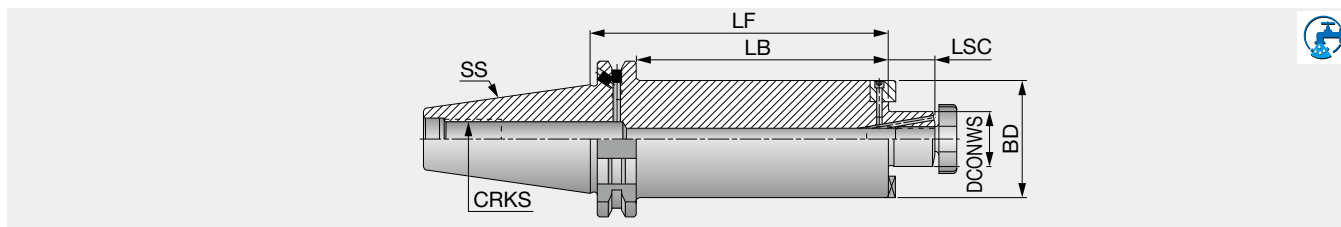

Designation	SS	DCONWS	LSC	BD	LF	LB	CRKS
DIN6987150SEM22X48X200C	50	22	19	48	200	181	M24
DIN6987150SEM22X61X300C	50	22	19	61	300	281	M24
DIN6987150SEM27X61X300C	50	27	21	61	300	281	M24
DIN6987150SEM32X78X370C	50	32	24	78	370	351	M24


- Applicable for 10 MPa coolant

- When being used as a flange-through type, the plug screw must be removed from the flange with a 2-mm hex key

Option: Wrench for center bolt

BT-SEM-C

Shell mill holder with coolant hole, long type (BT)

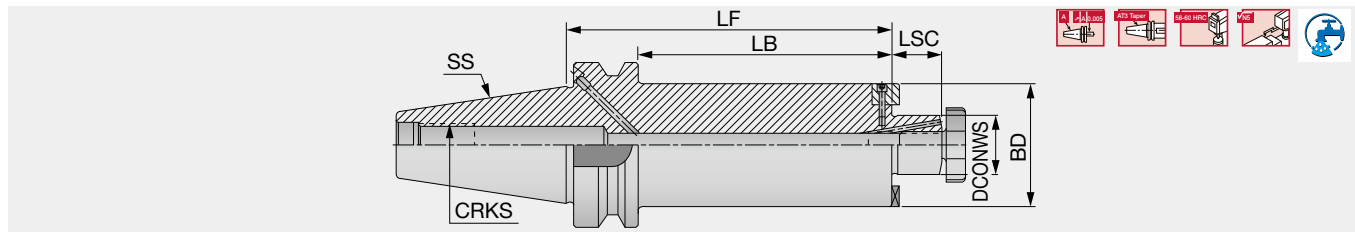

Designation	SS	DCONWS	BD	LF	LB	LSC	CRKS
BT40SEM16X60C	40	16	38	60	33	17	M16
BT40SEM16X100C	40	16	38	100	73	17	M16
BT40SEM22X100C	40	22	47	100	73	19	M16
BT40SEM27X100C	40	27	58	100	73	21	M16
BT40SEM32X60C	40	32	66	60	33	24	M16
BT50SEM16X100C	50	16	38	100	62	17	M24
BT50SEM22X75C	50	22	47	75	37	19	M24
BT50SEM22X48X220C	50	22	48	220	182	19	M24
BT50SEM22X61X320C	50	22	61	320	282	19	M24
BT50SEM25.4X60C	50	25.4	50.4	60	22	22	M24
BT50SEM27X100C	50	27	58	100	62	21	M24
BT50SEM27X61X320C	50	27	61	320	282	21	M24
BT50SEM32X75C	50	32	66	75	37	24	M24
BT50SEM32X100C	50	32	66	100	62	24	M24
BT50SEM32X78X390C	50	32	78	390	352	24	M24


- Applicable for 10 MPa coolant

- When being used as a flange-through type, the plug screw must be removed from the flange with a 2-mm hex key

Option: Wrench for lock screw

SM TungFlex-straight shank

Screw-clamp holder for modular heads (straight shank)

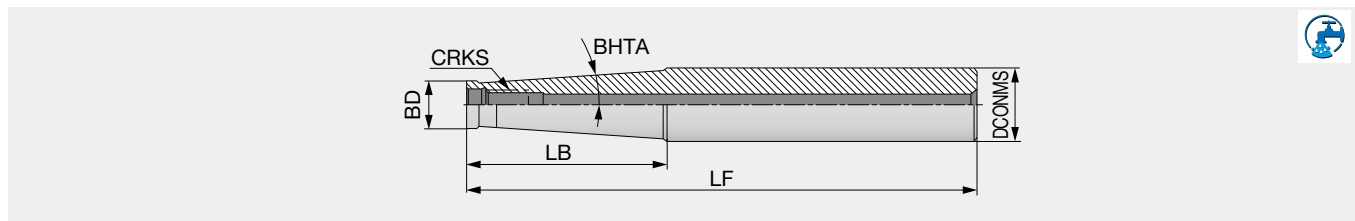

Designation	DCONMS	BD	LF	LB	BHTA	CRKS
SM06-L60C10	10	9.7	60	20	0°	M6
SM06-L105-C12	12	9.7	105	60	1.2°	M6
SM06-L125-C16	16	9.7	125	60	3.3°	M6
SM08-L73C16	16	13	73	25	0°	M8
SM08-L128-C16	16	13	128	80	0.9°	M8
SM08-L170-C20	20	13	170	66.8	3.3°	M8
SM10-L80C20	20	18	80	30	0°	M10
SM10-L130-C20	20	18	130	80	0.6°	M10
SM10-L200-C25	25	19	200	57.2	3.3°	M10
SM12-L86-C25	25	21	86	30	5.1°	M12
SM12-L200-C32	32	21	200	78	4.4°	M12
SM16-L95-C32	32	29	95	35	1.7°	M16
SM16-L230-C32	32	29	230	50	1.8°	M16

- Applicable for 10 MPa coolant

- A coolant hole with all types of shanks

TECHNICAL GUIDE FOR OPTIMUM TOOLING

● For long overhang tool setup

The number of teeth



When using a tool overhang of over 4xD up to 6xD, extra care must be taken in determining the number of teeth and the cutting parameters to be used for the application.

A cutter body with **standard tooth pitch** must be selected as a minimum number of teeth are always in contact with the workpiece simultaneously for maximum tool stability.

Cutting parameter settings

The cutting parameters must be set **within the range as described below**.

For a tool overhang of over 6xD, use a taper shank or carbide shank holder or **BoreMeister** holder with vibration dampening for extra machining stability.

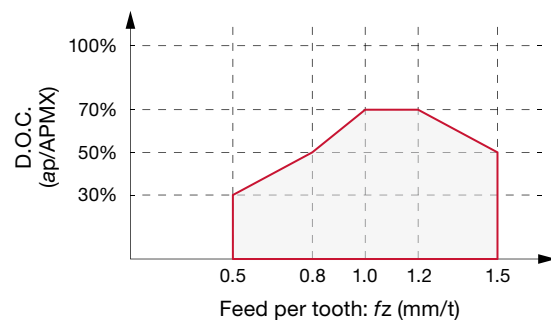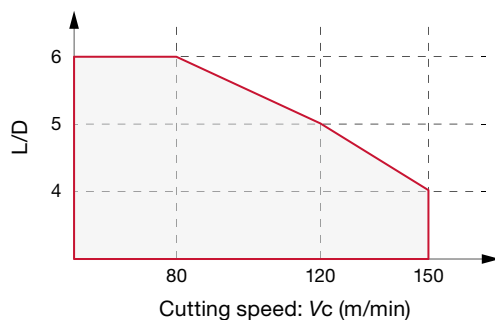


Chipbreakers

Soft cutting inserts eliminate chatter and provide stability during machining.

Four different chipbreaker styles of **DoFeed** inserts are described below in order from the lowest cutting load to the highest.

Select a softer cutting chipbreaker when excess chatter occurs.

(All four chipbreakers are not available for all insert sizes. See the list below for chipbreaker availability for each insert size.)

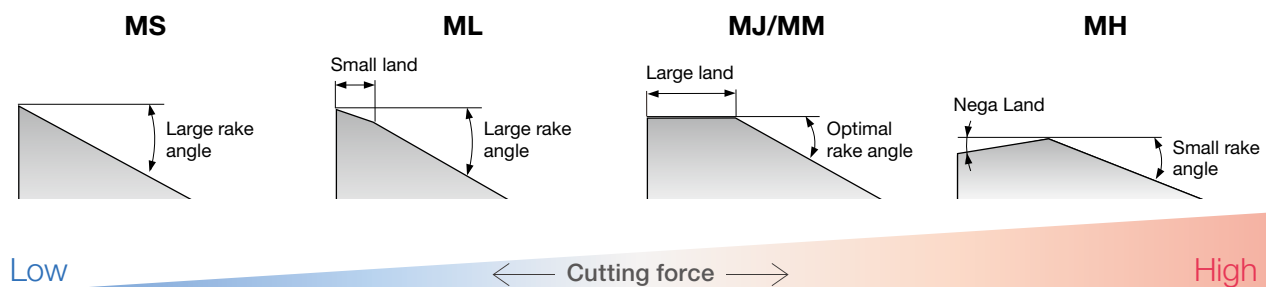

Chipbreaker availability for each insert size


Insert size	MS	ML	MJ/MM	MH
02	-	-	✓	-
03	✓	✓	✓	✓
06	-	✓	✓	✓

● Milling of shoulders located deep

Extra care must be taken for work-tool interference.

For **straight bodies**, whose cutter and shank diameters are identical, maximum axial cutting depth that allows machining without interference will be: **Head Length (LH) - 2 mm**.

To avoid tool interference with the workpiece, use reduced-shank cutter bodies or modular system tools, whose cutter diameter is larger than the shank diameter.

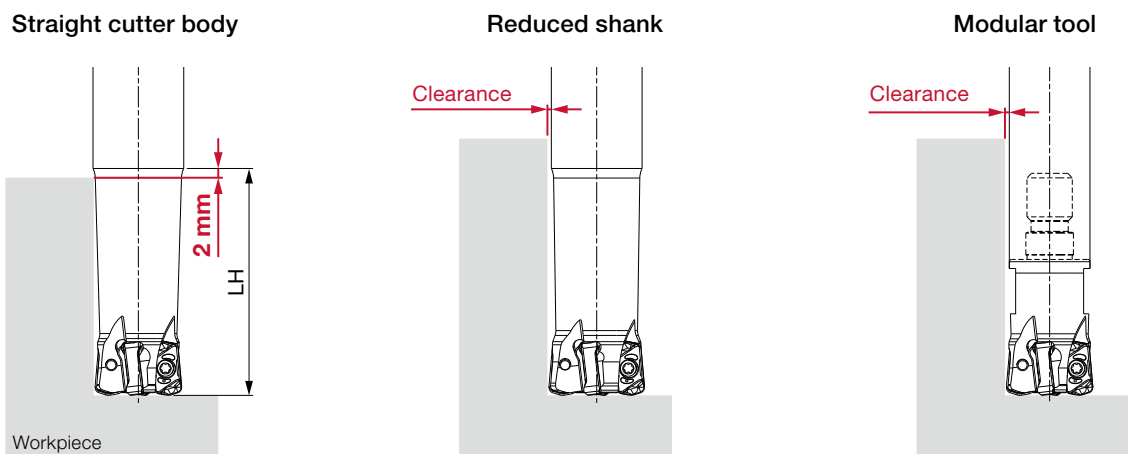

● Insert selection for machining hard materials

The following list shows optimal insert grade and chipbreaker selections for different hardness scale ranges.

H	Hardness range of the workpiece (HRC)	Chipbreaker			Grade	
	- 40	First choice	MJ/MM		First choice	AH3225
		For soft cutting/ built-up edge resistance	ML		Wear resistance	AH8015
	40 - 45	First choice	MJ/MM		First choice	AH3225
		For impact resistance	MH		Wear resistance	AH8015
	45 - 55	First choice	MH		First choice	AH8015
					Wear resistance	AH8005
	55 - 60	First choice	MH		First choice	AH8005
					Impact resistance	AH8015

● Common fracture patterns and remedies

Flank wear is one of the common, and ideal, wear mode. However, most inserts end up with fracture wear due to the interrupted nature of the milling process.

Fracture wear can be caused by various factors, and the most common causes are outlined below.


Fracture caused by a weak cutting edge

How to identify

Small edge chipping or noticeable series of chippings along the cutting edge

Common applications

Heavy interrupted cuts; milling of rough surfaces such as cast or hot forged workpieces, welded parts, or hardened steel

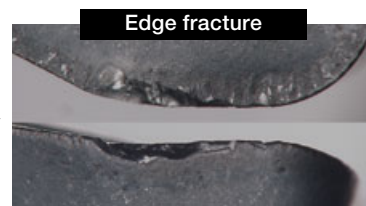

Remedies

Insert	Use an insert grade with higher fracture resistance (see page 6) Use chipbreaker with a stronger cutting edge (see page 34)
Cutting conditions	↓ Decrease cutting speed



Fracture caused when built-up edge is torn away

How to identify

An accumulation of material against the rake face

Common applications

Low speed cutting, dry milling, milling of gummy material

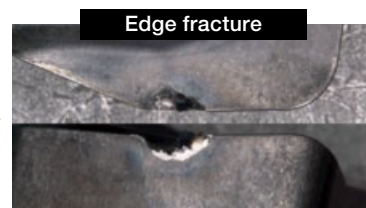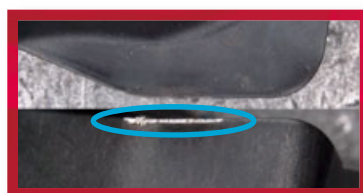

Remedies

Insert	Use an insert grade with higher fracture resistance (see page 6) Use a chipbreaker with sharp cutting edges (see page 34)
Cutting conditions	↑ Increase cutting speed. Use coolant.


Fracture caused by **thermal cracks**

How to identify

Cracks in the tool perpendicular to the cutting edge

Common applications

High speed cutting, milling using coolant, large diameter cutter, machining of high temp alloys

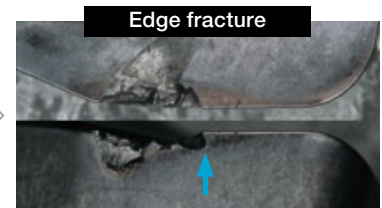

Remedies

Insert	Use an insert grade with higher fracture resistance (see page 6) Use a chipbreaker with sharp cutting edges (see page 34) For Size 03, use UER inserts for thinner chips
Cutting conditions	↓ Decrease cutting speed. Use dry machining.


Fracture caused by **crater wear**

How to identify

Wear appears on the rake face at a short distance from cutting edge
 Typical at the depth of cut line and on the bottom cutting edges

Common applications






High speed cutting, high feed cutting at $fz \geq 1 \text{ mm/z}$, machining of high-tensile steel





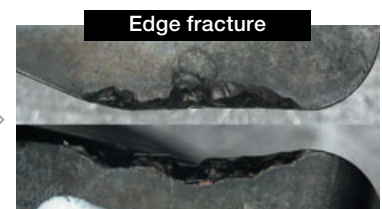


Remedies

Insert	Use an insert grade with higher wear resistance (see page 6) Use a chipbreaker with sharp cutting edges (see page 34) For Size 03, use UER inserts for thinner chips
Cutting conditions	↓ Decrease cutting speed. ↓ Decrease feed per tooth

PRACTICAL EXAMPLES

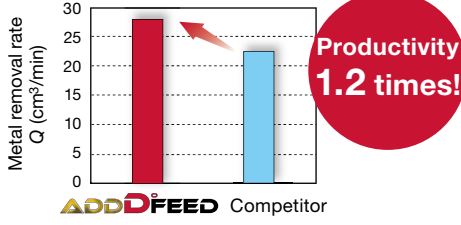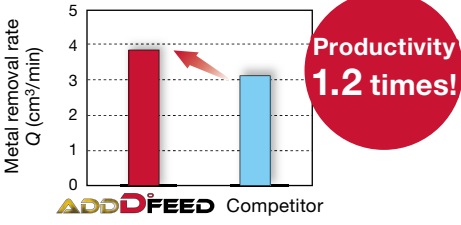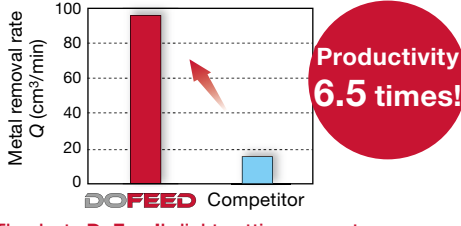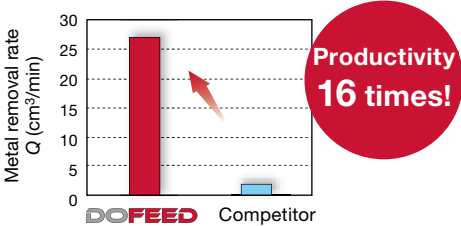Workpiece type		Compressor shaft	Gas turbine component
Cutter		EXN02R010M10.0-02 (ø10 mm, CICT = 2)	EXN02R012M12.0-02 (ø12 mm, CICT = 2)
Insert		LNMU0202ZER-MM	LNMU0202ZER-MM
Grade		AH3225	AH130
Workpiece material		SNCM439 (42HRC)	SUH660
		 P	 M
Cutting conditions	Cutting speed : Vc (m/min)	180	60
	Feed per tooth: fz (mm/t)	0.6	0.5
	Depth of cut : ap (mm)	0.4	0.3
	Width of cut : ae (mm)	10	8
	Machining	Slotting	Shoulder milling
	Coolant	Wet	Wet
	Machine	Vertical M/C, BT30	Vertical M/C, BT50
Results		 AddDoFeed eliminated chatter despite high cutting speed thanks to low cutting force, gaining productivity by 1.2 times.	 AddDoFeed's small depth of cut, but much faster feed improved productivity by 1.2 times.
Workpiece type		Mould base	Turbine blade
Cutter		EXN03R025M25.0-05 (ø25 mm, CICT = 5)	EXN03R030M32.0-05 (ø30 mm, CICT = 5)
Insert		LNMU0303ZER-MJ	LNMU0303ZER-ML
Grade		AH725	AH725
Workpiece material		SC360	Heat resistant cast steel
		 P	 S
Cutting conditions	Cutting speed : Vc (m/min)	140	70
	Feed per tooth: fz (mm/t)	0.48	0.5
	Depth of cut : ap (mm)	0.9	0.5
	Width of cut : ae (mm)	25	30
	Machining	Slot milling	Shoulder milling
	Coolant	Dry	Wet
	Machine	Horizontal M/C, BT50	Vertical M/C, BT50
Results		 Thanks to DoFeed's light cutting geometry, the MRR has improved by 650%, while maintaining the same level of, or even reduced, spindle load as the competitor's tool. Chip re-cutting has significantly reduced, while increasing the tool life by 7-fold.	 Tripled cutting speed and super high feed milling offer 16 times higher productivity.

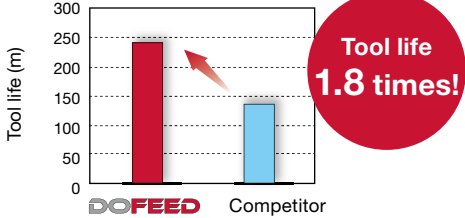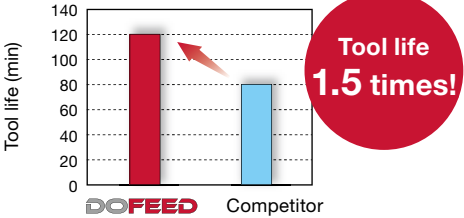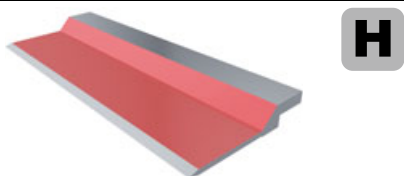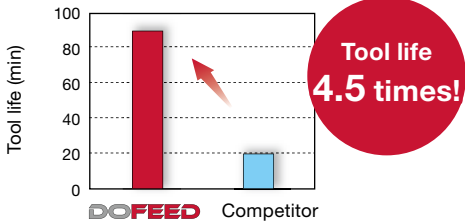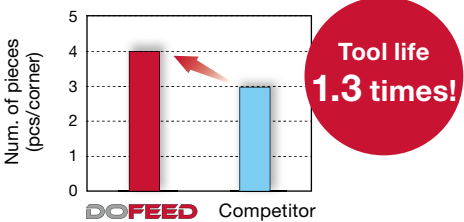Workpiece type		Die & Mould	Aircraft part
Cutter		HXN03R025MM12-05 (ø25 mm, CICT = 5)	EXN03R025M25.0-05-C (ø25 mm, CICT = 5)
Insert		LNMU0303UER-MJ	LNMU0303UER-ML
Grade		AH3225	AH130
Workpiece material		SKD61 / X40CrMoV5-1 (45HRC)	15-5PH
			
Cutting conditions	Cutting speed : Vc (m/min)	118	105
	Feed per tooth: fz (mm/t)	0.4	0.33
	Depth of cut : ap (mm)	0.5	0.76
	Width of cut : ae (mm)	- 25	- 25
	Machining	Contouring	Profiling
	Coolant	Dry	Wet
	Machine	Vertical M/C, HSK63	Vertical M/C, BT40
Results		 UER inserts in AH3225 grade provided 180% tool life increase.	 UER inserts provided 150% tool life increase in exotic material.
Workpiece type		Die & Mould	Press-cutter blade
Cutter		TXN06R063M22.0E04 (ø63 mm, CICT = 4)	TXN06R063M22.0E06 (ø63 mm, CICT = 6)
Insert		LNMU06X5ZER-MJ	LNGU06X5ZER-MH
Grade		AH3225	AH8015
Workpiece material		S45C / C45 (20 - 35 HRC)	SCM440/42CrMo4(44HRC)
			
Cutting conditions	Cutting speed : Vc (m/min)	197	118
	Feed per tooth: fz (mm/t)	1.5	0.8
	Depth of cut : ap (mm)	0.75	0.8
	Width of cut : ae (mm)	45	38
	Machining	Contouring	Face milling
	Coolant	Dry	Dry
	Machine	Vertical M/C, BT50	Vertical M/C
Results		 AH3225 reduced the damage of the bottom cutting edge, extending tool life by 4.5 times.	 A combination of the MH chipbreaker and AH8015 reduced chipping and wear. Tool life has increased to 130%.

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy-NTK America Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloy.com/us

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5799
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy-NTK De Mexico S.A.

C. Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx

Tungaloy-NTK do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy-NTK Germany GmbH.

Katzbergstr. 3a
D-40764 Langenfeld, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.com/de

Tungaloy France s.a.s

Les Fjords
19 avenue de Norvège
91140 Villebon Sur Yvette, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.com/fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.com/it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.com/cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
www.tungaloy.com/es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
Fax: +46-462119207
www.tungaloy.com/se

Tungaloy Rus, LLC

Andropova avenue, h.18/7,
11 floor, office 3, 115432,
Moscow, Russia
Phone: +7-499-683-01-80
Fax: +7-499-683-01-81
www.tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

Ul. Irysowa 1, 55-040 Bielany
Wroclawskie, Poland
Phone: +48 607 907 237
www.tungaloy.com/pl

Tungaloy-NTK UK Ltd.

Suite 3, Pioneer House, Mill Street,
Cannock, WS11 0EF, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu

Tungaloy Turkey

Serifali Mah.bayraktar Bulvari Kule Sk. No:26
34775 Umraniye / Istanbul / Turkey
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com/tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy.com/nl

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430, Samobor, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.com/hr

Tungaloy Cutting Tool (Shanghai) Co. Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.com/cn

Tungaloy Cutting Tools Taiwan Co. Ltd.

9F, No.293, Zhongyang Rd,
Xinzhuan Dist, New Taipei City,
24251 Taiwan
Phone: +886-2-8521-9986
Fax: +886-2-8521-8935
www.tungaloy.com/tw

Tungaloy-NTK Cutting Tool (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.com/th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/singapore

Tungaloy-NTK Vietnam LLC

3rd Floor, Licogi 13 Tower, 164 Khuat Duy
Tien, Nhan Chinh, Thanh Xuan District,
Hanoi, Vietnam
Phone: +84 24 63282086
www.tungaloy.com/vn

Tungaloy India Pvt. Ltd.

One International Center,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai 400013, India
Phone: +91-22-6124-8803
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

Unit 68 1470 Ferntree Gully Road
Knoxfield 3180 Victoria, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com/au

PT. Tungaloy Indonesia

Ruko Blok AA.10 No3&5, Grand Wisata,
Lambangjaya, Tambun Selatan, Bekasi,
17510 Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id



tungaloy.com

follow us at:

facebook.com/tungaloyjapan

twitter.com/tungaloyjapan

www.youtube.com/tungaloycorporation

Distributed by:



Tungaloy APP & SNS

FIND US ON THE CLOUD!
machiningcloud.com



AS9100 Certified
78006
2015.11.04
ISO 14001 Certified
EC97J1123
1997.11.26