



For more information

External turning tool

ADD^{ULTI}MTURN

Tungaloy Report No. 550-G

Expansion of internal coolant tool holder for multi directional turning tool





INDUSTRY 4.0
FEED the SPEED!



ADD^{ULTI}M TURN





Ultra high productivity of Front Turning, Back Turning, Profiling,
and Face Turning with **ONE SINGLE TOOL**

Innovative geometry for high productivity and process security


Double-sided 6-corner insert with 80° or 35° corner angle for versatile applications

- **Back (pull) turning:** High feed designed cutting edge improves productivity about 200% higher than existing ISO tools with no need for special programming.
- **Front (push) turning:** Same machining process is available using the same cutting edge angle as standard ISO tools.

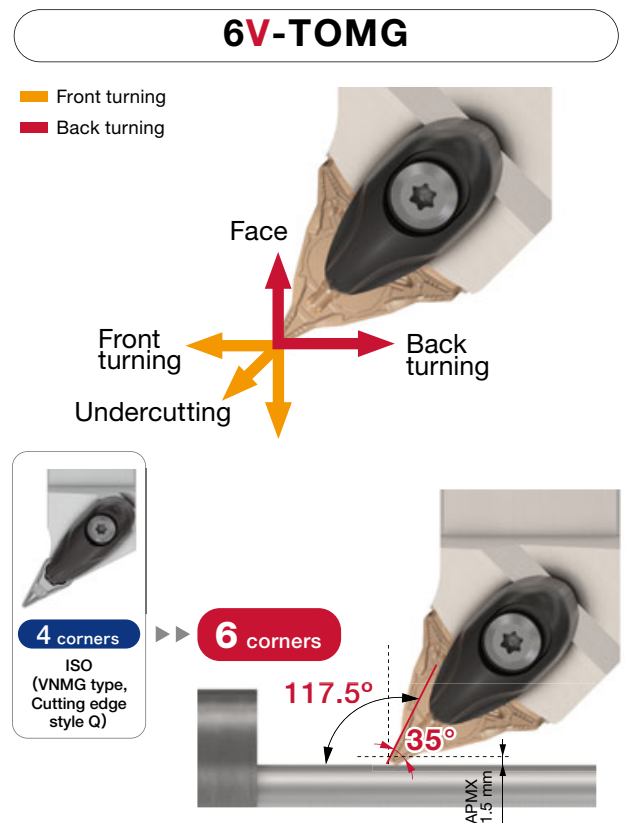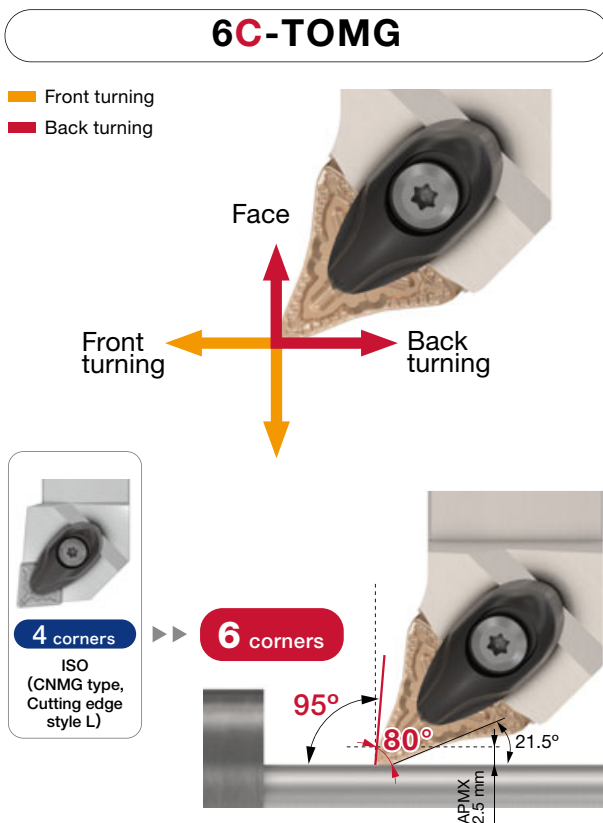


APPLICATION RANGE

Corner angle 80° + TM chipbreaker

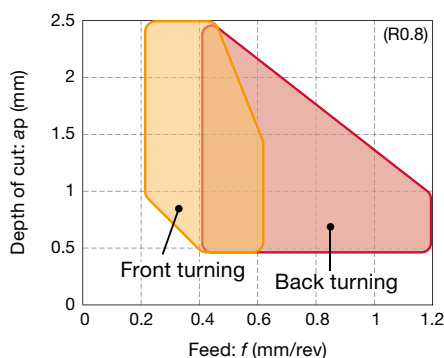

Corner angle 35° + TSF chipbreaker

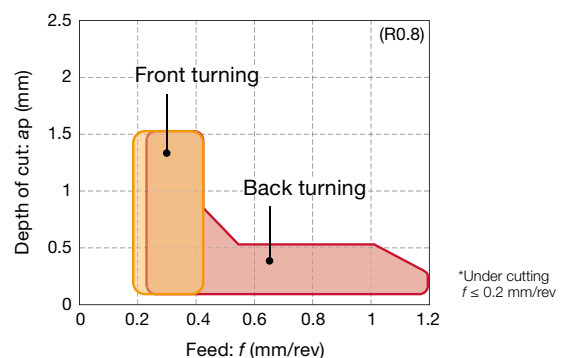

Chip control


Double-sided 6-corner insert

ADD^{MULTI}TURN
6C-TOMG**-TM


Insert : 6C-TOMG250608M-TM T9225
Workpiece material : S45C / C45
Cutting speed : $V_c = 200$ m/min
Coolant : Wet



Front turning

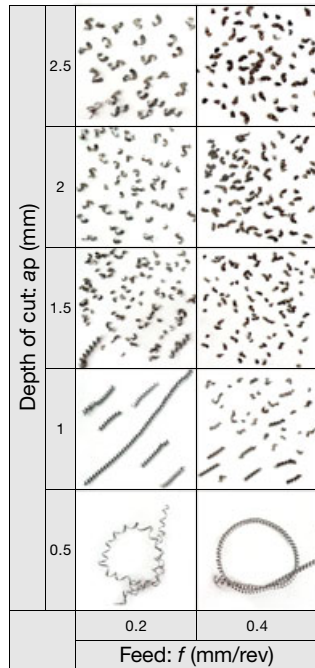

Back turning

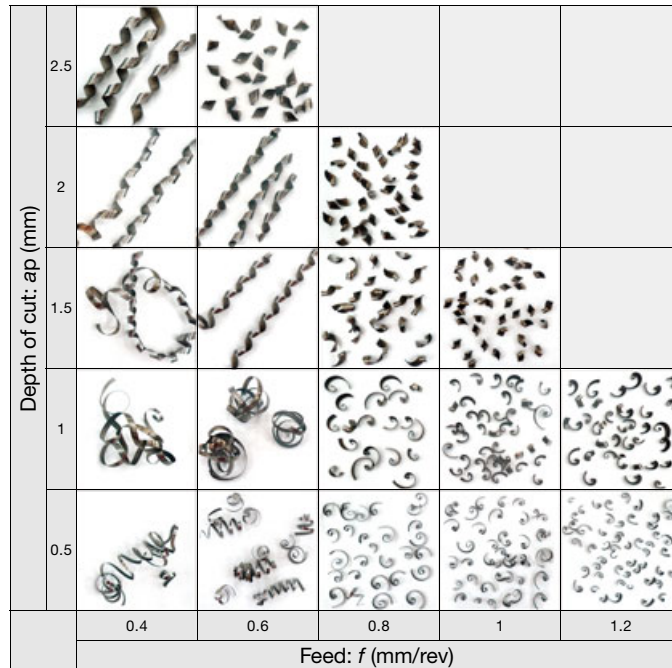

Front turning ← → Back turning

For
6V-TOMG**-TSF
chip control




Medium operation

- Front turning: Excellent chip control
- Back turning: Excellent chip control in high feed


Tool life

Double-sided 6-corner insert

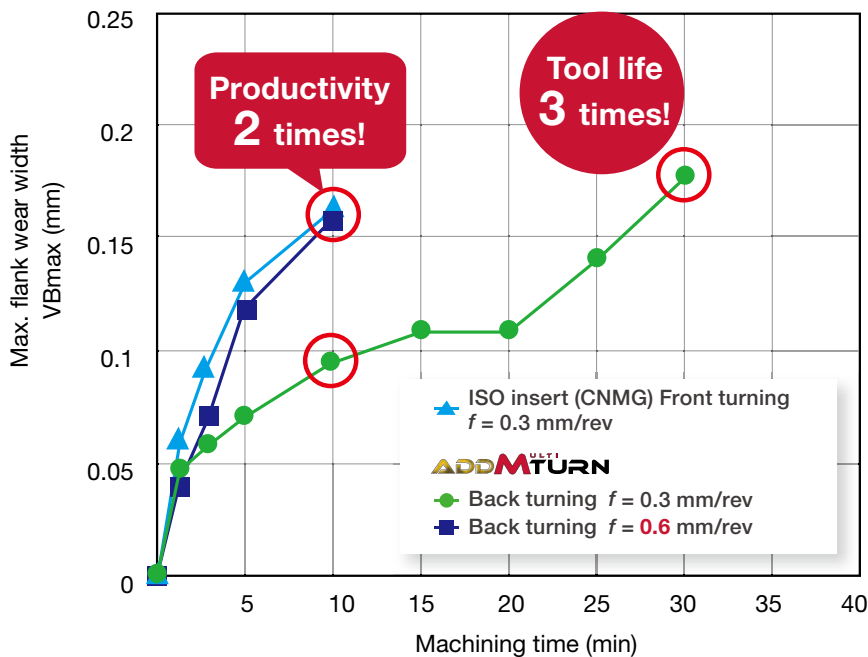

Insert : 6C-TOMG**-TM T9225
Workpiece material : S45C / C45
Cutting speed : $V_c = 250$ m/min
Depth of cut : $a_p = 1.5$ mm
Coolant : Wet

ISO insert (CNMG)
Front turning (10 minutes)



Feed: $f = 0.3$ mm/rev

ADD^{MULTI}TURN
Back turning (10 minutes)



Feed: $f = 0.3$ mm/rev

Feed: $f = 0.6$ mm/rev

AddMultiTurn insert provided triple tool life when fed at the same feed rate as ISO insert.
Double the feed rate with AddMultiTurn compared with ISO insert without compromising tool life.

Expansion of PSC & square shank internal coolant tool holder for double-sided 6-corner inserts

New



PSC tool holder

P9

New




Square shank tool holder

P10 Will be released in 2025

Features

- High rigidity clamping system optimized for multi-directional and high feed turning
- Top 4 coolant holes covers front and back turning
- Effective for preventing crater wear, better chip control

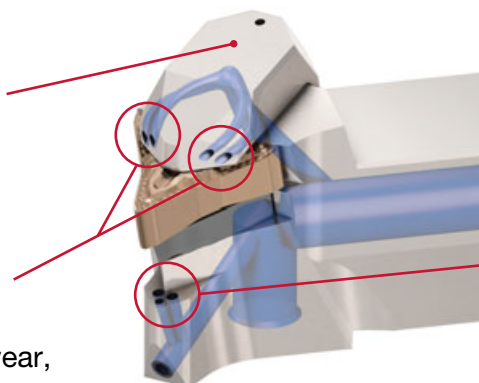

- Bottom 3 coolant holes effective for preventing flank wear and better surface finish

Internal coolant efficiency



Internal coolant supply

New



Approx 4 times higher Coolant efficiency!


External coolant supply

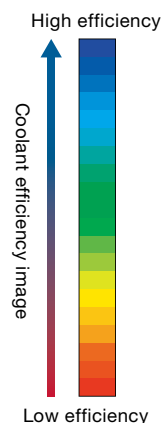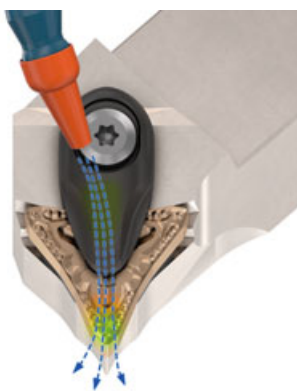

*Internal evaluation

Improve chip control and tool life with internal coolant

P Alloy steel
SCM440 / 42CrMo4



- 1** Insert : 6C-TOMG250608M-TM T9215
Toolholder : ATXOR2525X25-CHP
Cutting speed : $V_c = 250$ m/min
Feed : $f = 0.5$ mm/rev
Depth of cut : $a_p = 1$ mm

Back turning



	New Internal coolant 14 MPa	New Internal coolant 7 MPa	External coolant (Normal pressure)
Depth of cut: a_p (mm)	1	1	1
	0.5	0.5	0.5
	Feed: f (mm/rev)		

2 Front turning

Insert : 6C-TOMG250608M-TM T9215
Cutting speed : $V_c = 250$ m/min
Feed : $f = 0.3$ mm/rev
Depth of cut : $a_p = 1.5$ mm

Back turning

Insert : 6C-TOMG250608M-TM T9215
Cutting speed : $V_c = 250$ m/min
Feed : $f = 1$ mm/rev
Depth of cut : $a_p = 1$ mm

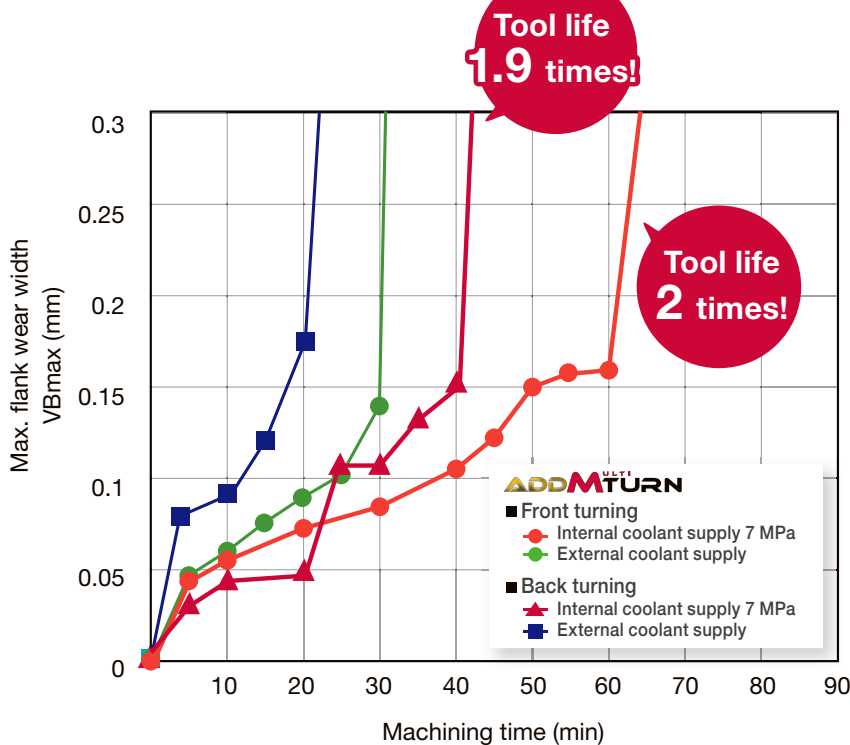


ADDMTURN

Front turning (30 minutes)




Internal coolant supply
7 MPa




External coolant supply
(Normal pressure)

ADDMTURN

Back turning (20 minutes)



Internal coolant supply
7 MPa



External coolant supply
(Normal pressure)

New Internal coolant tool holder achieved 2 times longer in front turning, 1.9 times longer in back turning compared with external coolant supply!


Improve chip control and tool life with internal coolant

M Stainless steel
SUS304 / X5CrNi18-9


- 1 Insert : 6C-TOMG250608M-TM AH8015
Toolholder : ATXOR2525X25-CHP
Cutting speed : $V_c = 250$ m/min
Feed : $f = 0.5$ mm/rev
Depth of cut : $a_p = 1$ mm

Back turning

		New		
		Internal coolant 14 MPa	Internal coolant 7 MPa	External coolant (Normal pressure)
Depth of cut: a_p (mm)	1			
	0.5			
		Feed: f (mm/rev)		



- 2 Insert : 6C-TOMG250608M-TM AH8015
Workpiece material : SUS304 / X5CrNi18-9
Cutting speed : $V_c = 150$ m/min
Feed : $f = 0.8$ mm/rev.
Depth of cut : $a_p = 1$ mm

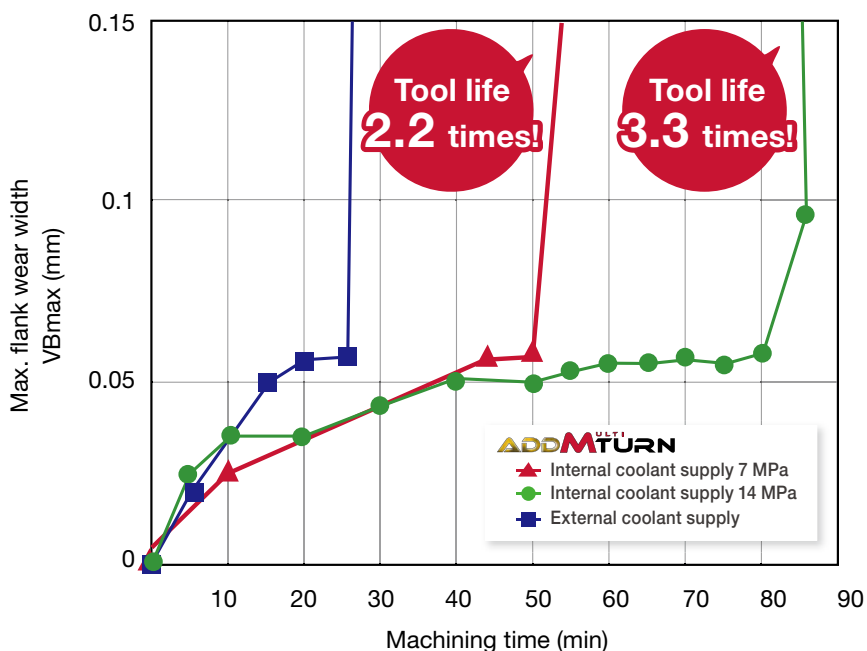

ADDMULTURN

Back turning (20 minutes)



Internal coolant supply
7 MPa




External coolant supply
(Normal pressure)

New Internal coolant tool holder achieved 2.2 times longer tool life compared with external coolant supply! Tool life extended to 3.3 times longer with high-pressure coolant.

New

C-ATXOR/L-CHP

Double-clamp toolholder, with 95° approach angle, for negative 80°/70° rhombic inserts (TurningA)

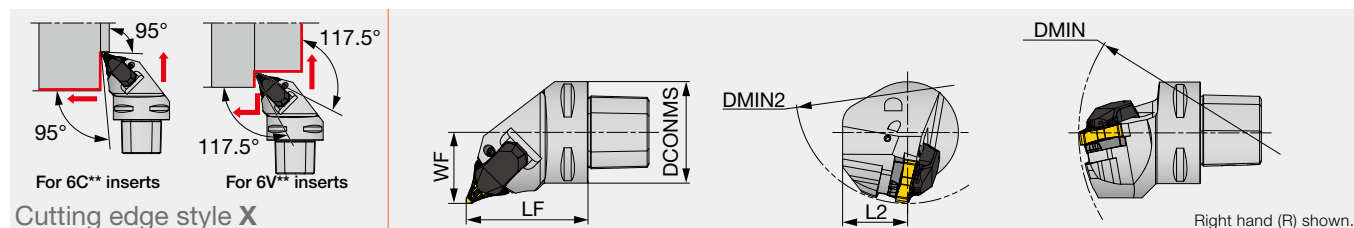

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert	Torque*
C4ATXOR/L27050-25-CHP	40	50	25	27	140	110	0.8	6C/6V-TOMG2506**	3
C5ATXOR/L35060-25-CHP	50	60	32	35	165	110	0.8	6C/6V-TOMG2506**	3
C6ATXOR/L45065-25-CHP	63	65	32	45	190	120	0.8	6C/6V-TOMG2506**	3


Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius

New

C-ATEON-CHP

Double-clamp toolholder, with 50° approach angle, for negative 80°/70° rhombic inserts

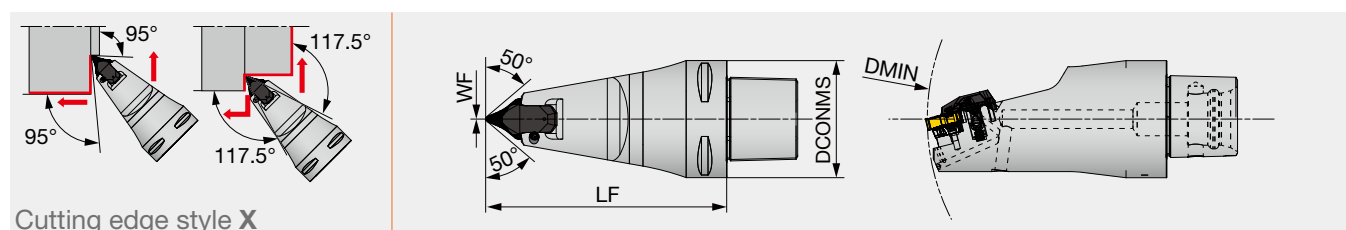

Designation	DCONMS	LF	WF	DMIN	RE**	Insert	Torque*
C6ATEON00130-25-CHP	63	130	0	190	0.8	6C/6V-TOMG2506**	3

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius

SPARE PARTS


Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench	O-ring
C*ATXOR/L****-25-CHP, C6ATEON00130-25-CHP	AC-Y-PRISM-CHP	SR 11800782	LST33	CSTB-3.5	BP-4.5	T-15F	ORAS568-2.62X6.02

New

ATXOR/L-CHP

★: Will be released in 2025

Double-clamp toolholder with 95° and 117.5° approach angle, for negative 80° and 35° triangular inserts

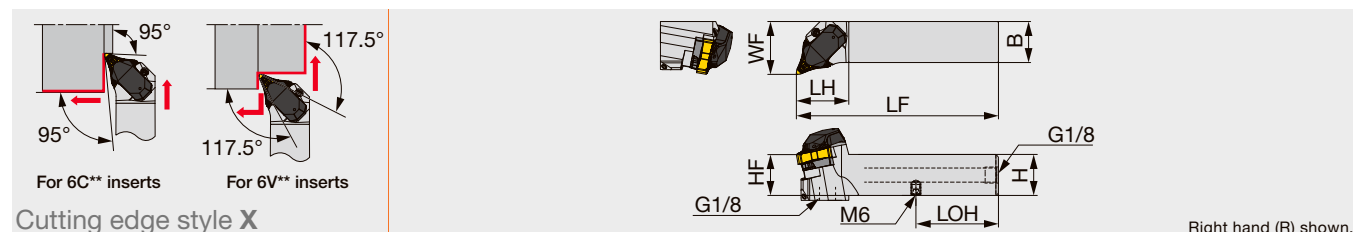

Designation	H	B	LF	LH	LOH	HF	WF	RE**	Insert	Torque*
ATXOR/L2020X25-CHP	20	20	122	32	61.75	20	25	0.8	6C/6V-TOMG2506**	3
ATXOR/L2525X25-CHP	25	25	122	32	56.25	25	32	0.8	6C/6V-TOMG2506**	3

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius

Applicable for 14 MPa pressure coolant

Parts for coolant hose information




SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench	O-ring
ATXOR/L***X25-CHP	AC-Y-PRISM-CHP	SR 11800782	LST33	CSTB-3.5	BP-4.5	T-15F	ORAS568-2.62X6.02

ATXOR/L

Double-clamp toolholder with 95° and 117.5° approach angle, for negative 80° and 35° triangular inserts

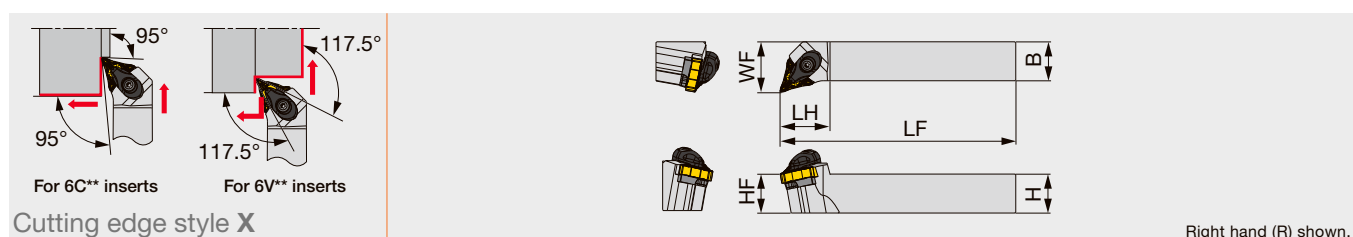

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ATXOR/L2020K25-A	20	20	125	32	20	25	0.8	6C/6V-TOMG2506...	3
ATXOR/L2525M25-A	25	25	150	32	25	32	0.8	6C/6V-TOMG2506...	3
ATXOR/L3232P25-A	32	32	170	32	32	40	0.8	6C/6V-TOMG2506...	3

Torque*: Recommended clamping torque (N·m)


RE**: Standard corner radius

SPARE PARTS


Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ATXOR/L**25-A	ACP4S	ACS-5W	BP-7	SP-2.5	LST33 KS15F	CSTB-3.5	T-15F

INSERT

6V-TOMG**F-TSF

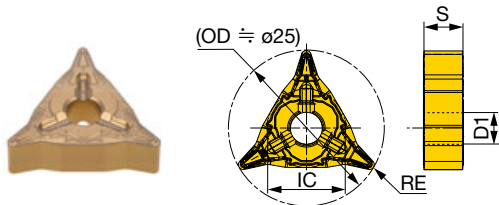

6C-TOMG**M-TM

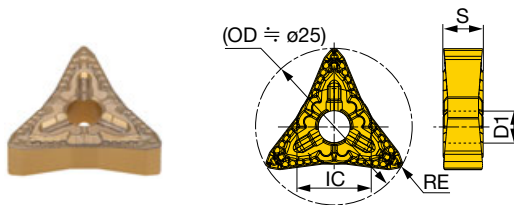

P	Steel	★	★				
M	Stainless	☆		☆			
K	Cast iron	☆					
N	Non-ferrous						
S	Superalloys			★			
H	Hard materials						

★ : First choice
☆ : Second choice

Designation	RE	Coated										IC	S	D1	
		T9215	T9225	AH8015											
6V-TOMG250604F-TSF	0.4	●	●	●									12.7	6.35	5.16
6V-TOMG250608F-TSF	0.8	●	●	●									12.7	6.35	5.16
6C-TOMG250608M-TM	0.8	●	●	●									12.1	6.35	5.16
6C-TOMG250612M-TM	1.2	●	●	●									12.1	6.35	5.16

Please note: When machining using the pull face-turning method, the **6V-TOMG2506...** insert may interfere with workpieces having an external diameter of 70 mm or smaller, and the **6C-TOMG2506...** insert may interfere with workpieces of 30 mm or smaller.


● : Line up

Single-sided 3-corner insert for super high productivity


- Back (pull) turning: High feed designed cutting edge improves productivity 300 - 400% higher than standard ISO tools.
- Front (push) turning: Applicable for large D.O.C.

3C-TCMT

■ Front turning
■ Back turning

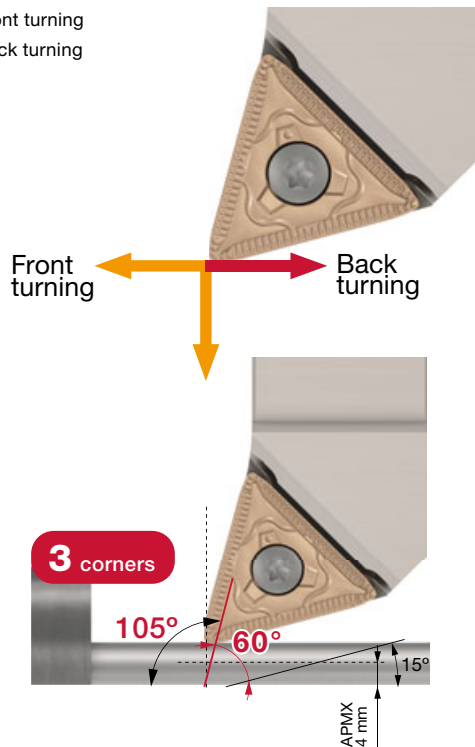


Unique cutting edge (Corner R + large radius arc) enables higher feed rates to be applied and better wear resistance for long tool life

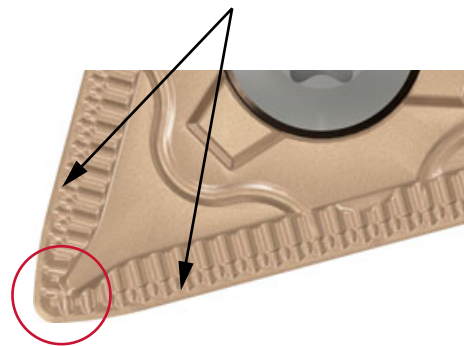

APPLICATION RANGE

Single-sided 3-corner + TM chipbreaker

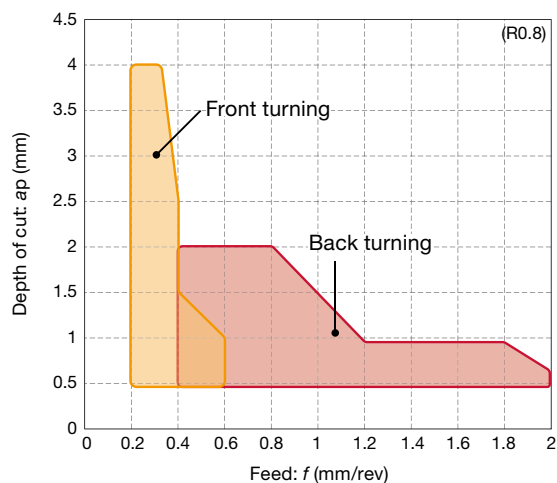

Screw-on toolholder with 105° approach angle, for positive triangular inserts




Right hand (R) shown.

SPARE PARTS



3C-TCMT**-TM




★ : First choice
☆ : Second choice

Please note that 3C-TCMT... insert is not recommended for pull face-turning method (pulling the insert away from the part center).

tungaloy.com





I Y-PRISM Secure insert clamping system

- **Y-PRISM**'s safe lock design has a rail on the shim/toolholder and matching slot on the insert for tight interlocking and secure clamping.
- Prevents the cutting forces from affecting the tool position in any direction and ensures high stability.

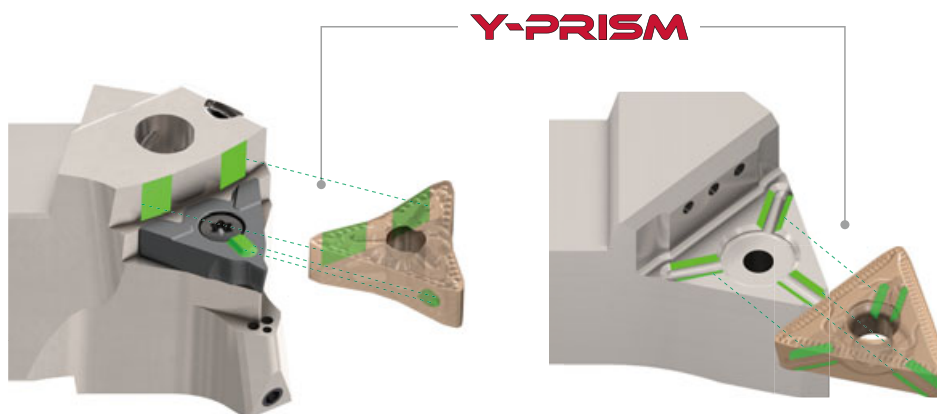

Clamp rigidity – cutting point displacements after machining (Back turning → Front turning)

Y-PRISM achieved high accuracy cutting edge position!!

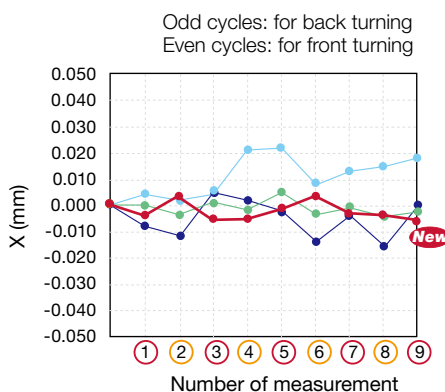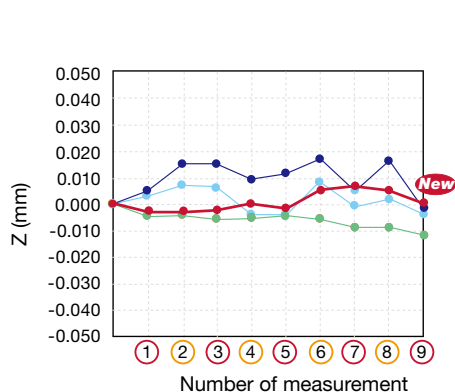

ADDMULTURN
 Insert: **6C-TOMG250608M-TM**
New **ADDMULTURN**
 Insert: **3C-TCMT29X608-TM**
 Competitor

Workpiece material : S45C / C45
 Cutting speed : $V_c = 250$ m/min

Back turning
 Feed : $f = 1$ mm/rev
 Depth of cut : $a_p = 1$ mm

Front turning
 Feed : $f = 0.4$ mm/rev
 Depth of cut : $a_p = 1.5$ mm

■ Cautions when mounting the insert on the holder

- 1 Ensure that the rail on the shim/toolholder is positioned on the matching slot on the insert




- 2 Ensure that the clamp is tightened on the shim and insert using the proper torque



Note: As the insert and shim/toolholder are interlocked on the rail and slot, it is no problem to have the clearance shown above.

- 3 Programming sample to change from front turning to back turning

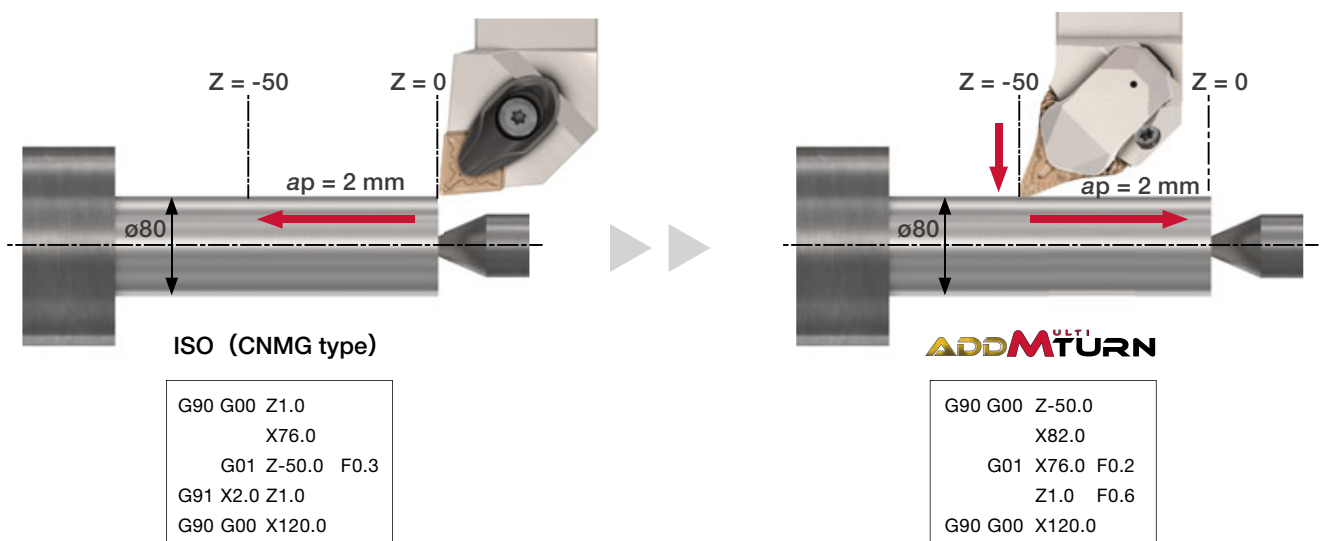

*When entering the cut, feed the tool at 0.2 mm/rev or use roll-in approach.

*When turning away from the main chuck, the cutting edge contact with the workpiece becomes larger, generating greater cutting load than when turning towards the chuck. Always use the tailstock support.

GRADES

Grade	Recommended workpiece material	Feature
PREMIUMTEC T9215	P M K	- Well-balanced wear and chipping resistance - First choice for steel - High versatility for a wide range of applications
PREMIUMTEC T9225	P	- First choice for roughing to medium cutting - High fracture resistance
PREMIUMTEC AH8015	M S	- PVD coated grade with a balanced resistance to wear and fracture - First choice for stainless steel and heat-resistant superalloys

STANDARD CUTTING CONDITIONS





Double-sided 6-corner insert

ISO	Operation	Chipbreaker	Grade	Depth of cut: ap (mm)		Feed: f (mm/rev)		Cutting speed
				Front turning	Back turning	Front turning	Back turning	Vc (m/min)
P	Finishing	TSF	T9215	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	150 - 400
		TSF	T9225	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	80 - 300
	Medium to heavy cutting	TM	T9215	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	150 - 400
		TM	T9225	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	80 - 300
M	Finishing	TSF	T9215	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	100 - 250
		TSF	AH8015	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	90 - 190
	Medium to heavy cutting	TM	T9215	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	100 - 250
		TM	AH8015	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	90 - 190
K	Finishing	TSF	T9215	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	140 - 500
	Medium to heavy cutting	TM	T9215	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	140 - 500
S	Finishing	TSF	AH8015	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	20 - 80
	Medium to heavy cutting	TM	AH8015	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	20 - 80

Single-sided 3-corner insert

ISO	Operation	Chipbreaker	Grade	Depth of cut: ap (mm)		Feed: f (mm/rev)		Cutting speed
				Front turning	Back turning	Front turning	Back turning	Vc (m/min)
P	Medium to heavy cutting	TM	T9215	0.5 - 4	0.5 - 2	0.2 - 0.6	0.4 - 2	150 - 400
M	Medium to heavy cutting	TM	T9215	0.5 - 4	0.5 - 2	0.2 - 0.6	0.4 - 2	100 - 250
K	Medium to heavy cutting	TM	T9215	0.5 - 4	0.5 - 2	0.2 - 0.6	0.4 - 2	140 - 500

PRACTICAL EXAMPLES

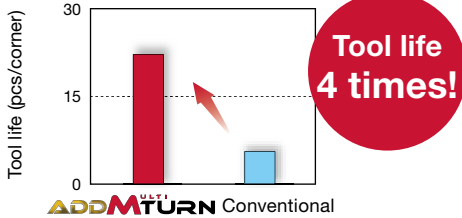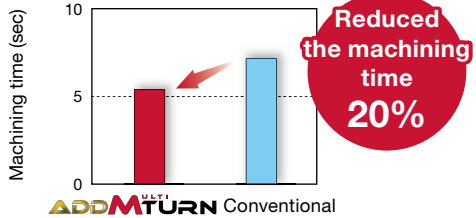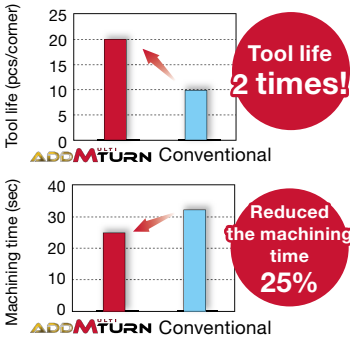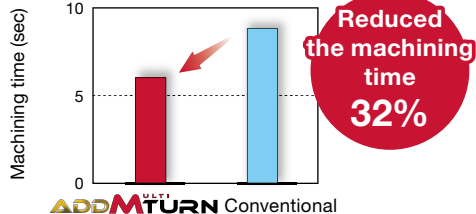Workpiece type		Automotive part	Wheels
Toolholder		ATXOR2525X25-CHP	C5ATXOR35060-25-CHP
Insert		6C-TOMG250612M-TM	6C-TOMG250608M-TM
Grade		T9215	T9215
Workpiece material		SUP10 (51CrV4)	FCD500
			
Cutting conditions	Cutting speed : V_c (m/min)	200	250
	Feed : f (mm/rev)	0.35 - 1	0.35 - 0.6
	Depth of cut : a_p (mm)	Max 2.5	1.2
	Machining	Face and External turning	Face and External turning
	Coolant	Internal coolant (4MPa)	Internal coolant (Normal pressure)
Results		 Tool life (pcs/corner) Tool life 4 times! ADDMultiTURN Conventional New internal coolant AddMultiTurn extends tool life by 4 times, thanks to effective coolant supply at 4 MPa.	 Machining time (sec) Reduced the machining time 20% ADDMultiTURN Conventional New Internal coolant AddMultiTurn reduced machining time by 20% thanks to high feed back turning, while tool life was equal to or better than current tools.
Workpiece type		Atomizer part	Input shaft
Toolholder		ATXOR2525X25-CHP	ATXOL2525M25-A
Insert		6C-TOMG250612M-TM	6C-TOMG250608M-TM
Grade		AH8015	T9215
Workpiece material		INCONEL 625	SCr420 / 20Cr4
			
Cutting conditions	Cutting speed : V_c (m/min)	50	147
	Feed : f (mm/rev)	0.25 - 0.44	Face turning: 0.35, External turning: 0.5
	Depth of cut : a_p (mm)	Max 2	Face turning: 1 - 2, External turning: 0.5
	Machining	External turning	Face turning, External turning
	Coolant	Internal coolant (4MPa)	Wet (External coolant)
Results		 Tool life (pcs/corner) Tool life 2 times! ADDMultiTURN Conventional Machining time (sec) Reduced the machining time 25% ADDMultiTURN Conventional New internal coolant AddMultiTurn extended tool life by 2 times and reduced machining time by 25%, thanks to high-feed back turning and effective coolant supply at 4 MPa.	 Machining time (sec) Reduced the machining time 32% ADDMultiTURN Conventional AddMultiTurn reduced machining time by 32% and prevented burr formation thanks to high-feed back turning.

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy-NTK America Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloy.com/us

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.com/ca

Tungaloy-NTK De Mexico S.A.

C. Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.com/mx

Tungaloy-NTK do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com/br

Tungaloy-NTK Germany GmbH.

Katzbergstr. 3a
D-40764 Langenfeld, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.com/de

Tungaloy France s.a.s

Les Fjords
19 avenue de Norvège
91140 Villebon Sur Yvette, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.com/fr

Tungaloy Italia S.r.l.

Viale Sarca 336/Edificio 13
20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.com/it

Tungaloy Czech s.r.o.

Turanka 1583/115g,
627 00 Brno, Czech Republic
Phone: +420-532 123 391
www.tungaloy.com/cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
www.tungaloy.com/es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
Fax: +46-462119207
www.tungaloy.com/se

Tungaloy Rus, LLC

Andropova avenue, h.18/7,
11 floor, office 3, 115432,
Moscow, Russia
Phone: +7-499-683-01-80
Fax: +7-499-683-01-81
www.tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

Ul. Irysowa 1, 55-040 Bielany
Wroclawskie, Poland
Phone: +48 607 907 237
www.tungaloy.com/pl

Tungaloy-NTK UK Ltd.

Suite 3, Pioneer House, Mill Street,
Cannock, WS11 0EF, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.com/uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.com/hu

Tungaloy Turkey

Serifali Mah.bayraktar Bulvari Kule Sk. No:26
34775 Umraniye / Istanbul / Turkey
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com/tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy.com/nl

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430, Samobor, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.com/hr

Tungaloy Cutting Tool (Shanghai) Co. Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.com/cn

Tungaloy Cutting Tools Taiwan Co. Ltd.

9F, No.293, Zhongyang Rd,
Xinzhuan Dist, New Taipei City,
24251 Taiwan
Phone: +886-2-8521-9986
Fax: +886-2-8521-8935
www.tungaloy.com/tw

Tungaloy-NTK Cutting Tool (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.com/th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #08-09 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.com/singapore

Tungaloy-NTK Vietnam LLC

3rd Floor, Licogi 13 Tower, 164 Khuat Duy
Tien, Nhan Chinh, Thanh Xuan District,
Hanoi, Vietnam
Phone: +84 24 63282086
www.tungaloy.com/vn

Tungaloy India Pvt. Ltd.

One International Center,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai 400013, India
Phone: +91-22-6124-8803
Fax: +91-22-6124-8899
www.tungaloy.com/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.com/my

Tungaloy Australia Pty Ltd

Unit 68 1470 Ferntree Gully Road
Knoxfield 3180 Victoria, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com/au

PT. Tungaloy Indonesia

Ruko Blok AA.10 No3&5, Grand Wisata,
Lembangjaya, Tambun Selatan, Bekasi,
17510 Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.com/id



tungaloy.com

follow us at:

facebook.com/tungaloyjapan

twitter.com/tungaloyjapan

www.youtube.com/tungaloycorporation

Distributed by:



Tungaloy APP & SNS



AS9100 Certified
78006
2015.11.04
ISO 14001 Certified
EC97J1123
1997.11.26