



External Toolholder - Content structure


- Indexable toolholders are listed by cutting edge shape.
- Toolholders in the catalog are our standard items.

How to use the page

- Method①** Select the cutting edge shape described at the left end of each page, jump to the page on the left index, and choose a designation you need (4) in the dimension table (3). Applicable inserts are shown in (6) and (8).
- Method②** Select the cutting edge on **C003** and check the details on the product page.
- Method③** Select the series name of a toolholder on **C003** and check the details on each page.
- Method④** Select an item from Quick Guide on **C004 - C010**.

② TURNING

C-ACLNR/L
Double-clamp toolholder, with 95° approach angle, for negative 80°/70° rhombic inserts (TurningA)




Designation table:

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert	Torque*
CSACLNR/L22040-09040	32	40	20	22	110	121	0.8	CN**GMA0204L	3
CSACLNR/L22040-12N	32	40	20	22	121	116	0.8	CN**GMA0204L	3
CSACLNR/L27050-09040	40	50	25	27	140	110	0.8	CN**GMA0204L	3
CSACLNR/L27050-12N	40	50	25	27	140	110	0.8	CN**GMA0204L	3
CSACLNR/L33060-12N	50	60	32	35	165	110	0.8	CN**GMA0204L	3
CSACLNR/L40065-09040	63	65	35	45	190	110	0.8	CN**GMA0204L	3
CSACLNR/L40065-12N	63	65	41	45	190	125	0.8	CN**GMA0204L	3
CSACLNR/L40135-12N	63	135	41	45	190	110	0.8	CN**GMA0204L	3
CSACLNR/L40065-16N	63	65	41	45	190	125	1.2	CN**GMA0204L	6.4

④

③

C-A
Double-clamp toolholder, with 50° approach angle, for negative 80°/70° rhombic inserts



Designation table:

Designation	DCONMS	LF	L2	WF	DMIN	RE	Insert	Torque*
CSACLNR/L0095-12N	30	90	32	0	-	0.8	CN**GMA0204L	3
CSACLNR/L0095-12N ¹⁾	50	90	32	0	165	0.8	CN**GMA0204L	3
CSACLNR/L0125-12N	50	125	32	0	165	0.8	CN**GMA0204L	3
CSACLNR/L0125-12N ¹⁾	50	125	32	0	165	0.8	CN**GMA0204L	3
CSACLNR/L0125-12N ¹⁾	63	100	37.5	0	190	0.8	CN**GMA0204L	3
CSACLNR/L0140-12N ¹⁾	63	140	37.5	0	190	0.8	CN**GMA0204L	3

⑥


⑦

⑧ INSERT SELECTION

Reference pages: C-ACLNR/L: Inserts → B054 -, B075, CBN → B168 -, B178, PCD → B211 -
DCLNR/L: Inserts → B054 -, B075, CBN → B168 -, B178, PCD → B211 -

TUNECAP

C-PCLNR/L
Lever-lock toolholder, with 95° approach angle, for negative 80°/70° rhombic inserts



Designation table:

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert
CSPCLNR/L30060-12	50	60	32	35	165	110	0.8	CN**GMA0204L
CSPCLNR/L30060-12N	50	60	32	35	165	110	0.8	CN**GMA0204L
CSPCLNR/L40065-12N	63	65	41	45	190	125	0.8	CN**GMA0204L

⑤

⑦

⑦ SPARE PARTS

⑧

⑧ INSERT SELECTION

⑨

Reference pages: C-PCLNR/L: Inserts → B054 -, B075, CBN → B168 -, B178, PCD → B211 -
DCLNR/L: Inserts → B054 -, B075, CBN → B168 -, B178, PCD → B211 -

- ①: Cutting edge shape
- ②: Series name of indexable external toolholders
- ③: Dimension table
- ④: Toolholder designation
e.g. right-hand, 25x25 square shank

→ **ACLNR2525M12-A ... 1** (one external toolholder per package)

- ⑤: Dimension drawing (conforming to ISO13399)
- ⑥: Applicable insert
- ⑦: Spare parts
- ⑧: Basic selection
- ⑨: Reference pages

When ordering

- Please specify the designation and quantity.
e.g. **ACLNR2525M12-A ... 1** (one external toolholder per package)
- * Inserts are not included. Please order those separately.

Main products

L
95°  C015

J
93°  C032

V
72.5°  C050

I
76.5°  C053

A
91°  C054

G
91°  C057

X
20°  C065

E
60°  C069

N
63°  C070

D
45°  C074

S
45°  C080

K
75°  C084

F
91°  C087

Q
107.5°  C091

H
100°  C098

B
75°  C100

R
75°  C104

Special  C105



ADDMULTURN

Ultimate solution for multi-directional turning

C011



TURNTEEN

Innovative tool realizing both high productivity and economy

C013, C067



ISOETURN

Small-sized "Eco" insert series for maximized profits

C014



MINIFORCE

Economical double-sided inserts with excellent sharpness

C029, C045
C047, C113 -, C118



TURNINGA

Highly rigid clamping system with excellent repeatability

C004 -



TUNGTURN

Toolholders for high pressure coolant supply

C019 -, C026, C031
C037 -, C043 -, C059, C095



DIMPLEFX

Ceramic insert with dimple for highly efficient cast iron machining

C008



TURNTEC

Inserts and toolholders for roughing large depths of cut with high productivity

C054, C090, C103



Y-PRO SERIES

Inserts with 25° corner angle for profiling

C049, C053, C098 -



TURNFEED

Tool series for super high-feed cutting

C068







FIXRTURN

Highly productive round insert with 6 indexes

C064, C078

External Toolholder - Quick Guide (Square shanks)

Brand name / Clamp system	Approach angle (Cutting edge style)	Designation	Inserts	Sizes of square shanks (mm)					Coolant supply		Page
				20x20	25x25	32x25	32x32	40x40	External supply	TUNGALOY (Through-coolant)	
ADDTURN 	Front turning: 95° Back turning: 21.5° 	ATXOR/L	6C-TOMG** 	☐	☐		☐		☒		C065
	Front turning: 117.5° Back turning: 27.5° 	ATXOR/L	6V-TOMG** 	☐	☐		☐		☒		C065
	Front turning: 95° Back turning: 21.5° 	STXCR/L-CHP-MC	3C-TCMT** 		☐					☒	C066
TURNFEED 	48.5° 	PPXOR/L**-HD	POMG** 		☐		☐		☒		C067
	22.5° 	PPXOR/L**-HF			☐		☐		☒		C067
Double clamp A TURNING 	L 95° 	ACLNR/L**12	CN**12 80° 	☐	☐	☐			☒		C015
		ACLNR/L**12-CHP-MC	GNGA12 70° 	☐	☐					☒	C019
		ACLNR/L**0904	CN**09 80° GNMG09 70° 	☐	☐				☒		C015
	L 95° 	AWLNR/L**08	WN**08 80° 	☐	☐	☐			☒		C024
		AWLNR/L**08-CHP-MC		☐	☐					☒	C027
		AWLNR/L**06	WN**06 80° 	☐	☐				☒		C024
	J 93° 	ATJNR/L**16	TN**16 	☐	☐				☒		C032
	G 91° 	ATGNR/L**16		☐	☐				☒		C057
	F 91° 	ATFNR/L**16		☐	☐				☒		C088
	Q 105° 	ATQNR/L**16		☐	☐				☒		C091
	J 93° 	ADJNR/L**15	DN**15 55° FNGA15 45° 	☐	☐	☐			☒		C034
		ADJNR/L**15-CHP-MC		☐	☐					☒	C038
		ADJNR/L**1104	DN**11 55° FNMG11 45° 	☐	☐				☒		C034
	P 62.5° * 	ADPNN**15	DN**15 55° FNGA15 45° 	☐	☐				☒		C108
	Q 107.5° 	ADQNR/L**15		☐	☐				☒		C092
		ADQNR/L**11	DN**11 55° FNMG11 45° 	☐	☐				☒		C092

*: Tungaloy's symbol

Brand name / Clamp system	Approach angle (Cutting edge style)	Designation	Inserts	Sizes of square shanks (mm)					Coolant supply		Page
				20x20	25x25	32x25	32x32	40x40	External supply	TUNGALOID (Through-coolant)	
Double clamp A 	J 93°	AVJNR/L**16	VN**16 	○	○				✓		C041
	V 72.5°	AVVNN**16	YN**16 	○	○				✓		C050
	Q 117.5°	AVQNR/L**16		○	○				✓		C094
	J 93°	AVJNR/L**1204	VN**1204 	○	○				✓		C041
	V 72.5°	AVVNN**1204		○	○				✓		C050
	Q 122.5°	AVQNR/L**1204		○	○				✓		C094
	B 75°	ASBNR/L12	SN**12 	○	○				✓		C101
	D 45°	ASDNN12		○	○				✓		C074
	S 45°	ASSNR/L12		○	○				✓		C080
	K 75°	ASKNR/L12		○	○				✓		C084
		ARGNR/L	RN** 		○				✓		C060
One Double D 	L 95°	DCLNR/L12	CN**12  GNGA12 	○	○	○			✓		C017
	L 95°	DWLNR/L08	WN**08 	○	○	○			✓		C025
	J 93°	DDJNR/L15	DN**15 	○	○	○			✓		C035
	Q 105°	DDQNR/L15	FNGA15 	○	○	○			✓		C093
	G 91°	DTGNR/L16	TN**16 	○	○				✓		C058
	F 91°	DTFNR/L16		○	○				✓		C088
	B 75°	DSBNR/L12	SN**12 	○	○				✓		C102
	D 45°	DSDNN12		○	○				✓		C074
	S 45°	DSSNR/L12		○	○				✓		C080
	K 75°	DSKNR/L12		○	○				✓		C084
		DRGNR/L12	RN** 		○				✓		C060

Grade

Insert

Ext. Toolholder

Int. Toolholder

Threading

Grooving

Miniature tool

Milling cutter

Endmill


Drilling tool


Tooling System

User's Guide

Index

External Toolholder - Quick Guide (Square shanks)

Brand name / Clamp system	Approach angle (Cutting edge style)	Designation	Inserts	Sizes of square shanks (mm)					Coolant supply		Page
				16x16	20x20	25x25	32x25	32x32	External supply	TUNGALOY (Through-coolant)	
Lever lock P 	L 95° 	PCLNR/L**12 PCL2NR**12	CN**12 80° 	○	○	○	○		✓		C018
		PCLNR/L**12-CHP PCLNR/L**12-CHP-MC	GNGA12 70° 		○	○				✓	C019, C020
		PCLNR/L**0904	CN**09 80° 		○	○			✓		C018
		PCLNR/L**09-CHP-MC	GNMG09 70° 		○					✓	C020
		PCLNR/L**09-CHP-N			○	○				✓	C020
	B 75° 	PCBNR/L**12	CN**12 80° 			○			✓		C100
	F 91° 	PCFNR/L**12	CN**12 80° 						✓		C087
			GNGA12 70° 		○	○					
	L 95° 	PWLNR/L**08-CHP PWLNR/L**08-CHP-MC	WN**08 80° 		○	○				✓	C026, C027
		PWLNR/L**0604	WN**06 80° 		○	○			✓		C026
		PWLNR/L**0604-CHP			○	○				✓	C026
	L 95° 	PTL2NR/L**16	TN**16 60° 		○				✓		C030
	J 93° 	PTJNR/L**1104	TN**11 60° 			○			✓		C032
	G 91° 	PTGNR/L**16	TN**16 60° 	○	○	○			✓		C058
		PTGNR/L**16-CHP			○	○				✓	C059
		PTGNR/L**1104	TN**11 60° 		○	○			✓		C058
		PTGNR/L**1104-CHP			○	○				✓	C059
	F 91° 	PTFNR/L**16	TN**16 60° 	○	○	○			✓		C089
		PTFNR/L**1104	TN**11 60° 		○	○			✓		C089

Brand name / Clamp system	Approach angle (Cutting edge style)	Designation	Inserts	Sizes of square shanks (mm)					Coolant supply		Page
				16x16	20x20	25x25	32x25	32x32	External supply	TUNGALOID (Through-coolant)	
Lever lock P 	J 93° 	PDJNR/L**15	DN**15 55° 		○	○	○		✓		C036
		PDJNR/L**15-CHP	FNGA15 45° 		○	○				✓	C037
		PDJNR/L**1104	DN**11 55° 	○	○	○			✓		C036
		PDJNR/L**1104-CHP	FNMG11 45° 		○	○				✓	C037
	P 62.5° * 	PDPNN**15	DN**15 55° 			○			✓		C108
	Q 107.5° 	PDQNR/L15	FNGA15 45° 			○			✓		C093
	J 93° 	PVJNR/L**16-CHP	VN**16 35° YN**16 25°  		○	○				✓	C043
		PVJNR/L**1204	VN**12 35° 	○	○	○			✓		C042
		PVJNR/L**1204-CHP			○	○				✓	C043
	Q 107.5° 	PVQNR/L**1204	VN**12 35° 		○	○			✓		C094
		PVQNR/L**16-CHP	VN**16 35° YN**16 25°  		○	○				✓	C095
		PVVNN**1204	VN**12 35° 		○	○			✓		C050
	B 75° 	PSBNR/L12	SN**12		○	○			✓		C102
	D 45° 	PSDNN12	90° 		○	○			✓		C075
	S 45° 	PSSNR/L12			○	○	○		✓		C075
	K 75° 	PSKNR/L12			○	○			✓		C085
		PRGNR/L	RN** 		○	○			✓		C060
		PRGCR/L	RCM**12 			○	○	○	✓		C062
		PRDCN12				○	○		✓		C076

*: Tungaloy's symbol

External Toolholder - Quick Guide (Square shanks)

Brand name / Clamp system	Approach angle (Cutting edge style)	Designation	Inserts	Sizes of square shanks (mm)							Coolant supply		Page
				10x10	16x16	20x20	25x25	32x25	32x32	40x40	External supply	TUNGALLOY (Through-coolant)	
Screw-on S 	L 95°	 SCLCR/L	CC**12 80°			○					✓		C030
	L 95°	 JSWLXR/L JSWL2XR/L	WX** 80°	○	○	○	○				✓		C029
	A 91°	 STACR/L	TC**16 60°		○						✓		C054
	J 93°	 SDJCR/L11	DC**11 55°		○	○	○				✓		C046
		 JSDJXR/L JSDJ2XR/L	DX**07 55°	○	○	○	○				✓		C045
	N 62.5°	 SDNCN11	DC**11 55°		○	○	○				✓		C073
	Q 107.5°	 SDQCR/L11				○	○				✓		C096
	J 93°	 SVJCR/L	VC**16 35°		○	○	○				✓		C048
		 JSVJXR/L JSVJ2XR/L	VX**09 35°	○	○	○	○				✓		C047
	V 72.5°	 SVVCN	VC**16 35°			○	○				✓		C052
	Q 117.5°	 SVQCR/L				○	○				✓		C097
	J 93°	 SYJBR/L16	YWMT16			○	○				✓		C049
	Q 122.5°	 SYQBR/L16	 25°			○	○				✓		C098
	H 100°	 SYHBR/L16				○	○				✓		C099
	I 76.5°	 SYIBN16				○	○				✓		C053
Double clamp for dimple ceramic insert C DIMPLEFX 	L 45°	 CCLNR/L-RD	CN** 80°				○	○			✓		C022
	J 93°	 CDJNR/L-RD	DN** 55°				○	○			✓		C040
	N 63°	 CDNNN-RD					○				✓		C072
	V72.5°	 CVVNN-RD	VN** 35°				○				✓		C051
	S 45°	 CSSNR/L-RD	SNGD 90°				○				✓		C082
	S 45°	 CHSNR/L-RD	HNGD 90°				○				✓		C083
TURNTEC 	A 93°	 TLANR/L16	LNMX16 			○	○		○	○	✓		C054
	F 93°	 TLFNR/L16	LNMX16 				○		○		✓		C090

Brand name / Clamp system	Approach angle (Cutting edge style)	Designation	Inserts	Size						Coolant supply		Page
				C3	C4	C5	C6			Through-coolant	TUNGJET (Through-coolant)	
	E	 C6STECN-Y-CHP	3C-TCMT** 				○			✓		C069
	N	 C6SDNCN-Y-CHP	2D-DCMT** 				○			✓		C070
Double clamp A	L 95°	 C*ACLNR/L12	CN**12 80° 	○	○	○	○			✓		C016
	L 95°	 C*ACLNN12	GNGA12 70° 			○	○			✓		C016
	M	 C6ACMNN0904	CN**09 80° 				○			✓		C105
	L 95°	 C*ACLNR/L**0904	GNGM09 70° 	○	○		○			✓		C016
Lever lock P	L 95°	 C*PCLNR/L12	CN**12 80° 			○	○			✓		C017
		 C*PCLNR/L**12-CHP	GNGA12 70° 		○	○	○				✓	C019
	M	 C6PCMNN**12-CHP					○				✓	C106
	L 95°	 C*PCLNR/L**0904-CHP	CN**09 80° GNGM09 70° 		○		○			✓		C021
Double clamp A	L 95°	 C*AWLNR/L08	WN**08 80° 		○		○			✓		C024
		 C*AWLNR/L06	WN**06 80° 		○					✓		C024
Lever lock P	L 95°	 C*PWLNR/L**08-CHP	WN**08 80° 		○		○				✓	C028
		 C*PWLNR/L**06-CHP	WN**06 80° 		○						✓	C028

Brand name / Clamp system	Approach angle (Cutting edge style)	Designation	Inserts	Size						Coolant supply		Page
				C3	C4	C5	C6			Through-coolant	TUNGJET (Through-coolant)	
Double clamp A	J 93°	 C*ADJNR/L15	DN**15  55°		○	○	○			✓		C034
	N 62.5°	 C*ADNNN15				○	○			✓		C071
	Q 107.5°	 C*ADQNR/L15	FNGA15  45°	○	○					✓		C092
	U 93°	 C*ADUNR/L			○					✓		C109
	J 93°	 C*ADJNR/L1104	DN**11  55° FNMG11  45°	○	○		○			✓		C034
Lever lock P	J 93°	 C*PDJNR/L15	DN**15  55°			○	○			✓		C038
		 C*PDJNR/L**15-CHP	FNGA15  45°		○	○	○				✓	C039
		 C*PDJNR/L**1104-CHP	DN**11  55°		○		○				✓	C039
	M	 C6PDMNL1104-CHP	FNMG11  45°				○				✓	C107
Screw-on S	J 93°	 C*SDJCR/L-CHP	DC**11  55°	○							✓	C046
Double clamp A	J 93°	 C4ATJNR/L	TN**16  60°		○					✓		C032
Lever lock P	J 93°	 C4PTJNR/L			○					✓		C033
Double clamp A	J 93°	 C*AVJNR/L12	VN**12  35°		○		○			✓		C042
	Q 117.5°	 C*AVQNR/L16	VN**16  35° YN**16  25°		○					✓		C094
Lever lock P	J 93°	 C*PVJNR/L**-CHP	VN**16  35° YN**16  25°		○		○				✓	C044
		 C*PVJNR/L**1204-CHP	VN**12  35°		○		○				✓	C044
Screw-on S	J 93°	 C*SVJCR/L	VC**16  35°			○	○			✓		C048
	V 72.5°	 C*SVVCN				○	○			✓		C052




Ultra high productivity of
Front Turning, Back Turning, Profiling,
and Face Turning with **ONE SINGLE TOOL**

Double-sided 6-corner insert with 80° or 35° corner angle for versatile applications

- **Back (pull) turning:** High feed designed cutting edge improves productivity about 200% higher than existing ISO tools with no need for special programming.
- **Front (push) turning:** Same machining process is available using the same cutting edge angle as standard ISO tools.


6C-TOMG

Front turning
Back turning

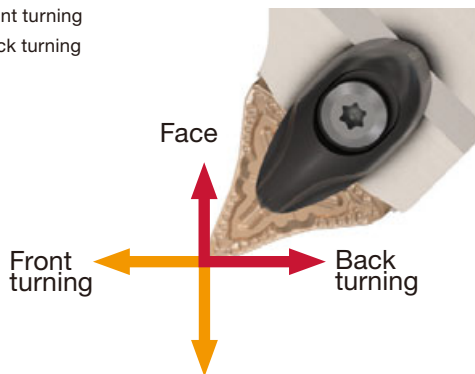

6V-TOMG

Front turning
Back turning

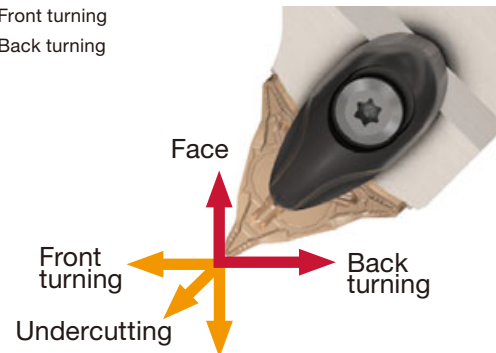


Single-sided 3-corner insert for super high productivity


- **Back (pull) turning:** High feed designed cutting edge improves productivity 300 - 400% higher than standard ISO tools.
- **Front (push) turning:** Applicable to great D.O.C.

3C-TCMT

Front turning
Back turning

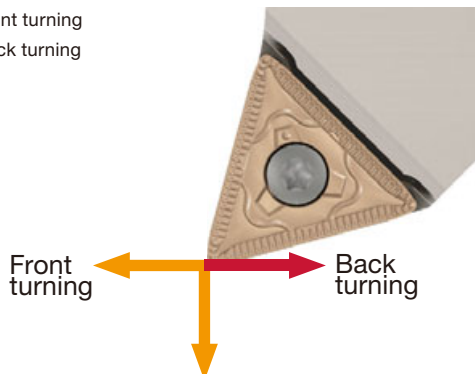

Internal coolant toolholder prevents chip jamming and maximizes performance during back turning operations



Reference pages: **C065, C066, C116**


LEADING IN THE NEW DIRECTION

Y-axis turning tool with PSC connection for multitasking machines



■ Y-axis machining benefits

- The cutting force vector is directed in the longitudinal axis of the tool, resulting in higher stability and minimized vibration
- No chip entanglements, chips are directed down and away from the workpiece and toolholder

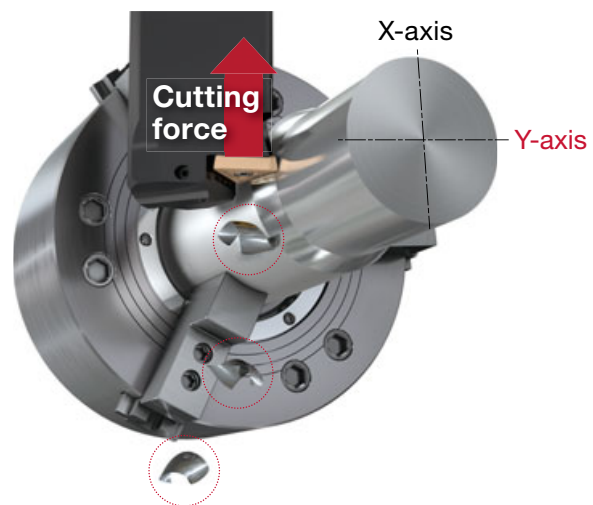


■ Tooling image of Y-axis orientation and applying high feed back turning

Medium cutting



3C-TCMT

Insert: 3C-TCMT29X608-TM
(Single-sided, 3 corners)

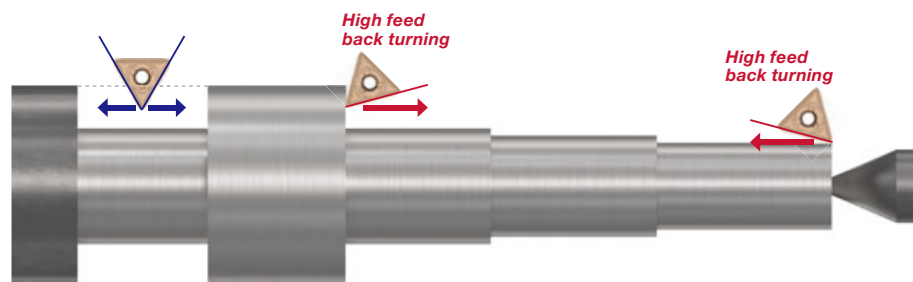


- Thanks to its high-feed geometry, **AddY-axisTurn** insert provides high productivity
- Y-axis tool orientation allows both sides of the cutting edge to be used, providing stable and long tool life

Finishing - Profiling



2D-DCMT

Insert: 2D-DCMT13T404-ZF
(Single-sided, 2 corners)

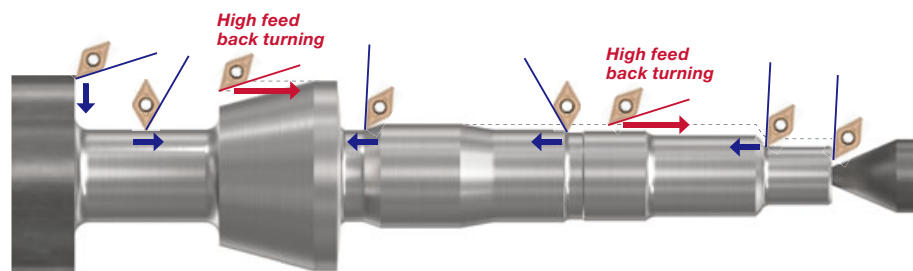

- **AddY-axisTurn** allows a precision workpiece completion with a single tool setup
- No interference with the tailstock
- Eliminates chip entanglement, promoting fully automated manufacturing




Economical, 10-cornered insert ensures high machining efficiency

- Available in 2 types of holders: HD type for large depths of cut and HF type for high feed turnin
- Maximum 7 mm depth of cut, or maximum 2.0 mm feed per rev is attainable!

Economical 10-cornered, double-sided, M-class insert

Achieves outstanding cost efficiency over standard ISO inserts.



Flat Wiper


Built in the cutting edge to achieve superior machining surface at higher feed rates!

New – MNW style chipbreaker

Features protrusions on the rake face to facilitate smooth chip control, while achieving high crater wear resistance.

Dovetail clamping


Ensures secure insert retention while promoting smooth chip flow thanks to the integration of lever lock and dovetail clamping methods.

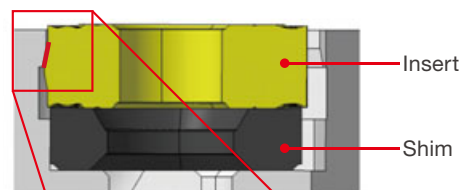

Holder selections


Available in 2 types:

- HD holder for large depths of cut
 - HF holder for high feed turning
- Inserts are interchangeable between these two holders.

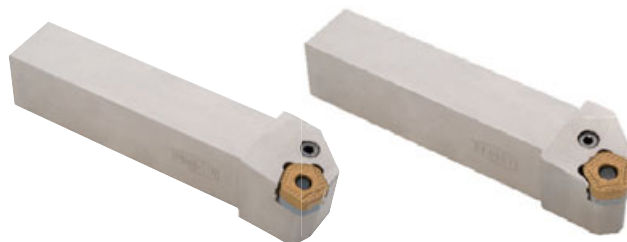


Features of Holders

HD holder
For **H**igh **D**epth of Cut

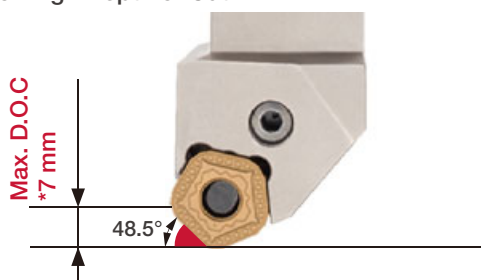

HF holder
For **H**igh **F**eed

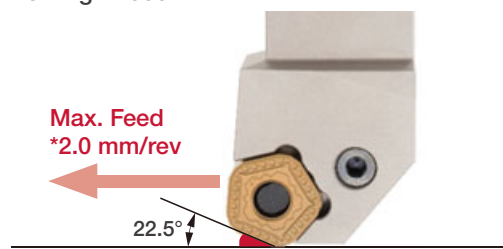

*Insert: POMG130612-MNW


Reference pages: **C067**, **C117**



ISO-EcoTurn Small size inserts, for an economical advantage

■ Uncompromising insert performance

Comparison of ISO-EcoTurn and regular size inserts

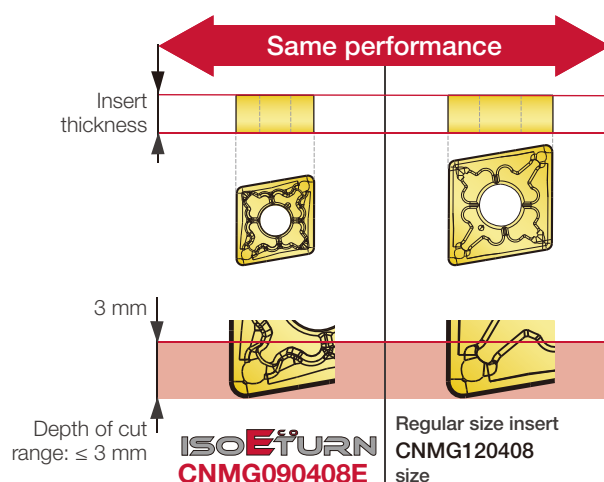

ISO-EcoTurn inserts feature the identical thickness and chipbreaker geometry as Tungaloy's regular size inserts.

These properties provide cutting performance equal to that of the regular size inserts, including chip control at a depth of cut up to 3 mm.

■ Chip control

ISO-EcoTurn inserts incorporate an identical chipbreaker geometry as regular size inserts providing the same chip removal at a depth of cut up to 3 mm.


ISO^{Eco}TURN
CNMG090408E-TM

Depth of cut (mm)					
	0.10	0.15	0.20	0.30	0.40
3.0					
2.0					
1.5					
1.0					
0.5					
condition	Feed (mm/rev)				

Regular size
CNMG120408-TM

Depth of cut (mm)					
	0.10	0.15	0.20	0.30	0.40
3.0					
2.0					
1.5					
1.0					
0.5					
condition	Feed (mm/rev)				

Workpiece : S45C
Cutting speed : $V_c = 200$ m/min
Coolant : Wet

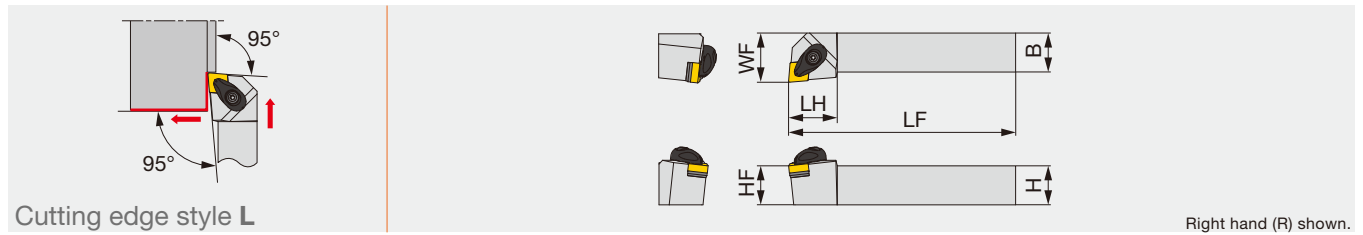

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ACLNR/L2020K0904-A	20	20	125	25	20	25	0.8	CN**/GNMG0904...	3
ACLNR/L2020H12-A	20	20	100	26	20	25	0.8	CN**/GNGA1204...	3
ACLNR/L2020K12-A	20	20	125	26	20	25	0.8	CN**/GNGA1204...	3
ACLNR/L2525M0904-A	25	25	150	25	25	32	0.8	CN**/GNMG0904...	3
ACLNR/L2525K12-A	25	25	125	30	25	32	0.8	CN**/GNGA1204...	3
ACLNR/L2525M12-A	25	25	150	30	25	32	0.8	CN**/GNGA1204...	3
ACLNR/L2525M16-A	25	25	150	31	25	32	1.2	CN**1606...	6.4
ACLNR/L3225P12-A	32	25	170	30	32	32	0.8	CN**/GNGA1204...	3
ACLNR/L3225P16-A	32	25	170	31	32	32	1.2	CN**1606...	6.4
ACLNR/L3232P16-A	32	32	170	31	32	40	1.2	CN**1606...	6.4
ACLNR/L3232P19-A	32	32	170	40	32	40	1.2	CN**1906...	6.4
ACLNR/L4040S19-A	40	40	250	40	40	50	1.2	CN**1906...	6.4

*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench1	Wrench2
ACLNR/L**0904-A	ACP3S-E	ACS-5W	BP-7	SP-2.5	ASC322	CSTB-3.5	T-15F	-
ACLNR/L**12-A	ACP4S	ACS-5W	BP-7	SP-2.5	ASC422	CSTB-3.5	T-15F	-
ACLNR/L**16-A	ACP5S	ACS-6W	BP-8.8	SP-2.5	ASC533	CSTB-5	-	KEYV-T20
ACLNR/L**19-A	ACP6S	ACS-6W	BP-8.8	SP-2.5	ASC634	CSTB-5	-	KEYV-T20

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
Cutting conditions		B004			

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
Cutting conditions		B006		


K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
Cutting conditions		B008		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	with rake DIA	P
Cutting conditions		B010		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
Cutting conditions		B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
Cutting conditions		B014	

Double-clamp toolholder, with 95° approach angle, for negative 80°/70° rhombic inserts (TurningA)

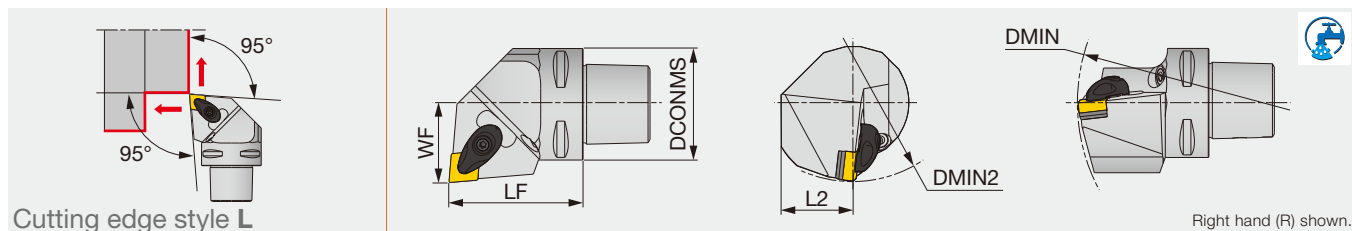


Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert	Torque*
C3ACLNR/L22040-0904N	32	40	20	22	110	121	0.8	CN**/GNMG0904...	3
C3ACLNR/L22040-12N	32	40	20	22	121	116	0.8	CN**/GNGA1204...	3
C4ACLNR/L27050-0904N	40	50	25	27	140	110	0.8	CN**/GNMG0904...	3
C4ACLNR/L27050-12N	40	50	25	27	140	110	0.8	CN**/GNGA1204...	3
C5ACLNR/L35060-12N	50	60	32	35	165	110	0.8	CN**/GNGA1204...	3
C6ACLNR/L45065-0904N	63	65	35	45	190	110	0.8	CN**/GNMG0904...	3
C6ACLNR/L45065-12N	63	65	41	45	190	125	0.8	CN**/GNGA1204...	3
C6ACLNR/L45135-12N	63	135	41	45	190	110	0.8	CN**/GNGA1204...	3
C6ACLNR/L45065-16N	63	65	41	45	190	125	1.2	CN**1606...	6.4

Applicable for 7 MPa coolant
*Torque: Recommended clamping torque (N·m)

C-ACLNN

Double-clamp toolholder, with 50° approach angle, for negative 80°/70° rhombic inserts

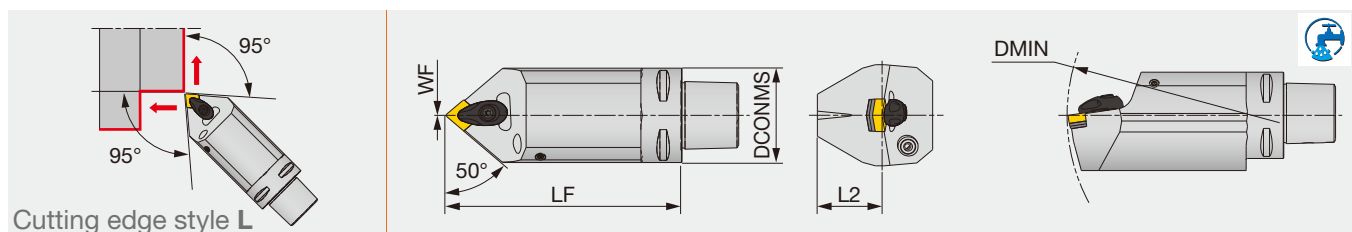

Designation	DCONMS	LF	L2	WF	DMIN	RE	Insert	Torque*
C5ACLNN00090-12 ⁽¹⁾	50	90	32	0	-	0.8	CN**/GNGA1204...	3
C5ACLNN00090-12N ⁽²⁾	50	90	32	0	165	0.8	CN**/GNGA1204...	3
C5ACLNN00125-12 ⁽¹⁾	50	125	32	0	-	0.8	CN**/GNGA1204...	3
C5ACLNN00125-12N ⁽²⁾	50	125	32	0	165	0.8	CN**/GNGA1204...	3
C6ACLNN00100-12N ⁽²⁾	63	100	37.5	0	190	0.8	CN**/GNGA1204...	3
C6ACLNN00140-12N ⁽²⁾	63	140	37.5	0	190	0.8	CN**/GNGA1204...	3


The items without DMIN cannot be used for boring.
*Torque: Recommended clamping torque (N·m)
(1) Applicable for 3 MPa coolant (2) Applicable for 7 MPa coolant

SPARE PARTS

Designation	Clamp	Clamping screw	Coolant parts	Shim	Shim screw	Spring	Spring pin	Wrench 1	Wrench 2
C*ACLNN*-0904N	ACP3S-E	ACS-5W	SATZ-M10X1-5	ASC322	CSTB-3.5	BP-7	SP-2.5	-	T-15F
C*ACLNN*-12N	ACP4S	ACS-5W	SATZ-M8X1-M3	ASC422	CSTB-3.5	BP-7	SP-2.5	-	T-15F
C6ACLNN45065-16N	ACP5S	ACS-6W	SATZ-M8X1-M3	ASC533	CSTB-5	BP-8.8	SP-2.5	KEYV-T20	-
C5ACLNN00090-12	ACP4S	ACS-5W	EZ83	ASC422	CSTB-3.5	BP-7	SP-2.5	-	T-15F
C5ACLNN00125-12	ACP4S	ACS-5W	EZ83	ASC422	CSTB-3.5	BP-7	SP-2.5	-	T-15F

Reference pages: C-ACLNR/L, C-ACLNN: Inserts → **B054 - , B075**, CBN → **B168 - , B178**, PCD → **B211 -**
Parts for coolant hose → **C115**

Lever-lock toolholder, with 95° approach angle, for negative 80°/70° rhombic inserts

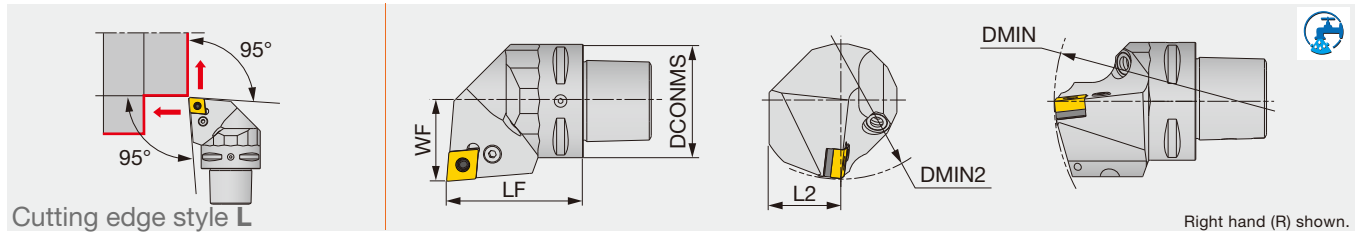

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert
C5PCLNR/L35060-12	50	60	32	35	-	-	0.8	CN**/GNGA1204...
C5PCLNR/L35060-12N	50	60	32	35	165	110	0.8	CN**/GNGA1204...
C6PCLNR/L45065-12N	63	65	41	45	190	125	0.8	CN**/GNGA1204...


Applicable for 7 MPa coolant
The item without DMIN and DMIN2 cannot be used for boring.

SPARE PARTS

Designation	Coolant parts	Lever	Clamping screw	Shim	Spring pin	Wrench
C5PCLNR/L35060-12	EZ104	LCL4	LCS4	LSC42	LSP4	P-3
C*PCLN***-12N	SATZ-M10X1-M5	LCL4	LCS4	LSC42	LSP4	P-3

DCLNR/L

"One-Double" toolholder with 95° approach angle, for negative 80°/70° rhombic inserts

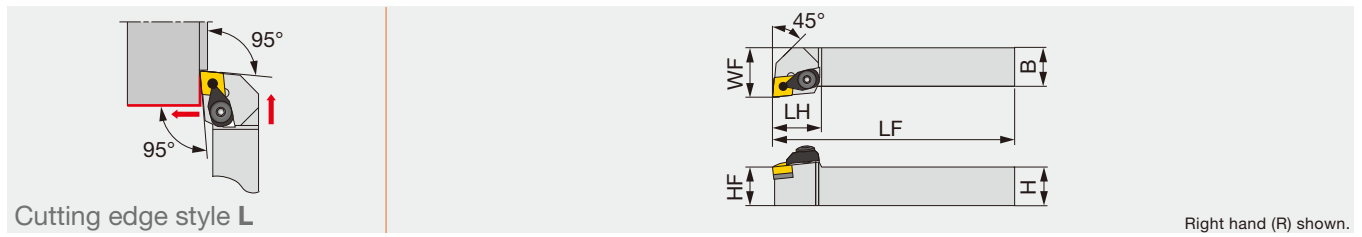

Designation	H	B	LF	LH	HF	WF	RE**	Insert
DCLNR/L2020K12	20	20	125	30	20	25	0.8	CN**/GNGA1204...
DCLNR/L2525M12	25	25	150	30	25	32	0.8	CN**/GNGA1204...
DCLNR/L3225P12	32	25	170	30	32	32	0.8	CN**/GNGA1204...

Note: Except for TRS, TU, TUS, 57, and 65-type chipbreaker inserts **RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench1	Wrench2
DCLNR/L...	DCPM-43	DLCL43	DPIS43	DLCS43	LSC42	BP-10	LSP4	P-3	P-4

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF 	TSF 	TM 	TH 
	Cutting conditions	B004			

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round 	All-round 	All-round 
	Cutting conditions	B008		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN 	HRF 	HRM 
	Cutting conditions	B012		

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF 	SM 	SH 
	Cutting conditions	B006		


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA 	with rake DIA 	P 
	Cutting conditions	B010		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN 	CBN 
	Cutting conditions	B014	

Reference pages: C-PCLNR/L: Inserts → **B054 - , B075**, CBN → **B168 - , B178**, PCD → **B211 -**
DCLNR/L: Inserts → **B054 - , B075**, CBN → **B168 - , B178**, PCD → **B211 -**,
Parts for coolant hose → **C115**

PCLNR/L

Lever-lock toolholder with 95° approach angle, for negative 80°/70° rhombic inserts

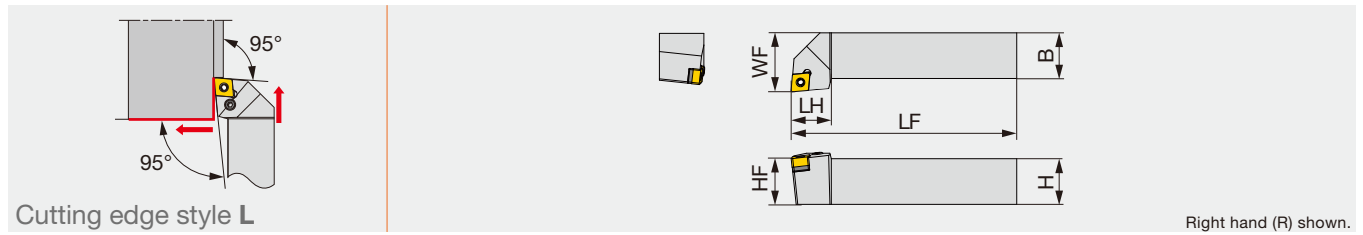

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PCLNR/L1616H09	16	16	100	20	16	20	0.8	CN**0903...	2
PCLNR/L1616	16	16	100	26	16	20	0.8	CN**/GNGA1204...	3
PCLNR/L1616H12E	16	16	100	26	16	20	0.8	CN**/GNGA1204...	3
PCLNR/L2020K09	20	20	125	20	20	25	0.8	CN**0903...	2
PCLNR/L2020K0904	20	20	125	20	20	25	0.8	CN**/GNMG0904...	2
PCLNR/L2020	20	20	125	28	20	25	0.8	CN**/GNGA1204...	3
PCLNR/L2020K12E	20	20	125	28	20	25	0.8	CN**/GNGA1204...	3
PCLNR/L2525M09	25	25	150	20	25	32	0.8	CN**0903...	2
PCLNR/L2525M0904	25	25	150	25	25	32	0.8	CN**/GNMG0904...	2
PCLNR/L2525M4	25	25	150	28	25	32	0.8	CN**/GNGA1204...	3
PCLNR/L2525M12E	25	25	150	28	25	32	0.8	CN**/GNGA1204...	3
PCLNR/L2525M16E	25	25	150	31	25	25	1.2	CN**1606...	3
PCLNR/L3225P4	32	25	170	28	32	32	0.8	CN**/GNGA1204...	3
PCLNR/L3232	32	32	170	40	32	40	1.2	CN**1906...	5
PCLNR/L3225P12E	32	25	170	28	32	32	0.8	CN**/GNGA1204...	3
PCLNR/L3225P16E	32	25	150	31	32	32	1.2	CN**1606...	3
PCLNR/L3232P16E	32	32	170	31	32	40	1.2	CN**1606...	3
PCLNR/L3232P19E	32	32	170	40	32	40	1.2	CN**1906...	5

*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PCLNR/L**09	ELSC32	LCS3	P-2.5	LSP3L	LCL33
PCLNR/L1616	LSC42	LCS4CA	P-3	LSP4	LCL4
PCLNR/L1616H12E	ELSC42	LCS4CA	P-3	LSP4S	LCL43S
PCLNR/L**0904	LSC317	LCS3	P-2.5	LSP3	LCL33
PCLNR/L2020	LSC42	LCS4	P-3	LSP4	LCL4
PCLNR/L2020K12E, **2525M12E, **3225P12E	ELSC42	LCS4	P-3	LSP4S	LCL43M
PCLNR/L2525M4, **3225P4	LSC42	LCS4	P-3	LSP4	LCL4
PCLNR/L**16E	ELSC53	LCS5	P-3	LSP6C	LCL54
PCLNR/L3232	LSC63	LCS6	P-4	LSP6	LCL6
PCLNR/L3232P19E	ELSC63	LCS6	P-4	LSP6	LCL6

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Cutting conditions	B006		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	with rake DIA	P
	Cutting conditions	B010		


H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: PCLNR/L: Inserts → **B054 -**, **B075**, CBN → **B168 -**, **B178**, PCD → **B211 -**

PCLNR/L-CHP

Tube connection

Lever lock toolholders – 95° approach angle.
For negative 80°/70° rhombic insert. High-pressure coolant capability.

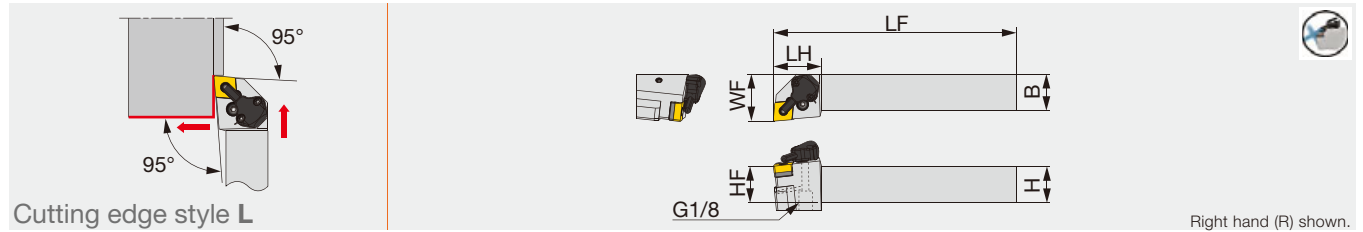

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PCLNR/L2020K0904-CHP	20	20	125	33	20	32	0.8	CN**/GNMG0904...	2
PCLNR/L2020K12-CHP	20	20	125	33	20	32	0.8	CN**/GNGA1204...	3
PCLNR/L2525M0904-CHP	25	25	150	33	25	32	0.8	CN**/GNMG0904...	2
PCLNR/L2525M12-CHP	25	25	150	33	25	32	0.8	CN**/GNGA1204...	3

*Torque: Recommended torque (N-m) for clamping

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
PCLNR/L**0904-CHP	LSC317	LCS3	P-2.5	LSP3	LCL33
PCLNR/L**12-CHP	LSC42	LCS4	P-3	LSP4	LCL4

SPARE PARTS


Designation	Coolant unit	Mounting screw	Wrench 2	O-ring	Coolant screw	Wrench 3
PCLNR/L**0904-CHP	CU-CW-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2
PCLNR/L**12-CHP	CU-CW-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2

ACLNR/L-CHP-MC

Direct connection

Tube connection

Double clamping tool holders-95° approach angle
For negative 80°/70° rhombic insert. High-pressure coolant capability with tube and direct connections

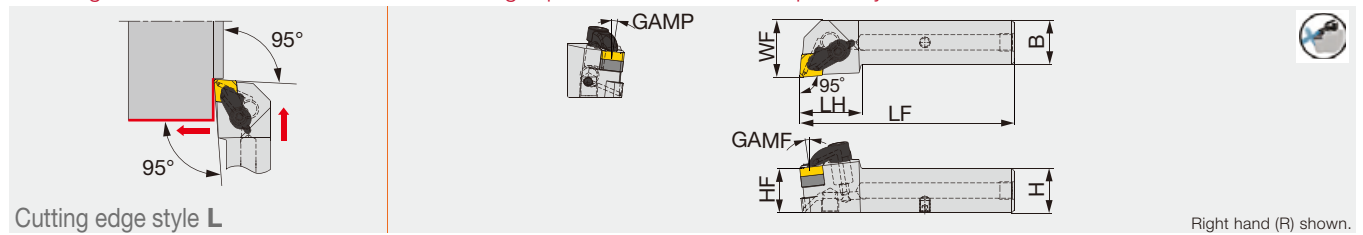

Designation	H	B	LF	LH	HF	WF	GAMP	GAMF	Insert	Torque*
ACLNR/L2020X-12-CHP-MC	20	20	105	35	20	25	6°	6°	CN**/GNGA1204...	4
ACLNR/L2525X-12-CHP-MC	25	25	120	35	25	32	6°	6°	CN**/GNGA1204...	4

*Torque: Recommended torque (N-m) for clamping

Applicable for 14 MPa pressure coolant

SPARE PARTS

Designation	Clamp set	Shim	Shim screw	screw for tube connection	Coolant plug	O-ring	Wrench 1
ACLNL**X-12-CHP-MC	LCGL-4JCSET	RCT443	SR14-506	PLUGG1/8-6.5TL360	SRM5X5 DIN913TL360	OR4X3NBR70	KEYV-T20
ACLNR**X-12-CHP-MC	LCGR-4JCSET	RCT443	SR14-506	PLUGG1/8-6.5TL360	SRM5X5 DIN913TL360	OR4X3NBR70	KEYV-T20

Reference pages: PCLNR/L-CHP, ACLNR/L-CHP-MC:


Inserts → **B054 -**, **B075**, CBN → **B168 -**, **B178**, PCD → **B211 -**, Parts for coolant hose → **C115**

PCLNR/L2020X-CHP-MC

Direct connection

Lever lock toolholders – 95° approach angle.

For negative 80°/70° rhombic insert. High-pressure coolant capability with bottom direct connection

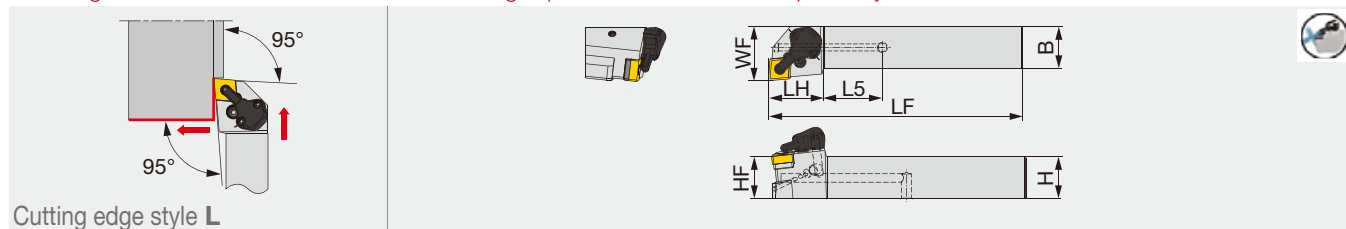

Cutting edge style L

Designation	H	B	LF	LH	HF	L5	WF	Insert	Torque*
PCLNR/L2020X09-CHP-MC	20	20	97	27	20	29	25	CN**/GNMG0904...	2
PCLNR/L2020X12-CHP-MC	20	20	97	27	25	29	25	CN**/GNGA1204...	3

*Torque: Recommended torque (N-m) for clamping


SPARE PARTS

Designation	Shim	Spring	Lever	Spring	Spring pin	Wrench	Coolant unit	Wrench	Coolant plug	Wrench
PCLNR/L2020X09-CHP-MC	TCN323	SP3	LR3	SR117-2014	PN3-4	HW2.5	CU-CW-CHP	T-8/5	SRM5X5 DIN913TL360	-
PCLNR/L2020X12-CHP-MC	TCN443	SP4	LR4DH	SR117-2010	PN3-4L	HW2.5	CU-CW-CHP	T-8/5	SRM5X5 DIN913TL360	HW3.0

ISO TURN PCLNR/L-CHP-N

Tube connection

Lever-lock toolholder with 95° approach angle, for negative 80°/70° rhombic inserts

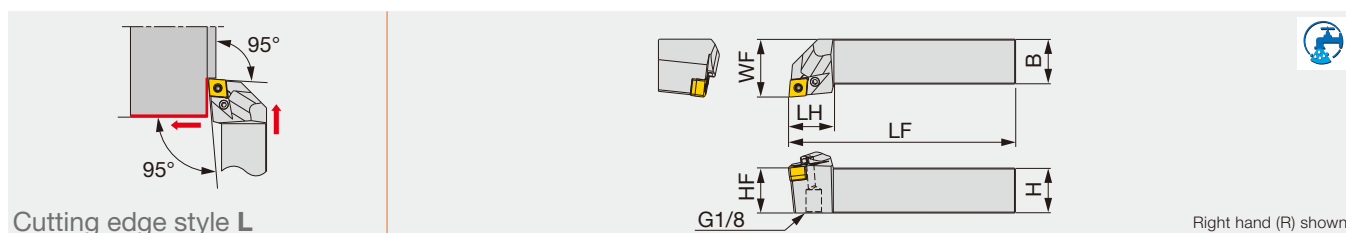

Cutting edge style L

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	RE**	Air hole	Insert	Torque*
PCLNR/L2020H0904-CHP-N	20	20	100	25	20	25	0.8	With	CN**/GNMG0904...	2
PCLNR/L2525K0904-CHP-N	25	25	125	25	25	32	0.8	With	CN**/GNMG0904...	2

*Torque: Recommended torque (N-m) for clamping

**RE: The holder measurements are true with this insert radius

Applicable for 14 MPa pressure coolant


SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PCLNR/L**0904-CHP-N	LSC317	LCS3	P-2.5	LSP3	LCL33

Reference pages: PCLNR/L2020X-CHP-MC, PCLNR/L-CHP-N:

Inserts → **B054 -**, **B075**, CBN → **B168 -**, **B178**, PCD → **B211 -**, Parts for coolant hose → **C115**

Double-clamp toolholder with 95° approach angle, for negative 80° rhombic ceramic inserts with dimple

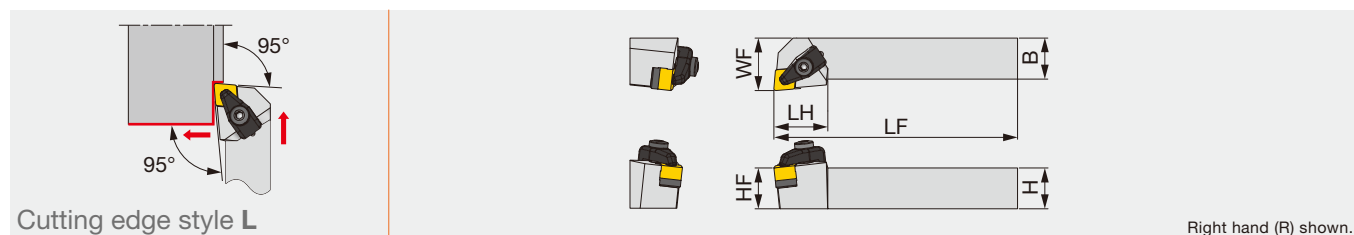

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
CCLNR/L2525M1207-RD	25	25	150	33	25	32	1.2	CN*D1207...	4
CCLNR3225P1207-RD	32	25	170	33	32	32	1.2	CN*D1207...	4

*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius

SPARE PARTS


Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench1	Wrench2
CCLNR/L*-RD	CCP4-A	CCS4-A	CC44-A	BH5-10-A	BP-5-A	P-3	P-4

INSERT SELECTION

K	Application	Finishing to medium cutting
	Grade	FX105
	Chipbreaker shape	
	Cutting conditions	C118

Reference pages: CCLNR/L-RD: Inserts → **B065**,
Standard cutting conditions → **C115**

Double-clamp toolholder with 95° approach angle, for negative 80° trigon inserts

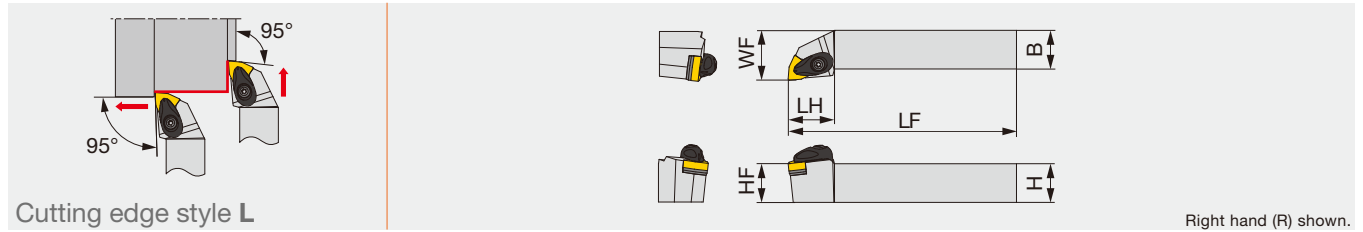


Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
AWLNR/L2020K0604-A	20	20	125	27	20	25	0.8	WN**0604...	3
AWLNR/L2020H08-A	20	20	100	30	20	25	0.8	WN**0804...	3
AWLNR/L2020K08-A	20	20	125	30	20	25	0.8	WN**0804...	3
AWLNR/L2525M0604-A	25	25	150	27	25	32	0.8	WN**0604...	3
AWLNR/L2525K08-A	25	25	125	30	25	32	0.8	WN**0804...	3
AWLNR/L2525M08-A	25	25	150	30	25	32	0.8	WN**0804...	3
AWLNR/L3225P08-A	32	25	170	30	32	32	0.8	WN**0804...	3

*Torque: Recommended clamping torque (N-m) **RE: Standard corner radius

C-AWLNR/L

Double-clamp toolholder, with 95° approach angle, for negative 80° trigon inserts

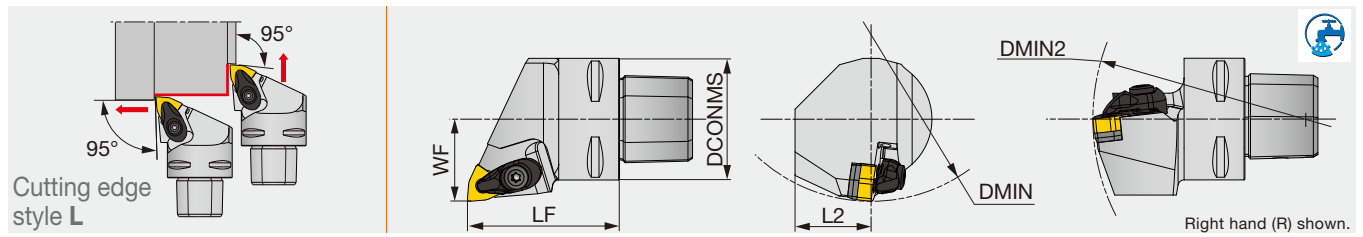

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert
C4AWLNR/L27050-0604N	40	50	25	27	140	110	0.8	WN**0604...
C4AWLNR/L27050-08N	40	50	25	27	-	-	0.8	WN**0804...
C6AWLNR/L45065-08N	63	65	35	45	190	110	0.8	WN**0804...

Applicable for 7 MPa coolant


The items without DMIN and DMIN2 cannot be used for boring.

SPARE PARTS	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench	Coolant parts
Designation	ACP3S-E	ACS-5W	BP-7	SP-2.5	ASW322	CSTB-3.5	T-15F	-
AWLNR/L**0604-A C4AWLNR/L**-0604N	ACP3S-E	ACS-5W	BP-7	SP-2.5	ASW322	CSTB-3.5	T-15F	-
AWLNR/L**08-A C4AWLNR/L**-08N	ACP4S	ACS-5W	BP-7	SP-2.5	ASW422	CSTB-3.5	T-15F	-
C6AWLNR/L**-08N	ACP4S	ACS-5W	BP-7	SP-2.5	ASW422	CSTB-3.5	T-15F	SATZ-M8X1-M3

Reference pages: AWLNR/L, C-AWLNR/L: Inserts → **B102 -**, CBN → **B187**
Parts for coolant hose → **C115**

DWLNLR/L

One-Double toolholder with 95° approach angle, for negative 80° trigon inserts

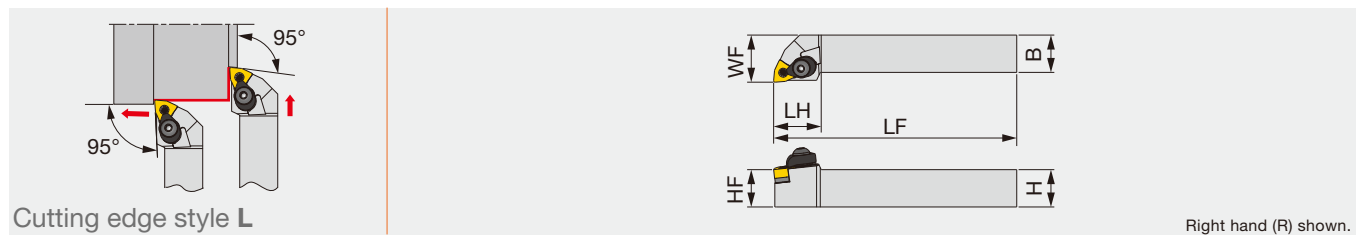

Designation	H	B	LF	LH	HF	WF	RE**	Insert
DWLNLR/L2020K06	20	20	125	25.5	20	25	0.8	WN**0604...
DWLNLR/L2020K08	20	20	125	31	20	25	0.8	WN**0804...
DWLNLR/L2525M06	25	25	150	26	25	32	0.8	WN**0604...
DWLNLR/L2525M08	25	25	150	31	25	32	0.8	WN**0804...
DWLNLR/L3225P08	32	25	170	30	32	32	0.8	WN**0804...

Note: Except for 57-type chipbreaker inserts

**RE: Standard corner radius

SPARE PARTS	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench1	Wrench2
Designation	DCPM-33	LCL33	DPIS33	DLCS33	LSW312	BP-9	LSP3	P-2.5	P-3
DWLNLR/L**06	DCPM-33	LCL33	DPIS33	DLCS33	LSW312	BP-9	LSP3	P-2.5	P-3
DWLNLR/L**08	DCPM-43	DLCL43	DPIS43	DLCS43	LSW42	BP-10	LSP4	P-3	P-4

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Breaker Shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Breaker Shape	SF	SM	SH
	Cutting conditions	B006		


K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Breaker Shape	All-round	All-round	All-round
	Cutting conditions	B008		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX480	AH8005	AH8005
	Breaker Shape	CBN	HRF	HRM
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Breaker Shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: DWLNLR/L: Inserts → **B102 -**, CBN → **B187**
Parts for coolant hose → **C115**

Lever-lock toolholder with 95° approach angle, for negative 80° trigon inserts

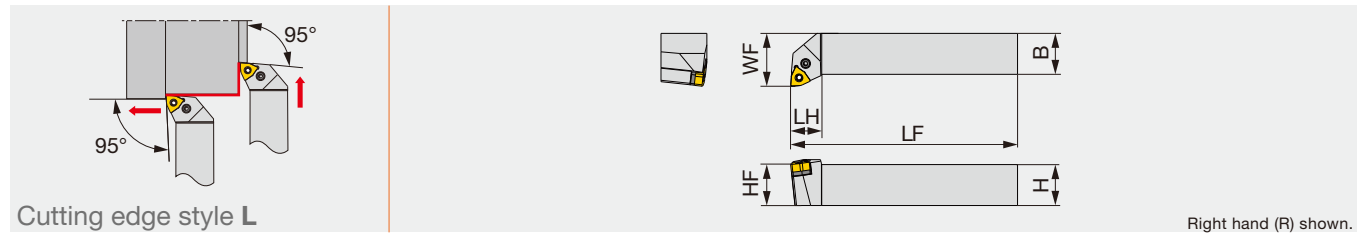

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PWLNLR/L2020K0604	20	20	125	15	20	25	0.8	WN**0604...	2
PWLNLR/L2525M0604	25	25	150	19	25	32	0.8	WN**0604...	2

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius


SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PWLNLR/L**0604	LSW312	LCS3	P-2.5	LSP3	LCL3

PWLNLR/L-CHP

Tube connection

Lever lock toolholders – 95° approach angle.
For negative 80° trigon insert. High-pressure coolant capability.

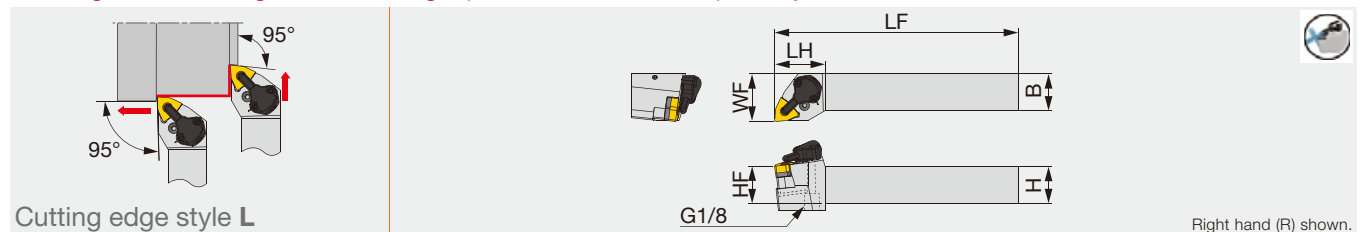

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PWLNLR/L2020K0604-CHP	20	20	125	34	20	32	0.8	WN**0604...	2
PWLNLR/L2020K08-CHP	20	20	125	34	20	32	0.8	WN**0804...	3
PWLNLR/L2525M0604-CHP	25	25	150	34	25	32	0.8	WN**0604...	2
PWLNLR/L2525M08-CHP	25	25	150	34	25	32	0.8	WN**0804...	3

*Torque: Recommended torque (N·m) for clamping
**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
PWLNLR/L**0604-CHP	LSW312	LCS3	P-2.5	LSP3	LCL3
PWLNLR/L**08-CHP	LSW42	LCS4	P-2.5	LSP4	LCL4

SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring	Coolant screw	Wrench 3
PWLNLR/L**0604-CHP	CU-CW-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2
PWLNLR/L**08-CHP	CU-CW-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2

Reference pages: PWLNLR/L-Eco: Inserts → **B102 -**
PWLNLR/L-CHP: Inserts → **B102 -**, CBN → **B187**
Parts for coolant hose → **C115**


AWLNR/L-CHP-MC

Direct connection

Tube connection

Double clamping tool holders-95° approach angle

For negative 80° trigon insert. High-pressure coolant capability with tube and direct connections

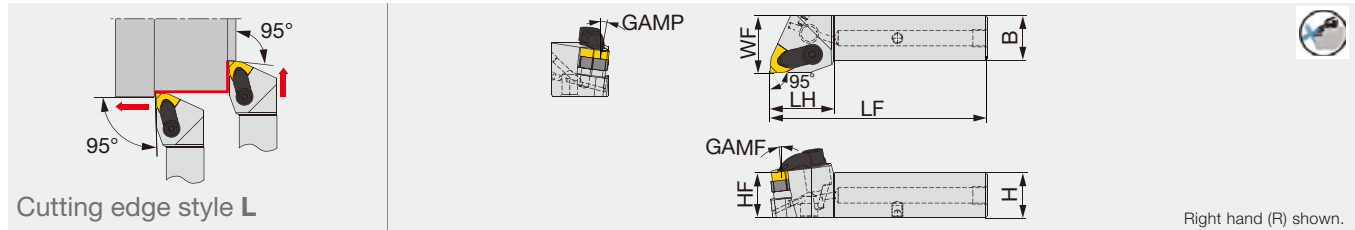

Designation	H	B	LF	LH	HF	WF	GAMP	GAMF	Insert	Torque*
AWLNR/L2020X-08-CHP-MC	20	20	106	36	20	25	6°	6°	WN**0804...	4
AWLNR/L2525X-08-CHP-MC	25	25	121	36	25	32	6°	6°	WN**0804...	4

*Torque: Recommended torque (N-m) for clamping
Applicable for 14 MPa pressure coolant

SPARE PARTS


Designation	Clamp set	Shim	Shim screw	screw for tube connection	Coolant plug	O-ring	Wrench 1
AWLNR**X-08-CHP-MC	LCGL-4JCSET	RWT443	SR14-506	PLUGG1/8-6.5TL360	SRM5X5 DIN913TL360	OR4X3NBR70	KEYV-T20
AWLNR**X-08-CHP-MC	LCGR-4JCSET	RWT443	SR14-506	PLUGG1/8-6.5TL360	SRM5X5 DIN913TL360	OR4X3NBR70	KEYV-T20

PWLNR/L2020X-CHP-MC

Direct connection

Lever lock toolholders – 95° approach angle.

For negative 80° trigon insert. High-pressure coolant capability with bottom direct connection

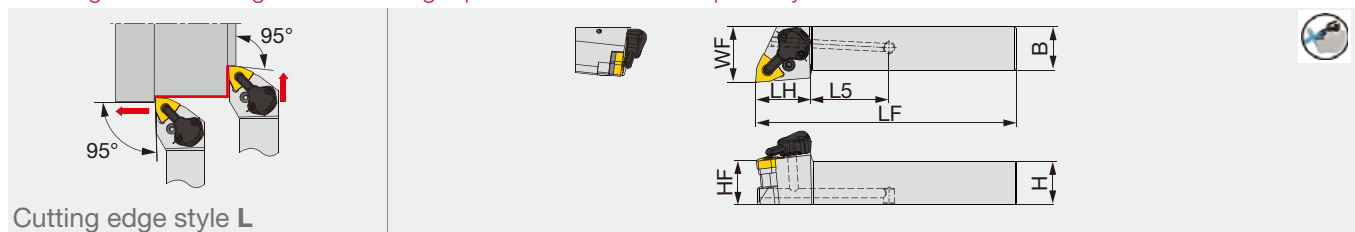

Designation	H	B	LF	LH	HF	L5	WF	Insert	Torque*
PWLNR/L2020X06-CHP-MC	20	20	97	27	20	29	25	WN**0604...	2
PWLNR/L2020X08-CHP-MC	20	20	97	27	20	29	25	WN**0804...	3

*Torque: Recommended torque (N-m) for clamping
Applicable for 30 MPa pressure coolant

SPARE PARTS

Designation	Shim	Spring	Lever	Spring	Spring pin	Wrench	Coolant unit	Wrench	Coolant plug	Wrench
PWLNR/L2020X06-CHP-MC	TWN3	SP3	LR3	SR117-2014	PN3-4	HW2.5	CU-CW-CHP	T-8/5	SRM5X5 DIN913TL360	-
PWLNR/L2020X08-CHP-MC	TWN443	SP4	LR4DH	SR117-2010	PN3-4L	HW2.5	CU-CW-CHP	T-8/5	SRM5X5 DIN913TL360	HW3.0

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Breaker Shape	TF	TSF	TM	TH
	Cutting conditions	B004			

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Breaker Shape	All-round	All-round	All-round
	Cutting conditions	B008		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Breaker Shape	CBN	CBN
	Cutting conditions	B014	

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Breaker Shape	SF	SM	SH
	Cutting conditions	B006		


S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX480	AH8005	AH8005
	Breaker Shape	CBN	HRF	HRM
	Cutting conditions	B012		

Reference pages: AWLNR/L-CHP-MC, PWLNR/L2020X-CHP-MC:

Inserts → **B102 -**, CBN → **B187**

Parts for coolant hose → **C115**

Lever lock toolholders with TungCap connection – 95° approach angle.
For negative 80° trigon insert. High-pressure coolant capability.

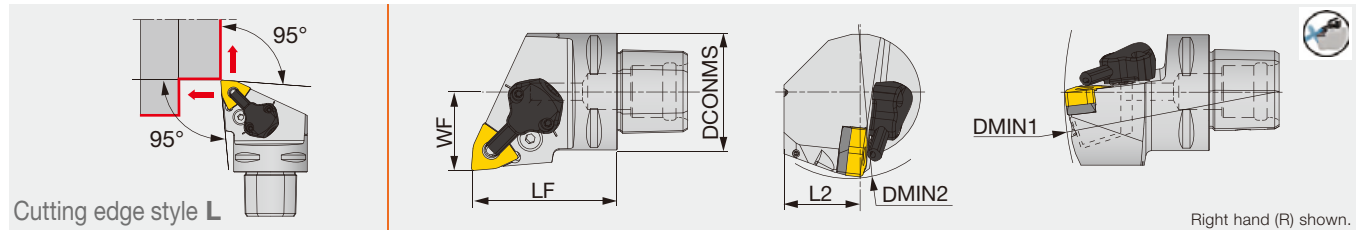

Right hand (R) shown.

Designation	DCONMS	LF	L2	WF	DMIN1	DMIN2	RE**	Insert	Torque*
C4PWLNLR/L27050-0604-CHP	40	50	25	27	140	110	0.8	WN**0604...	2
C4PWLNLR/L27050-08-CHP	40	50	25	27	140	110	0.8	WN**0804...	3
C6PWLNLR/L45065-08-CHP	63	65	41	45	190	110	0.8	WN**0804...	3

*Torque: Recommended torque (N·m) for clamping

Applicable for 14 MPa pressure coolant

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
C*PWLNLR/L**0604-CHP	LSW312	LCS3	P-2.5	LSP3	LCL3
C*PWLNLR/L**-08-CHP	LSW42BL	LCS4	P-3	LSP4	LCL4

SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring
C*PWLNLR/L**0604-CHP	CU-CW-CHP	SRM3	T-8F	OR6.4X0.9N
C*PWLNLR/L**-08-CHP	CU-CW-CHP	SRM3	T-8F	OR6.4X0.9N

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Breaker Shape	TF	TSF	TM	TH
Cutting conditions		B004			

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	SF	SM	SH
	Breaker Shape			
Cutting conditions		B006		


K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Breaker Shape	All-round 	All-round 	All-round 
Cutting conditions		B008		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX480	AH8005	AH8005
	Breaker Shape	CBN 	HRF 	HRM 
Cutting conditions		B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Breaker Shape	CBN 	CBN 
Cutting conditions		B012	

Reference pages: C-PWLNLR/L-CHP: Inserts → **B102** -, CBN → **B187**
Parts for coolant hose → **C115**

Screw-on toolholder with 95° approach angle, for negative 80° trigon inserts

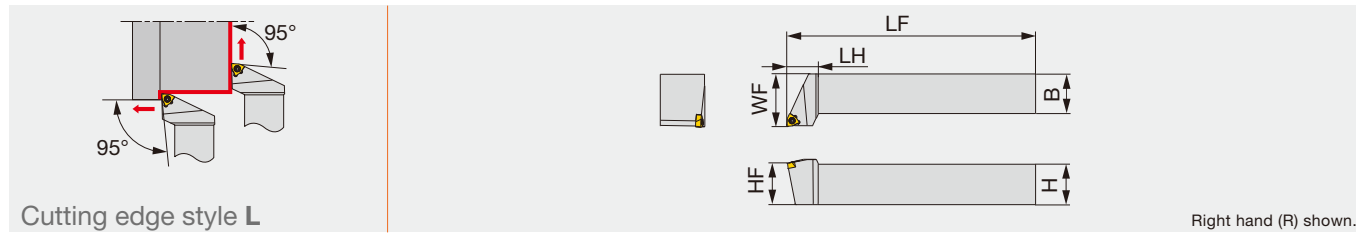


Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JSWLXR/L2020K04	20	20	125	15	20	25	0.4	WXGU0403**L/R...	0.9
JSWLXR/L2525M04	25	25	150	19	25	32	0.4	WXGU0403**L/R...	0.9

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

Note: Use right-hand toolholders (R) with left-hand inserts (L); and left-hand toolholders (L) with right-hand inserts (R).

JSWL2XR/L

Screw-on toolholder with 95° approach angle, for WXGU inserts

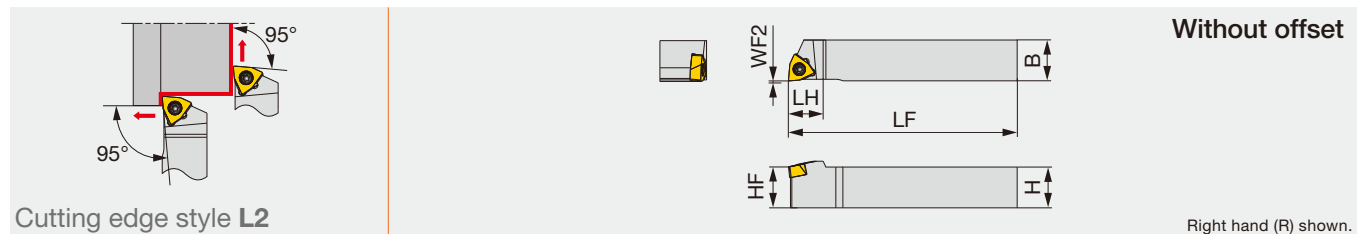

Designation	H	B	LF	LH	HF	WF2	RE**	Insert	Torque*
JSWL2XR/L1010X04	10	10	120	11	10	0	0.2	WXGU0403**L/R...	0.9
JSWL2XR/L1212F04	12	12	85	11	12	0	0.2	WXGU0403**L/R...	0.9
JSWL2XR/L1212X04	12	12	120	11	12	0	0.2	WXGU0403**L/R...	0.9
JSWL2XR/L1616X04	16	16	120	13	16	0	0.2	WXGU0403**L/R...	0.9
JSWL2XR/L2020H04	20	20	100	13	20	0	0.2	WXGU0403**L/R...	0.9

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

Note: Use right-hand toolholders (R) with left-hand inserts (L); and left-hand toolholders (L) with right-hand inserts (R).

Designation	Clamping screw	Wrench
JSWLXR/L...	SR34-514	T-7F
JSWL2XR/L...		

INSERT SELECTION

Swiss lathes

P	Application	Finishing	Medium cutting	M	Application	Finishing	Medium cutting
	Grade	SH725	AH725		Grade	SH725	AH725
	Chipbreaker shape	JSS	JTS		Chipbreaker shape	JSS	JTS
	Cutting conditions	C118			Cutting conditions	C118	


Small CNC lathes

P	Application	Finishing	Medium cutting	M	Application	Finishing	Medium cutting
	Grade	AH725	TS		Grade	AH8015	AH8015
	Chipbreaker shape	SS	TS		Chipbreaker shape	SS	TS
	Cutting conditions	C118			Cutting conditions	C118	

Reference pages: JSWLXR/L, JSWL2XR/L: Inserts → **B157** -
Standard cutting conditions → **C118**

PTL2NR/L

Lever-lock toolholder with 95° approach angle, for negative 60° triangular inserts

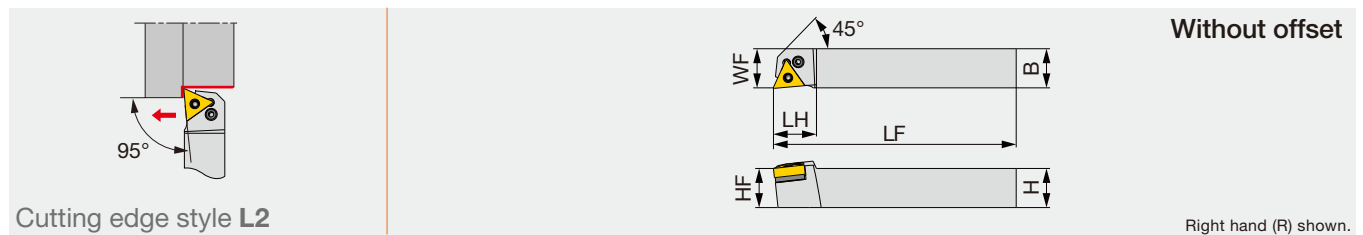

Cutting edge style L2

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PTL2NR/L2020H16	20	20	100	22	20	20	0.4	TN**1604...	2

*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius

SPARE PARTS


Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PTL2NR/L...	LST317 D30	LCS3	P-2.5	LSP3	LCL3

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			
M	Application	Finishing	Medium cutting		
	Grade	T6215	AH6225		
	Chipbreaker shape	SF	SM		
	Cutting conditions	B006			
K	Application	Finishing	Medium cutting	Medium to heavy cutting	
	Grade	T515	T515	T515	
	Chipbreaker shape	All-round	All-round	All-round	
	Cutting conditions	B008			
S	Application	Precision finishing	Finishing	Medium cutting	
	Grade	BX470	AH8005	AH8005	
	Chipbreaker shape	CBN	HRF	HRM	
	Cutting conditions	B012			
N	Application	Precision finishing	Finishing	Medium cutting	
	Grade	DX120	DX140	TH10	
	Chipbreaker shape	DIA	DIA	P	
	Cutting conditions	B010			
H	Application	Precision finishing	Finishing		
	Grade	BXA10	BXA20		
	Chipbreaker shape	CBN	CBN		
	Cutting conditions	B014			

SCLCR/L

Screw-on toolholder with 95° approach angle, for positive 80° rhombic inserts

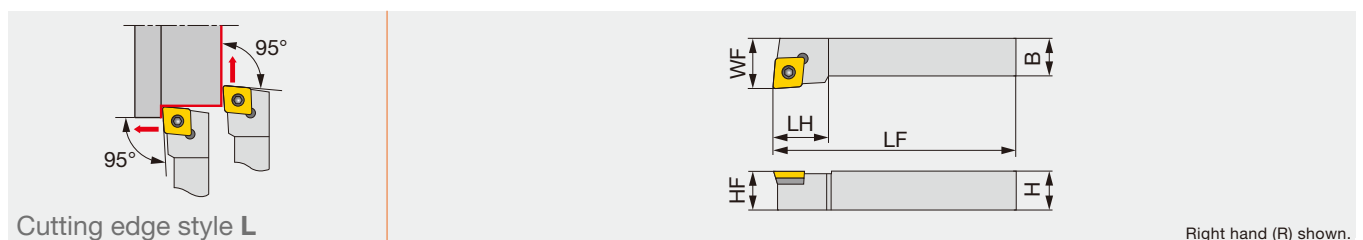

Cutting edge style L

Designation	H	B	LF	LH	HF	WF	RE**	Insert
SCLCR/L1616H09	16	16	100	16	16	20	0.8	CC**09T3...
SCLCR/L2020K12	20	20	125	20	20	25	0.8	CC**1204...

**RE: Standard corner radius


SPARE PARTS

Designation	Clamping screw	Shim screw	Shim	Wrench1	Wrench2
SCLCR/L1616H09	CSTB-3.5L	DTS5-3.5	SSC32	P-3.5	T-15F
SCLCR/L2020K12	CSTB-4F	DTS6-4	SSC4T3	P-4	T-15F

Reference pages: PTL2NR/L: Inserts → **B087 -**, CBN → **B182 -**, PCD → **B212**
SCLCR/L: Inserts → **B112 -**, CBN → **B189 -**, PCD → **B213**

Lever lock toolholders – 95° approach angle.

For positive 80° rhombic insert. High-pressure coolant capability with bottom direct connection

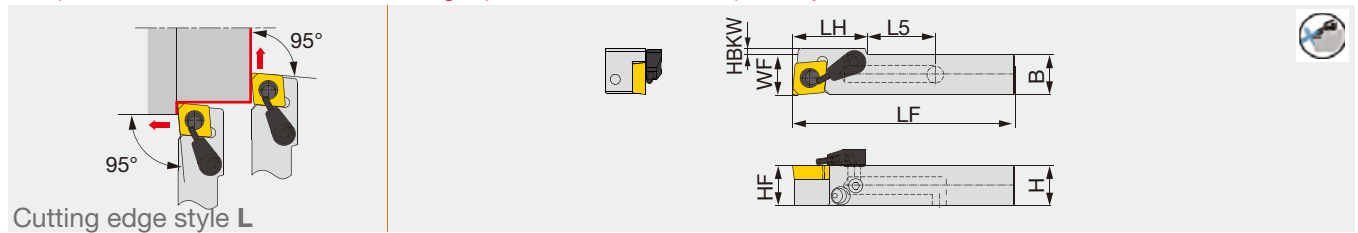

Designation	H	B	LF	LH	L5	HF	WF	HBKW	Insert
PCLCR/L1616X09S-CHP-MC	16	16	71	23	17	16	16.2	-	CC**09T3...

Applicable for 14 MPa pressure coolant


SPARE PARTS

Designation	Lever	Pin	Clamping screw	Wrench	Coolant plug	Coolant unit
PCLCR/L1616X09S-CHP-MC	SLLV-3	SLPI-3	SR10400150	HW2.5/5	SR5/16UNFTL360	S-CU-CHP

TUNGCAP

C-SCLCL-CHP

Screw-on toolholder, with 95° approach angle, for positive 80° rhombic inserts, with high pressure coolant capability

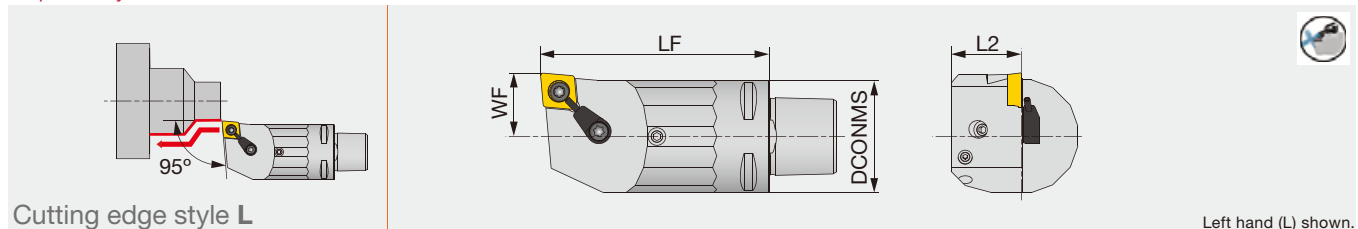

Designation	DCONMS	LF	L2	WF	RE	Insert
C3SCLCL18040-09-CHP	32	40	20	18	0.8	CC**09T3...
C3SCLCL18065-09-CHP	32	65	20	18	0.8	CC**09T3...

Applicable for 14 MPa coolant
Cannot be used for boring

SPARE PARTS

Designation	Clamping screw	Coolant unit	Wrench
C3SCLCL...	CSTB-4S	S-CU-CHP	T-15F

INSERT SELECTION

Application	Precision finishing	Finishing	Finishing to medium cutting	Medium cutting
Grade	NS9530	NS9530	T9215	T9215
Chipbreaker shape	01	PSS	PS	PM
Cutting conditions	B016			

Application	Precision finishing	Finishing	Finishing to medium cutting	Medium cutting
Grade	GH330	AH6225	AH6225	AH6225
Chipbreaker shape	W**	PSS	PS	PM
Cutting conditions	B018			

Application	Finishing to medium cutting
Grade	T515
Chipbreaker shape	CM
Cutting conditions	B020

Application	Precision finishing	Finishing	Medium cutting
Grade	DX120	DX140	KS05F
Chipbreaker shape	DIA	DIA	AL
Cutting conditions	B022		

Application	Finishing	Finishing to medium cutting
Grade	AH8015	AH8015
Chipbreaker shape	PSS	PS
Cutting conditions	B024	


Application	Precision finishing	Finishing
Grade	BXA10	BXA20
Chipbreaker shape	CBN	CBN
Cutting conditions	B026	

Reference pages: PCLCR/L1616X09S-CHP-MC, C-SCLCL-CHP:

Inserts → **B112 -**, CBN → **B189 -**, PCD → **B213**

Parts for coolant hose → **C115**

Double-clamp toolholder with 93° approach angle, for negative 60° triangular inserts

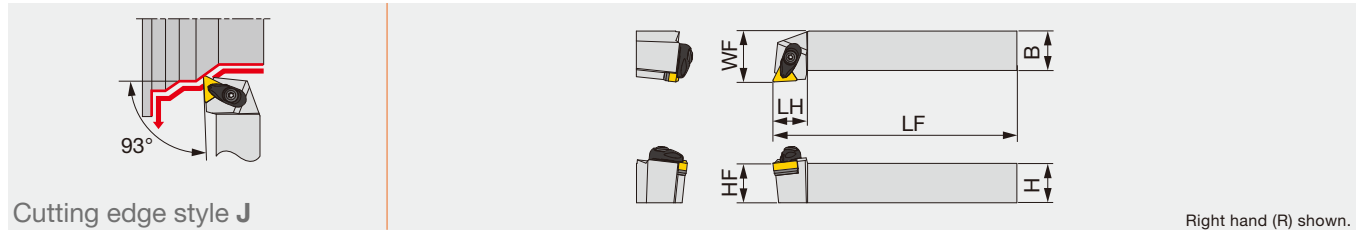


Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ATJNR/L2020K16-A	20	20	125	22	20	25	0.8	TN**1604...	3
ATJNR/L2525M16-A	25	25	150	22	25	32	0.8	TN**1604...	3

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

C-ATJNR/L

Double-clamp toolholder, with 93° approach angle, for negative 60° triangular inserts

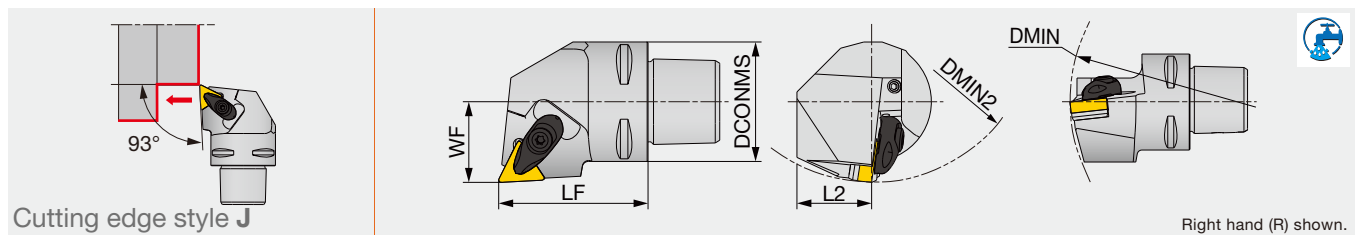

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert
C4ATJNR/L27050-16N	40	50	25	27	140	110	0.8	TN**1604...

Applicable for 7 MPa coolant


SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ATJNR/L**16-A C4ATJNR/L**16N	ACP3S	ACS-5W	BP-7	SP-2.5	AST322	CSTB-3.5	T-15F

ISO ETURN

PTJNR/L-Eco

Lever-lock toolholder with 93° approach angle, for negative triangular inserts

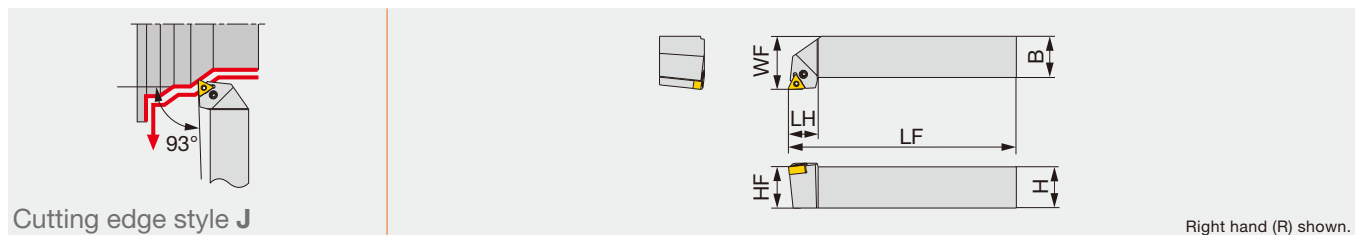

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PTJNR/L2525M1104	25	25	150	18	25	32	0.8	TN**1104...	2


*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius

SPARE PARTS

Designation	Clamping screw	Wrench	Lever
PTJNR/L2525M1104	LCS23A	P-2.5	LCL23

Reference pages: ATJNR/L, C-ATJNR/L: Inserts → **B087 -**, CBN → **B182 -**, PCD → **B212**
PTJNR/L-Eco: Inserts → **B087 -**

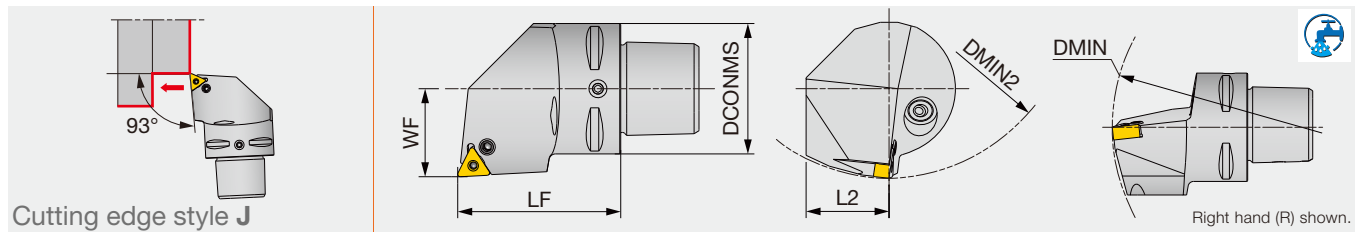

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE**	Insert
C4PTJNR/L27050-1104N	40	50	25	27	140	110	0.8	TN**1104...


**RE: The holder measurements are true with this insert radius
Applicable for 7 MPa coolant

SPARE PARTS

Designation	Clamping screw	Wrench	Lever	Coolant parts
C4PTJNR/L27050-1104N	LCS23A	P-2.5	LCL23	SATZ-M8X1-M3

WTJNR/L

Wedge-on toolholder with 93° approach angle, for negative 60° triangular inserts

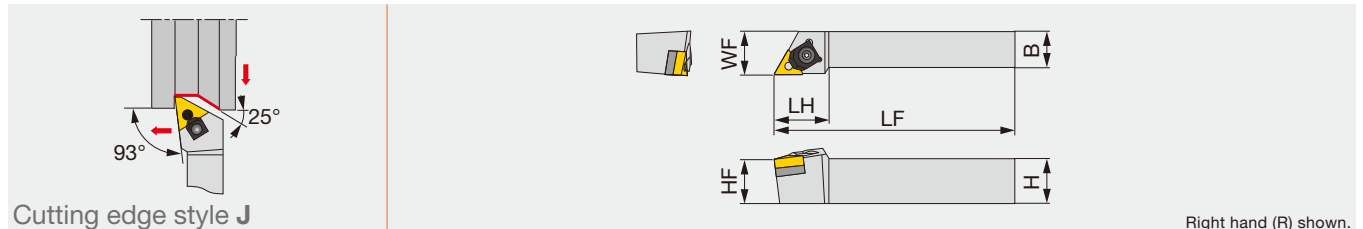

Designation	H	B	LF	LH	HF	WF	RE**	Insert
WTJNR2020	20	20	125	31	20	25	0.8	TN**1604...
WTJNR/L2525M3	25	25	150	31	25	32	0.8	TN**1604...

**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	E-ring	Nut	Pin	Clamping screw	Shim	Wrench
WTJNR2020	WCW3	5103-25	WCN3S	WCP3S	WCS3	WST33	P-3
WTJNR/L2525M3	WCW3	5103-25	WCN3	WCP3S	WCS3	WST33	P-3

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting
	Grade	T6215	AH6225
	Chipbreaker shape	SF	SM
	Cutting conditions	B006	

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA	P
	Cutting conditions	B010		


S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: C-PTJNR/L: Inserts → **B087 -**

WTJNR/L: Inserts → **B087 -**, CBN → **B182 -**, PCD → **B212**

Double-clamp toolholder with 93° approach angle, for negative 55°/45° rhombic inserts

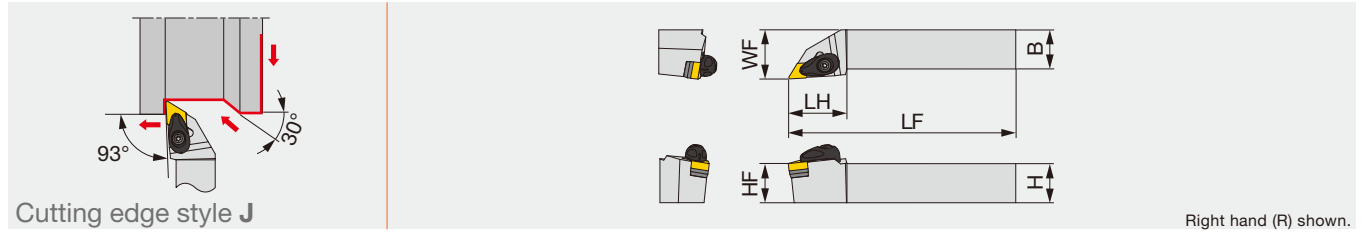


Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ADJNR/L2020K1104-A	20	20	125	30	20	25	0.8	DN**/FNMG1104...	3
ADJNR/L2020K15-A	20	20	125	36	20	25	0.8	DN**/FNGA1504...	3
ADJNR/L2020K1506-A	20	20	125	36	20	25	0.8	DN**/FNGA1506...	3
ADJNR/L2525M1104-A	25	25	150	30	25	32	0.8	DN**/FNMG1104...	3
ADJNR/L2525M15-A	25	25	150	36	25	32	0.8	DN**/FNGA1504...	3
ADJNR/L2525M1506-A	25	25	150	36	25	32	0.8	DN**/FNGA1506...	3
ADJNR/L3225P15-A	32	25	170	36	32	32	0.8	DN**/FNGA1504...	3

*Torque: Recommended clamping torque (N-m)

**RE: Standard corner radius

C-ADJNR/L

Double-clamp toolholder, with 93° approach angle, for negative 55°/45° rhombic inserts

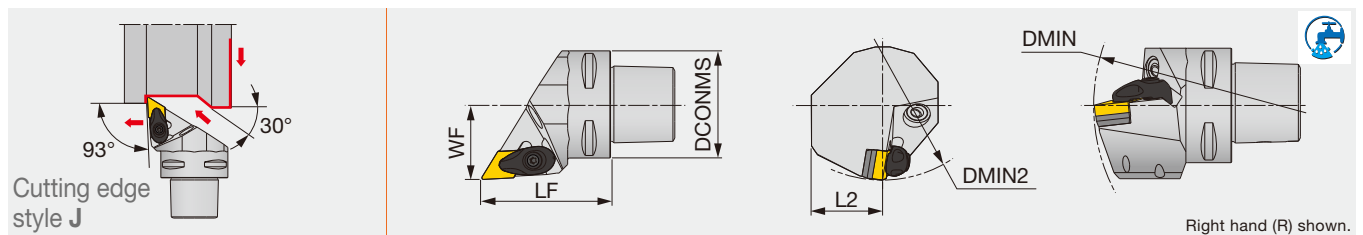

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert
C3ADJNR/L22050-1104N	32	50	20	22	121	85	0.8	DN**/FNMG1104...
C4ADJNR/L27050-1104N	40	50	25	27	145	110	0.8	DN**/FNMG1104...
C4ADJNR/L27050-15N	40	50	25	27	145	110	0.8	DN**/FNGA1504...
C5ADJNR/L35060-15N	50	60	32	35	165	110	0.8	DN**/FNGA1504...
C6ADJNR/L45065-1104N	63	65	35	45	190	110	0.8	DN**/FNMG1104...
C6ADJNR/L45065-15N	63	65	41	45	190	110	0.8	DN**/FNGA1504...
C6ADJNR/L45135-15N	63	135	41	45	190	110	0.8	DN**/FNGA1504...

Applicable for 7 MPa coolant


Option: ASD423 (Shim for DN**1506**)

SPARE PARTS	Clamp	Clamp screw	Coolant parts	Shim	Shim screw	Spring	Spring pin	Wrench
ADJNR/L**1104-A	ACP3S-E	ACS-5W	-	ASD322	CSTB-3.5	BP-7	SP-2.5	T-15F
ADJNR/L**15-A	ACP4S	ACS-5W	-	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F
ADJNR/L**1506-A	ACP4S	ACS-5W	-	ASD423	CSTB-3.5	BP-7	SP-2.5	T-15F
C4ADJN*27050-15N	ACP4S	ACS-5W	SATZ-M10X1-M5	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F
C5ADJN*35060-15N	ACP4S	ACS-5W	SATZ-M10X1-M5	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F
C6ADJN*45065-15N	ACP4S	ACS-5W	SATZ-M10X1-M5	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F
C6ADJN*45135-15N	ACP4S	ACS-5W	SATZ-M10X1-M5	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F

Reference pages: ADJNR/L, C-ADJNR/L: Inserts → **B066 -**, **B075 -**, CBN → **B172 -**, **B176 -**, PCD → **B211**

DDJNR/L

One-Double toolholder with 93° approach angle, for negative 55°/45° rhombic inserts

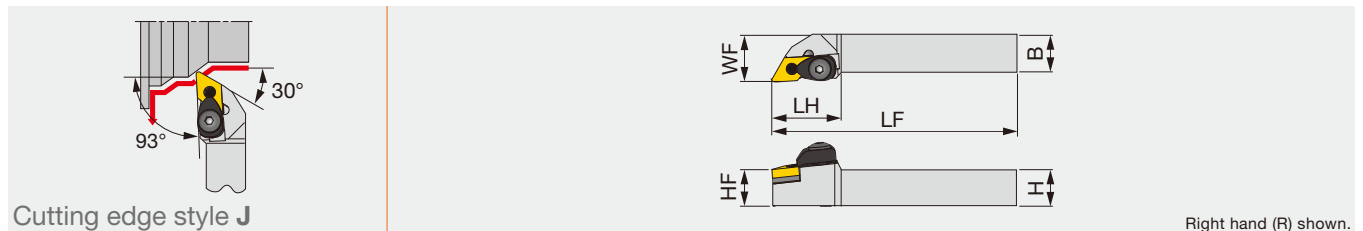

Designation	H	B	LF	LH	HF	WF	RE**	Insert
DDJNR/L2020K15	20	20	125	38	20	25	0.8	DN**/FNGA1504...
DDJNR/L2020K1506	20	20	125	38	20	25	0.8	DN**/FNGA1506...
DDJNR/L2525M15	25	25	150	38	25	32	0.8	DN**/FNGA1504...
DDJNR/L2525M1506	25	25	150	38	25	32	0.8	DN**/FNGA1506...
DDJNR/L3225P15	32	25	170	38	32	32	0.8	DN**/FNGA1504...
DDJNR/L3225P1506	32	25	170	38	32	32	0.8	DN**/FNGA1506...

Note: Except for 57-type chipbreaker inserts
**RE: Standard corner radius

SPARE PARTS	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench1	Wrench2
DDJNR/L**15	DCPM-43	DLCL43	DPIS43	DLCS43	LSD42	BP-10	LSP4	P-3	P-4
DDJNR/L**1506	DCPM-43	DLCL43	DPIS44	DLCS43	LSD42	BP-10	LSP4	P-3	P-4

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Chipbreaker shape				
Cutting conditions B004					

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Chipbreaker shape			
Cutting conditions B008				

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	CBN BX470	HRF AH8005	HRM AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Chipbreaker shape			
Cutting conditions B012				

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Chipbreaker shape			
Cutting conditions B006				


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA with rake	DIA	P
	Chipbreaker shape			
Cutting conditions B010				

H	Application	Precision finishing	Finishing
	Grade	CBN BXA10	CBN BXA20
	Chipbreaker shape	CBN	CBN
	Chipbreaker shape		
Cutting conditions B014			

Reference pages: DDJNR/L: Inserts → B066 -, B075 -, CBN → B172 -, B176 -,PCD → B211

PDJNR/L

Lever-lock toolholder with 93° approach angle, for negative 55°/45° rhombic inserts

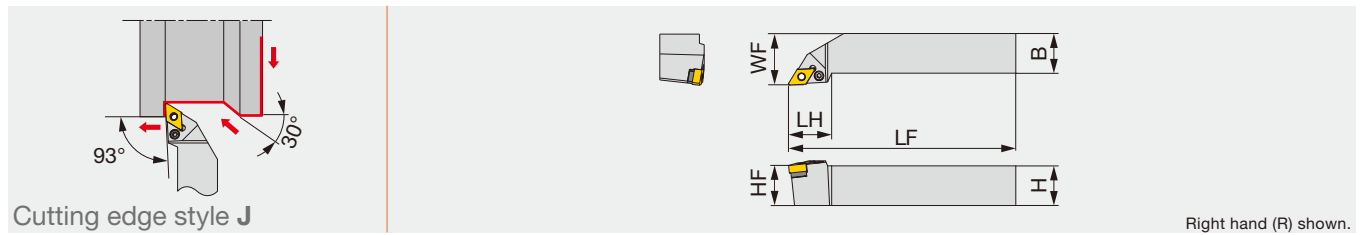

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PDJNR/L1616H1104	16	16	100	27	16	20	0.8	DN**/FNMG1104...	2
PDJNR/L1616H11	16	16	100	27	16	20	0.8	DN**/FNMG1104...	2
PDJNR/L2020K1104	20	20	125	27	20	25	0.8	DN**/FNMG1104...	2
PDJNR/L2020K11	20	20	125	27	20	25	0.8	DN**/FNMG1104...	2
PDJNR/L2020	20	20	125	34	20	25	0.8	DN**/FNGA1504...	3
PDJNR2020K15E	20	20	125	36	20	25	0.8	DN**/FNGA1504...	3
PDJNR/L2520	25	20	150	34	25	25	0.8	DN**/FNGA1504...	3
PDJNR/L2525M1104	25	25	150	27	25	32	0.8	DN**/FNMG1104...	2
PDJNR/L2525M11	25	25	150	27	25	32	0.8	DN**/FNMG1104...	2
PDJNR/L2525	25	25	150	34	25	32	0.8	DN**/FNGA1504...	3
PDJNR/L2525M15E	25	25	150	36	25	32	0.8	DN**/FNGA1506...	3
PDJNR/L3225	32	25	170	32	32	32	0.8	DN**/FNGA1504...	3
PDJNR3225P15E	32	25	170	36	32	34	0.8	DN**/FNGA1506...	3

*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PDJNR/L****11/1104	ELSD32	LCS3	P-2.5	LSP3	LCL33L
PDJNR/L2020	LSD42	LCS4	P-3	LSP4	LCL4
PDJNR2020K15E	ELSD42	ELCS4	P-3	LSP4S	LCL44
PDJNR/L2520	LSD42	LCS4	P-3	LSP4	LCL4
PDJNR/L2525	LSD42	LCS4	P-3	LSP4	LCL4
PDJNR/L2525M15E	ELSD42	ELCS4	P-3	LSP4S	LCL44
PDJNR/L3225	LSD42	LCS4	P-3	LSP4	LCL4
PDJNR3225P15E	ELSD42	ELCS4	P-3	LSP4S	LCL44

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Chipbreaker shape				
Cutting conditions B004					

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Chipbreaker shape			
Cutting conditions B008				

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	CBN BX470	HRF AH8005	HRM AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Chipbreaker shape			
Cutting conditions B012				

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Chipbreaker shape			
Cutting conditions B006				


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA with rake	DIA	P
	Chipbreaker shape			
Cutting conditions B010				

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Chipbreaker shape		
Cutting conditions B014			

Reference pages: PDJNR/L: Inserts → B066 -, B075 -, CBN → B172 -, B176 -,PCD → B211

Lever lock toolholders – 93° approach angle.

For negative 55°/45° rhombic insert. High-pressure coolant capability.

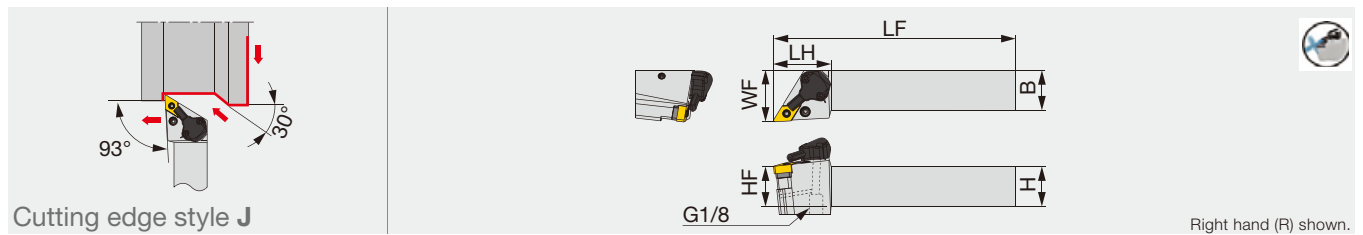

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PDJNR/L2020K1104-CHP	20	20	125	36	20	32	0.8	DN**/FNMG1104...	2
PDJNR/L2020K15-CHP	20	20	125	36	20	32	0.8	DN**/FNGA1504...	3
PDJNR/L2525M1104-CHP	25	25	150	36	25	32	0.8	DN**/FNMG1104...	2
PDJNR/L2525M15-CHP	25	25	150	36	25	32	0.8	DN**/FNGA1504...	3

*Torque: Recommended torque (N·m) for clamping

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
PDJNR/L**1104-CHP	ELSD32	LCS3	P-2.5	LSP3	LCL33L
PDJNR/L**15-CHP	LSD43A	LCS4	P-3	LSP4	LCL4

SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring	Coolant screw	Wrench 3
PDJNR/L**1104-CHP	CU-D-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2
PDJNR/L**15-CHP	CU-D-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Cutting conditions	B006		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA with rake	P
	Cutting conditions	B010		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: PDJNR/L-CHP: Inserts → **B066 -**, **B075 -**, CBN → **B172 -**, **B176 -**,PCD → **B211**
Parts for coolant hose→ **C115**


ADJNR/L-CHP-MC

Direct connection

Tube connection

Double clamping tool holders-93° approach angle

For negative 55°/45° rhombic insert. High-pressure coolant capability with tube and direct connections

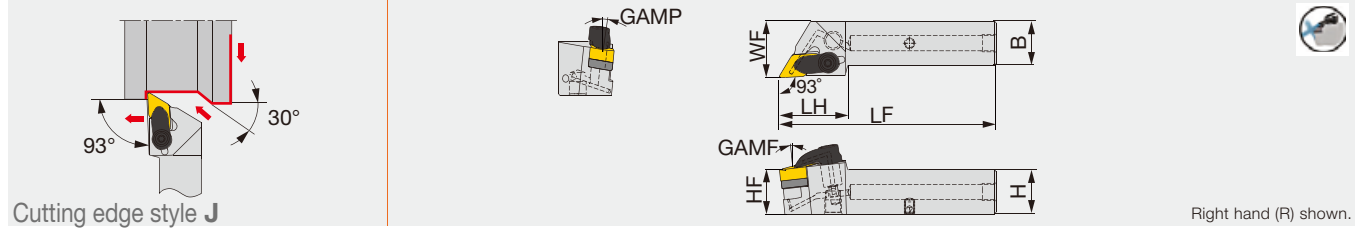

Designation	H	B	LF	LH	HF	WF	GAMP	GAMF	Insert	Torque*
ADJNR/L2020X-15-CHP-MC	20	20	110	40	20	25	6°	6°	DN**/FNGA1506...	4
ADJNR/L2525X-15-CHP-MC	25	25	125	40	25	32	6°	6°	DN**/FNGA1506...	4

*Torque: Recommended torque (N-m) for clamping
 Used shim RDT443, in case using insert DN1504...
 Applicable for 14 MPa pressure coolant


SPARE PARTS

Designation	Clamp set	Shim	Shim screw	screw for tube connection	Coolant plug	O-ring	Wrench 1
ADJNL***X-15-CHP-MC	LCGL-4JCSET	RDT433	SR14-506	PLUGG1/8-6.5TL360	SRM5X5 DIN913TL360	OR4X3NBR70	KEYV-T20
ADJNR***X-15-CHP-MC	LCGR-4JCSET	RDT433	SR14-506	PLUGG1/8-6.5TL360	SRM5X5 DIN913TL360	OR4X3NBR70	KEYV-T20

TUNGCAP

C-PDJNR/L

Lever-lock toolholder, with 93° approach angle, for negative 55°/45° rhombic inserts

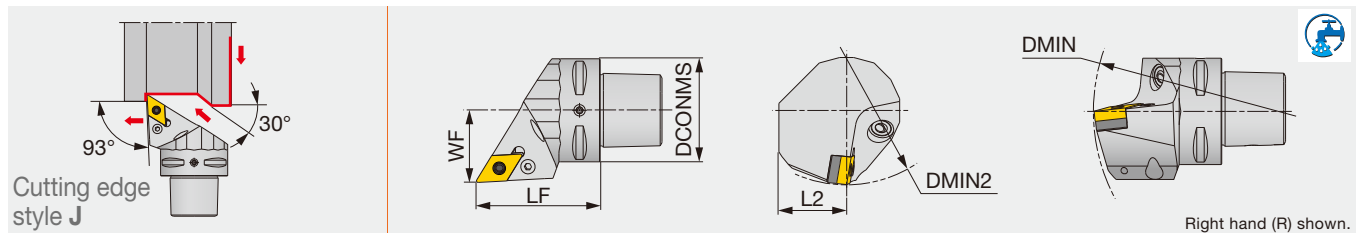

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert
C5PDJNR/L35060-15N	50	60	32	35	165	110	0.8	DN**/FNGA1504(06)...
C6PDJNR/L45065-15N	63	65	41	45	195	95	0.8	DN**/FNGA1504(06)...

Applicable for 7 MPa coolant

SPARE PARTS

Designation	Coolant parts	Shim	Lever	Clamping screw	Spring pin	Wrench
C5PDJN*35060-15N	SATZ-M10X1-M5	LSD43A	LCL4	LCS4	LSP4	P-3
C6PDJN*45065-15N	SATZ-M10X1-M5	LSD43A	LCL4	LCS4	LSP4S	P-3


Option: LSD42A (Shim for DN**1506**), LSP4S (Spring pin for DN**1506**)

Reference pages: ADJNR/L-CHP-MC: Inserts → **B066 -**, **B075 -**, CBN → **B172 -**, **B176 -**, PCD → **B211**

C-PDJNR/L: Inserts → **B066 -**, **B075 -**, CBN → **B172 -**, **B176 -**, PCD → **B211**

Parts for coolant hose → **C115**

Lever lock toolholders with TungCap connection – 93° approach angle.
For negative 55°/45° rhombic insert. High-pressure coolant capability.

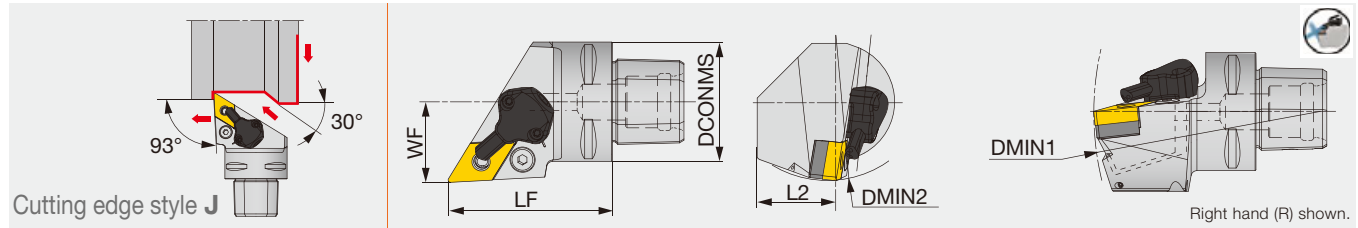

Designation	DCONMS	LF	L2	WF	DMIN1	DMIN2	RE**	Insert	Torque*
C4PDJNR/L27055-1104-CHP	40	55	27	27	145	110	0.8	DN**/FNMG1104...	2
C4PDJNR/L27055-15-CHP	40	55	27	27	145	110	0.8	DN**/FNGA1504(06)...	3
C5PDJNR/L35060-15-CHP	50	60	32	35	165	110	0.8	DN**/FNGA1504(06)...	3
C6PDJNR/L45065-1104-CHP	63	65	35	45	195	95	0.8	DN**/FNMG1104...	2
C6PDJNR/L45065-15-CHP	63	65	35	45	195	95	0.8	DN**/FNGA1504(06)...	3

*Torque: Recommended torque (N·m) for clamping

Applicable for 14 MPa pressure coolant

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
C*PDJNR/L**1104-CHP	ELSD32	LCS3	P-2.5	LSP3	LCL33L
C*PDJNR/L**-15-CHP	LSD43A	LCS4	P-3	LSP4	LCL4

Option: LSD42A (Shim for DN**1506...), LSP4S (Spring pin for DN**1506...)

SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring
C*PDJNR/L**1104-CHP	CU-D-CHP	SRM3	T-8F	OR6.4X0.9N
C*PDJNR/L**-15-CHP	CU-D-CHP	SRM3	T-8F	OR6.4X0.9N

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
					
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
				
	Cutting conditions	B006		

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
				
	Cutting conditions	B008		


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA with rake	P
				
	Cutting conditions	B010		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
				
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
			
	Cutting conditions	B014	

Reference pages: PDJNR/L-CHP: Inserts → **B066 -**, **B075 -**, CBN → **B172 -**, **B176 -**,PCD → **B211**
Parts for coolant hose→ **C115**

Double-clamp toolholder with 93° approach angle, for negative 55° rhombic ceramic inserts with dimple

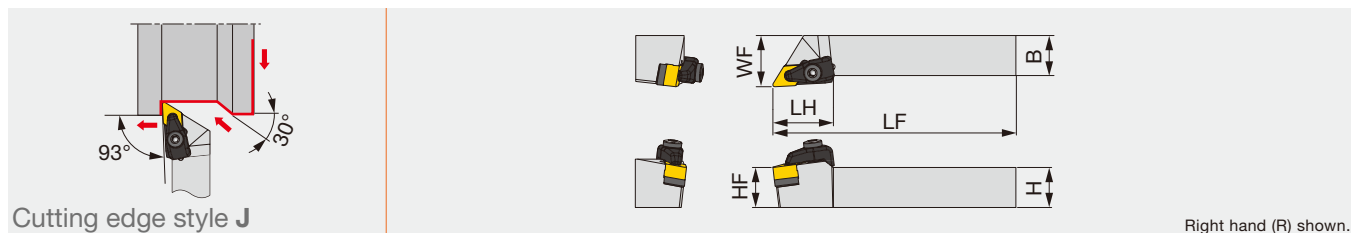

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
CDJNR/L2525M1507-RD	25	25	150	38	25	32	1.2	DN*D1507...	4
CDJNR3225P1507-RD	32	25	170	38	32	32	1.2	DN*D1507...	4

*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius


SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench1	Wrench2
CDJNR/L*-RD	CCP4-A	CCS4-A	CD44-A	BH5-10-A	BP-5-A	P-3	P-4

INSERT SELECTION

K	Application	Finishing to medium cutting
	Grade	FX105
	Chipbreaker shape	
	Cutting conditions	C118

Reference pages: CDJNR/L-RD: Inserts → **B074**
Standard cutting conditions → **C118**

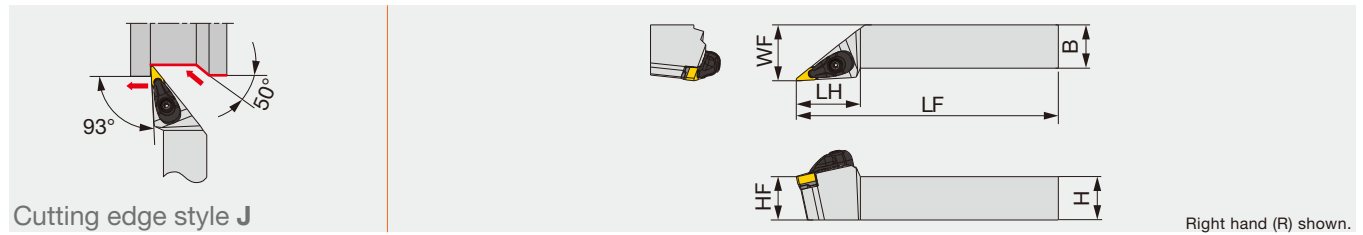

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
AVJNR/L2020K1204-A	20	20	125	37	20	25	0.8	VN**1204...	3
AVJNR/L2020K16-A	20	20	125	43	20	25	0.8	VN**/YN**1604...	3
AVJNR/L2525M1204-A	25	25	150	37	25	32	0.8	VN**1204...	3
AVJNR/L2525M16-A	25	25	150	46	25	32	0.8	VN**/YN**1604...	3

*Torque: Recommended clamping torque (N-m) **RE: Standard corner radius

SPARE PARTS


Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
AVJNR/L**1204-A	ACP3L-E	ACS-5W	BP-7	SP-2.5	ASV222	CSTB-3.0	T-15F
AVJNR/L**16-A	ACP3L	ACS-5W	BP-7	SP-2.5	ASV322	CSTB-3.5	T-15F

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting
	Grade	NS9530	GT9530	T9215
	Chipbreaker shape	TF	TSF	TM
	Cutting conditions	B004		
K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		
S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		
M	Application	Finishing	Medium cutting	
	Grade	T6215	AH6225	
	Chipbreaker shape	SF	SM	
	Cutting conditions	B006		
N	Application	Precision finishing		
	Grade	DX120		
	Chipbreaker shape	DIA with rake		
	Cutting conditions	B010		
H	Application	Precision finishing	Finishing	
	Grade	BXA10	BXA20	
	Chipbreaker shape	CBN	CBN	
	Cutting conditions	B014		

Reference pages: AVJNR/L: Inserts → **B098 -**, **B110**, CBN → **B186 -**, PCD → **B188**
Parts for coolant hose → **C115**

Double-clamp toolholder, with 93° approach angle, for negative 35° rhombic inserts (TurningA)

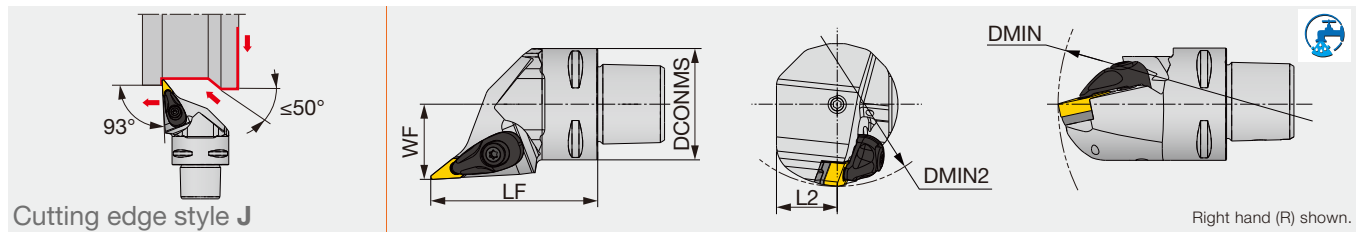

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE**	Insert
C4AVJNR/L27060-1204N	40	60	20	27	140	55	0.8	VN**1204...
C6AVJNR/L45065-1204N	63	65	31.5	45	190	81	0.8	VN**1204...

**RE: The holder measurements are true with this insert radius
Applicable for 7 MPa coolant


SPARE PARTS

Designation	Clamp	Clamp screw	Coolant parts	Shim	Shim screw	Spring	Spring pin	Wrench 1	Wrench 2
C4AVJNR/L...	ACP3L-E	ACS-5W	-	ASV222	CSTB-3	BP-7	SP-2.5	T-9F	T-15F
C6AVJNR/L...	ACP3L-E	ACS-5W	SATZ-M10X1-M5	ASV222	CSTB-3	BP-7	SP-2.5	T-9F	T-15F

ISO ETURN

PVJNR/L-Eco

Lever-lock toolholder with 93° approach angle, for negative 35° rhombic inserts

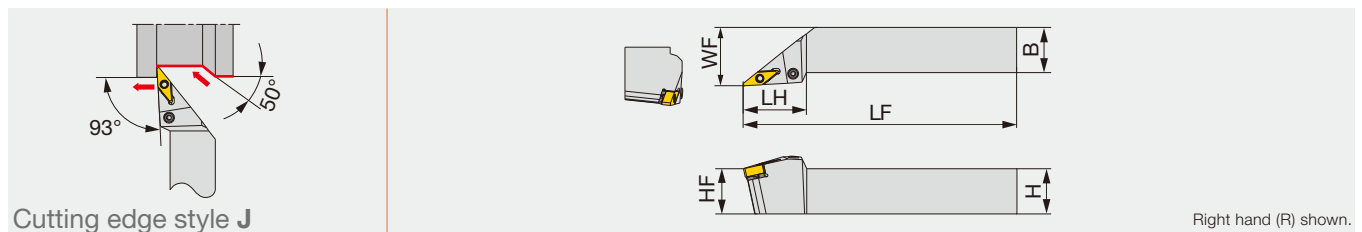

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PVJNR/L1616H1204	16	16	100	35	16	20	0.8	VN**1204...	2
PVJNR/L2020K1204	20	20	125	35	20	25	0.8	VN**1204...	2
PVJNR/L2525M1204	25	25	150	35	25	32	0.8	VN**1204...	2

*Torque: Recommended torque (N-m) for clamping


**RE: The holder measurements are true with this insert radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PVJNR/L**1204	LSV212	LCS3V	P-2.5	LSP3	LCL3V

Reference pages: AVJNR/L: Inserts → **B098 -**, Parts for coolant hose → **C115**
PVJNR/L-Eco: Inserts → **B098 -**

Lever lock toolholders – 93° approach angle.
For negative 35°/25° rhombic insert. High-pressure coolant capability.

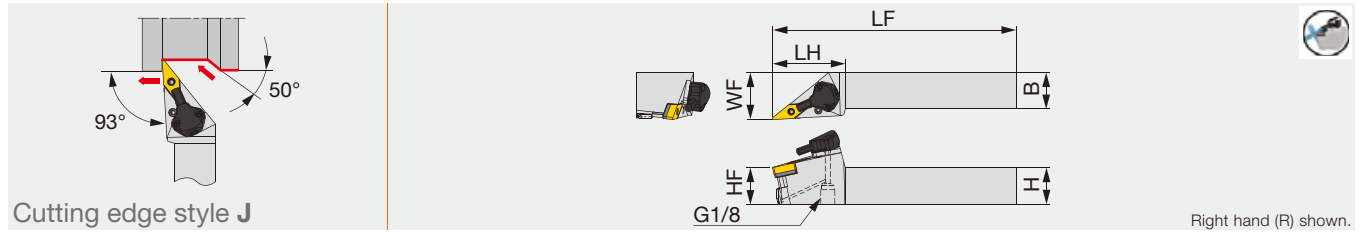

Designation	H	B	LF	LH	HF	WF	RE **	Insert	Torque*
PVJNR/L2020K1204-CHP	20	20	125	50	20	32	0.8	VN**1204...	2
PVJNR/L2020K16-CHP	20	20	125	50	20	32	0.8	VN**/YN**1604...	2
PVJNR/L2525M1204-CHP	25	25	150	50	25	32	0.8	VN**1204...	2
PVJNR/L2525M16-CHP	25	25	150	50	25	32	0.8	VN**/YN**1604...	2

*Torque: Recommended torque (N·m) for clamping

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
PVJNR/L**1204-CHP	LSV212	LCS3V	P-2.5	LSP3	LCL3V
PVJNR/L**16-CHP	LSV317	LCS3V	P-2.5	LSP3	LCL3V

SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring	Coolant screw	Wrench 3
PVJNR/L**1204-CHP	CU-V-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2
PVJNR/L**16-CHP	CU-V-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting
	Grade	NS9530	GT9530	T9215
	Chipbreaker shape	TF	TSF	TM
	Cutting conditions	B004		

M	Application	Finishing	Medium cutting
	Grade	T6215	AH6225
	Chipbreaker shape	SF	SM
	Cutting conditions	B006	

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		


N	Application	Precision finishing
	Grade	DX120
	Chipbreaker shape	DIA with rake
	Cutting conditions	B010

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: PVJNR/L-CHP: Inserts → **B098 -**, **B110**, CBN → **B186 -**, PCD → **B188**
Parts for coolant hose → **C115**

Lever lock toolholders with TungCap connection – 93° approach angle.
For negative 35°/25° rhombic insert. High-pressure coolant capability.

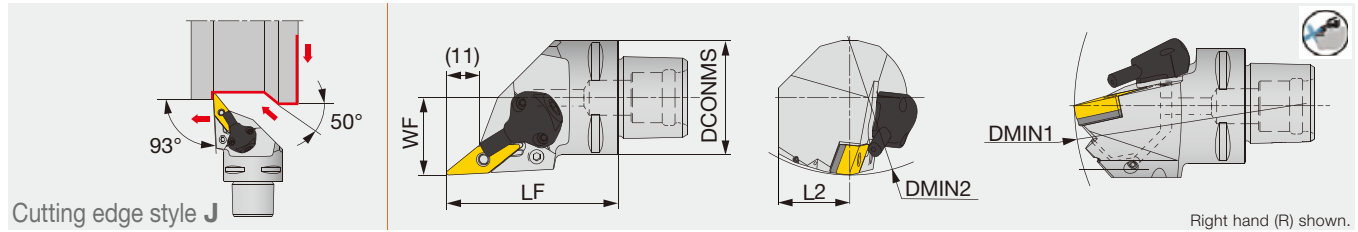

Designation	DCONMS	LF	L2	WF	DMIN1	DMIN2	RE**	Insert	Torque*
C4PVJNR/L27060-1204-CHP	40	60	20	27	140	90	0.8	VN**1204...	2
C4PVJNR/L27060-16-CHP	40	60	20	27	140	110	0.8	VN**/YN**1604...	2
C6PVJNR/L45065-1204-CHP	63	65	31.5	45	190	81	0.8	VN**1204...	2
C6PVJNR/L45065-16-CHP	63	65	31.5	45	190	81	0.8	VN**/YN**1604...	2

*Torque: Recommended torque (N·m) for clamping

Applicable for 14 MPa pressure coolant

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
C*PVJNR/L*-1204-CHP	LSV212	LCS3V	P-2.5	LSP3	LCL3V
C*PVJNR/L...16-CHP	LSV317	LCS3V	P-2.5	LSP3	LCL3V

SPARE PARTS


Designation	Coolant unit	Mounting screw	Wrench 2	O-ring
C*PVJNR/L*-1204-CHP	CU-V-CHP	SRM3	T-8F	OR6.4X0.9N
C*PVJNR/L...16-CHP	CU-V-CHP	SRM3	T-8F	OR6.4X0.9N

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting
	Grade	NS9530	GT9530	T9215
	Chipbreaker shape	TF	TSF	TM
	Cutting conditions	B004		
M	Application	Finishing	Medium cutting	
	Grade	T6215	AH6225	
	Chipbreaker shape	SF	SM	
	Cutting conditions	B006		
K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		
N	Application	Precision finishing		
	Grade	DX120		
	Chipbreaker shape	DIA with rake		
	Cutting conditions	B010		
S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		
H	Application	Precision finishing	Finishing	
	Grade	BXA10	BXA20	
	Chipbreaker shape	CBN	CBN	
	Cutting conditions	B014		

Reference pages: C-PVJNR/L-CHP: Inserts → **B098 -**, **B110**, CBN → **B186 -**, PCD → **B188**
Parts for coolant hose → **C115**

Screw-on toolholder with 93° approach angle, for DX*U inserts

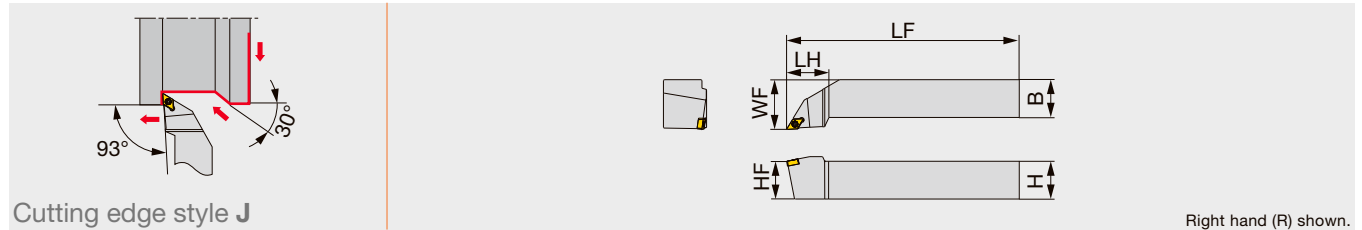


Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JSDJXR/L2020K07	20	20	125	27	20	25	0.4	DX*U0703**/L/R...	0.9
JSDJXR/L2525M07	25	25	150	27	25	32	0.4	DX*U0703**/L/R...	0.9

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

Note: Use right-hand toolholders (R) with left-hand inserts (L); and left-hand toolholders (L) with right-hand inserts (R).

JSDJ2XR/L

Screw-on toolholder with 93° approach angle, for DX*U inserts

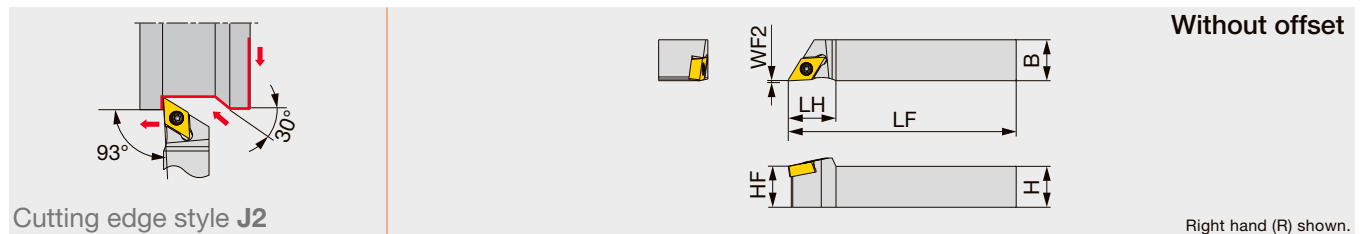

Designation	H	B	LF	LH	HF	WF2	RE**	Insert	Torque*
JSDJ2XR/L1010X07	10	10	120	14	10	0	0.2	DX*U0703**/L/R...	0.9
JSDJ2XR/L1212F07	12	12	85	14	12	0	0.2	DX*U0703**/L/R...	0.9
JSDJ2XR/L1212X07	12	12	120	14	12	0	0.2	DX*U0703**/L/R...	0.9
JSDJ2XR/L1616X07	16	16	120	18	16	0	0.2	DX*U0703**/L/R...	0.9
JSDJ2XR/L2020H07	20	20	100	18	20	0	0.2	DX*U0703**/L/R...	0.9

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

Note: Use right-hand toolholders (R) with left-hand inserts (L); and left-hand toolholders (L) with right-hand inserts (R).

SPARE PARTS	Clamping screw	Wrench
JSDJXR/L...	SR34-514	T-7F
JSDJ2XR/L...		

INSERT SELECTION

Swiss lathes

P	Application	Finishing	Medium cutting	M	Application	Finishing	Medium cutting
	Grade	SH725	AH725		Grade	SH725	AH725
	Chipbreaker shape	JSS	JTS		Chipbreaker shape	JSS	JTS
	Cutting conditions	C118			Cutting conditions	C118	


Small CNC lathes

P	Application	Finishing	Medium cutting	M	Application	Finishing	Medium cutting
	Grade	AH725	AH725		Grade	AH8015	AH8015
	Chipbreaker shape	SS	TS		Chipbreaker shape	SS	TS
	Cutting conditions	C118			Cutting conditions	C118	

Reference pages: JSDJXR/L, JSDJ2XR/L: Inserts → **B128** -
Standard cutting conditions → **C118**

SDJCR/L

Screw-on toolholder with 93° approach angle, for positive 55° rhombic inserts

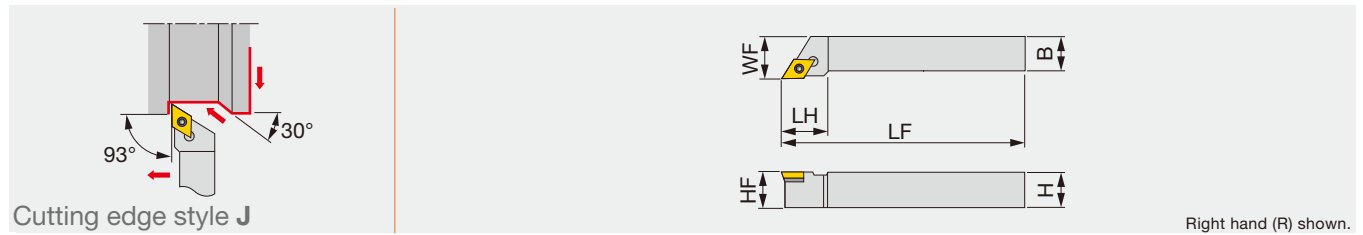

Designation	H	B	LF	LH	HF	WF	RE**	Insert
SDJCR1616H11	16	16	100	20	16	20	0.8	DC**11T3...
SDJCR/L2020K11	20	20	125	20.5	20	25	0.8	DC**11T3...
SDJCR/L2525M11	25	25	150	21.5	25	32	0.8	DC**11T3...

**RE: Standard corner radius


SPARE PARTS

Designation	Clamping screw	Shim screw	Shim	Wrench1	Wrench2
SDJCR/L...	CSTB-3.5L	DTS5-3.5	SSD32	P-3.5	T-15F

TUNGCAP

C-SDJCR/L-CHP

Screw-on toolholder, with 93° approach angle, for positive 55° rhombic inserts, with high pressure coolant capability

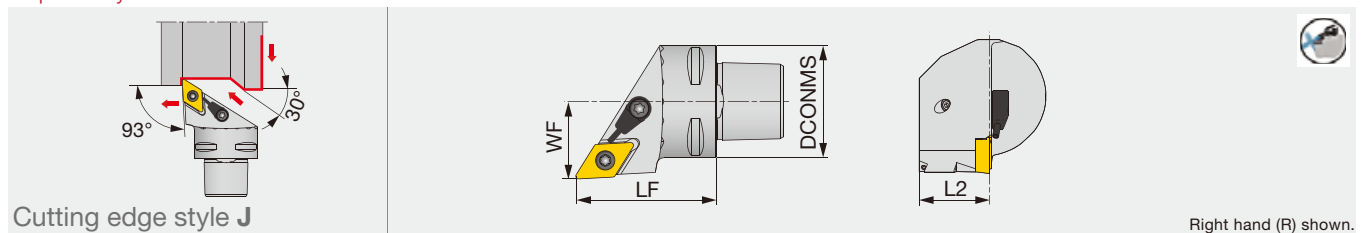

Designation	DCONMS	LF	L2	WF	RE	Insert
C3SDJCR/L22040-11-CHP	32	40	20	22	0.8	DC**11T3...

Applicable for 14 MPa coolant
Cannot be used for boring

SPARE PARTS

Designation	Clamping screw	Coolant unit	Wrench
C3SDJCR/L22040-11-CHP	CSTB-4S	S-CU-CHP	T-15F

INSERT SELECTION

P	Application	Finishing	Finishing to medium cutting	Medium cutting
	Grade	NS9530	T9215	T9215
	Chipbreaker shape	PSS	PS	PM
	Cutting conditions	B016		

M	Application	Precision finishing	Finishing	Finishing to medium cutting	Medium cutting
	Grade	GH330	AH6225	AH6225	AH6225
	Chipbreaker shape	W**	PSS	PS	PM
	Cutting conditions	B018			

K	Application	Finishing to medium cutting
	Grade	T515
	Chipbreaker shape	CM
	Cutting conditions	B020

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	KS05F
	Chipbreaker shape	DIA	DIA with rake	AL
	Cutting conditions	B022		


S	Application	Finishing	Finishing to medium cutting
	Grade	AH8015	AH8015
	Chipbreaker shape	PSS	PS
	Cutting conditions	B024	

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B026	

Reference pages: SDJCR/L: Inserts → **B121** -, CBN → **B194**, PCD → **B214**

C-SDJCR/L-CHP: Inserts → **B121** -, CBN → **B194**, PCD → **B214**, Parts for coolant hose → **C115**

Screw-on toolholder with 93° approach angle, for VXGU inserts

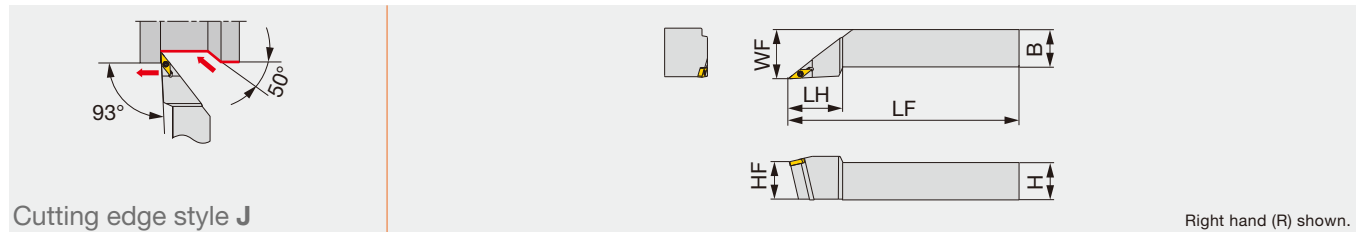


Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
JSVJXR/L2020K09	20	20	125	35	20	25	0.4	VXGU09T2**L/R...	0.9
JSVJXR/L2525M09	25	25	150	35	25	32	0.4	VXGU09T2**L/R...	0.9

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

Note: Use right-hand toolholders (R) with left-hand inserts (L); and left-hand toolholders (L) with right-hand inserts (R).

JSVJ2XR/L

Screw-on toolholder with 93° approach angle, for VXGU inserts

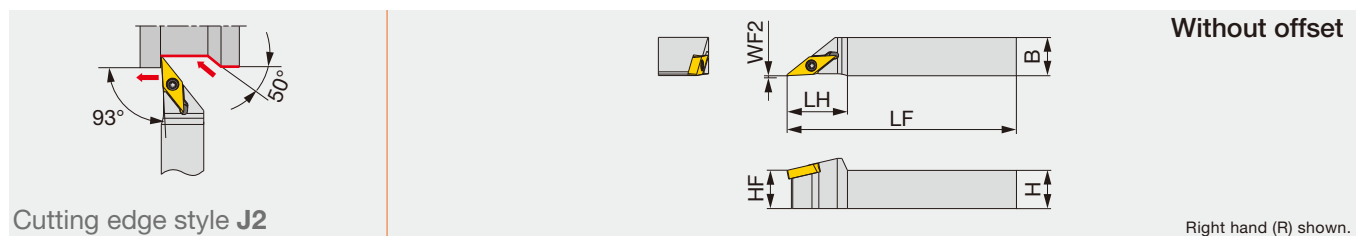

Designation	H	B	LF	LH	HF	WF2	RE**	Insert	Torque*
JSVJ2XR/L1010X09	10	10	120	17	10	0	0.2	VXGU09T2**L/R...	0.9
JSVJ2XR/L1212F09	12	12	85	19	12	0	0.2	VXGU09T2**L/R...	0.9
JSVJ2XR/L1212X09	12	12	120	19	12	0	0.2	VXGU09T2**L/R...	0.9
JSVJ2XR/L1616X09	16	16	120	19	16	0	0.2	VXGU09T2**L/R...	0.9
JSVJ2XR/L2020H09	20	20	100	19	20	0	0.2	VXGU09T2**L/R...	0.9

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

Note: Use right-hand toolholders (R) with left-hand inserts (L); and left-hand toolholders (L) with right-hand inserts (R).

SPARE PARTS

Designation	Clamping screw	Wrench
JSVJXR/L...	SR34-508	T-7F
JSVJ2XR/L...		

INSERT SELECTION


P	Application	Finishing	M	Application	Finishing
	Grade	SH725		Grade	SH725
	Chipbreaker shape	JRP		Chipbreaker shape	JRP
	Cutting conditions	C118		Cutting conditions	C118

Reference pages: JSVJXR/L, JSVJ2XR/L: Inserts → **B155**

Standard cutting conditions → **C118**

SVJCR/L

Screw-on toolholder with 93° approach angle, for positive 35° rhombic inserts

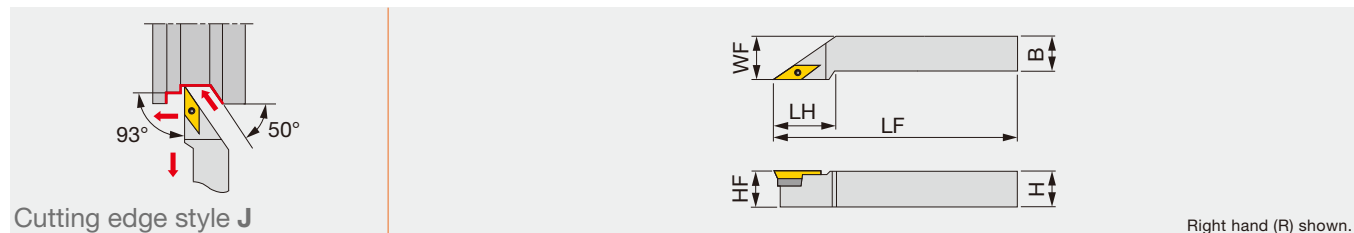


Designation	H	B	LF	LH	HF	WF	RE**	Insert
SVJCR/L1616H16	16	16	100	32	16	20	0.8	VC**1604...
SVJCR/L2020K16	20	20	125	32	20	25	0.8	VC**1604...
SVJCR/L2525M16	25	25	150	40	25	32	0.8	VC**1604...

**RE: Standard corner radius

TUNGCAP

C-SVJCR/L

Screw-on toolholder, with 93° approach angle, for positive 35° rhombic inserts

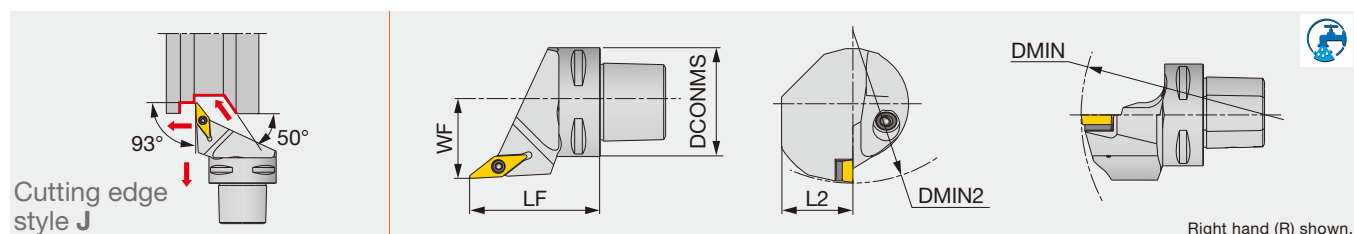

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert
C3SVJCR/L22040-11N ⁽²⁾	32	40	20	22	-	-	0.4	VC**1103...
C5SVJCL35060-16 ⁽¹⁾	50	60	32	35	-	-	0.8	VC**1604...
C5SVJCR/L35060-16N ⁽²⁾	50	60	32	35	170	160	0.8	VC**1604...
C6SVJCR/L45065-16 ⁽¹⁾	63	65	41	45	-	-	0.8	VC**1604...
C6SVJCR/L45065-16N ⁽²⁾	63	65	41	45	170	190	0.8	VC**1604...

The items without DMIN and DMIN2 cannot be used for boring.
(1) Applicable for 3 MPa coolant (2) Applicable for 7 MPa coolant

SPARE PARTS

Designation	Clamping screw	Coolant parts	Shim	Shim screw	Wrench 1	Wrench 2
SVJCR/L...	CSTB-3.5L	-	SSV32	DTS5-3.5	P-3.5	T-15F
C3SVJC*22040-11N	CSTB-2.5	SATZ-M8X1-M3	-	-	-	T-8F
C5SVJC*35060-16	CSTB-3.5L	EZ104	SSV32	DTS5-3.5	P-3.5	T-15F
C5SVJC*35060-16N	CSTB-3.5L	SATZ-M10X1-M5	SSV32	DTS5-3.5	P-3.5	T-15F
C6SVJC*45065-16	CSTB-3.5L	EZ104	SSV32	DTS5-3.5	P-3.5	T-15F
C6SVJC*45065-16N	CSTB-3.5L	SATZ-M10X1-M5	SSV32	DTS5-3.5	P-3.5	T-15F

Reference pages: SVJCR/L, C-SVJCR/L: Inserts → **B152 -**, CBN → **B209**, PCD → **B220**

INSERT SELECTION

P	Application	Finishing	Finishing to medium cutting
	Grade	NS9530	T9215
	Chipbreaker shape	PSS	PS
	Cutting conditions	B016	

M	Application	Finishing	Finishing to medium cutting
	Grade	AH6225	AH6225
	Chipbreaker shape	PSS	PS
	Cutting conditions	B018	

K	Application	Finishing to medium cutting
	Grade	T515
	Chipbreaker shape	CM
	Cutting conditions	B020


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	KS05F
	Chipbreaker shape	DIA with rake	DIA	AL
	Cutting conditions	B022		

S	Application	Finishing	Finishing to medium cutting
	Grade	AH8015	AH8015
	Chipbreaker shape	PSS	PS
	Cutting conditions	B024	

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B026	

Y-PRO SERIES SYJBR/L

Screw-on toolholder with 93° approach angle, for positive 25° rhombic inserts

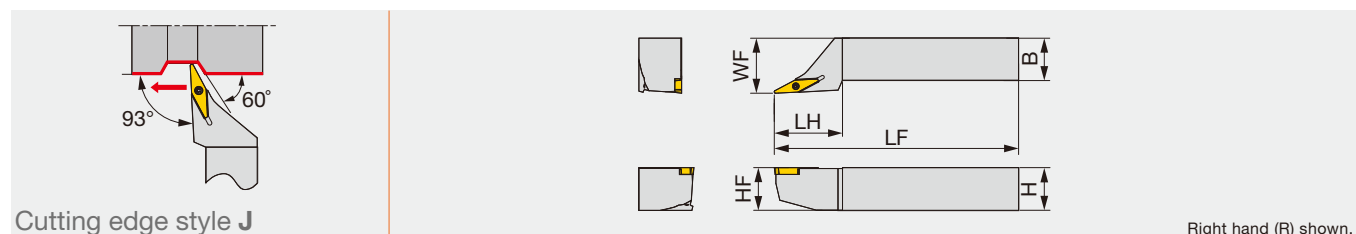

Designation	H	B	LF	LH	HF	WF	RE**	Insert
SYJBR/L2020K16	20	20	125	35	20	25	0.8	YWMT16T3...
SYJBR/L2525M16	25	25	150	40	25	32	0.8	YWMT16T3...

**RE: Standard corner radius

SPARE PARTS


Designation	Clamping screw	Wrench
SYJBR/L...	CSTB-2.5L080	T-8F

INSERT SELECTION

P	Application	Finishing to medium cutting
	Grade	T9225
	Breaker Shape	ZM
	Cutting conditions	B016
M	Application	Finishing to medium cutting
	Grade	AH8015
	Breaker Shape	ZM
	Cutting conditions	B018
K	Application	Finishing to medium cutting
	Grade	GT9530
	Breaker Shape	ZM
	Cutting conditions	B020
S	Application	Finishing to medium cutting
	Grade	AH8015
	Breaker Shape	ZM
	Cutting conditions	B024

Reference pages: SYJBR/L: Inserts → **B159**

Double-clamp toolholder with 72.5° approach angle, for negative 35°/25° rhombic inserts

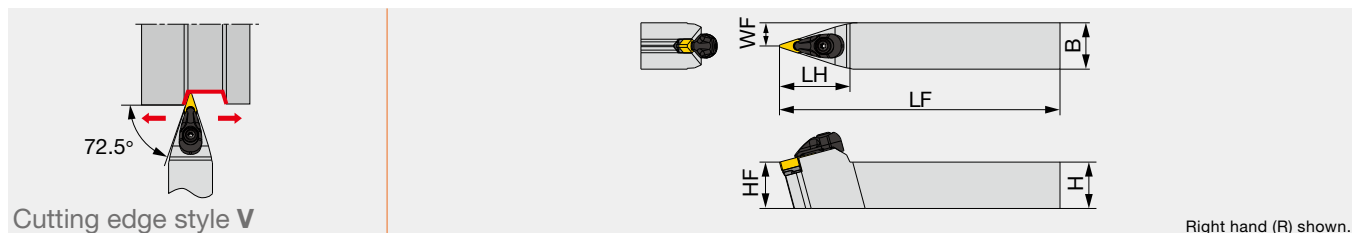

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
AVVNN2020K1204-A	20	20	125	38	20	10	0.8	VN**1204...	3
AVVNN2020K16-A	20	20	125	46	20	10	0.8	VN**/YN**1604...	3
AVVNN2525M1204-A	25	25	150	38	25	12.5	0.8	VN**1204...	3
AVVNN2525M16-A	25	25	150	46	25	12.5	0.8	VN**/YN**1604...	3

*Torque: Recommended clamping torque (N-m) **RE: Standard corner radius


SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
AVVNN**1204-A	ACP3L-E	ACS-5W	BP-7	SP-2.5	ASV222	CSTB-3.0	T-15F
AVVNN**16-A	ACP3L	ACS-5W	BP-7	SP-2.5	ASV322	CSTB-3.5	T-15F

ISO ETURN

PVVNN-Eco

Lever-lock toolholder with 72.5° approach angle, for negative 35° rhombic inserts

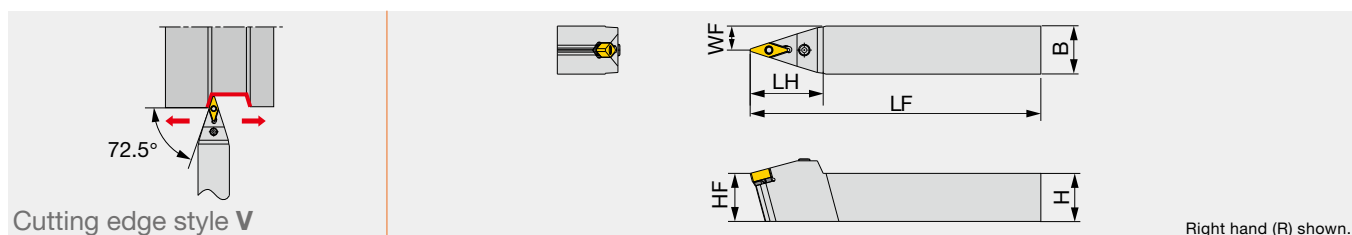

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PVVNN2020K1204	20	20	125	38	20	10	0.8	VN**1204...	2
PVVNN2525M1204	25	25	150	38	25	12.5	0.8	VN**1204...	2

*Torque: Recommended clamping torque (N-m) **RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PVVNN**1204	LSV212	LCS3V	P-2.5	LSP3	LCL3V

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting
	Grade	NS9530	GT9530	T9215
	Chipbreaker shape	TF 	TSF 	TM 
	Cutting conditions B004			

M	Application	Finishing	Medium cutting
	Grade	T6215	AH6225
	Chipbreaker shape	SF 	SM 
	Cutting conditions B006		

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round 	All-round 	All-round 
	Cutting conditions B008			


N	Application	Precision finishing
	Grade	DX120
	Chipbreaker shape	DIA  with rake
	Cutting conditions B010	

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN 	HRF 	HRM 
	Cutting conditions B012			

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN 	CBN 
	Cutting conditions B014		

Reference pages: AVVNN: Inserts → **B098 -**, B110, CBN → **B186 -**, PCD → **B188**
 PVVNN-Eco: Inserts → **B098 -**

Double-clamp toolholder with 72.5° approach angle, for negative 35° rhombic ceramic inserts with dimple

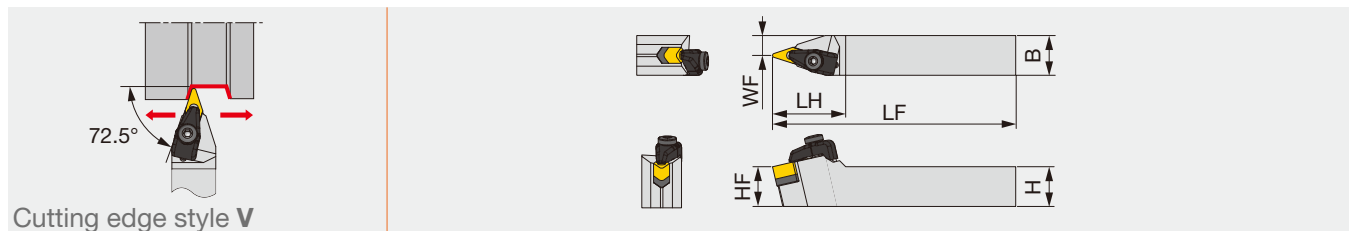

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
CVVNN2525M1607-RD	25	25	150	46	25	12.5	1.2	VN*D160712	4

*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius

SPARE PARTS


Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench1	Wrench2
CVVNN2525M1607-RD	CCP4-A	CCS4-A	CV34-A	BH-4-10-A	BP-5-A	P-3	P-4

INSERT SELECTION

K	Application	Finishing to medium cutting
	Grade	FX105
	Chipbreaker shape	
	Cutting conditions	C118

SVVCN

Screw-on toolholder with 72.5° approach angle, for positive 35° rhombic inserts

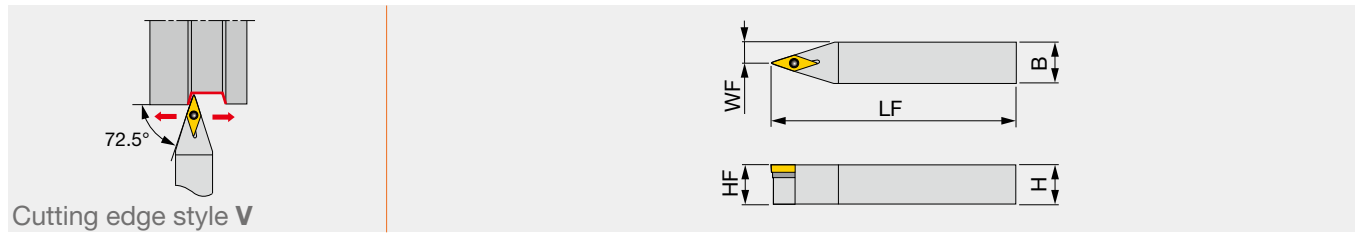

Designation	H	B	LF	HF	WF	RE**	Insert
SVVCN2020K16	20	20	125	20	10	0.8	VC**1604...
SVVCN2525M16	25	25	150	25	12.5	0.8	VC**1604...

**RE: Standard corner radius


SPARE PARTS

Designation	Clamping screw	Shim	Shim screw	Wrench 1	Wrench 2
SVVCN...	CSTB-3.5L	SSV32	DTS5-3.5	P-3.5	T-15F

TUNGCAP

C-SVVCN

Screw-on toolholder, with 72.5° approach angle, for positive 35° rhombic inserts

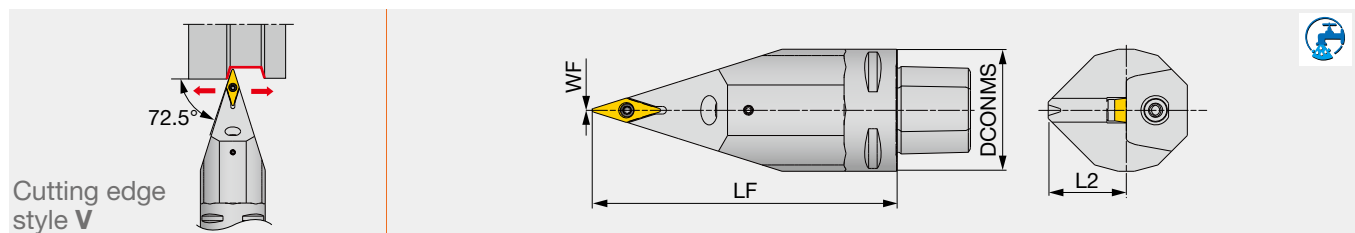

Designation	DCONMS	LF	L2	WF	RE	Insert
C5SVVCN00090-16 ⁽¹⁾	50	90	32	0	0.8	VC**1604...
C5SVVCN00090-16N ⁽²⁾	50	90	32	0	0.8	VC**1604...
C5SVVCN00125-16 ⁽¹⁾	50	125	32	0	0.8	VC**1604...
C5SVVCN00125-16N ⁽²⁾	50	125	32	0	0.8	VC**1604...
C6SVVCN00100-16N ⁽²⁾	63	100	37.5	0	0.8	VC**1604...
C6SVVCN00140-16N ⁽²⁾	63	140	37.5	0	0.8	VC**1604...

(1) Applicable for 3 MPa coolant (2) Applicable for 7 MPa coolant

SPARE PARTS

Designation	Clamping screw	Coolant parts	Shim	Shim screw	Wrench 1	Wrench 2
C5SVVCN00090-16	CSTB-3.5L	EZ104	SSV32	DTS5-3.5	P-3.5	T-15F
C5SVVCN00090-16N	CSTB-3.5L	SATZ-M10X1-M5	SSV32	DTS5-3.5	P-3.5	T-15F
C5SVVCN00125-16	CSTB-3.5L	EZ104	SSV32	DTS5-3.5	P-3.5	T-15F
C5SVVCN00125-16N	CSTB-3.5L	SATZ-M10X1-M5	SSV32	DTS5-3.5	P-3.5	T-15F
C6SVVCN00100-16N	CSTB-3.5L	SATZ-M10X1-M5	SSV32	DTS5-3.5	P-3.5	T-15F
C6SVVCN00140-16N	CSTB-3.5L	SATZ-M10X1-M5	SSV32	DTS5-3.5	P-3.5	T-15F

Reference pages: SVVCN, C-SVVCN: Inserts → **B152 -**, CBN → **B209**, PCD → **B220**

INSERT SELECTION

P	Application	Finishing	Finishing to medium cutting
	Grade	NS9530	T9215
	Chipbreaker shape	PSS	PS
	Cutting conditions	B016	

M	Application	Finishing	Finishing to medium cutting
	Grade	AH6225	AH6225
	Chipbreaker shape	PSS	PS
	Cutting conditions	B018	

K	Application	Finishing to medium cutting
	Grade	T515
	Chipbreaker shape	CM
	Cutting conditions	B020

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	KS05F
	Chipbreaker shape	DIA	DIA with rake	AL
	Cutting conditions	B022		


S	Application	Finishing	Finishing to medium cutting
	Grade	AH8015	AH8015
	Chipbreaker shape	PSS	PS
	Cutting conditions	B024	

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B026	

Y-PRO SERIES

SYIBN

Screw-on toolholder with 77.5° approach angle, for positive 25° rhombic inserts

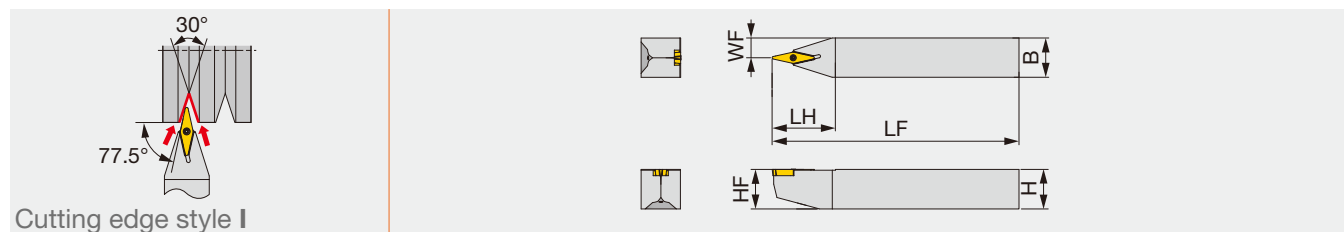

Designation	H	B	LF	LH	HF	WF	RE**	Insert
SYIBN2020K16	20	20	125	32	20	10	0.8	YWMT16T3...
SYIBN2525M16	25	25	150	40	25	12.5	0.8	YWMT16T3...

**RE : Standard corner radius

SPARE PARTS

Designation	Clamping screw	Wrench
SYIBN...	CSTB-2.5L080	T-8F

INSERT SELECTION

P	Application	Finishing to medium cutting
	Grade	T9225
	Breaker Shape	ZM
	Cutting conditions	B016

M	Application	Finishing to medium cutting
	Grade	AH8015
	Breaker Shape	ZM
	Cutting conditions	B018


K	Application	Finishing to medium cutting
	Grade	GT9530
	Breaker Shape	ZM
	Cutting conditions	B020

S	Application	Finishing to medium cutting
	Grade	AH8015
	Breaker Shape	ZM
	Cutting conditions	B024

Reference pages: SYIBN: Inserts → **BB159**

STACR/L

Screw-on toolholder with 91° approach angle, for positive 60° triangular inserts

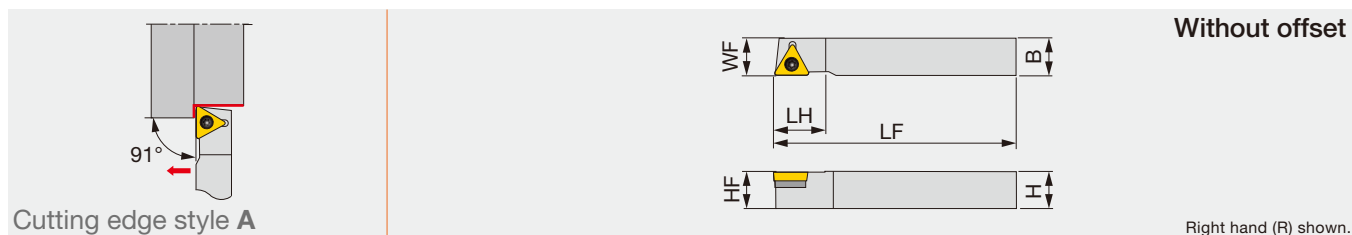

Designation	H	B	LF	LH	HF	WF	RE**	Insert
STACR/L1616H16	16	16	100	22.5	16	16	0.8	TC**16T3...

**RE: Standard corner radius

SPARE PARTS					
Designation	Clamping screw	Shim screw	Shim	Wrench1	Wrench2
STACR/L...	CSTB-3.5L	DTS5-3.5	SST32	P-3.5	T-15F

INSERT SELECTION


P	Application	Finishing	Finishing to medium cutting	Medium cutting	M	Application	Finishing	Finishing to medium cutting	Medium cutting
	Grade	T9215	T9215	T9215		Grade	AH725	AH6225	AH6225
	Breaker Shape	PSS	PS	PM		Breaker Shape	PSS	PS	PM
	Cutting conditions	B016				Cutting conditions	B018		

K	Application	Finishing to medium cutting	N	Application	Finishing to medium cutting	S	Application	Finishing	Finishing to medium cutting	Medium cutting
	Grade	T515		Grade	KS05F		Grade	AH725	AH6225	AH6225
	Breaker Shape	CM		Breaker Shape	AL with rake		Breaker Shape	PSS	PS	PM
	Cutting conditions	B020		Cutting conditions	B022		Cutting conditions	B024		

TURNTEC


TLANR/L

Screw-on toolholder for roughing with 93° approach angle, for negative tangential inserts

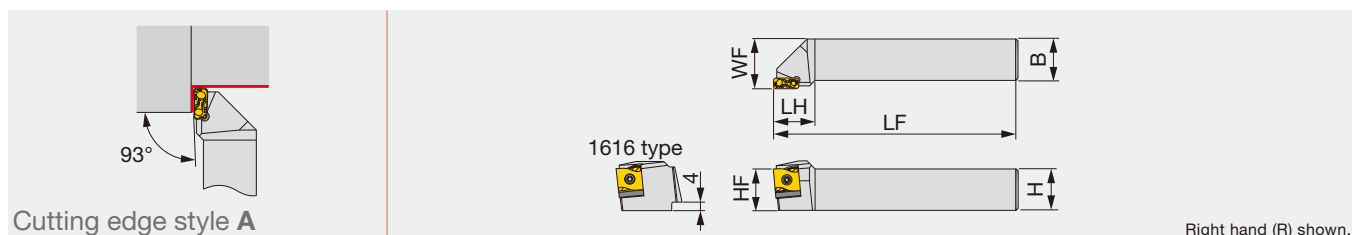

Designation	H	B	LF	LH	HF	WF	Insert
TLANR/L1616H12	16	16	100	20	16	20	LNMX1204**R/L...
TLANR/L1616M12S	16	16	150	20	16	20	LNMX1204**R/L...
TLANR/L2020K12	20	20	125	20	20	25	LNMX1204**R/L...
TLANR/L2020K16	20	20	125	25	20	25	LNMX1606**R/L...
TLANR/L2525M12	25	25	150	20	25	30	LNMX1204**R/L...
TLANR/L2525M16	25	25	150	25	25	30	LNMX1606**R/L...
TLANR/L3232P16	32	32	170	35	32	37	LNMX1606**R/L...
TLANR/L3232P24	32	32	170	35	32	38	LNMX2410**R/L...
TLANR/L4040R16	40	40	200	35	40	47	LNMX1606**R/L...
TLANR/L4040R24	40	40	200	40	40	47	LNMX2410**R/L...
TLANR/L5050S24	50	50	250	40	50	57	LNMX2410**R/L...

Reference pages: TLANR/L: Standard cutting conditions → C119

Index

P	Steel	★	★	★			
M	Stainless	☆		☆			
K	Cast iron	☆	☆	☆			
N	Non-ferrous						
S	Superalloys						
H	Hard materials						

★ : First choice
☆ : Second choice


Designation	HAND	RE	Coated						BW	INSL	S
			T9115	T9125	AH725						
LNMX120408R-TDR	R	0.8	●	●					4.8	12	11.6
LNMX120408L-TDR	L	0.8	●	●					4.8	12	11.6
LNMX120412R-TDR	R	1.2	●	●					4.8	12	11.6
LNMX120412L-TDR	L	1.2	●	●					4.8	12	11.6
LNMX160608R-TDR	R	0.8	●	●					6.4	16.2	13.5
LNMX160608L-TDR	L	0.8	●	●					6.4	16.2	13.5
LNMX160612R-TDR	R	1.2	●	●					6.4	16.2	13.5
LNMX160612L-TDR	L	1.2	●	●					6.4	16.2	13.5
LNMX160616R-TDR	R	1.6	●	●					6.4	16.2	13.5
LNMX160616L-TDR	L	1.6	●	●					6.4	16.2	13.5
LNMX241016R-TDR	R	1.6	●	●					9.4	24	20.5
LNMX241016L-TDR	L	1.6	●	●					9.4	24	20.5
LNMX241024R-TDR	R	2.4	●	●					9.4	24	20.5
LNMX241024L-TDR	L	2.4	●	●					9.4	24	20.5
LNMX160608R-MDR	R	0.8	●		●				6.4	16.2	13.5
LNMX160608L-MDR	L	0.8	●		●				6.4	16.2	13.5
LNMX160612R-MDR	R	1.2	●		●				6.4	16.2	13.5
LNMX160612L-MDR	L	1.2	●		●				6.4	16.2	13.5
LNMX160608R-TWR	R	0.8	●						6.4	16.2	13.5
LNMX160608L-TWR	L	0.8	●	●					6.4	16.2	13.5
LNMX160612R-TWR	R	1.2	●	●					6.4	16.2	13.5
LNMX160612L-TWR	L	1.2	●	●					6.4	16.2	13.5

● : Line up

Reference pages: Standard cutting conditions → **C119**

SRACR/L

Screw-on toolholder with 91° approach angle, for positive round inserts

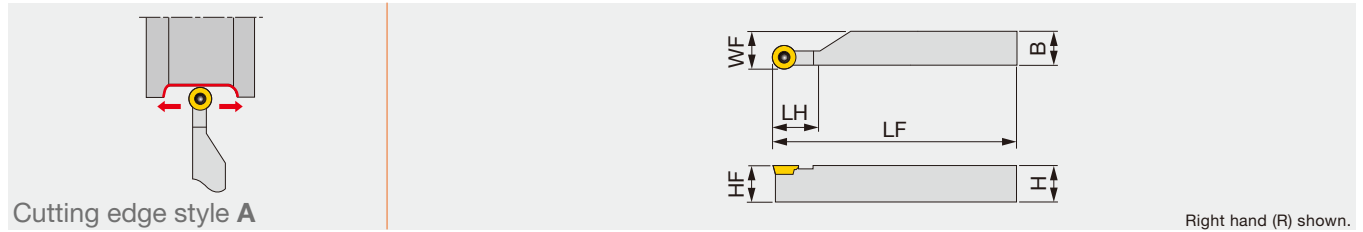

Designation	H	B	LF	LH	HF	WF	Insert
SRACR1010H05	10	10	100	10	10	10.3	RCMT0502...
SRACR/L1212H05	12	12	100	10	12	12.3	RCMT0502...
SRACR/L1212H06	12	12	100	12	12	12.4	RC*T0602...
SRACR1616H05	16	16	100	10	16	16.3	RCMT0502...
SRACR/L1616H06	16	16	100	12	16	16.4	RC*T0602...
SRACR/L1616H08	16	16	100	16	16	16.5	RC*T0803...
SRACR/L2020K05	20	20	125	10	20	20.3	RCMT0502...
SRACR/L2020K06	20	20	125	12	20	20.4	RC*T0602...
SRACR/L2020K08	20	20	125	16	20	20.5	RC*T0803...
SRACR/L2525M05	25	25	150	10	25	25.3	RCMT0502...
SRACR/L2525M06	25	25	150	12	25	25.4	RC*T0602...
SRACR/L2525M08	25	25	150	16	25	25.5	RC*T0803...


SPARE PARTS

Designation	Clamping screw	Wrench
SRACR/L111H05	CSTB-2.2R	T-7F
SRACR/L1212H06	CSTB-2.5	T-8F
SRACR1616H05	CSTB-2.2R	T-7F
SRACR/L1616H06	CSTB-2.5	T-8F
SRACR/L1616H08	CSTB-3	T-9F
SRACR/L2020K05	CSTB-2.2R	T-7F
SRACR/L2020K06	CSTB-2.5	T-8F
SRACR/L2020K08	CSTB-3	T-9F
SRACR/L2525M05	CSTB-2.2R	T-7F
SRACR/L2525M06	CSTB-2.5	T-8F
SRACR/L2525M08	CSTB-3	T-9F

INSERT SELECTION

P	Application	Finishing to medium cutting	heavy cutting
	Grade	T9215	T9215
	Chipbreaker shape	RS	61
	Cutting conditions	B016	
M	Application	heavy cutting	
	Grade	T9215	
	Chipbreaker shape	61	
	Cutting conditions	B018	
K	Application	heavy cutting	
	Grade	T9215	
	Chipbreaker shape	61	
	Cutting conditions	B020	
N	Application	Finishing to medium cutting	
	Grade	KS05F	
	Chipbreaker shape	AL	
	Cutting conditions	B022	
S	Application	Finishing to medium cutting	heavy cutting
	Grade	AH8015	AH8015
	Chipbreaker shape	RS	61
	Cutting conditions	B024	

Reference pages: SRACR/L: Inserts → **B130** -

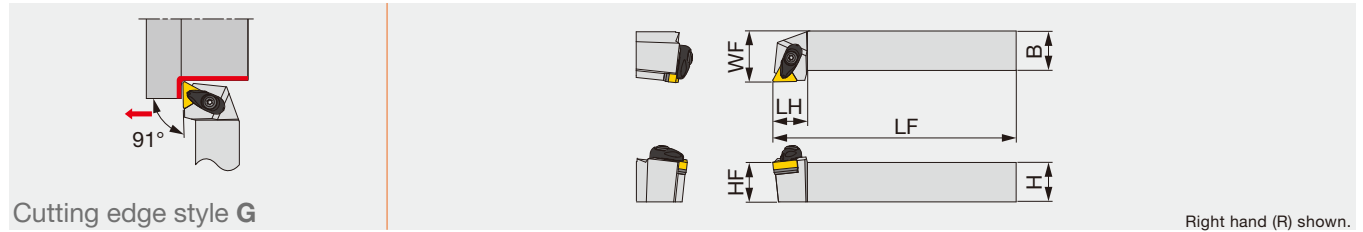

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ATG NR/L2020K16-A	20	20	125	22	20	25	0.8	TN**1604...	3
ATG NR/L2525M16-A	25	25	150	22	25	32	0.8	TN**1604...	3
ATG NR/L2525M22-A	25	25	150	26	25	32	0.8	TN**2204...	3

*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ATG NR/L**16-A	ACP3S	ACS-5W	BP-7	SP-2.5	AST322	CSTB-3.5	T-15F
ATG NR/L**22-A	ACP4S	ACS-5W	BP-7	SP-2.5	AST422	CSTB-3.5	T-15F

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting
	Grade	T6215	AH6225
	Chipbreaker shape	SF	SM
	Cutting conditions	B006	

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	with rake DIA	P
	Cutting conditions	B010		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

DTGNR/L

"One-Double" toolholder with 91° approach angle, for negative 60° triangular inserts

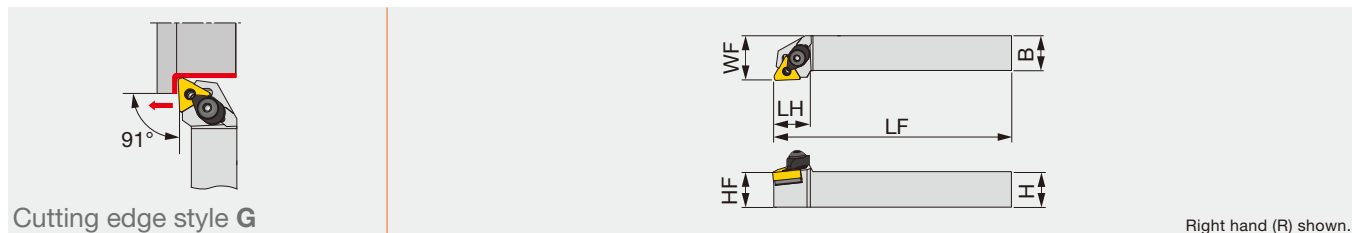

Designation	H	B	LF	LH	HF	WF	RE**	Insert
DTGNR/L2020K16	20	20	125	21	20	25	0.8	TN**1604...
DTGNR/L2525M16	25	25	150	21	25	32	0.8	TN**1604...
DTGNR/L2525M22	25	25	150	28	25	32	0.8	TN**2204...

Note: Except for 57-type chipbreaker inserts


**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench 1	Wrench 2
DTGNR/L**16	DCPM-33	LCL33	DPIS33	DLCS33	LST317	BP-9	LSP3	P-2.5	P-3
DTGNR/L**22	DCPM-43	DLCL43	DPIS43	DLCS43	LST42	BP-10	LSP4	P-3	P-4

ISO TURN PTGNR/L

Lever-lock toolholder with 91° approach angle, for negative triangular inserts

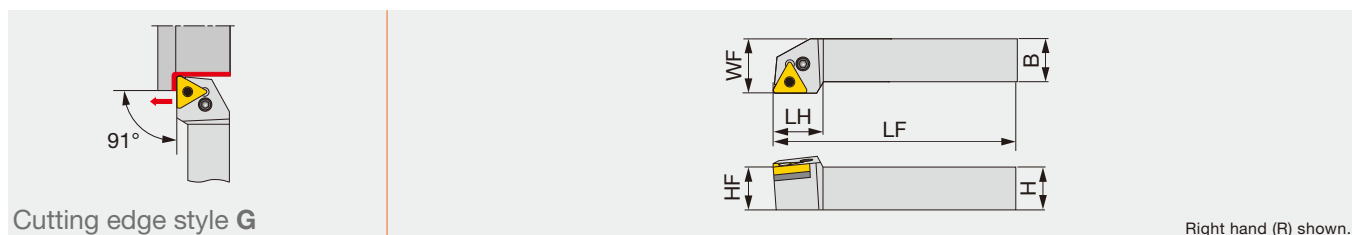

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PTGNR/L1616	16	16	100	22	16	20	0.8	TN**1604...	2
PTGNR/L2020K1104	20	20	125	20	20	25	0.8	TN**1104...	2
PTGNR/L2020	20	20	125	22	20	25	0.8	TN**1604...	2
PTGNR/L2525M1104	25	25	150	20	25	32	0.8	TN**1104...	2
PTGNR/L2525M3	25	25	150	22	25	32	0.8	TN**1604...	2
PTGNR/L2525M4	25	25	150	28	25	32	0.8	TN**2204...	3
PTGNR3225P4	32	25	170	28	32	32	0.8	TN**2204...	3


*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PTGNR/L1616, 2020	LST317	LCS3	P-2.5	LSP3	LCL3
PTGNR/L**1104	-	LCS23A	P-2.5	-	LCL23
PTGNR/L2525M3	LST317	LCS3	P-2.5	LSP3	LCL3
PTGNR/L2525M4	LST42	LCS4	P-3	LSP4	LCL4
PTGNR3225P4	LST42	LCS4	P-3	LSP4	LCL4

Reference pages: DTGNR/L, PTGNR/L: Inserts → **B087 -**, CBN → **B182 -**, PCD → **B212**

Lever lock toolholders – 91° approach angle.
For negative triangle insert. High-pressure coolant capability.

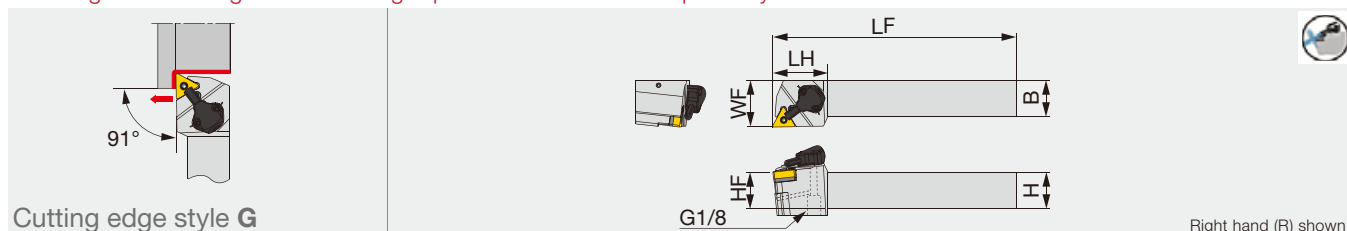

Designation	H	B	LF	LH	HF	WF	RE **	Insert	Torque*
PTG NR/L2020K1104-CHP	20	20	125	38	20	32	0.8	TN**1104...	2
PTG NR/L2020K16-CHP	20	20	125	38	20	32	0.8	TN**1604...	2
PTG NR/L2525M1104-CHP	25	25	150	38	25	32	0.8	TN**1104...	2
PTG NR/L2525M16-CHP	25	25	150	38	25	32	0.8	TN**1604...	2

*Torque: Recommended torque (N·m) for clamping

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
PTG NR/L**1104-CHP	-	LCS23A	P-2.5	LSP3	LCL23
PTG NR/L**16-CHP	LST317	LCS3	P-2.5	LSP3	LCL3

SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring	Coolant screw	Wrench 3
PTG NR/L**1104-CHP	CU-CW-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2
PTG NR/L**16-CHP	CU-CW-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting
	Grade	T6215	AH6225
	Chipbreaker shape	SF	SM
	Cutting conditions	B006	

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	with rake DIA	P
	Cutting conditions	B010		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: PTG NR/L-CHP: Inserts → **B087** -, CBN → **B182** -, PCD → **B212**
Parts for coolant hose → **C115**

Double-clamp toolholder with 91° approach angle, for negative round inserts

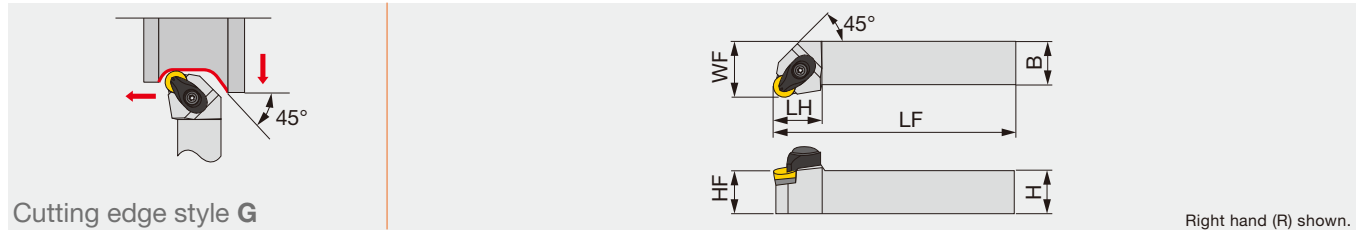

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ARGNR/L2525M12-A	25	25	150	28	25	32	6.35	RN**120400	3

*Torque: Recommended clamping torque (N·m)


**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ARGNR/L...	ACP4S	ACS-5W	BP-7	SP-2.5	ASR420	CSTB-3.5	T-15F

DRGNR/L

"One-Double" toolholder with 91° approach angle, for negative round inserts

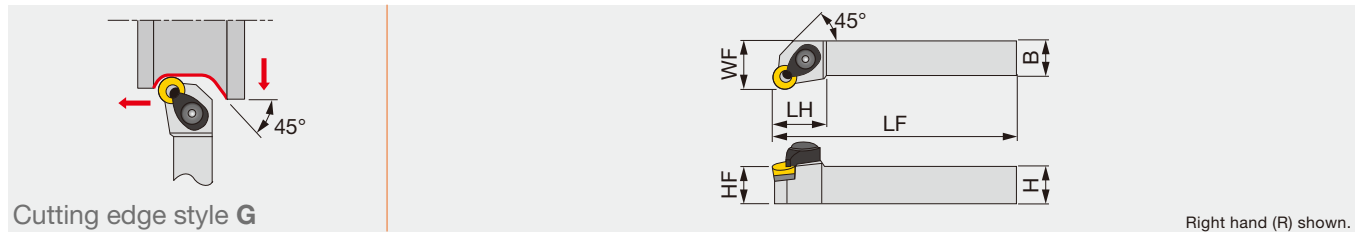

Designation	H	B	LF	LH	HF	WF	RE**	Insert
DRGNR/L2525M12	25	25	150	28	25	32	6.35	RN**120400


**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench 1	Wrench 2
DRGNR/L...	DCPM-43	DLCL43	DPIS43	DLCS43	LSR42	BP-10	LSP4	P-3	P-4

PRGNR/L

Lever-lock toolholder with 91° approach angle, for negative round inserts

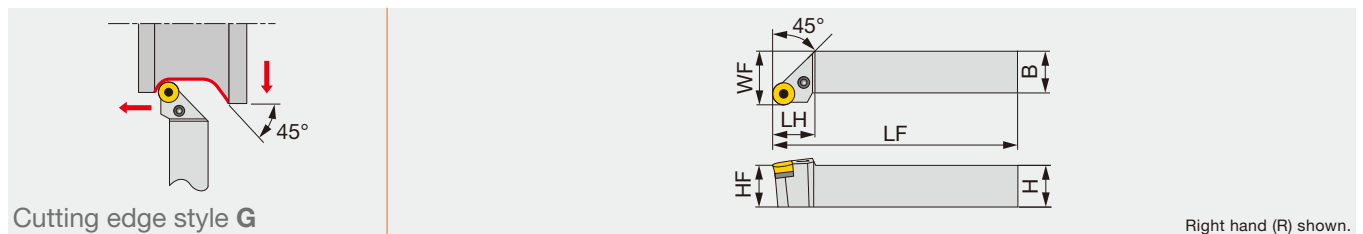

Designation	H	B	LF	LH	HF	WF	RE**	Insert
PRGNR/L2020	20	20	125	19	20	25	4.76	RNMG090300-61
PRGNR/L2525M4	25	25	150	25	25	32	6.35	RN**120400

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PRGNR/L2020	LSR32	LCS3	P-2.5	LSP3	LCL3
PRGNR/L2525M4	LSR42	LCS4	P-3	LSP4	LCL4


Reference pages: ARGNR/L, DRGNR/L, PRGNR/L: Inserts → **B076**

INSERT SELECTION

P	Applicadtion	Heavy cutting	M	Applicadtion	Heavy cutting	K	Applicadtion	Heavy cutting
	Grade	T9215		Grade	T9215		Grade	T9215
	Chipbreaker Shape	61		Chipbreaker Shape	61		Chipbreaker Shape	61
	Cutting conditions	B004		Cutting conditions	B006		Cutting conditions	B008
N	Applicadtion	Heavy cutting	S	Applicadtion	Heavy cutting	H	Applicadtion	Finishing to medium cutting
	Grade	TH10		Grade	TH10		Grade	LX11
	Chipbreaker Shape	61		Chipbreaker Shape	61		Chipbreaker Shape	
	Cutting conditions	B010		Cutting conditions	B012		Cutting conditions	B014

TRGNR/L-F

Toolholder with carbide clamping plate, with 90° approach angle, for negative round ceramic inserts without hole

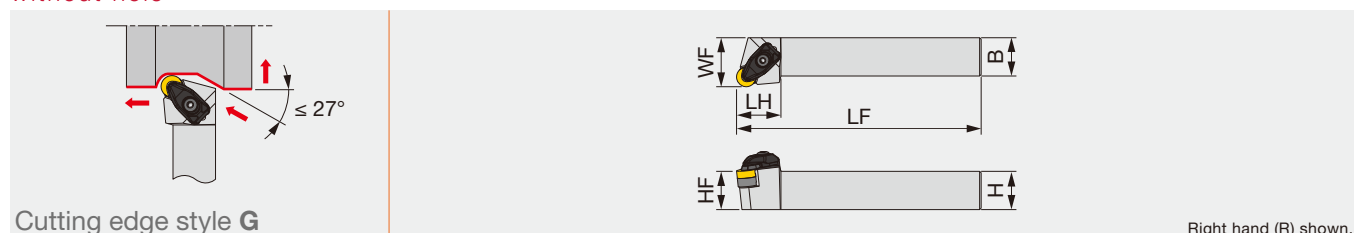

Designation	H	B	LF	LH	HF	WF	RE**	Insert
TRGNR/L2525M1207-F	25	25	150	29	25	32	6.35	RNGN1207...


**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench 1	Wrench 2
TRGNR/L2525M1207-F	DCLS-4F	DLS-4A	S-43	BH-M5X0.8X0.8	DSP-4A	T-15F	P-3

INSERT

RNGN-E/T1

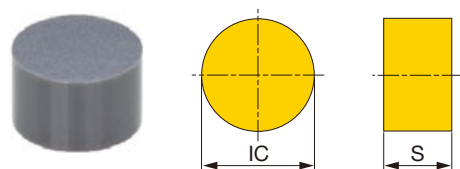



Designation	Edge prep.*	Ceramic								RE	IC	S
		TS200	TS300									
RNGN120700-E	E	●	●							-	12.7	7.94
RNGN120700-T1	T1	●	●							-	12.7	7.94

* Types of cutting edge preparations

● : Line up



E: Low cutting force

T1: Strong cutting edge



PRGCR/L

Lever-lock toolholder with 91° approach angle, for positive round inserts

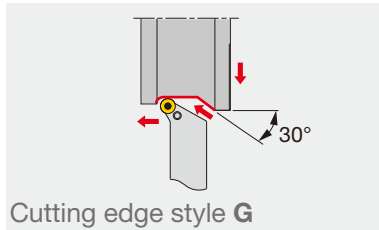

Right hand (R) shown.

Designation	H	B	LF	HF	WF	Insert
PRGCR/L2020K10	20	20	125	20	25	RCMM1003...
PRGCR/L2525M12	25	25	150	25	32	RCM*1204...
PRGCR/L3225P16	32	25	170	32	32	RCM*1606...
PRGCR/L3232P20	32	32	170	32	40	RCM*2006...

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PRGCR/L2020K10	LSR32C	LCS2	P-2	LSP3	LCL3C
PRGCR/L2525M12	LSR42C	LCS3	P-2.5	LSP3	LCL4C
PRGCR/L3225P16	LSR53C	LCS5	P-3	LSP4	LCL5C
PRGCR/L3232P20	LSR63C	LCS5	P-3	LSP6C	LCL6C

INSERT SELECTION

P	Application	Finishing to medium cutting	heavy cutting
	Grade	T9215	T9215
	Chipbreaker shape		
	Cutting conditions	B016	

M	Application	heavy cutting
	Grade	T9215
	Chipbreaker shape	
	Cutting conditions	B018

K	Application	heavy cutting
	Grade	T9215
	Chipbreaker shape	
	Cutting conditions	B020



N	Application	Finishing to medium cutting
	Grade	KS05F
	Chipbreaker shape	
	Cutting conditions	B022

S	Application	Finishing to medium cutting	heavy cutting
	Grade	AH8015	AH8015
	Chipbreaker shape		
	Cutting conditions	B024	

Reference pages: PRGCR/L: Inserts → **B130** -

SRGCR/L

Screw-on toolholder with 91° approach angle, for positive round inserts

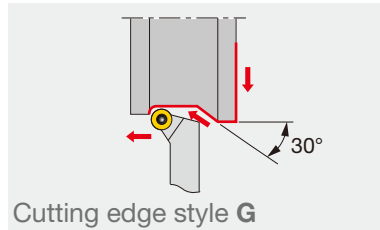

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	Insert
SRGCR1212H05	12	12	100	9.5	12	16	RCMT0502...
SRGCR/L1212H06	12	12	100	10	12	16	RC*T0602...
SRGCR/L1616H05	16	16	100	9.5	16	20	RCMT0502...
SRGCR/L1616H06	16	16	100	10	16	20	RC*T0602...
SRGCR/L1616H08	16	16	100	11	16	20	RC*T0803...
SRGCR/L2020K05	20	20	125	11.2	20	25	RCMT0502...
SRGCR/L2020K06	20	20	125	12	20	25	RC*T0602...
SRGCR/L2020K08	20	20	125	12.7	20	25	RC*T0803...
SRGCR/L2020K10	20	20	125	14	25	25	RC*T1003...
SRGCR/L2525M05	25	25	150	14.7	25	32	RCMT0502...
SRGCR/L2525M06	25	25	150	15	25	32	RC*T0602...
SRGCR/L2525M08	25	25	150	16.2	25	32	RC*T0803...
SRGCR/L2525M10	25	25	150	17.5	25	32	RC*T1003...

SPARE PARTS

Designation	Clamping screw	Shim screw	Shim	Wrench 1	Wrench 2
SRGCR1212H05	CSTB-2.2R	-	-	-	T-7F
SRGCR/L1212H06	CSTB-2.5	-	-	-	T-8F
SRGCR/L1616H05	CSTB-2.2R	-	-	-	T-7F
SRGCR/L1616H06	CSTB-2.5	-	-	-	T-8F
SRGCR/L1616H08	CSTB-3	-	-	-	T-9F
SRGCR/L2020K05	CSTB-2.2R	-	-	-	T-7F
SRGCR/L2020K06	CSTB-2.5	-	-	-	T-8F
SRGCR/L2020K08	CSTB-3	-	-	-	T-9F
SRGCR/L2020K10	CSTB-3.5L	DTS5-3.5	SSR32	P-3.5	T-15F
SRGCR/L2525M05	CSTB-2.2R	-	-	-	T-7F
SRGCR/L2525M06	CSTB-2.5	-	-	-	T-8F
SRGCR/L2525M08	CSTB-3	-	-	-	T-9F
SRGCR/L2525M10	CSTB-3.5L	DTS5-3.5	SSR32	P-3.5	T-15F

INSERT SELECTION

P	Application	Finishing to medium cutting	heavy cutting
	Grade	T9215	T9215
	Chipbreaker shape	RS	61
	Cutting conditions	B016	


M	Application	heavy cutting
	Grade	T9215
	Chipbreaker shape	61
	Cutting conditions	B018

K	Application	heavy cutting
	Grade	T9215
	Chipbreaker shape	61
	Cutting conditions	B020

N	Application	Finishing to medium cutting
	Grade	KS05F
	Chipbreaker shape	AL
	Cutting conditions	B022

S	Application	Finishing to medium cutting	heavy cutting
	Grade	AH8015	AH8015
	Chipbreaker shape	RS	61
	Cutting conditions	B024	

Reference pages: SRGCR/L: Inserts → **B130** -

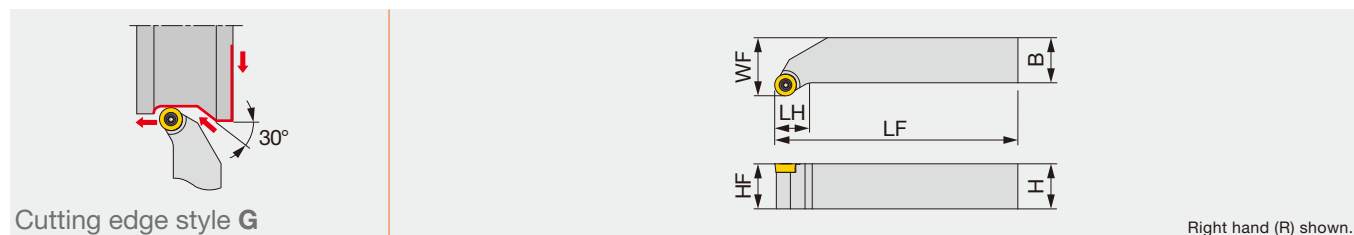

Designation	H	B	LF	LH	HF	WF	Insert	Torque*
SRGCR/L2525M12-6F	25	25	150	18.6	25	32	RCMT1204M0-6RS/-6RM	3


*Torque: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamping screw	Lubricant	Wrench
SRGCR/L2525M12-6F	CSTB-4	M-1000	T-15F

INSERT

RCMT

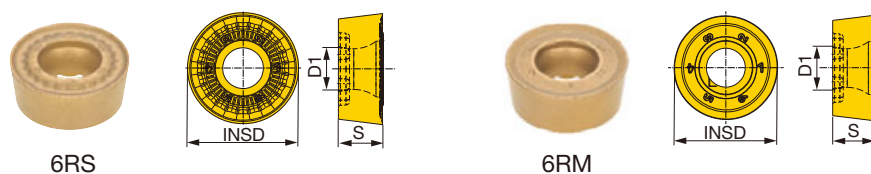


	P	M	K	N	S	H
Steel	★	★				★
Stainless	☆					
Cast iron	☆	☆				☆
Non-ferrous						
Superalloys						
Hard materials						

★ : First choice
☆ : Second choice

Designation	Coated		Cermet		INSD	S	D1
	T9215	T9225	NS9530				
RCMT1204M0-6RS	●	●	●		12	4.76	5.16
RCMT1204M0-6RM	●	●	●		12	4.76	5.16

● : Line up

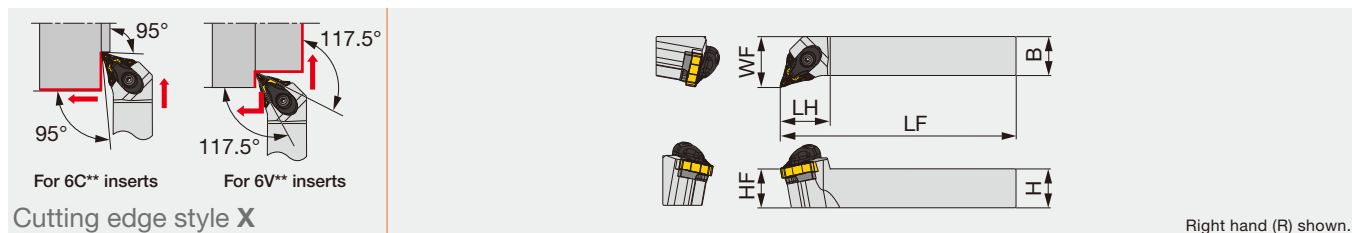

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ATXOR/L2020K25-A	20	20	125	32	20	25	0.8	6C/6V-TOMG2506...	3
ATXOR/L2525M25-A	25	25	150	32	25	32	0.8	6C/6V-TOMG2506...	3
ATXOR/L3232P25-A	32	32	170	32	32	40	0.8	6C/6V-TOMG2506...	3

Torque*: Recommended clamping torque (N·m)


RE**: Standard corner radius

SPARE PARTS


Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ATXOR/L**25-A	ACP4S	ACS-5W	BP-7	SP-2.5	LST33 KS15F	CSTB-3.5	T-15F

INSERT

6V-TOMG**F-TSF

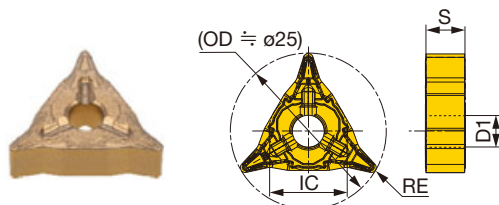

6C-TOMG**M-TM

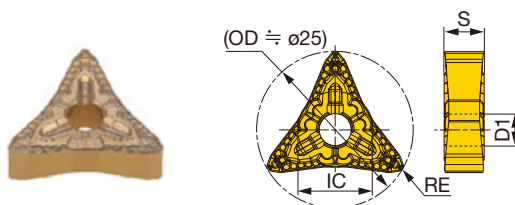

P	Steel	★	★						
M	Stainless	☆		☆					
K	Cast iron	☆							
N	Non-ferrous								
S	Superalloys			★					
H	Hard materials								


★ : First choice
☆ : Second choice

Designation	RE	Coated			IC	S	D1
		T9215	T9225	AH8015			
6V-TOMG250604F-TSF	0.4	●	●	●	12.7	6.35	5.16
6V-TOMG250608F-TSF	0.8	●	●	●	12.7	6.35	5.16
6C-TOMG250608M-TM	0.8	●	●	●	12.1	6.35	5.16
6C-TOMG250612M-TM	1.2	●	●	●	12.1	6.35	5.16


Please note, when machining with pull face-turning method, that 6V-TOMG2506... insert may interfere with the workpiece whose external diameter is 70 mm or smaller and that 6C-TOMG2506... insert 30 mm or smaller.

● : Line up

Screw-on toolholder with 105° approach angle, for positive triangular inserts



Cutting edge style X

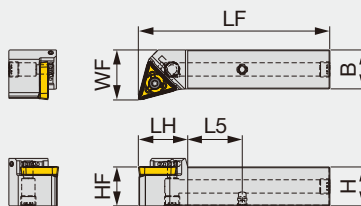

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	L5	Insert	Torque*
STXCR/L2525X29-CHP-MC	25	25	122	32	25	32	35	3C-TCMT29X6...	5


Torque*: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamping screw	Grip	Torx bit	Coolant plug
STXCR/L2525X29-CHP-MC	CSTB-5	H-TB2W	BT20M	PLUGG1/8-6.5TL360

INSERT

3C-TCMT**-TM

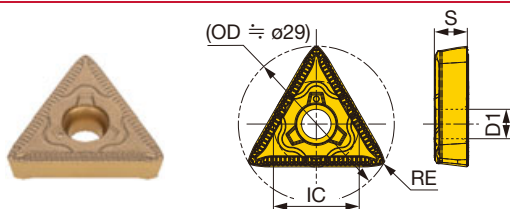

P	Steel	★					
M	Stainless	☆					
K	Cast iron	☆					
N	Non-ferrous						
S	Superalloys						
H	Hard materials						


★ : First choice
☆ : Second choice

Designation	RE	Coated							IC	S	D1
		T9215									
3C-TCMT29X608-TM	0.8	●							16	6.15	5.5

Please note that 3G-TCMT... insert is not recommended for pull face-turning method (pulling the insert away from the part center).

● : Line up

Lever-lock toolholder with 48.5° approach angle, for negative 108° pentagonal inserts

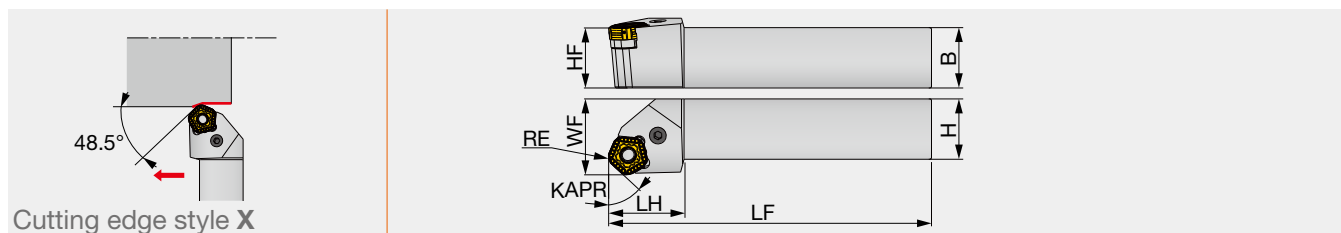


Designation	H	B	LF	LH	HF	WF	KAPR	RE	Insert
PPXOR/L2525M11-HD	25	25	150	35	25	32	48.5	1.2	POMG110612...
PPXOR/L3232P13-HD	32	32	170	40	32	40	48.5	1.2	POMG130612...

Note : Since the corner angle of TurnTenFeed insert is 108°, the workpiece corner may require additional post-process to remove stock to achieve a right angle.

PPXOR/L-HF

Lever-lock toolholder with 22.5° approach angle, for negative 108° pentagonal inserts

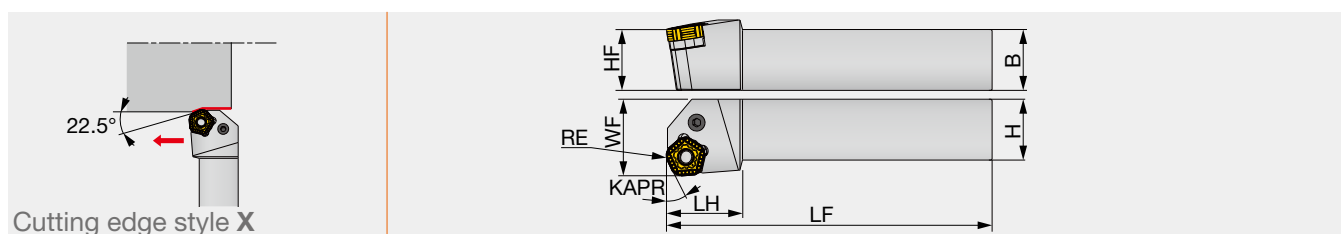

Designation	H	B	LF	LH	HF	WF	KAPR	RE	Insert
PPXOR/L2525M11-HF	25	25	150	35	25	32	22.5	1.2	POMG110612...
PPXOR/L3232P13-HF	32	32	170	40	32	40	22.5	1.2	POMG130612...


Note : Since the corner angle of TurnTenFeed insert is 108°, the workpiece corner may require additional post-process to remove stock to achieve a right angle.

SPARE PARTS

Designation	Shim	Spring pin	Lever	Clamping screw	Wrench
PPXOR/L2525M11-H*	LSPO53	LSP5	LCL5	LCS5	P-3
PPXOR/L3232P13-H*	LSPO63	LSP6	LCL6	LCS6	P-4

INSERT

POMG-MNW



P	Steel	★	★						
M	Stainless	☆		☆					
K	Cast iron	☆	☆						
N	Non-ferrous								
S	Superalloys			★					
H	Hard materials								


★ : First choice
☆ : Second choice

Designation	RE	Coated					IC	L	BS	S	D1
		T9215	T9225	AH8015							
POMG110612-MNW	1.2	●	●	●			15.875	11.53	1.5	6.35	6.35
POMG130612-MNW	1.2	●	●	●			19.05	13.84	2	6.35	7.93

● : Line up

Reference pages: Standard cutting conditions → C117

Cutting edge style X

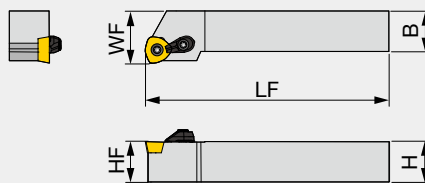


Designation	H	B	LF	HF	WF	Insert
XWXPR/L2525M09	25	25	150	25	32	WPMT090725ZPR/L-ML
XWXPR/L3232P09	32	32	170	32	40	WPMT090725ZPR/L-ML
XWXPR/L4040S09	40	40	250	40	50	WPMT090725ZPR/L-ML



Designation	Clamp set	Clamping screw	Wrench
XWXPR/L...	CSY-20	CSPB-5	IP-20T

 INSERT

WPMT09-ML


[illegible]

★ : First choice
☆ : Second choice

Designation	RE	Coated							IC	S
		T9215	T9225	AH120						
WPMT090725ZPR-ML	2.5	●	●	●					15	7
WPMT090725ZPL-ML	2.5	●	●	●					15	7

● : Line up

Screw-on Y-axis turning toolholder with TungCap connection, for positive 55° rhombic inserts

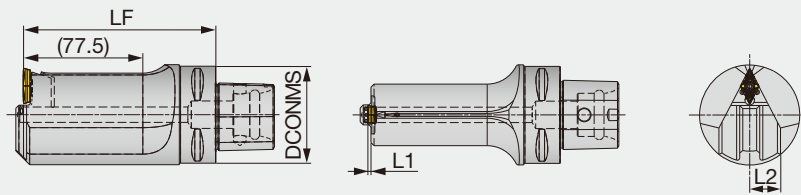Cutting edge style **N**

Designation	SS	DCONMS	LF	L1	L2	RE	Insert	Torque*
C6SDNCN00125-13-Y-CHP	C6	63	125	2	20	0.4	2D-DCMT13T4...	3.5


Torque*: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamping screw	Grip	Torx bit
C6SDNCN00125-13-Y-CHP	CSTB-4M	H-TB2W	BT15M

INSERT

2D-DCMT**-ZF

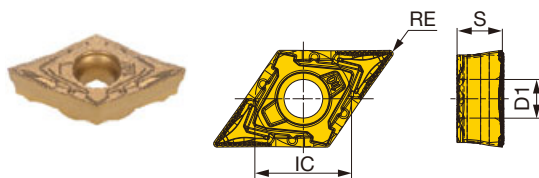


P	Steel	★				
M	Stainless	☆				
K	Cast iron	☆				
N	Non-ferrous					
S	Superalloys					
H	Hard materials					

★ : First choice
☆ : Second choice

Designation	RE	Coated					IC	S	D1
		T9215							
2D-DCMT13T404-ZF	0.4	●					11	5.16	4.4

Please note that 2D-DCMT... insert is not recommended for pull face-turning method (pulling the insert away from the part center).

● : Line up

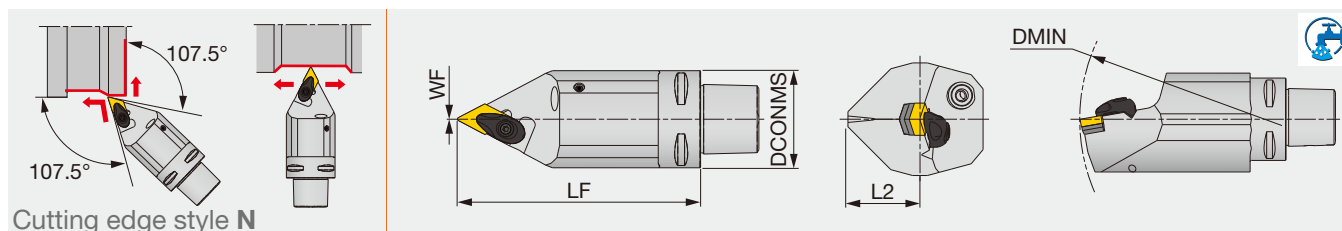

Designation	DCONMS	LF	L2	WF	DMIN	RE	Insert
C5ADNNN00090-15 ⁽¹⁾	50	90	32	0	-	0.8	DN**/FNGA1504(06)...
C5ADNNN00090-15N ⁽²⁾	50	90	32	0	165	0.8	DN**/FNGA1504(06)...
C5ADNNN00125-15 ⁽¹⁾	50	125	32	0	-	0.8	DN**/FNGA1504(06)...
C5ADNNN00125-15N ⁽²⁾	50	125	32	0	165	0.8	DN**/FNGA1504(06)...
C6ADNNN00100-15N ⁽²⁾	63	100	37.5	0	190	0.8	DN**/FNGA1504(06)...
C6ADNNN00140-15N ⁽²⁾	63	140	37.5	0	190	0.8	DN**/FNGA1504(06)...

The items without DMIN cannot be used for boring
 (1) Applicable for 3 MPa coolant (2) Applicable for 7 MPa coolant

SPARE PARTS

Designation	Clamp	Clamp screw	Coolant parts	Shim	Shim screw	Spring	Spring pin	Wrench
C5ADNNN00090-15	ACP4S	ACS-5W	EZ104	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F
C5ADNNN00090-15N	ACP4S	ACS-5W	SATZ-M10X1-M5	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F
C5ADNNN00125-15	ACP4S	ACS-5W	EZ104	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F
C5ADNNN00125-15N	ACP4S	ACS-5W	SATZ-M10X1-M5	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F
C6ADNNN00100-15N	ACP4S	ACS-5W	SATZ-M10X1-M5	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F
C6ADNNN00140-15N	ACP4S	ACS-5W	SATZ-M10X1-M5	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F

Option: ASD423 (Shim for DN**1506**)

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		


M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Cutting conditions	B006		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA with rake	P
	Cutting conditions	B010		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: C-ADNNN: Inserts → **B066 -**, CBN → **B172 -**, PCD → **B211**
 Parts for coolant hose → **C115**

Double-clamp toolholder with 63° approach angle, for negative 55° rhombic ceramic inserts with dimple

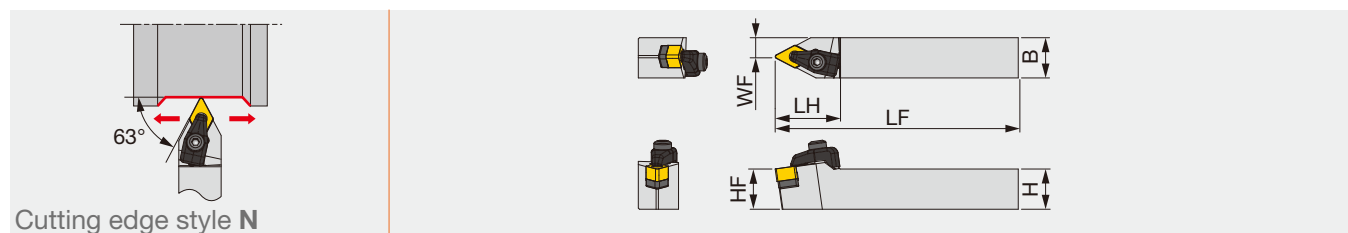

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
CDNNN2525M1507-RD	25	25	150	40	25	12.5	1.2	DN*D1507...	4

*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench1	Wrench2
CDNNN2525M1507-RD	CCP4-A	CCS4-A	CD44-A	BH5-10-A	BP-5-A	P-3	P-4


INSERT SELECTION

K	Application	Finishing to medium cutting
	Grade	FX105
	Chipbreaker shape	
	Cutting conditions	C118

Reference pages: CDNNN-RD: Inserts → **B074**
Standard cutting conditions → **C118**

SDNCN

Screw-on toolholder with 62.5° approach angle, for positive 55° rhombic inserts

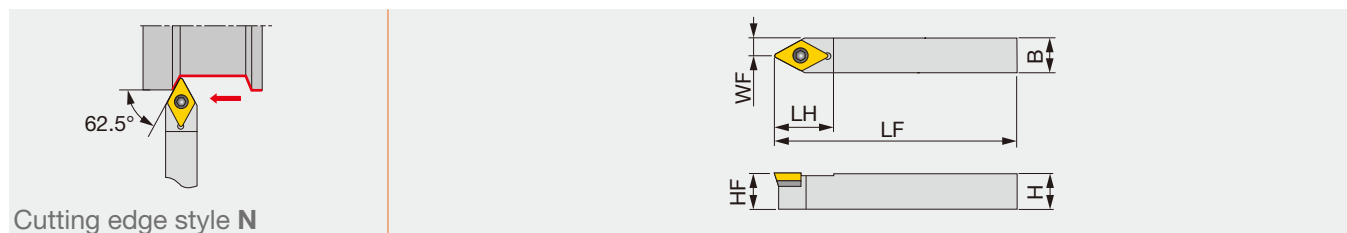

Designation	H	B	LF	LH	HF	WF	RE**	Insert
SDNCN1616H11	16	16	100	21	16	8	0.8	DC**11T3...
SDNCN2020K11	20	20	125	21	20	10	0.8	DC**11T3...
SDNCN2525M11	25	25	150	21	25	12.5	0.8	DC**11T3...

**RE: Standard corner radius

SPARE PARTS

Designation	Clamping screw	Shim screw	Shim	Wrench1	Wrench2
SDNCN...	CSTB-3.5L	DTS5-3.5	SSD32	P-3.5	T-15F

INSERT SELECTION

P	Application	Finishing	Finishing to medium cutting	Medium cutting
	Grade	NS9530	T9215	T9215
	Chipbreaker shape	PSS	PS	PM
	Cutting conditions	B016		

K	Application	Finishing to medium cutting
	Grade	T515
	Chipbreaker shape	CM
	Cutting conditions	B020

S	Application	Finishing	Finishing to medium cutting
	Grade	AH8015	AH8015
	Chipbreaker shape	PSS	PS
	Cutting conditions	B024	


M	Application	Precision finishing	Finishing	Finishing to medium cutting	Medium cutting
	Grade	GH330	AH6225	AH6225	AH6225
	Chipbreaker shape	W**	PSS	PS	PM
	Cutting conditions	B018			

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	KS05F
	Chipbreaker shape	DIA	DIA with rake	AL
	Cutting conditions	B022		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B026	

Reference pages: SDNCN:Inserts → **B121** -, CBN → **B193** -, PCD → **B214**

Double-clamp toolholder with 45° approach angle, for negative square inserts

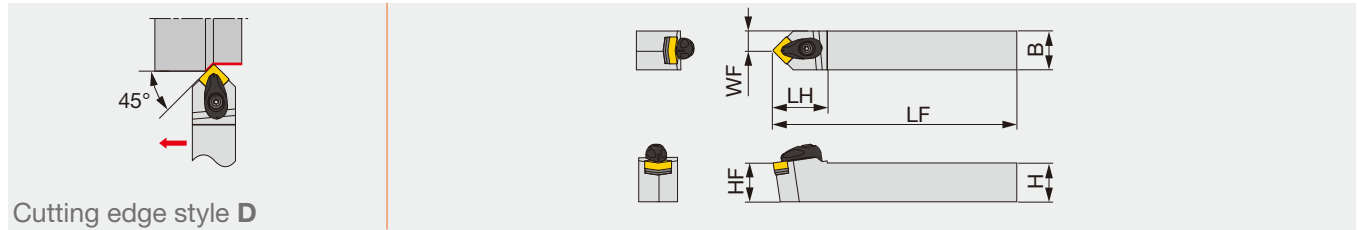

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ASDNN2020K12-A	20	20	125	35	20	10	0.8	SN**1204...	3
ASDNN2525M12-A	25	25	150	35	25	12.5	0.8	SN**1204...	3


*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ASDNN**12-A	ACP4S	ACS-5W	BP-7	SP-2.5	ASS422	CSTB-3.5	T-15F

DSDNN

One-Double toolholder with 45° approach angle, for negative square inserts

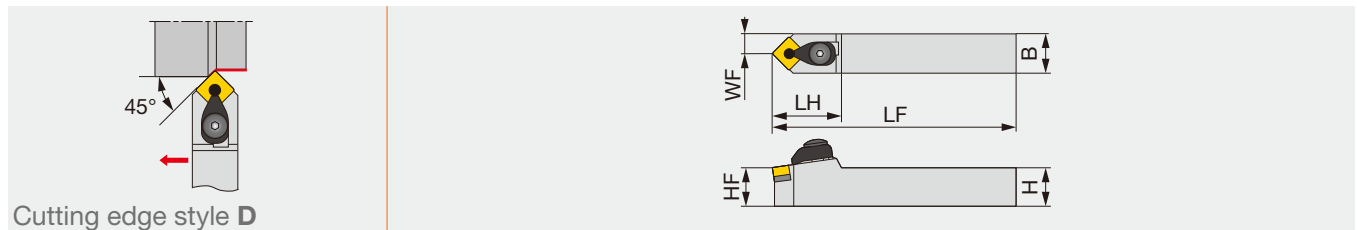

Designation	H	B	LF	LH	HF	WF	RE**	Insert
DSDNN2020K12	20	20	125	36	20	10	0.8	SN**1204...
DSDNN2525M12	25	25	150	36	25	12.5	0.8	SN**1204...

Note: Except for TRS, TU, TUS, 57, and 65-type chipbreaker inserts


**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench 1	Wrench 2
DSDNN...	DCPM-43	DLCL43	DPIS43	DLCS43	LSS42	BP-10	LSP4	P-3	P-4

PSDNN

Lever-lock toolholder with 45° approach angle, for positive round inserts

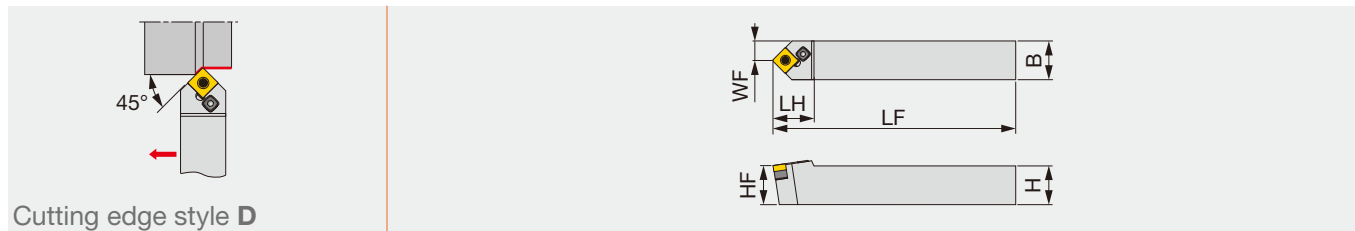

Designation	H	B	LF	LH	HF	WF	RE**	Insert
PSDNN1616	16	16	100	22	16	8	0.8	SN**0903...
PSDNN2020	20	20	125	30	20	10.3	0.8	SN**1204...
PSDNN2525	25	25	150	30	25	12.8	0.8	SN**1204...

**RE: Standard corner radius

SPARE PARTS					
Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PSDNN1616	LSS33	LCS3	P-2.5	LSP3L	LCL3
PSDNN2020	LSS42	LCS4	P-3	LSP4	LCL4
PSDNN2525	LSS42	LCS4	P-3	LSP4	LCL4

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker Shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker Shape	SF	SM	SH
	Cutting conditions	B006		

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker Shape	All-round	All-round	All-round
	Cutting conditions	B008		


N	Application	Finishing	Medium cutting
	Grade	DX140	TH10
	Chipbreaker Shape	DIA	P
	Cutting conditions	B010	

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX480	AH8005	AH8005
	Chipbreaker Shape	CBN	HRF	HRM
	Cutting conditions	B012		


Reference pages: PSDNN: Inserts → **B077 -**, CBN → **B180**, PCD → **B211**

PRDCN

Lever-lock toolholder with 45° approach angle, for positive round inserts



Cutting edge style **D**



Designation	H	B	LF	LH	HF	WF	Insert
PRDCN2020K10	20	20	125	22.5	20	15	RCMM1003...
PRDCN2525M12	25	25	150	24	25	18.5	RCM*1204...
PRDCN3225P12	32	25	170	24	32	18.5	RCM*1204...
PRDCN3225P16	32	25	170	28	32	20.5	RCM*1606...
PRDCN3232P20	32	32	170	32	32	26	RCM*2006...
PRDCN4040R25	40	40	200	42	40	32.5	RCM*2507...

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PRDCN2020K10	LSR32C	LCS2	P-2	LSP3	LCL3C
PRDCN**25*12	LSR42C	LCS3	P-2.5	LSP3	LCL4C
PRDCN3225P16	LSR53C	LCS5	P-3	LSP4	LCL5C
PRDCN3232P20	LSR63C	LCS5	P-3	LSP6C	LCL6C
PRDCN4040R25	LSR84C	LCS8C	P-4	LSP6	LCL8C

INSERT SELECTION

P	Application	Finishing to medium cutting	Heavy cutting
	Grade	T9215	T9215
	Chipbreaker Shape		
	Cutting conditions	B016	

M	Application	Heavy cutting
	Grade	T9215
	Chipbreaker Shape	
	Cutting conditions	B018

K	Application	Heavy cutting
	Grade	T9215
	Chipbreaker Shape	
	Cutting conditions	B020


N	Application	Finishing to medium cutting
	Grade	KS05F
	Chipbreaker Shape	
	Cutting conditions	B022

S	Application	Finishing to medium cutting	Heavy cutting
	Grade	AH8015	AH8015
	Chipbreaker Shape		
	Cutting conditions	B024	

Reference pages: PRDCN: Inserts → **B131**

SRDCN

Screw-on toolholder with 45° approach angle, for positive round inserts

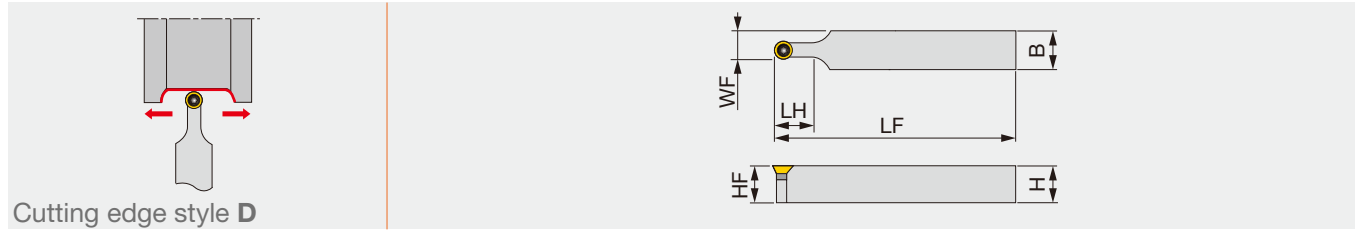

Designation	H	B	LF	LH	HF	WF	Insert
SRDCN2020K06	20	20	125	12	20	13	RC*T0602...
SRDCN2020K08	20	20	125	16	20	14	RC*T0803...
SRDCN2020K10	20	20	125	20.3	25	15	RC*T1003...
SRDCN2525M06	25	25	150	12	25	15.5	RC*T0602...
SRDCN2525M08	25	25	150	16	25	16.5	RC*T0803...
SRDCN2525M10	25	25	150	20.3	25	17.5	RC*T1003...


SPARE PARTS

Designation	Clamping screw	Shim screw	Shim	Wrench 1	Wrench 2
SRDCN2020K06	CSTB-2.5	-	-	-	T-8F
SRDCN2020K08	CSTB-3	-	-	-	T-9F
SRDCN2020K10	CSTB-3.5L	DTS5-3.5	SSR32	P-3.5	T-15F
SRDCN2525M06	CSTB-2.5	-	-	-	T-8F
SRDCN2525M08	CSTB-3	-	-	-	T-9F
SRDCN2525M10	CSTB-3.5L	DTS5-3.5	SSR32	P-3.5	T-15F

INSERT SELECTION

P	Application	Finishing to medium cutting	Heavy cutting
	Grade	T9215	T9215
	Chipbreaker	RS	61
	Shape		
Cutting conditions		B016	
M	Application	Heavy cutting	
	Grade	61	T9215
	Chipbreaker	61	
	Shape		
Cutting conditions		B018	
K	Application	Heavy cutting	
	Grade	T9215	
	Chipbreaker	61	
	Shape		
Cutting conditions		B020	
N	Application	Finishing to medium cutting	
	Grade	KS05F	
	Chipbreaker	AL	
	Shape		
Cutting conditions		B022	
S	Application	Finishing to medium cutting	Heavy cutting
	Grade	AH8015	AH8015
	Chipbreaker	RS	61
	Shape		
Cutting conditions		B024	

Reference pages: SRDCN: Inserts → **B131**

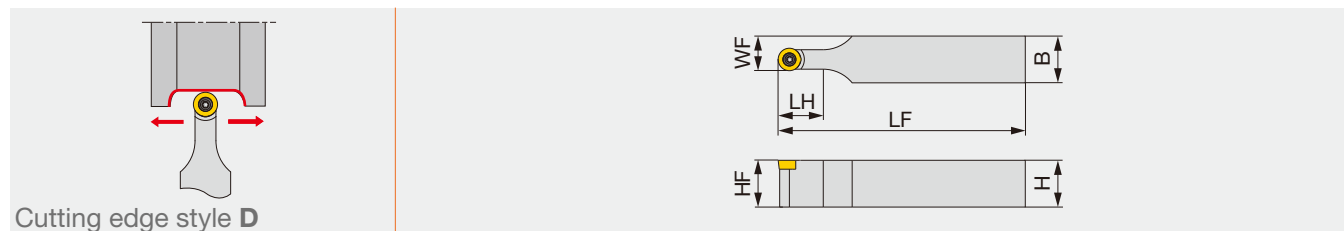

Designation	H	B	LF	LH	HF	WF	Insert	Torque*
SRDCN2525M12-6F	25	25	150	24.1	25	18.5	RCMT1204M0-6RS/-6RM	3


*Torque: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamping screw	Lubricant	Wrench
SRDCN2525M12-6F	CSTB-4	M-1000	T-15F

INSERT

RCMT

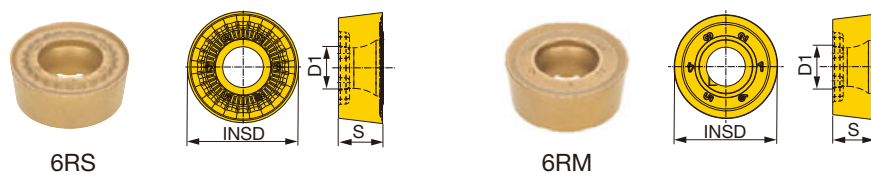

	P	M	K	N	S	H
Steel	★	★				★
Stainless	☆					
Cast iron	☆	☆				☆
Non-ferrous						
Superalloys						
Hard materials						

★ : First choice
☆ : Second choice

Designation	Coated		Cermet		INSD	S	D1
	T9215	T9225	NS9530				
RCMT1204M0-6RS	●	●	●		12	4.76	5.16
RCMT1204M0-6RM	●	●	●		12	4.76	5.16

● : Line up


Toolholder with carbide clamping plate, with 45° approach angle, for positive round ceramic inserts with V-bottom shape



**RE: Standard corner radius

Designation	Clamp	Clamp screw	Shim	Shim screw	Wrench 1	Wrench 2
TRDCN3225P09-120	BCL6-20A	BH-M6X1X25	CBRS-09	BH-M2.5X0.45X10	P-4	P-1.5
TRDCN3225P12-120	BCL6	BH-M6X1X25	CBRS-12	BH-M2.5X0.45X10	P-4	P-1.5

RCGX-E/T1





★ : First choice

* Types of cutting edge preparations

● : Line up

T1: Strong cutting edge



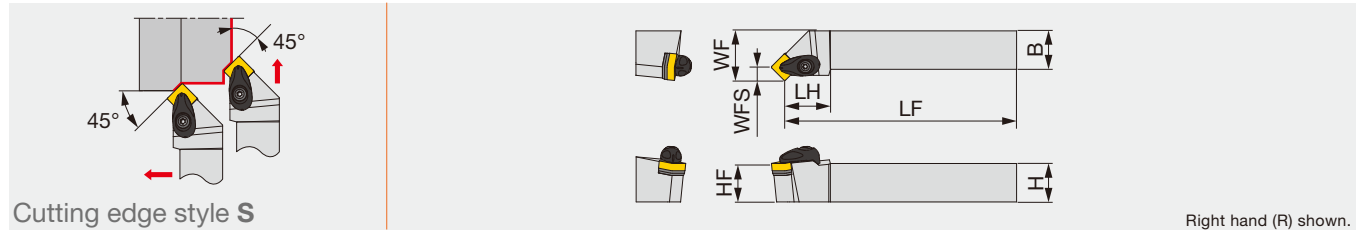

Designation	H	B	LF	LH	HF	WF	WFS	RE**	Insert	Torque*
ASSNR/L2020K12-A	20	20	125	30	20	25	8.3	0.8	SN**1204...	3
ASSNR/L2525M12-A	25	25	150	30	25	32	8.3	0.8	SN**1204...	3
ASSNR/L2525M15-A	25	25	150	25	25	32	10.3	1.2	SN**1506...	6.4
ASSNR/L3232P15-A	32	32	170	25	32	40	10.3	1.2	SN**1506...	6.4
ASSNR/L3232P19-A	32	32	170	27.5	32	40	12.5	1.2	SN**1906...	6.4
ASSNR/L4040S19-A	40	40	250	27.5	40	50	12.5	1.2	SN**1906...	6.4

*Torque: Recommended clamping torque (N·m)


**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench 1	Wrench 2
ASSNR/L**12-A	ACP4S	ACS-5W	BP-7	SP-2.5	ASS422	CSTB-3.5	T-15F	-
ASSNR/L**15-A	ACP5S	ACS-6W	BP-8.8	SP-2.5	ASS533	CSTB-5	-	KEYV-T20
ASSNR/L**19-A	ACP6S	ACS-6W	BP-8.8	SP-2.5	ASS634	CSTB-5	-	KEYV-T20

DSSNR/L

"One-Double" toolholder with 45° approach angle, for negative square inserts

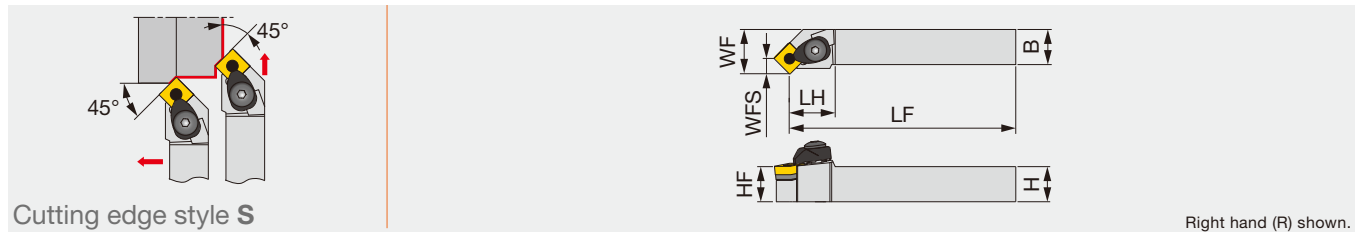

Designation	H	B	LF	LH	HF	WF	WFS	RE**	Insert
DSSNR/L2020K12	20	20	125	34.3	20	25	8.3	0.8	SN**1204...
DSSNR/L2525M12	25	25	150	34.3	25	32	8.3	0.8	SN**1204...

Note: Except for TRS, TU, TUS, 57, and 65-type chipbreaker inserts


**RE : Standard corner radius

SPARE PARTS

Designation	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench 1	Wrench 2
DSSNR/L...	DCPM-43	DLCL43	DPIS43	DLCS43	LSS42	BP-10	LSP4	P-3	P-4

PSSNR/L

Lever-lock toolholder with 45° approach angle, for positive round inserts

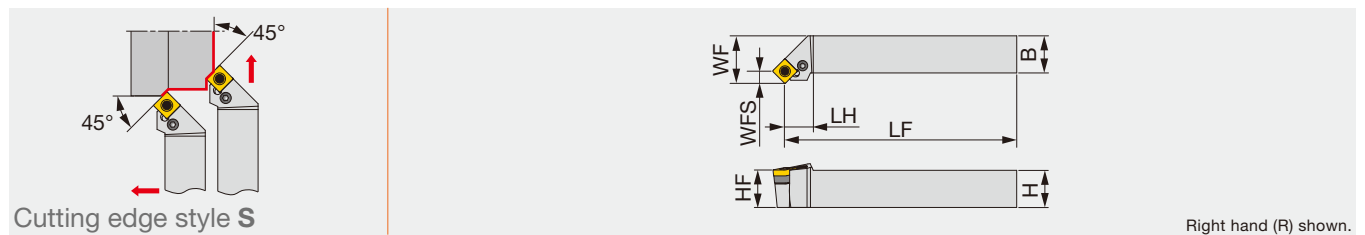

Designation	H	B	LF	LH	HF	WF	WFS	RE**	Insert
PSSNR/L1616	16	16	94	16	16	20	6.1	0.8	SN**0903...
PSSNR/L2020	20	20	116	21	20	25	8.3	0.8	SN**1204...
PSSNR/L2525	25	25	141	21	25	32	8.3	0.8	SN**1204...
PSSNR/L3225	32	25	161	21	32	32	8.3	0.8	SN**1204...
PSSNR/L3232	32	32	157.5	27.5	32	40	12.5	1.2	SN**1906...

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PSSNR/L1616	LSS33	LCS3	P-2.5	LSP3L	LCL3
PSSNR/L2020	LSS42	LCS4	P-3	LSP4	LCL4
PSSNR/L**25	LSS42	LCS4	P-3	LSP4	LCL4
PSSNR/L3232	LSS63	LCS6	P-4	LSP6	LCL6

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker Shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker Shape	SF	SM	SH
	Cutting conditions	B006		


K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker Shape	All-round	All-round	All-round
	Cutting conditions	B008		

N	Application	Finishing	Medium cutting
	Grade	DX140	TH10
	Chipbreaker Shape	DIA	P
	Cutting conditions	B010	

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX480	AH8005	AH8005
	Chipbreaker Shape	CBN	HRF	HRM
	Cutting conditions	B012		

Reference pages: PSSNR/L: Inserts → **B077** -, CBN → **B180**, PCD → **B211**

Double-clamp toolholder with 45° approach angle, for negative square ceramic inserts with dimple

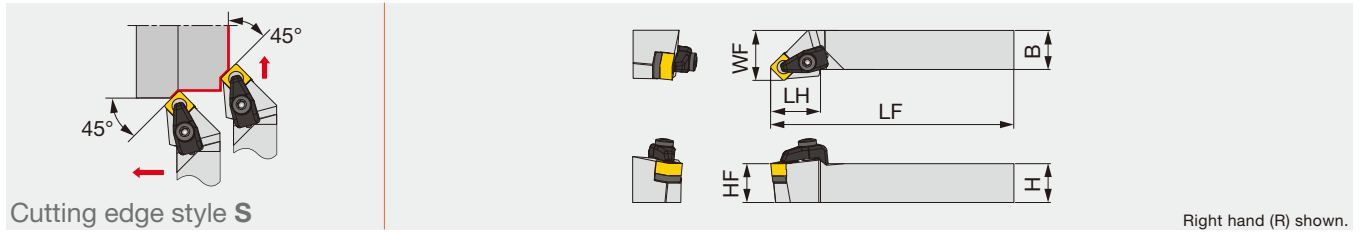

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
CSSNR/L2525M1207-RD	25	25	150	32	25	32	1.2	SN*D1207...	4

*Torque: Recommended clamping torque (N·m)

**RE : Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench 1	Wrench 2
CSSNR/L2525M1207-RD	CCP4-A	CCS4-A	CS44-A	BH5-10-A	BP-5-A	P-3	P-4


INSERT SELECTION

K	Application	Finishing to medium cutting
	Grade	FX105
	Chipbreaker Shape	
	Cutting conditions	C118

Reference pages: CSSNR/L-RD: Insert → **B085**

Standard cutting conditions → **C118**

Double-clamp toolholder with 45° approach angle, for negative 120° hexagonal ceramic inserts with dimple

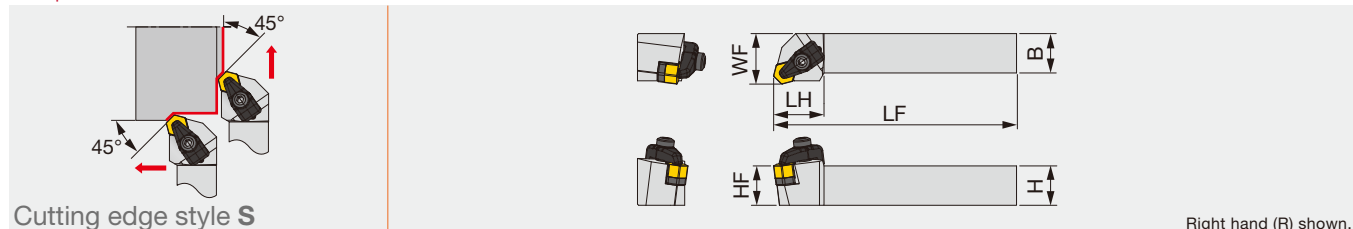

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
CHSNR2525M0507-RD	25	25	150	32	25	32	1.2	HN*D0507...	4

*Torque: Recommended clamping torque (N·m)

**RE: Standard corner radius


SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench 1	Wrench 2
CHSNR2525M0507-RD	CCP4-A	CCS4-A	CH44-A	BH-40050-A	BP-5-A	P-3	P-4

INSERT SELECTION

K	Application	Finishing to medium cutting
	Grade	FX105
	Chipbreaker Shape	
	Cutting conditions	C118

Double-clamp toolholder with 75° approach angle, for negative square inserts

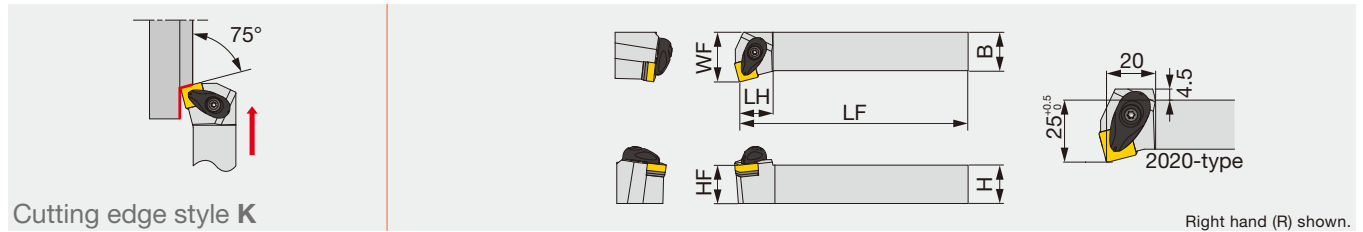

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ASKNR/L2020K12-A	20	20	125	20	20	25	0.8	SN**1204...	3
ASKNR/L2525M12-A	25	25	150	22	25	32	0.8	SN**1204...	3

*Torque: Recommended clamping torque (N·m)


**RE : Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ASKNR/L**12-A	ACP4S	ACS-5W	BP-7	SP-2.5	ASS422	CSTB-3.5	T-15F

DSKNR/L

"One-Double" toolholder with 75° approach angle, for negative square inserts

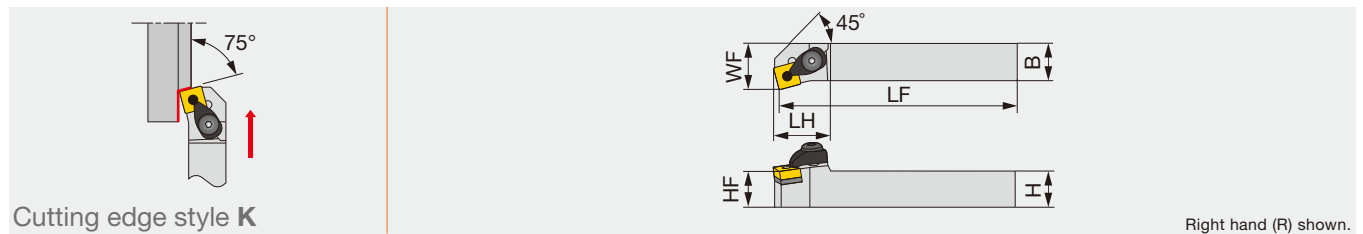

Designation	H	B	LF	LH	HF	WF	RE**	Insert
DSKNR/L2020K12	20	20	125	31	20	25	0.8	SN**1204...
DSKNR/L2525M12	25	25	150	31	25	32	0.8	SN**1204...

Note: Except for TRS, TU, TUS, 57, and 65-type chipbreaker inserts


**RE : Standard corner radius

SPARE PARTS

Designation	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench 1	Wrench 2
DSKNR/L...	DCPM-43	DLCL43	DPIS43	DLCS43	LSS42	BP-10	LSP4	P-3	P-4

PSKNR/L

Lever-lock toolholder with 75° approach angle, for negative square inserts

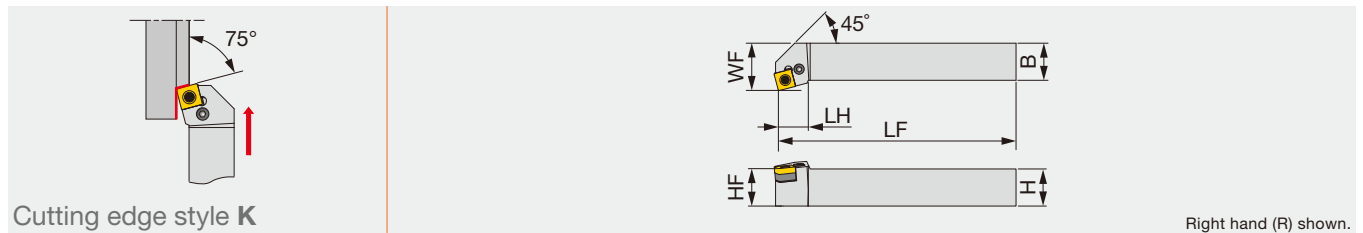

Designation	H	B	LF	LH	HF	WF	RE**	Insert
PSKNR/L1616	16	16	100	17	16	25	0.8	SN**0903...
PSKNR/L2020	20	20	125	22	20	25	0.8	SN**1204...
PSKNR/L2525	25	25	150	22	25	32	0.8	SN**1204...
PSKNR3232	32	32	170	40	32	40	1.2	SN**1906...

**RE : Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PSKNR/L1616	LSS33	LCS3	P-2.5	LSP3L	LCL3
PSKNR/L2*2*	LSS42	LCS4	P-3	LSP4	LCL4
PSKNR3232	LSS63	LCS6	P-4	LSP6	LCL6

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker Shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker Shape	SF	SM	SH
	Cutting conditions	B006		

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker Shape	All-round	All-round	All-round
	Cutting conditions	B008		


N	Application	Finishing	Medium cutting
	Grade	DX140	TH10
	Chipbreaker Shape	DIA	P
	Cutting conditions	B010	

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX480	AH8005	AH8005
	Chipbreaker Shape	CBN	HRF	HRM
	Cutting conditions	B012		

Reference pages: PSKNR/L: Inserts → **B077** -, CBN → **B180**, PCD → **B211**

TSKNR/L-F

Toolholder with carbide clamping plate, with 75° approach angle, for negative square ceramic inserts without hole

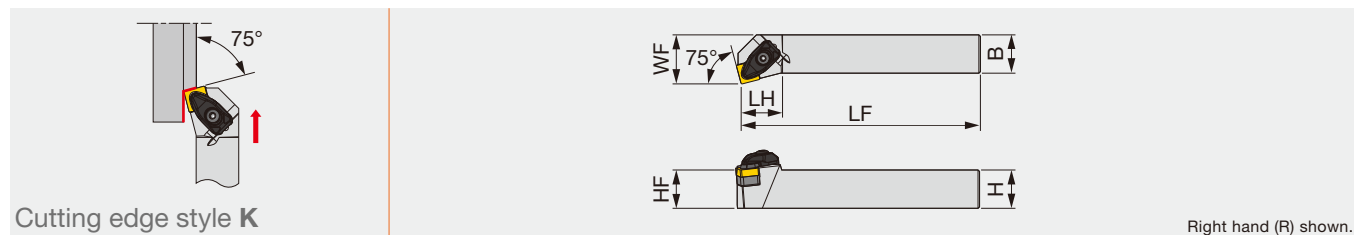

Designation	H	B	LF	LH	HF	WF	RE**	Insert
TSKNR/L2525M1207-F	25	25	150	27	25	32	0.8	SNGN1207...

**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench 1	Wrench 2
TSKNR/L2525M1207-F	DCLS-4F	DLS-4A	TSS-42	BH-40050-A	DSP-4A	T-15F	P-3

INSERT

SNGN-T1

P	Steel				
M	Stainless				
K	Cast iron				
N	Non-ferrous				
S	Superalloys	★	★		
H	Hard materials				


★ : First choice

Designation	Edge prep.*	Ceramic								RE	IC	S
		TS200	TS300									
SNGN120712-T1	T1	●								1.2	12.7	7.94


* Types of cutting edge preparations

● : Line up

E: Low cutting force




T1: Strong cutting edge




PCFNR/L

Lever-lock type toolholder for facing with 91° approach angle, for negative 80°/70° rhombic inserts



Cutting edge style F

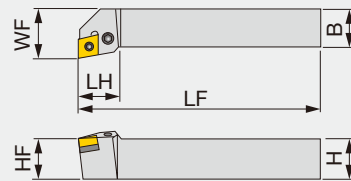

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	RE**	Insert
PCFNR/L2020	20	20	125	28	20	25	0.8	CN**/GNGA1204...
PCFNR/L2525	25	25	150	28	25	32	0.8	CN**/GNGA1204...

**RE : Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PCFNR/L...	LSC42 D30	LCS4	P-3	LSP4	LCL4

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		


M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Cutting conditions	B006		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	with rake DIA	P
	Cutting conditions	B010		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: PCFNR/L: Inserts → B054 -, CBN → B168 -, B178, PCD → B211

Double-clamp toolholder for facing with 91° approach angle, for negative 60° triangular inserts

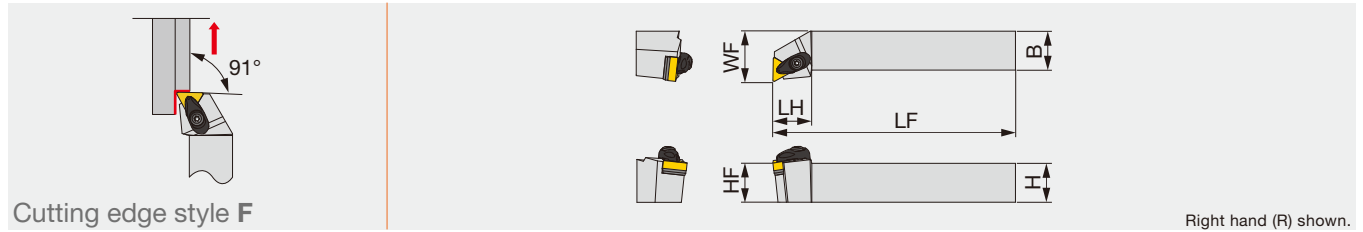

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ATFNR/L2020K16-A	20	20	125	25	20	25	0.8	TN**1604...	3
ATFNR/L2525M16-A	25	25	150	25	25	32	0.8	TN**1604...	3
ATFNR/L2525M22-A	25	25	150	29	25	32	0.8	TN**2204...	3

*Torque: Recommended clamping torque (N·m)


**RE : Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ATFNR/L**16-A	ACP3S	ACS-5W	BP-7	SP-2.5	AST322	CSTB-3.5	T-15F
ATFNR/L**22-A	ACP4S	ACS-5W	BP-7	SP-2.5	AST422	CSTB-3.5	T-15F

DTFNR/L

"One-Double" toolholder with 91° approach angle, for negative 60° triangular inserts

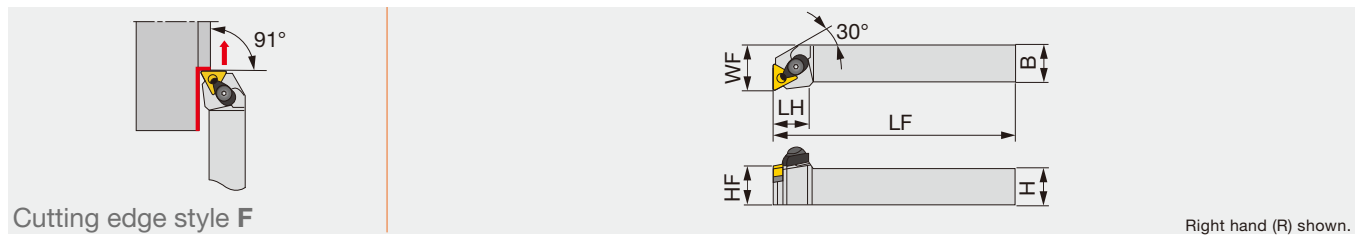

Designation	H	B	LF	LH	HF	WF	RE**	Insert
DTFNR/L2020K16	20	20	125	23	20	25	0.8	TN**1604...
DTFNR/L2525M16	25	25	150	23	25	32	0.8	TN**1604...
DTFNR/L2525M22	25	25	150	31	25	32	0.8	TN**2204...

Note: Except for 57-type chipbreaker inserts


**RE : Standard corner radius

SPARE PARTS

Designation	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench 1	Wrench 2
DTFNR/L**16	DCPM-33	LCL33	DPIS33	DLCS33	LST317	BP-9	LSP3	P-2.5	P-3
DTFNR/L**22	DCPM-43	DLCL43	DPIS43	DLCS43	LST42	BP-10	LSP4	P-3	P-4

PTFNR/L

Lever-lock toolholder with 91° approach angle, for negative triangular inserts

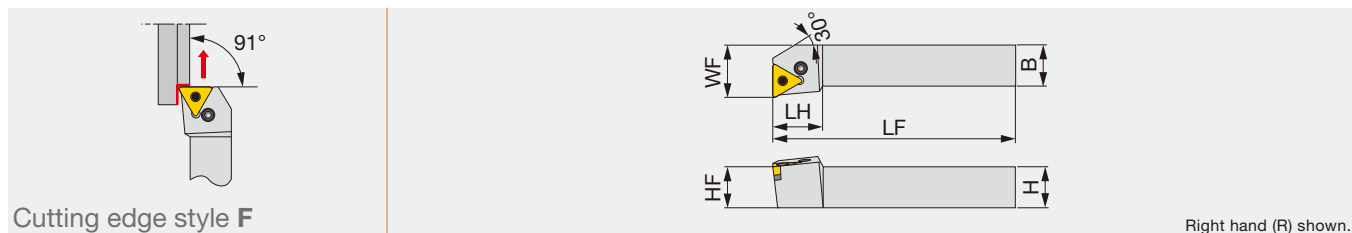

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PTFNR/L1616	16	16	100	22	16	20	0.8	TN**1604...	2
PTFNR/L2020K1104	20	20	125	16	20	25	0.8	TN**1104...	2
PTFNR/L2020	20	20	125	22	20	25	0.8	TN**1604...	2
PTFNR/L2525M1104	25	25	150	22	25	32	0.8	TN**1104...	2
PTFNR/L2525M3	25	25	150	22	25	32	0.8	TN**1604...	2
PTFNR/L2525M4	25	25	150	28	25	32	0.8	TN**2204...	3
PTFNR/L3225P4	32	25	170	28	32	32	0.8	TN**2204...	3

*Torque: Recommended clamping torque (N·m)

**RE : Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw 1	Clamping screw 2	Wrench	Spring pin	Lever
PTFNR/L1616, 2020	LST317	-	LCS3	P-2.5	LSP3	LCL3
PTFNR/L**1104	-	LCS23A	-	P-2.5	-	LCL23
PTFNR/L2525M3	LST317	-	LCS3	P-2.5	LSP3	LCL3
PTFNR/L**25*4	LST42	-	LCS4	P-3	LSP4	LCL4

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting
	Grade	T6215	AH6225
	Chipbreaker shape	SF	SM
	Cutting conditions	B006	


K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA with rake	P
	Cutting conditions	B010		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: PTFNR/L: Inserts → **B087 -**, CBN → **B182 -**, PCD → **B212**

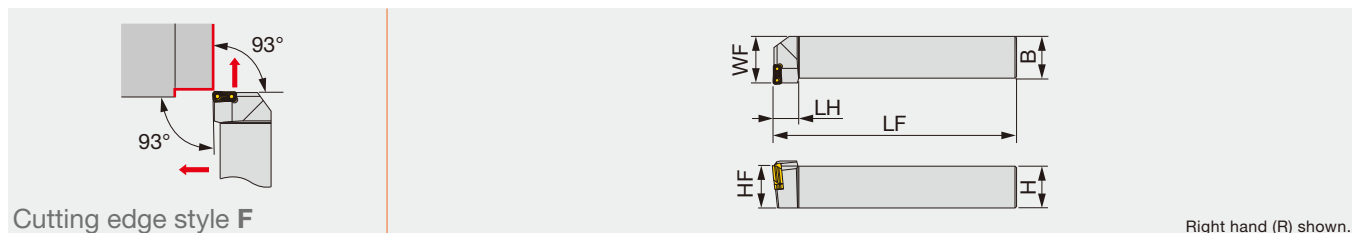

Designation	H	B	LF	LH	HF	WF	Insert
TLFNR/L2525M16	25	25	150	20	25	30	LNMX1606**L/R...
TLFNR/L3232P16	32	32	170	20	32	37	LNMX1606**L/R...


Note: Use right-hand toolholders (R) with left-hand inserts (L); and left-hand toolholders (L) with right-hand inserts (R).

SPARE PARTS

Designation	Clamping screw	Shim	Spring pin	Wrench
TLFNR/L2525M16	CSTB-4L115-S	TSL16L	PSP-16	KEYV-T15
TLFNR/L2525M16	CSTB-4L115-S	TSL16R	PSP-16	KEYV-T15
TLFNR/L3232P16	CSTB-4L115-S	TSL16L	PSP-16	KEYV-T15
TLFNR/L3232P16	CSTB-4L115-S	TSL16R	PSP-16	KEYV-T15

INSERT

LNMX12/16/24

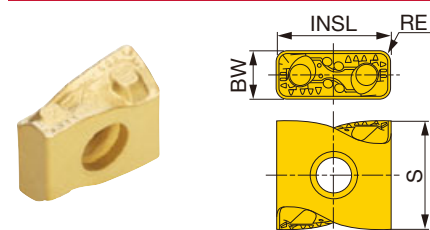


	P	M	K	N	S	H
Steel	★	★	★			
Stainless	☆	☆	☆			
Cast iron	☆	☆	☆			
Non-ferrous						
Superalloys						
Hard materials						

★ : First choice
☆ : Second choice

Designation	HAND	RE	Coated			BW	INSL	S
			T9115	T9125	AH725			
LNMX120408R-TDR	R	0.8	●	●		4.8	12	11.6
LNMX120408L-TDR	L	0.8	●	●		4.8	12	11.6
LNMX120412R-TDR	R	1.2	●	●		4.8	12	11.6
LNMX120412L-TDR	L	1.2	●	●		4.8	12	11.6
LNMX160608R-TDR	R	0.8	●	●		6.4	16.2	13.5
LNMX160608L-TDR	L	0.8	●	●		6.4	16.2	13.5
LNMX160612R-TDR	R	1.2	●	●		6.4	16.2	13.5
LNMX160612L-TDR	L	1.2	●	●		6.4	16.2	13.5
LNMX160616R-TDR	R	1.6	●	●		6.4	16.2	13.5
LNMX160616L-TDR	L	1.6	●	●		6.4	16.2	13.5
LNMX241016R-TDR	R	1.6	●	●		9.4	24	20.5
LNMX241016L-TDR	L	1.6	●	●		9.4	24	20.5
LNMX241024R-TDR	R	2.4	●	●		9.4	24	20.5
LNMX241024L-TDR	L	2.4	●	●		9.4	24	20.5
LNMX160608R-MDR	R	0.8	●	●		6.4	16.2	13.5
LNMX160608L-MDR	L	0.8	●	●		6.4	16.2	13.5
LNMX160612R-MDR	R	1.2	●	●		6.4	16.2	13.5
LNMX160612L-MDR	L	1.2	●	●		6.4	16.2	13.5
LNMX160608R-TWR	R	0.8	●	●		6.4	16.2	13.5
LNMX160608L-TWR	L	0.8	●	●		6.4	16.2	13.5
LNMX160612R-TWR	R	1.2	●	●		6.4	16.2	13.5
LNMX160612L-TWR	L	1.2	●	●		6.4	16.2	13.5

● : Line up

Reference pages: TLFNR/L: Standard cutting conditions → C119

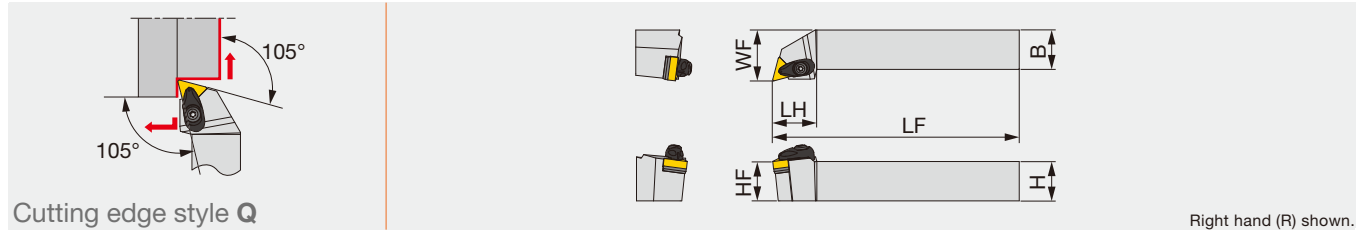

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ATQNR/L2020K16-A	20	20	125	28	20	25	0.8	TN**1604...	3
ATQNR/L2525M16-A	25	25	150	28	25	32	0.8	TN**1604...	3

*Torque: Recommended clamping torque (N·m)

**RE : Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ATQNR/L**16-A	ACP3S	ACS-5W	BP-7	SP-2.5	AST322	CSTB-3.5	T-15F

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting
	Grade	T6215	AH6225
	Chipbreaker shape	SF	SM
	Cutting conditions	B006	


K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA with rake	P
	Cutting conditions	B010		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Double-clamp toolholder with 107.5° approach angle, for negative 55°/45° rhombic inserts

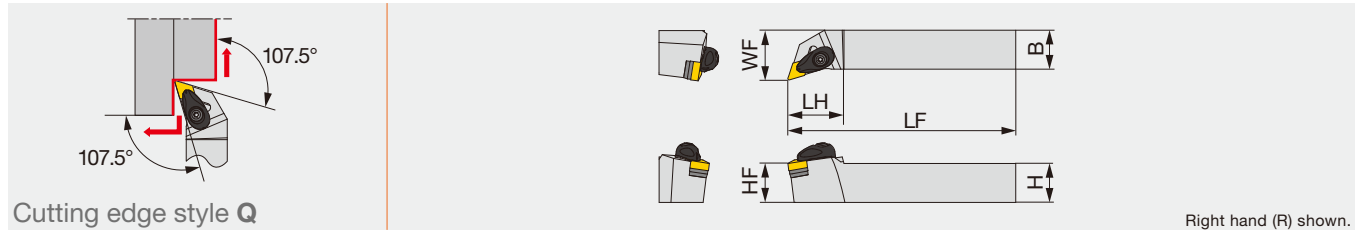


Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ADQNR/L2020K1104-A	20	20	125	30	20	25	0.8	DN**/FNMG1104...	3
ADQNR/L2020K15-A	20	20	125	32	20	25	0.8	DN**/FNGA1504...	3
ADQNR/L2020K1506-A	20	20	125	32	20	25	0.8	DN**/FNGA1506...	3
ADQNR/L2525M1104-A	25	25	150	30	25	32	0.8	DN**/FNMG1104...	3
ADQNR/L2525M15-A	25	25	150	36	25	32	0.8	DN**/FNGA1504...	3
ADQNR/L2525M1506-A	25	25	150	36	25	32	0.8	DN**/FNGA1506...	3

*Torque: Recommended clamping torque (N·m)
 **RE : Standard corner radius

C-ADQNR/L

Double-clamp toolholder, with 107.5° approach angle, for negative 55°/45° rhombic inserts

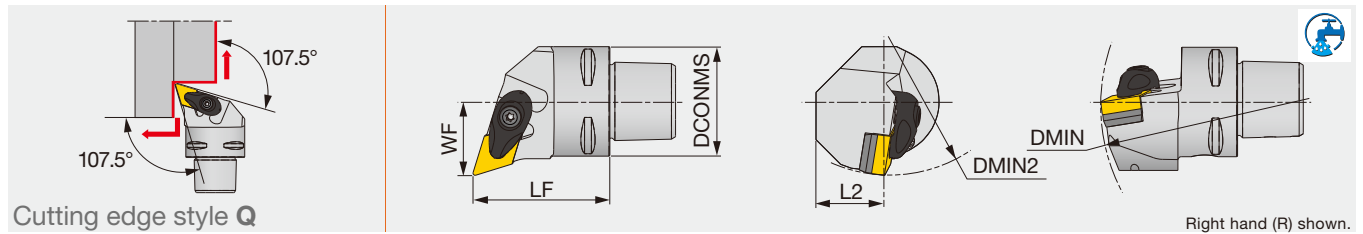

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert
C3ADQNR/L22040-15N	32	40	20	22	121	85	0.8	DN**/FNGA1504...
C4ADQNR/L27050-15N	40	50	25	27	145	110	0.8	DN**/FNGA1504...

Applicable for 7 MPa coolant


Option: ASD423 (Shim for DN**1506**)

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ADQNR/L**1104-A	ACP3S-E	ACS-5W	BP-7	SP-2.5	ASD322	CSTB-3.5	T-15F
ADQNR/L**15-A	ACP4S	ACS-5W	BP-7	SP-2.5	ASD432	CSTB-3.5	T-15F
ADQNR/L**1506-A	ACP4S	ACS-5W	BP-7	SP-2.5	ASD423	CSTB-3.5	T-15F
C*ADQNR/L**15N	ACP4S	ACS-5W	BP-7	SP-2.5	ASD432	CSTB-3.5	T-15F

DDQNR/L

"One-Double" toolholder with 107.5° approach angle, for negative 55°/45° rhombic inserts

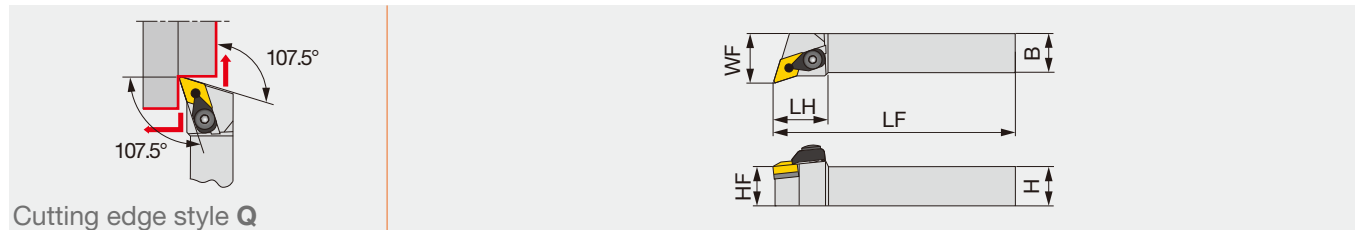

Designation	H	B	LF	LH	HF	WF	RE**	Insert
DDQNR/L2020K15	20	20	125	35	20	25	0.8	DN**/FNGA1504...
DDQNR/L2020K1506	20	20	125	35	20	25	0.8	DN**/FNGA1506...
DDQNR/L2525M15	25	25	150	35	25	32	0.8	DN**/FNGA1504...
DDQNR/L2525M1506	25	25	150	35	25	32	0.8	DN**/FNGA1506...
DDQNR/L3225P15	32	25	170	35	32	32	0.8	DN**/FNGA1504...
DDQNR/L3225P1506	32	25	170	35	32	32	0.8	DN**/FNGA1506...

Note: Except for 57-type chipbreaker inserts


**RE : Standard corner radius

SPARE PARTS

Designation	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench 1	Wrench 2
DDQNR/L**15	DCPM-43	DLCL43	DPIS43	DLCS43	LSD42	BP-10	LSP4	P-3	P-4
DDQNR/L**1506	DCPM-43	DLCL43	DPIS44	DLCS43	LSD42	BP-10	LSP4	P-3	P-4

PDQNR/L

Lever-lock toolholder with 107.5° approach angle, for negative 55°/45° rhombic inserts

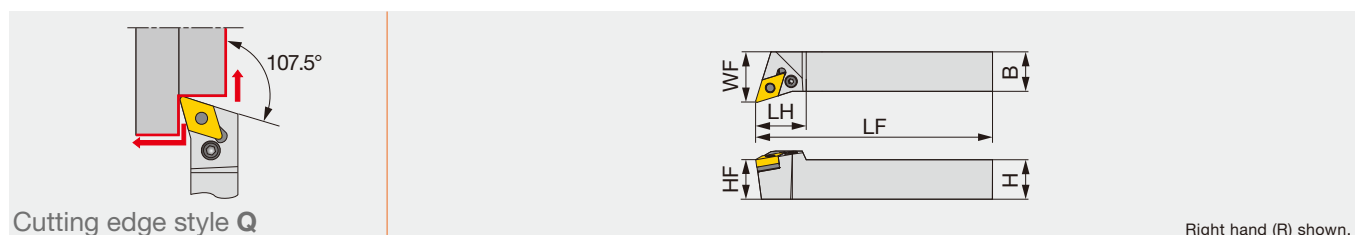

Designation	H	B	LF	LH	HF	WF	RE**	Insert
PDQNR/L2525	25	25	150	32	25	32	0.8	DN**/FNGA1504...

**RE : Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PDQNR/L...	LSD42 D30	LCS4	P-3	LSP4	LCL4

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	CBN	HRF	HRM
	Chipbreaker shape	BXA470	AH8005	AH8005
	Cutting conditions	B012		


M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Cutting conditions	B006		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA	P
	Cutting conditions	B010		

H	Application	Precision finishing	Finishing
	Grade	CBN	CBN
	Chipbreaker shape	BXA10	BXA20
	Cutting conditions	B014	

Reference pages: DDQNR/L, PDQNR/L: Inserts → B066 -, B075, CBN → B172 -, B176 -, PCD → B211

Double-clamp toolholder with 117.5° approach angle, for negative 35°/25° rhombic inserts

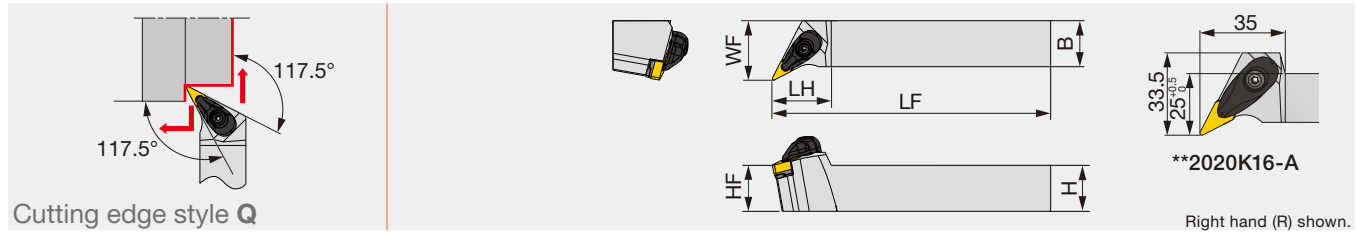


Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
AVQNR/L2020K1204-A	20	20	125	32	20	25	0.8	VN**1204...	3
AVQNR/L2020K16-A	20	20	125	35	20	25	0.8	VN**/YN**1604...	3
AVQNR/L2525M1204-A	25	25	150	32	25	32	0.8	VN**1204...	3
AVQNR/L2525M16-A	25	25	150	35	25	32	0.8	VN**/YN**1604...	3

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

C-AVQNR/L

Double-clamp toolholder, with 117.5° approach angle, for negative 35°/25° rhombic inserts

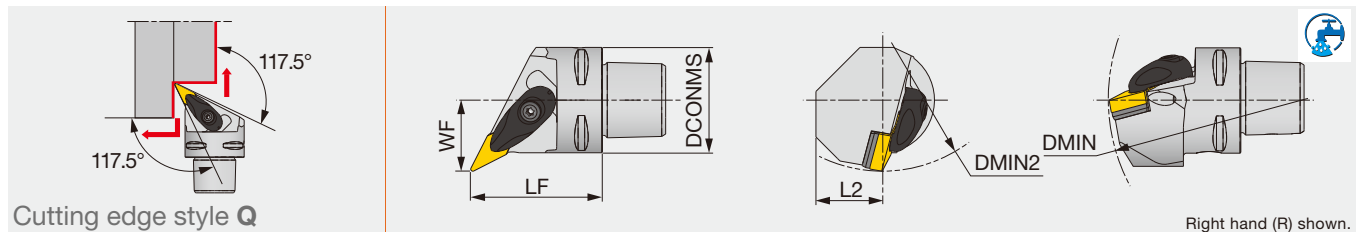

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert
C4AVQNR/L27050-16N	40	50	25	27	145	110	0.8	VN**/YN**1604...

Applicable for 7 MPa coolant


SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
AVQNR/L**1204-A	ACP3L-E	ACS-5W	BP-7	SP-2.5	ASV222	CSTB-3.0	T-15F
AVQNR/L**16-A	ACP3L	ACS-5W	BP-7	SP-2.5	ASV322	CSTB-3.5	T-15F
C4AVQNR/L**-16N	ACP3L	ACS-5W	BP-7	SP-2.5	ASV322	CSTB-3.5	T-15F

ISO ETURN

PVQNR/L-Eco

Lever-lock toolholder with 117.5° approach angle, for negative 35° rhombic inserts

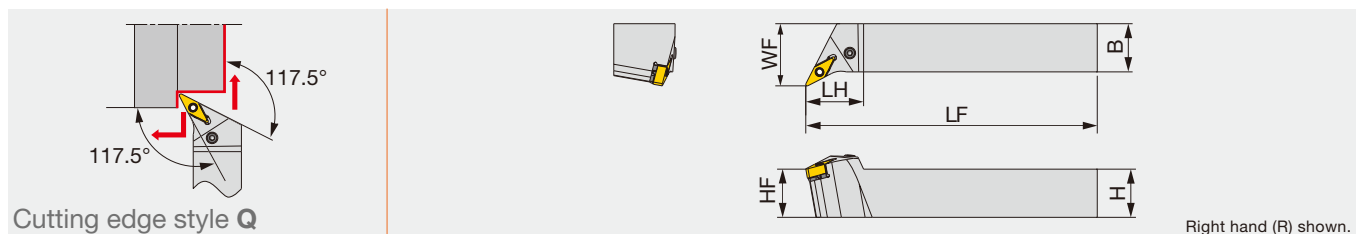

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PVQNR/L2020K1204	20	20	125	30	20	25	0.8	VN**1204...	2
PVQNR/L2525M1204	25	25	150	30	25	32	0.8	VN**1204...	2


*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PVQNR/L**1204	LSV212	LCS3V	P-2.5	LSP3	LCL3V

Reference pages: AVQNR/L, C-AVQNR/L: Inserts → **B098 -**, B110, CBN → **B186 -**, PCD → **B188**
PVQNR/L-Eco: Inserts → **B098 -**

Lever lock toolholders – 117.5° approach angle.
For negative 35°/25° rhombic insert. High-pressure coolant capability.

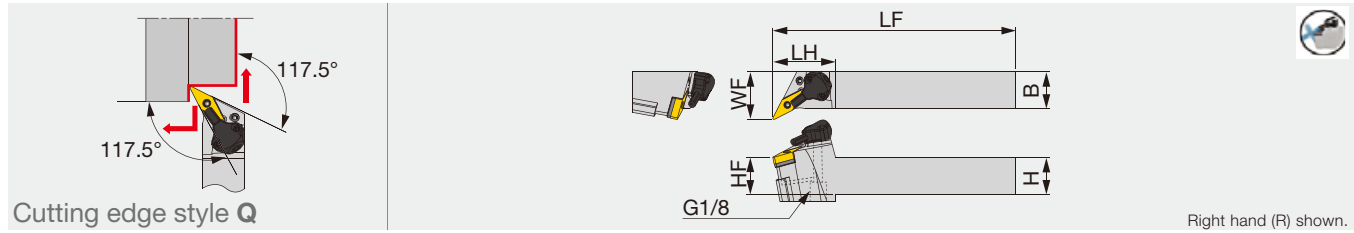

Designation	H	B	LF	LH	HF	WF	RE **	Insert	Torque*
PVQNR/L2020K16-CHP	20	20	125	42.5	20	32	0.8	VN**/YN**1604...	2
PVQNR/L2525M16-CHP	25	25	150	42.5	25	32	0.8	VN**/YN**1604...	2

*Torque: Recommended torque (N·m) for clamping

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
PVQNR/L**16-CHP	LSV317	LCS3V	P-2.5	LSP3	LCL3V

SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring	Coolant screw	Wrench 3
PVQNR/L**16-CHP	CU-V-CHP	SRM3	T-8F	OR6.4X0.9N	SRM4X4TL360	P-2

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting
	Grade	NS9530	GT9530	T9215
	Chipbreaker shape	TF	TSF	TM
	Cutting conditions	B004		

M	Application	Finishing	Medium cutting
	Grade	T6215	AH6225
	Chipbreaker shape	SF	SM
	Cutting conditions	B006	

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

N	Application	Precision finishing
	Grade	DX120
	Chipbreaker shape	DIA with rake
	Cutting conditions	B010


S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: PVQNR/L-CHP: Inserts → **B098** -, CBN → **B186** -, PCD → **B212**
Parts for coolant hose → **C115**

SDQCR/L

Screw-on toolholder with 107.5° approach angle, for positive 55° rhombic inserts

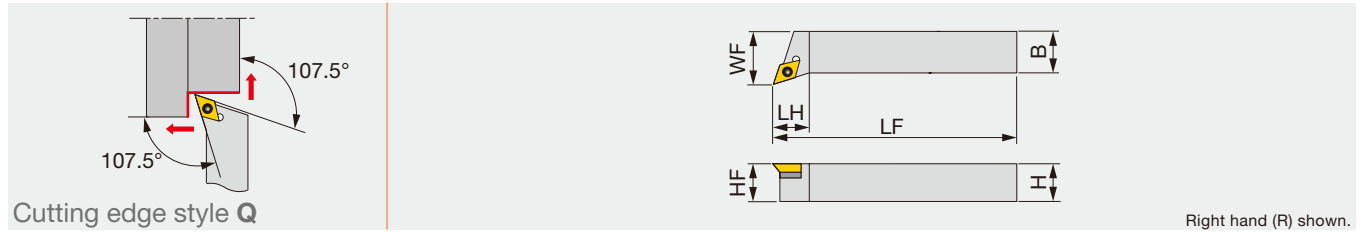

Designation	H	B	LF	LH	HF	WF	RE**	Insert
SDQCR/L2020K11	20	20	125	20.5	20	25	0.8	DC**11T3...
SDQCR2525M11	25	25	150	21.5	25	32	0.8	DC**11T3...

**RE : Standard corner radius

SPARE PARTS

Designation	Clamping screw	Shim screw	Shim	Wrench 1	Wrench 2
SDQCR/L...	CSTB-3.5L	DTS5-3.5	SSD32	P-3.5	T-15F

INSERT SELECTION

P	Application	Finishing	Finishing to medium cutting	Medium cutting
	Grade	NS9530	T9215	T9215
	Chipbreaker shape	PSS	PS	PM
	Cutting conditions	B016		

K	Application	Finishing to medium cutting
	Grade	T515
	Chipbreaker shape	CM
	Cutting conditions	B020

S	Application	Finishing	Finishing to medium cutting
	Grade	AH8015	AH8015
	Chipbreaker shape	PSS	PS
	Cutting conditions	B024	

M	Application	Precision finishing	Finishing	Finishing to medium cutting	Medium cutting
	Grade	GH330	AH6225	AH6225	AH6225
	Chipbreaker shape	W**	PSS	PS	PM
	Cutting conditions	B018			


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	KS05F
	Chipbreaker shape	DIA	DIA with rake	AL
	Cutting conditions	B022		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B026	

Reference pages: SDQCR/L: Inserts → **B121** -, CBN → **B194**, PCD → **B214**

SVQCR/L

Screw-on toolholder with 117.5° approach angle, for positive 35° rhombic inserts

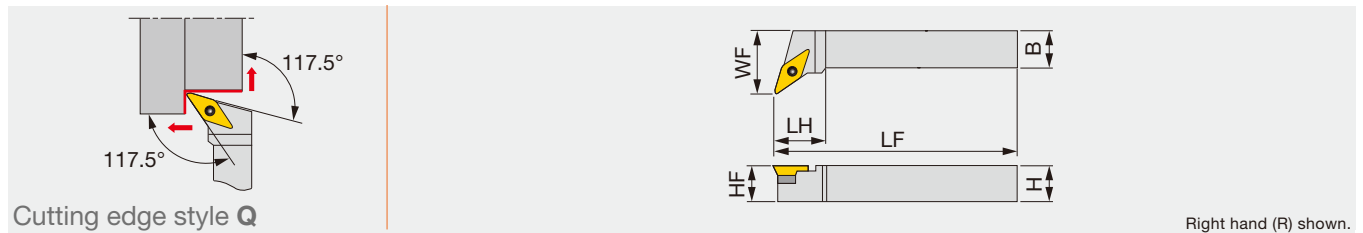

Designation	H	B	LF	LH	HF	WF	RE**	Insert
SVQCR/L2020K16	20	20	125	35	20	27	0.8	VC**1604...
SVQCR/L2525M16	25	25	150	35	25	32	0.8	VC**1604...

**RE : Standard corner radius

SPARE PARTS

Designation	Clamping screw	Shim screw	Shim	Wrench 1	Wrench 2
SVQCR/L...	CSTB-3.5L	DTS5-3.5	SSV32	P-3.5	T-15F

INSERT SELECTION

P	Application	Finishing	Finishing to medium cutting
	Grade	NS9530	T9215
	Chipbreaker shape	PSS	PS
	Cutting conditions	B016	

M	Application	Finishing	Finishing to medium cutting
	Grade	AH6225	AH6225
	Chipbreaker shape	PSS	PS
	Cutting conditions	B018	

K	Application	Finishing to medium cutting
	Grade	T515
	Chipbreaker shape	CM
	Cutting conditions	B020

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	KS05F
	Chipbreaker shape	DIA	with rake DIA	AL
	Cutting conditions	B022		

S	Application	Finishing	Finishing to medium cutting
	Grade	AH8015	AH8015
	Chipbreaker shape	PSS	PS
	Cutting conditions	B024	


H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B026	

Reference pages: SVQCR/L: Inserts → B152 -, CBN → B209, PCD → B220

Y-PRO SERIES

SYQBR/L

Screw-on toolholder with 122.5° approach angle, for positive 25° rhombic inserts

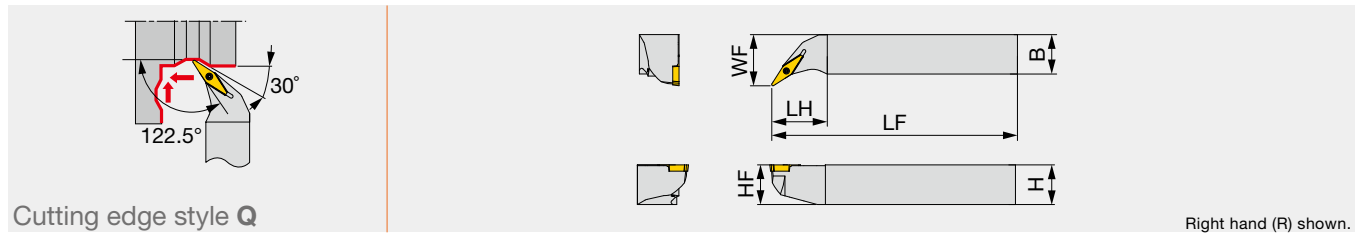

Designation	H	B	LF	LH	HF	WF	RE**	Insert
SYQBR/L2020K16	20	20	125	35	20	27	0.8	YWMT16T3...
SYQBR/L2525M16	25	25	150	35	25	32	0.8	YWMT16T3...

**RE : Standard corner radius

SPARE PARTS


Designation	Clamping screw	Wrench
SYQBR/L...	CSTB-2.5L080	T-8F

INSERT SELECTION

P	Application	Finishing to medium cutting	M	Application	Finishing to medium cutting	K	Application	Finishing to medium cutting	S	Application	Finishing to medium cutting
	Grade	T9225		Grade	AH8015		Grade	GT9530		Grade	AH8015
	Breaker Shape	ZM		Breaker Shape	ZM		Breaker Shape	ZM		Breaker Shape	ZM
	Cutting conditions	B016		Cutting conditions	B018		Cutting conditions	B020		Cutting conditions	B024

SVHCR/L

Screw-on toolholder with 107.5° approach angle, for positive 35° rhombic inserts

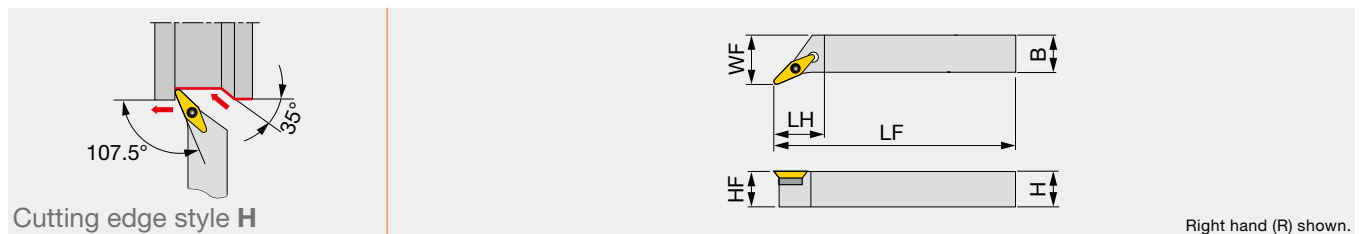

Designation	H	B	LF	LH	HF	WF	RE**	Insert
SVHCR/L2525M22	25	25	150	33.8	25	32	0.8	VCG*2205...

**RE : Standard corner radius

SPARE PARTS


Designation	Clamping screw	Shim screw	Shim	Wrench 1	Wrench 2
SVHCR/L2525M22	CSTB-4.5L110P	DTS6-4.5	SSV42	P-4.5	T-15F

INSERT SELECTION

K	Application	Finishing to medium cutting	N	Application	Finishing to medium cutting
	Grade	KS05F		Grade	KS05F
	Chipbreaker Shape	AL		Chipbreaker Shape	AL
	Cutting conditions	B020		Cutting conditions	B022

S	Application	Finishing to medium cutting
	Grade	KS05F
	Chipbreaker Shape	AL
	Cutting conditions	B024

Reference pages: SYQBR/L: Inserts → **B159**, SVHCR/L: Inserts → **B153**

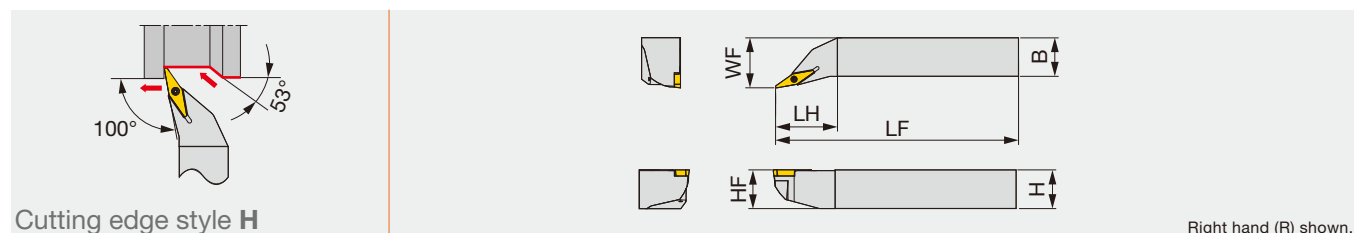

Designation	H	B	LF	LH	HF	WF	RE**	Insert
SYHBR/L2020K16	20	20	125	35	20	27	0.8	YWMT16T3...
SYHBR/L2525M16	25	25	150	40	25	32	0.8	YWMT16T3...

**RE : Standard corner radius

SPARE PARTS


Designation	Clamping screw	Wrench
SYHBR/L...	CSTB-2.5L080	T-8F

INSERT SELECTION

P	Application Grade Breaker Shape Cutting conditions	Finishing to medium cutting T9225 ZM B016
M	Application Grade Breaker Shape Cutting conditions	Finishing to medium cutting AH8015 ZM B018
K	Application Grade Breaker Shape Cutting conditions	Finishing to medium cutting GT9530 ZM B020
S	Application Grade Breaker Shape Cutting conditions	Finishing to medium cutting AH8015 ZM B024

PCBNR/L

Lever-lock toolholder with 75° approach angle, for negative 80° rhombic inserts

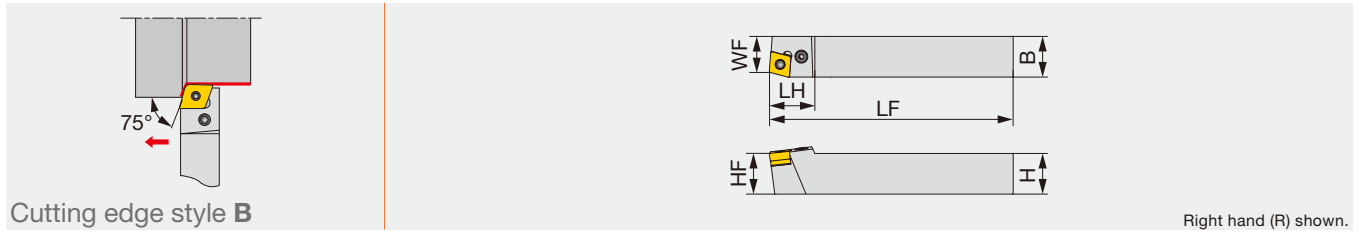

Designation	H	B	LF	LH	HF	WF	RE**	Insert
PCBNR/L2525	25	25	150	28	25	22	0.8	CN**1204...

Note: 100° corner is used.
**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PCBNR/L2525	LSC42	LCS4	P-3	LSP4	LCL4

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker Shape	TF	TSF	TM	TH
	Cutting conditions	B004			


M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Cutting conditions	B006		

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker Shape	All-round	All-round	All-round
	Cutting conditions	B008		

N	Application	Medium cutting
	Grade	TH10
	Chipbreaker Shape	P
	Cutting conditions	B010

S	Application	Finishing	Medium cutting
	Grade	AH8005	AH8005
	Chipbreaker Shape	HRF	HRM
	Cutting conditions	B012	

Reference pages: PCBNR/L: Inserts → **B054 -**, CBN → **B168 -**, PCD → **B211**

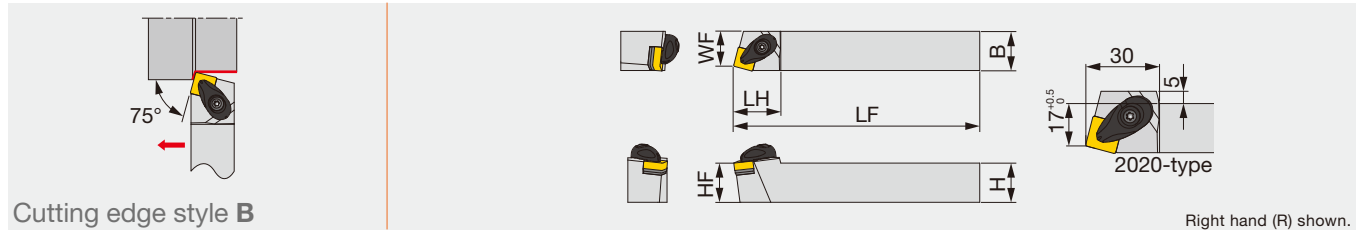

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ASBNR/L2020K12-A	20	20	125	30	20	17	0.8	SN**1204...	3
ASBNR/L2525M12-A	25	25	150	30	25	22	0.8	SN**1204...	3
ASBNR/L2525M15-A	25	25	150	42.5	25	22	1.2	SN**1506...	6.4
ASBNR/L3232P15-A	32	32	170	42.5	32	27	1.2	SN**1506...	6.4
ASBNR/L3232P19-A	32	32	170	47.5	32	27	1.2	SN**1906...	6.4
ASBNR/L4040S19-A	40	40	250	47.5	40	35	1.2	SN**1906...	6.4

*Torque: Recommended clamping torque (N-m)

**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench 1	Wrench 2
ASBNR/L**12-A	ACP4S	ACS-5W	BP-7	SP-2.5	ASS422	CSTB-3.5	T-15F	-
ASBNR/L**15-A	ACP5S	ACS-6W	BP-8.8	SP-2.5	ASS533	CSTB-5	-	KEYV-T20
ASBNR/L**19-A	ACP6S	ACS-6W	BP-8.8	SP-2.5	ASS634	CSTB-5	-	KEYV-T20

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker Shape	TF 	TSF 	TM 	TH 
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker Shape	SF 	SM 	SH 
	Cutting conditions	B006		


K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker Shape	All-round 	All-round 	All-round 
	Cutting conditions	B008		

N	Application	Finishing	Medium cutting
	Grade	DX140	TH10
	Chipbreaker Shape	DIA 	P 
	Cutting conditions	B010	

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX480	AH8005	AH8005
	Chipbreaker Shape	CBN 	HRF 	HRM 
	Cutting conditions	B012		

DSBNR/L

"One-Double" toolholder with 75° approach angle, for negative square inserts

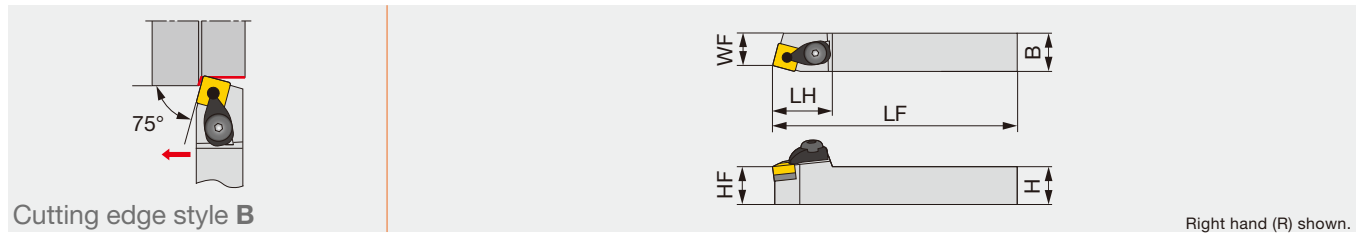

Designation	H	B	LF	LH	HF	WF	RE**	Insert
DSBNR/L2020K12	20	20	125	35	20	17	0.8	SN**1204...
DSBNR/L2525M12	25	25	150	35	25	22	0.8	SN**1204...


Note: Except for TRS, TU, TUS, 57, and 65-type chipbreaker inserts

**RE: Standard corner radius

SPARE PARTS	Clamp	Lever	Piston	Clamp screw	Shim	Spring	Spring pin	Wrench 1	Wrench 2
Designation	DCPM-43	DLCL43	DPIS43	DLCS43	LSS42	BP-10	LSP4	P-3	P-4
DSBNR/L...									

PSBNR/L

Lever-lock toolholder with 75° approach angle, for negative square inserts

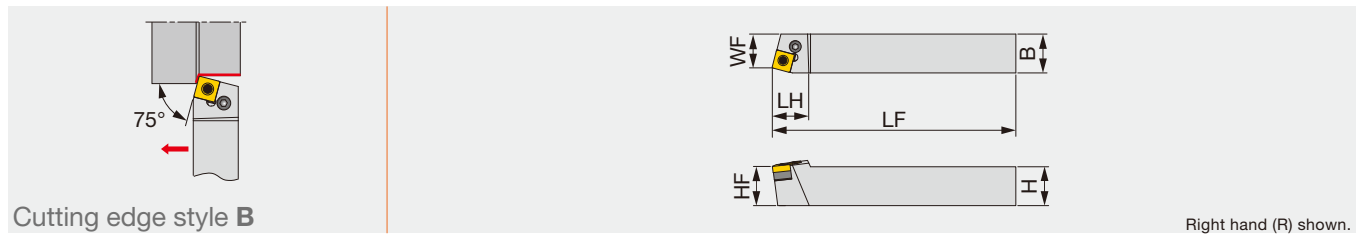

Designation	H	B	LF	LH	HF	WF	RE**	Insert
PSBNR/L1616	16	16	100	22	16	13	0.8	SN**0903...
PSBNR/L2020	20	20	125	28	20	17	0.8	SN**1204...
PSBNR/L2525	25	25	150	24	25	22	0.8	SN**1204...
PSBNR/L3232	32	32	170	40	32	27	1.2	SN**1906...

**RE: Standard corner radius

SPARE PARTS	Shim	Clamping screw	Wrench	Spring pin	Lever
Designation	LSS33	LCS3	P-2.5	LSP3L	LCL3
PSBNR/L1616					
PSBNR/L2*2*	LSS42	LCS4	P-3	LSP4	LCL4
PSBNR/L3232	LSS63	LCS6	P-4	LSP6	LCL6

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker Shape	TF	TSF	TM	TH
	Cutting conditions	B004			


M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker Shape	SF	SM	SH
	Cutting conditions	B006		

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker Shape	All-round	All-round	All-round
	Cutting conditions	B008		

N	Application	Finishing	Medium cutting
	Grade	DX140	TH10
	Chipbreaker Shape	DIA	P
	Cutting conditions	B010	

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX480	AH8005	AH8005
	Chipbreaker Shape	CBN	HRF	HRM
	Cutting conditions	B012		


Reference pages: DSBNR/L, PSBNR/L: Inserts → **B077 -**, CBN → **B180 -**, **B182 -**, PCD → **B211**

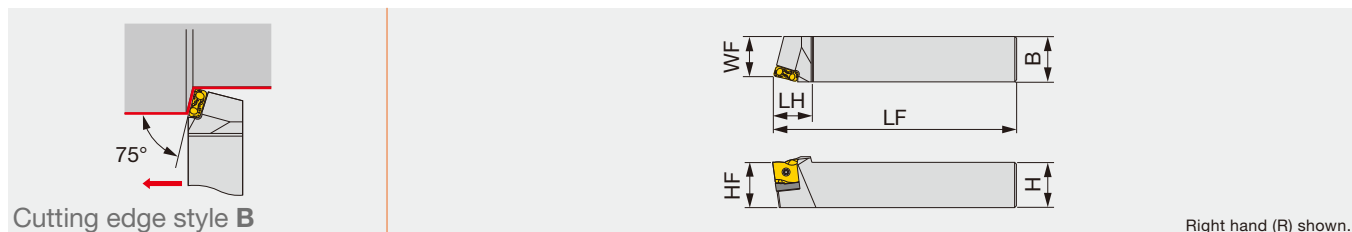

Designation	H	B	LF	LH	HF	WF	Insert
TLBNR/L4040R24	40	40	200	35	40	35	LNMX2410**R/L...

SPARE PARTS

Designation	Clamping screw	Shim	Spring pin	Wrench
TLBNR4040R24	CSTB-5L163-S	TSL24R	PSP-16	KEYV-T20
TLBNL4040R24	CSTB-5L163-S	TSL24L	PSP-16	KEYV-T20

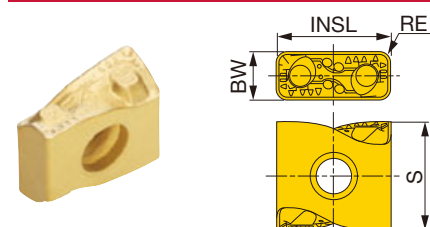INSERT
LNMX12/16/24


	P Steel	M Stainless	K Cast iron	N Non-ferrous	S Superalloys	H Hard materials
★	★	☆	☆			
☆		☆	☆			


★ : First choice
☆ : Second choice

Designation	HAND	RE	Coated			BW	INSL	S
			T9115	T9125	AH725			
LNMX120408R-TDR	R	0.8	●	●		4.8	12	11.6
LNMX120408L-TDR	L	0.8	●	●		4.8	12	11.6
LNMX120412R-TDR	R	1.2	●	●		4.8	12	11.6
LNMX120412L-TDR	L	1.2	●	●		4.8	12	11.6
LNMX160608R-TDR	R	0.8	●	●		6.4	16.2	13.5
LNMX160608L-TDR	L	0.8	●	●		6.4	16.2	13.5
LNMX160612R-TDR	R	1.2	●	●		6.4	16.2	13.5
LNMX160612L-TDR	L	1.2	●	●		6.4	16.2	13.5
LNMX160616R-TDR	R	1.6	●	●		6.4	16.2	13.5
LNMX160616L-TDR	L	1.6	●	●		6.4	16.2	13.5
LNMX241016R-TDR	R	1.6	●	●		9.4	24	20.5
LNMX241016L-TDR	L	1.6	●	●		9.4	24	20.5
LNMX241024R-TDR	R	2.4	●	●		9.4	24	20.5
LNMX241024L-TDR	L	2.4	●	●		9.4	24	20.5
LNMX160608R-MDR	R	0.8	●	●		6.4	16.2	13.5
LNMX160608L-MDR	L	0.8	●	●		6.4	16.2	13.5
LNMX160612R-MDR	R	1.2	●	●		6.4	16.2	13.5
LNMX160612L-MDR	L	1.2	●	●		6.4	16.2	13.5
LNMX160608R-TWR	R	0.8	●	●		6.4	16.2	13.5
LNMX160608L-TWR	L	0.8	●	●		6.4	16.2	13.5
LNMX160612R-TWR	R	1.2	●	●		6.4	16.2	13.5
LNMX160612L-TWR	L	1.2	●	●		6.4	16.2	13.5

● : Line up

HSRNR/L

Retract-pin toolholder with 75° approach angle, for negative square inserts

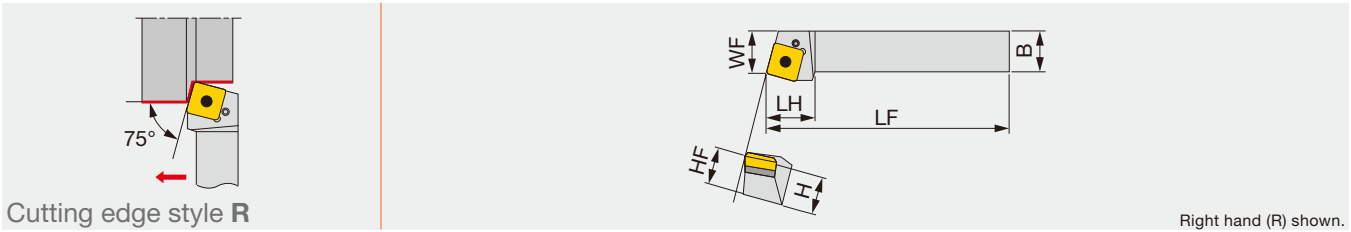

Designation	H	B	LF	LH	HF	WF	RE**	Insert
HSRNR/L4040R	40	40	200	50	40	43	1.6	SNMM3109...
HSRNR/L5050S	50	50	250	60	50	53	1.6	SNMM3109...

**RE: Standard corner radius

SPARE PARTS


Designation	Pin	Clamping screw	Shim	Wrench
HSRNR/L...	SW99	LS-8	NAS-04	P-4

INSERT SELECTION

P	Application	Heavy cutting
	Grade	T9225
	Chipbreaker Shape	65 
	Cutting conditions	B004

Reference pages: HSRNR/L: Inserts → B083

Double-clamp toolholder, with 50° approach angle, for negative 80°/70° rhombic inserts

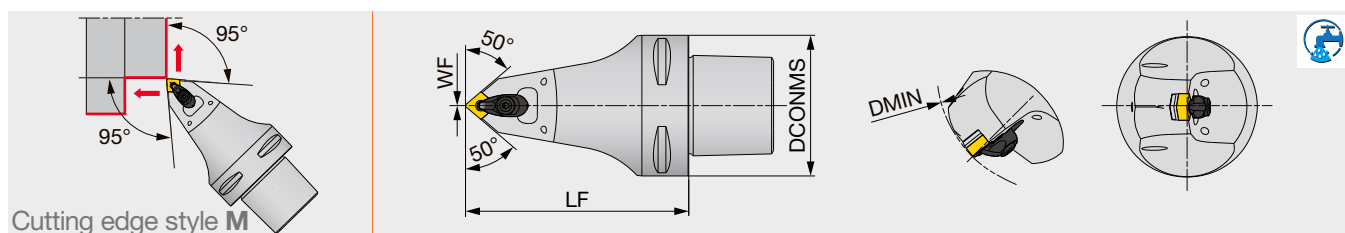

Designation	DCONMS	LF	WF	DMIN	RE**	Insert
C6ACMNN00100-0904N	63	100	0	110	0.8	CN**/GNMG0904...
C6ACMNN00140-0904N	63	140	0	110	0.8	CN**/GNMG0904...

**RE: The holder measurements are true with this insert radius
Applicable for 7 MPa coolant

SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Spring pin	Wrench
C6ACMNN001*-0904N	ACP3S-E	ACS-5W	ASC322	CSTB-3.5	BP-7	SP-2.5	T-15F

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		


M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Cutting conditions	B006		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	with rake DIA	P
	Cutting conditions	B010		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: C-ACMNN: Inserts → **B054**, **B075**, CBN → **B168**
Parts for coolant hose → **C115**

Lever lock toolholder with TungCap connection.
For negative 80°/70° rhombic insert. High-pressure coolant capability.

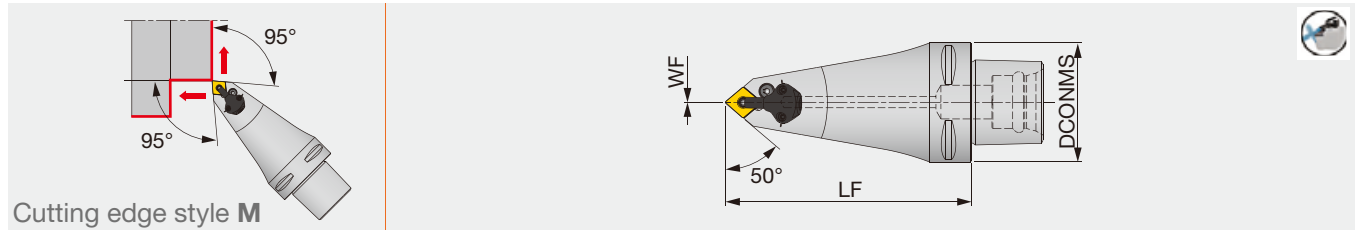

Designation	DCONMS	LF	WF	RE**	Insert	Torque*
C6PCMNN00130-12-CHP	63	130	0	0.8	CN**/GNGA1204...	3

*Torque: Recommended torque (N·m) for clamping
Applicable for 14 MPa pressure coolant
**RE: Standard corner radius

For external turning only.

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
C6PCMNN00130-12-CHP	LSC42	LCS4	P-3	LSP4	LCL4

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring
C6PCMNN00130-12-CHP	CU-CW-CHP	SRM3	T-8F	OR6.4X0.9N

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Cutting conditions	B006		

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA with rake	P
	Cutting conditions	B010		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: C-PCMNN-CHP: Inserts → **B054**, CBN → **B168 -**, PCD → **B211**
Parts for coolant hose → **C115**

Lever lock toolholder with TungCap connection.
For negative 55°/45° rhombic insert. High-pressure coolant capability.

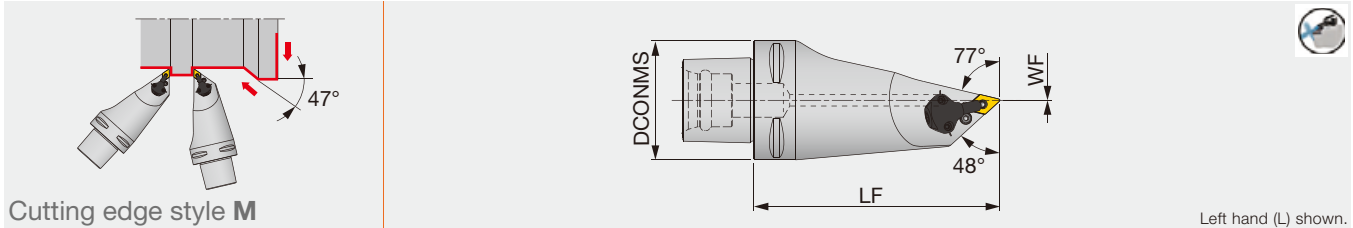

Designation	DCONMS	LF	WF	RE **	Insert	Torque*
C6PDMNL00130-1104-CHP	63	130	0	0.8	DN**/FNMG1104...	2

*Torque: Recommended torque (N·m) for clamping
Applicable for 14 MPa pressure coolant
**RE: Standard corner radius

For external turning only.

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
C6PDMNL00130-1104-CHP	ELSD32	LCS3	P-2.5	LSP3	LCL33L

SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring
C6PDMNL00130-1104-CHP	CU-D-CHP	SRM3	T-8F	OR6.4X0.9N

INSERT SELECTION


P	Application	Finishing	Medium cutting
	Grade	T9215	T9215
	Chipbreaker shape	TSF	TM
	Cutting conditions	B004	

M	Application	Finishing	Medium cutting
	Grade	AH6225	AH6225
	Chipbreaker shape	SS	SM
	Cutting conditions	B006	

K	Application	Medium cutting
	Grade	T515
	Chipbreaker shape	TM
	Cutting conditions	B008

Reference pages: C-PDMNL-CHP: Inserts → **B066** -, **B075**, CBN → **B172**
Parts for coolant hose → **C115**

Double-clamp toolholder with 62.5° approach angle, for negative 55°/45° rhombic inserts

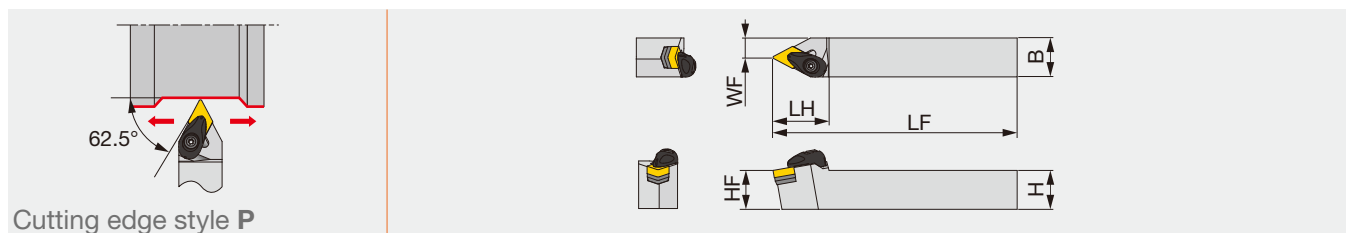

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ADPNN2020K15-A	20	20	125	36	20	7.5	0.8	DN**/FNGA1504...	3
ADPNN2525M15-A	25	25	150	36	25	12.5	0.8	DN**/FNGA1504...	3

*Torque: Recommended clamping torque (N-m)


**RE: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ADPNN**15-A	ACP4S	ACS-5W	BP-7	SP-2.5	ASD432	CSTB-3.5	T-15F

PDPNN

Lever-lock toolholder with 62.5° approach angle, for negative 55°/45° rhombic inserts

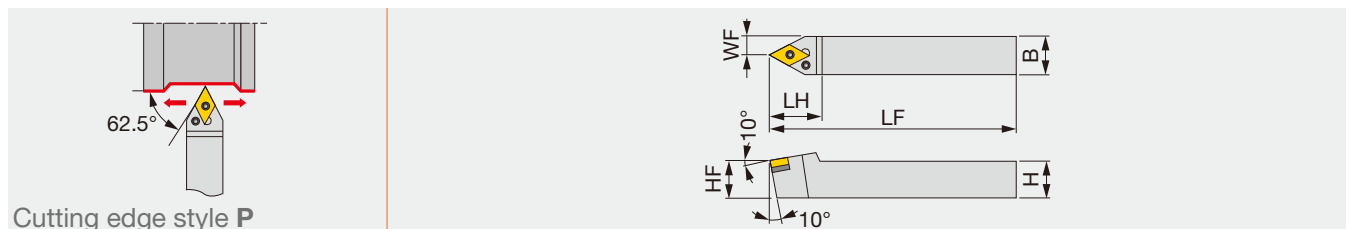

Designation	H	B	LF	LH	HF	WF	RE**	Insert
PDPNN2525	25	25	150	36	25	12.5	0.8	DN**/FNGA1504...
PDPNN2525M15E	25	25	150	36	25	12.5	0.8	DN**/FNGA1506...

**RE: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever
PDPNN2525	LSD42	LCS4	P-3	LSP4	LCL4
PDPNN2525M15E	ELSD42	ELCS4	P-3	LSP4S	LCL44

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		


S	Application	Precision finishing	Finishing	Medium cutting
	Grade	CBN	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Cutting conditions	B006		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA	P
	Cutting conditions	B010		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: ADPNN, PDPNN: Inserts → **B066** -, CBN → **B172** -, **B176**, PCD → **B211**

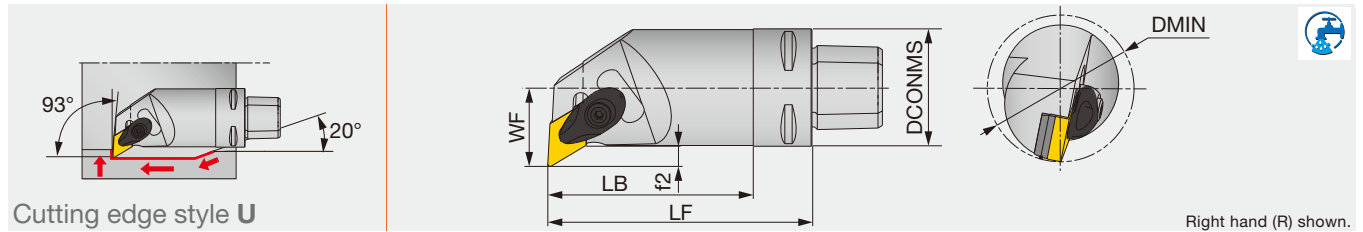

Designation	DMIN	DCONMS	LF	LB	WF	f2	RE	Insert
C4ADUNR20070-15	38	40	70	50	20	5	0.8	DN**/FNGA1504...
C4ADUNR27090-15	50	40	90	-	27	7	0.8	DN**/FNGA1504...

Applicable for 7 MPa coolant

SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Spring pin	Wrench
C*ADUNR/L...	ACP4S	ACS-5W	ASD432	CSTB-3.5	BP-7	SP-2.5	T-15F

Option: ASD423 (Shim for DN**1506**)

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		


M	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T6215	AH6225	AH6225
	Chipbreaker shape	SF	SM	SH
	Cutting conditions	B006		

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA with rake	P
	Cutting conditions	B010		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: C-ADUNR/L: Inserts → **B066** -, CBN → **B172** -, **B176**, PCD → **B211**
Parts for coolant hose → **C115**

Lever-lock toolholder, with 93° approach angle, for negative 60° triangular inserts, with high pressure coolant capability

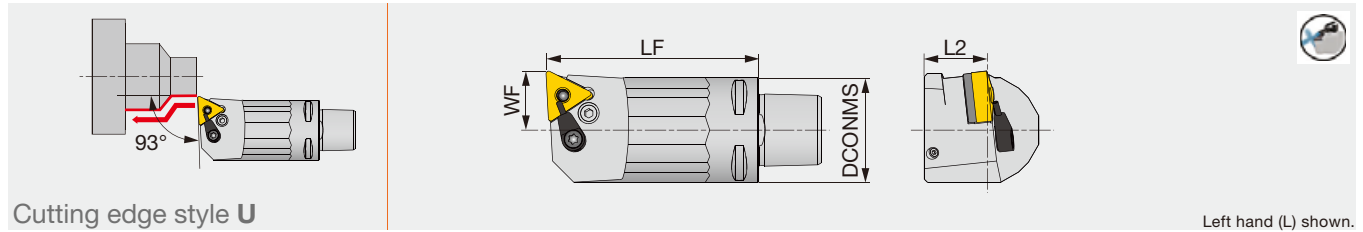

Designation	DCONMS	LF	L2	WF	RE	Insert
C3PTUNL18040-16-CHP	32	40	19	18	0.8	TN**1604...
C3PTUNL18065-16-CHP	32	65	19	18	0.8	TN**1604...

Applicable for 14 MPa coolant
Cannot be used for boring

SPARE PARTS

Designation	Coolant unit	Shim	Lever	Clamping screw	Spring pin	Wrench
C3PTUNL...	S-CU-CHP	LST317	LCL3	LCS3	LSP3	P-2.5

INSERT SELECTION

P	Application	Precision finishing	Finishing	Medium cutting	Medium to heavy cutting
	Grade	NS9530	GT9530	T9215	T9215
	Chipbreaker shape	TF	TSF	TM	TH
	Cutting conditions	B004			

M	Application	Finishing	Medium cutting
	Grade	T6215	AH6225
	Chipbreaker shape	SF	SM
	Cutting conditions	B006	

K	Application	Finishing	Medium cutting	Medium to heavy cutting
	Grade	T515	T515	T515
	Chipbreaker shape	All-round	All-round	All-round
	Cutting conditions	B008		


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	TH10
	Chipbreaker shape	DIA	DIA with rake	P
	Cutting conditions	B010		

S	Application	Precision finishing	Finishing	Medium cutting
	Grade	BX470	AH8005	AH8005
	Chipbreaker shape	CBN	HRF	HRM
	Cutting conditions	B012		

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B014	

Reference pages: C-PTUNL-CHP: Inserts → **B087** -, CBN → **B182** -, PCD → **B212**
Parts for coolant hose → **C115**

Screw-on toolholder, with 93° approach angle, for positive 55° rhombic inserts, with high pressure coolant capability

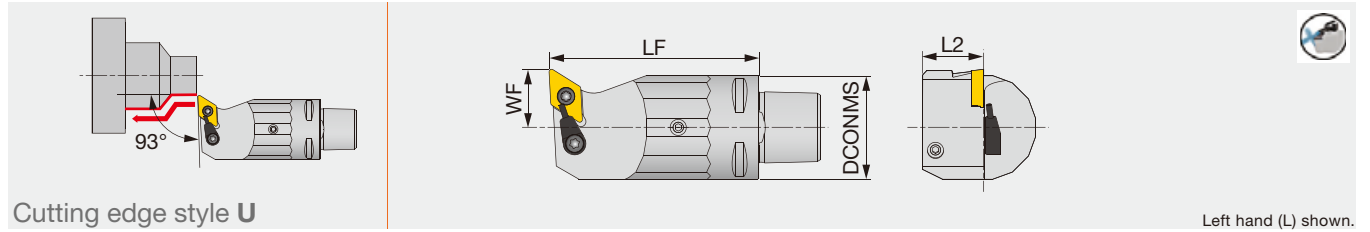

Designation	DCONMS	LF	L2	WF	RE	Insert
C3SDUCL18040-11-CHP	32	40	19	18	0.8	DC**11T3...
C3SDUCL18065-11-CHP	32	65	19	18	0.8	DC**11T3...

Applicable for 14 MPa coolant
Cannot be used for boring

SPARE PARTS

Designation	Clamping screw	Coolant unit	Wrench
C3SDUCL...	CSTB-4S	S-CU-CHP	T-15F

INSERT SELECTION

P	Application	Finishing	Finishing to medium cutting	Medium cutting
	Grade	NS9530	T9215	T9215
	Chipbreaker shape	PSS	PS	PM
	Cutting conditions	B016		

M	Application	Precision finishing	Finishing	Finishing to medium cutting	Medium cutting
	Grade	GH330	AH6225	AH6225	AH6225
	Chipbreaker shape	W**	PSS	PS	PM
	Cutting conditions	B018			

K	Application	Finishing to medium cutting
	Grade	T515
	Chipbreaker shape	CM
	Cutting conditions	B020


N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	KS05F
	Chipbreaker shape	DIA	with rake DIA	AL
	Cutting conditions	B022		

S	Application	Finishing	Finishing to medium cutting
	Grade	AH8015	AH8015
	Chipbreaker shape	PSS	PS
	Cutting conditions	B024	

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B026	

Reference pages: C-SDUCL-CHP: Inserts → **B121** -, CBN → **B194**, PCD → **B214**
Parts for coolant hose → **C115**

Screw-on toolholder, with 93° approach angle, for positive 35° rhombic inserts, with high pressure coolant capability

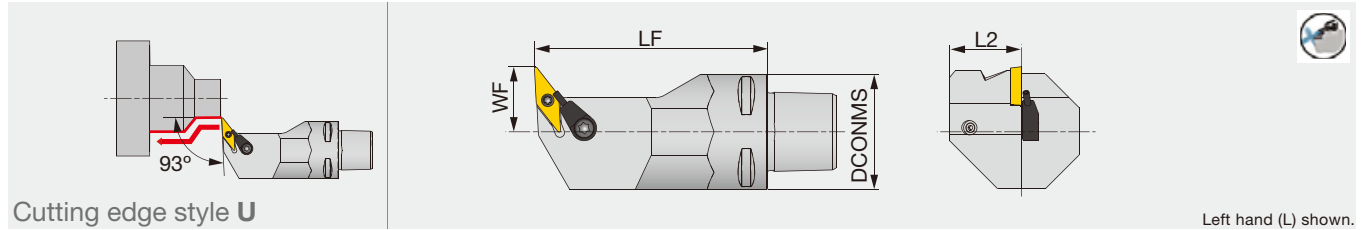

Designation	DCONMS	LF	L2	WF	RE	Insert
C3SVUCL18065-11-CHP	32	65	20	18	0.4	VC**1103...

Applicable for 14 MPa coolant
Cannot be used for boring

SPARE PARTS

Designation	Clamping screw	Coolant unit	Wrench
C3SVUCL18065-11-CHP	CSTB-2.5	S-CU-CHP	T-8F

INSERT SELECTION

P	Application	Finishing	Finishing to medium cutting
	Grade	NS9530	T9215
	Chipbreaker shape	PSS	PS
	Cutting conditions	B016	

M	Application	Finishing	Finishing to medium cutting
	Grade	AH6225	AH6225
	Chipbreaker shape	PSS	PS
	Cutting conditions	B018	


K	Application	Finishing to medium cutting
	Grade	T515
	Chipbreaker shape	CM
	Cutting conditions	B020

N	Application	Precision finishing	Finishing	Medium cutting
	Grade	DX120	DX140	KS05F
	Chipbreaker shape	DIA	with rake DIA	AL
	Cutting conditions	B022		

S	Application	Finishing	Finishing to medium cutting
	Grade	AH8015	AH8015
	Chipbreaker shape	PSS	PS
	Cutting conditions	B024	

H	Application	Precision finishing	Finishing
	Grade	BXA10	BXA20
	Chipbreaker shape	CBN	CBN
	Cutting conditions	B026	

Reference pages: C-SVUCL-CHP: Inserts → **B152**
Parts for coolant hose → **C115**

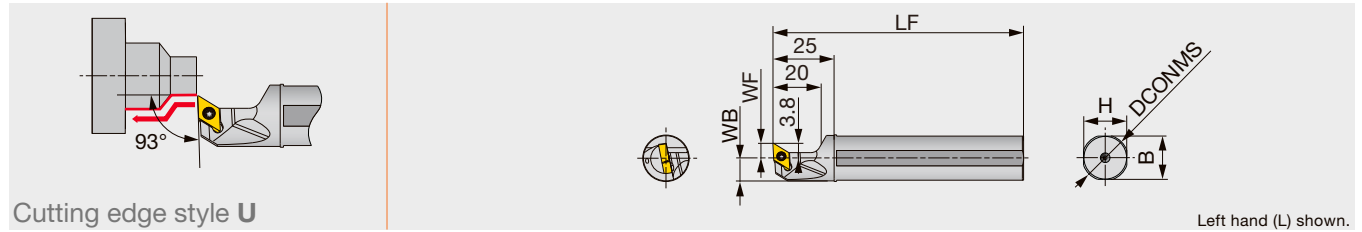

Designation	DCONMS	WF	LF	H	B	WB	RE**	Insert	Torque*
JS14H-SDUXL07	14	6	100	13	13	6.75	0.2	DX*U0703**L...	0.9
JS159F-SDUXL07	15.875	6	85	15	15	7.687	0.2	DX*U0703**L...	0.9
JS16F-SDUXL07	16	6	85	15	15	7.75	0.2	DX*U0703**L...	0.9
JS19G-SDUXL07	19.05	6	90	18	18	9.275	0.2	DX*U0703**L...	0.9
JS19X-SDUXL07	19.05	6	120	18	18	9.275	0.2	DX*U0703**L...	0.9
JS20G-SDUXL07	20	6	90	19	19	9.75	0.2	DX*U0703**L...	0.9
JS20X-SDUXL07	20	6	120	19	19	9.75	0.2	DX*U0703**L...	0.9
JS22X-SDUXL07	22	10	120	21	21	10.75	0.2	DX*U0703**L...	0.9
JS25H-SDUXL07	25	10	100	24	24	12.25	0.2	DX*U0703**L...	0.9
JS254X-SDUXL07	25.4	10	120	24	24	12.45	0.2	DX*U0703**L...	0.9

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius
Note: Use left-hand toolholders (L) with left-hand inserts (L).

SPARE PARTS

Designation	Clamping screw	Wrench
JS**-SDUXL07	SR34-514	T-7F


INSERT SELECTION

Swiss lathes

P	Application	Finishing	Medium cutting	M	Application	Finishing	Medium cutting
	Grade	SH725	AH725		Grade	SH725	AH725
	Chipbreaker shape	JSS	JTS		Chipbreaker shape	JSS	JTS
	Cutting conditions	C118			Cutting conditions	C118	

Small CNC lathes

P	Application	Finishing	Medium cutting	M	Application	Finishing	Medium cutting
	Grade	AH725	AH725		Grade	AH8015	AH8015
	Chipbreaker shape	SS	TS		Chipbreaker shape	SS	TS
	Cutting conditions	C118			Cutting conditions	C118	

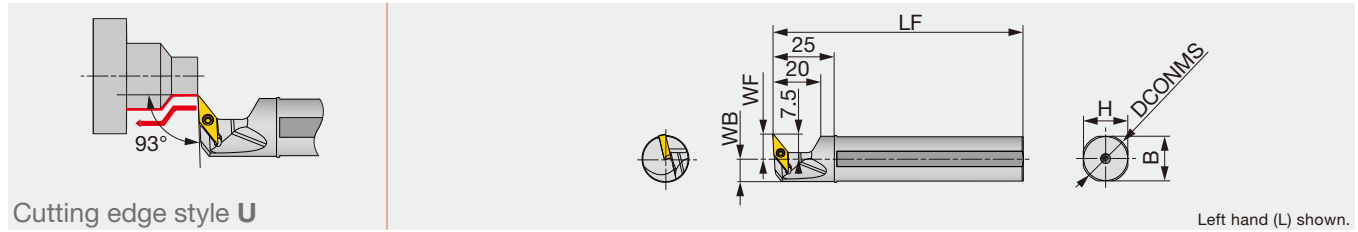

Designation	DCONMS	WF	LF	H	B	WB	RE**	Insert	Torque*
JS159F-SVUXL09	15.875	10	85	15	15	7.7	0.2	VXGU09T2**L...	0.9
JS16F-SVUXL09	16	10	85	15	15	7.7	0.2	VXGU09T2**L...	0.9
JS19G-SVUXL09	19.05	10	90	18	18	9.2	0.2	VXGU09T2**L...	0.9
JS19X-SVUXL09	19.05	10	120	18	18	9.2	0.2	VXGU09T2**L...	0.9
JS20G-SVUXL09	20	10	90	19	19	9.7	0.2	VXGU09T2**L...	0.9
JS20X-SVUXL09	20	10	120	19	19	9.7	0.2	VXGU09T2**L...	0.9
JS22X-SVUXL09	22	10	120	21	21	10.7	0.2	VXGU09T2**L...	0.9
JS25H-SVUXL09	25	10	100	24	24	12.2	0.2	VXGU09T2**L...	0.9
JS254X-SVUXL09	25.4	10	120	24	24	12.4	0.2	VXGU09T2**L...	0.9

*Torque: Recommended clamping torque (N·m) **RE: Standard corner radius
Note: Use left-hand toolholders (L) with left-hand inserts (L).

SPARE PARTS

Designation	Clamping screw	Wrench
JS**-SVUXL09	SR34-508	T-7F

INSERT SELECTION

P	Application	Finishing	M	Application	Finishing
	Grade	SH725		Grade	SH725
	Chipbreaker shape	JRP		Chipbreaker shape	JRP
	Cutting conditions	C118		Cutting conditions	C118

Reference pages: JS-SVUXL: Inserts → **B155**
Standard cutting conditions → **C118**

Technical Guide

PARTS FOR COOLANT HOSE

Connecting hose

Fig. 1



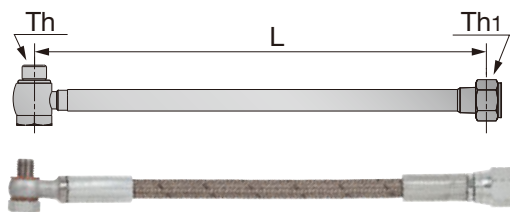


Fig. 2

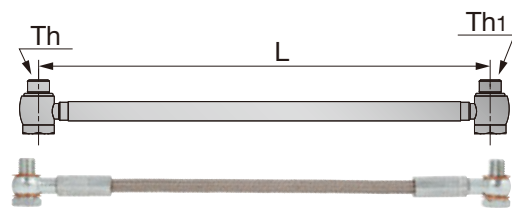


Designation	L	Th	Th1	Max. pressure (Mpa)	Fig.
CHP-HOSE-G1/8-7/16-200BS	200	G1/8"-28 BSPP	7/16"-20 UNF	26	1
CHP-HOSE-G1/8-7/16-250BS	250	G1/8"-28 BSPP	7/16"-20 UNF	26	1
CHP-HOSE-5/16-7/16-200BS	200	5/16"-24UNF	7/16"-20 UNF	20	1
CHP-HOSE-5/16-G1/8-200BS	200	5/16"-24UNF	G1/8"-28 BSPP	20	1
CHP-HOSE-G1/8-G1/8-200BB	200	G1/8"-28 BSPP	G1/8"-28 BSPP	26	2
CHP-HOSE-G1/8-G1/8-250BB	250	G1/8"-28 BSPP	G1/8"-28 BSPP	26	2

Connector

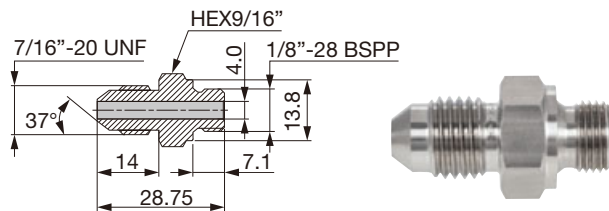


Designation
CHP-NIPPLE-G1/8-7/16UNF

Seal washer




Designation	øD	ød	W
CHP-COPPER-SEAL1/8	15	10	1
CHP-COPPER-SEAL5/16	11.9	8.15	1.35
CHP-COPPER-SEAL5/16-2.5	9.4	8	2.5

Connector for small lathe with seal washer

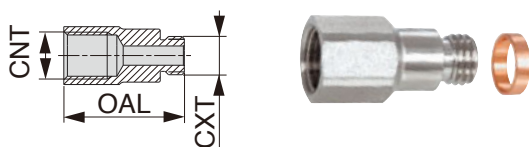

Designation	CNT	CXT	OAL
CHP-CONNECTOR5/16-G1/8	G1/8"-28 BSPP	5/16"-24 UNF	25
CHP-CONNECTOR-G1/8-R1/8	G1/8"-28 BSPP	R1/8"-28 BSPT	25

Connector elbow



Designation	CNT	CND	CXT	CXD
CHP-ELBOW-90-G1/8-7/16UNF	7/16"-20 UNF	4.4	1/8"-28 BSPP	4
CHP-ELBOW-90-5/16-7/16UNF	7/16"-20 UNF	4.4	5/16"-24 UNF	4

Technical Guide

STANDARD CUTTING CONDITIONS

ADDM^{ULTI}TURN

Double-sided 6-corner insert

ISO	Operation	Chipbreaker	Grade	Depth of cut: a_p (mm)		Feed: f (mm/rev)		Cutting speed
				Front turning	Back turning	Front turning	Back turning	V_c (m/min)
P	Finishing	TSF	T9215	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	150 - 400
		TSF	T9225	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	80 - 300
	Medium to heavy cutting	TM	T9215	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	150 - 400
		TM	T9225	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	80 - 300
M	Finishing	TSF	T9215	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	100 - 250
		TSF	AH8015	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	90 - 190
	Medium to heavy cutting	TM	T9215	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	100 - 250
		TM	AH8015	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	90 - 190
K	Finishing	TSF	T9215	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	140 - 500
	Medium to heavy cutting	TM	T9215	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	140 - 500
S	Finishing	TSF	AH8015	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	20 - 80
	Medium to heavy cutting	TM	AH8015	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	20 - 80

Single-sided 3-corner insert

ISO	Operation	Chipbreaker	Grade	Depth of cut: a_p (mm)		Feed: f (mm/rev)		Cutting speed
				Front turning	Back turning	Front turning	Back turning	V_c (m/min)
P	Medium to heavy cutting	TM	T9215	0.5 - 4	0.5 - 2	0.2 - 0.6	0.4 - 2	150 - 400
M	Medium to heavy cutting	TM	T9215	0.5 - 4	0.5 - 2	0.2 - 0.6	0.4 - 2	100 - 250
K	Medium to heavy cutting	TM	T9215	0.5 - 4	0.5 - 2	0.2 - 0.6	0.4 - 2	140 - 500

ADDY^{AXIS}TURN

ISO	Operation	Chipbreaker	Grade	Cutting speed
				V_c (m/min)
P	Finishing	ZF	T9215	150 - 400
	Medium to heavy cutting	TM	T9215	150 - 400
M	Finishing	ZF	T9215	100 - 250
	Medium to heavy cutting	TM	T9215	100 - 250
K	Finishing	ZF	T9215	140 - 500
	Medium to heavy cutting	TM	T9215	140 - 500

Reference pages: ATXOR/L → **C065**, STXCR/L-CHP-MC → **C066**,
C6STECN-Y-CHP → **C069**, C6SDNCN-Y-CHP → **C070**

STANDARD CUTTING CONDITIONS

TURN^{TEN}FEED

For HD holder
(High Depth of Cut)

ISO	Insert	Depth of cut ap (mm)	Feed f (mm/rev)	Cutting speed: Vc (m/min)	
				T9215	T9225
P	POMG110612-MNW	0.8 - 5.5	0.4 - 1.2	150 - 400	120 - 300
	POMG130612-MNW	1 - 7	0.4 - 1.3	150 - 400	120 - 300

ISO	Insert	Depth of cut ap (mm)	Feed f (mm/rev)	Cutting speed: Vc (m/min)	
				AH8015	
M	POMG110612-MNW	0.8 - 5.5	0.4 - 1.2	50 - 150	
	POMG130612-MNW	1 - 7	0.4 - 1.3	50 - 150	
S	POMG110612-MNW	0.8 - 5.5	0.4 - 1.2	20 - 80	
	POMG130612-MNW	1 - 7	0.4 - 1.3	20 - 80	

For HF holder
(High Feed)

ISO	Insert	Depth of cut ap (mm)	Feed f (mm/rev)	Cutting speed: Vc (m/min)	
				T9215	T9225
P	POMG110612-MNW	1 - 2.5	0.5 - 1.5	150 - 400	120 - 300
	POMG130612-MNW	1 - 3	0.5 - 2	150 - 400	120 - 300

ISO	Insert	Depth of cut ap (mm)	Feed f (mm/rev)	Cutting speed: Vc (m/min)	
				AH8015	
M	POMG110612-MNW	1 - 2.5	0.5 - 1.5	50 - 150	
	POMG130612-MNW	1 - 3	0.5 - 2	50 - 150	
S	POMG110612-MNW	1 - 2.5	0.5 - 1.5	20 - 80	
	POMG130612-MNW	1 - 3	0.5 - 2	20 - 80	

Technical Guide

STANDARD CUTTING CONDITIONS

MINIFORCE

Applications	ISO	Workpiece material	Priority	Chipbreaker	Grade	Cutting speed Vc (m/min)	Depth of cut ap (mm)	Feed f (mm/rev)
Swiss lathes	P	Low carbon steel SS400, etc. E275A, etc. Carbon steel S45C, etc. C45, etc. Low alloy steel SCM415, etc. 18CrMo4, etc. Alloy steel SCM440, etc. 42CrMo4, etc.	First choice	JS	SH725	50 - 180	0.1 - 3	0.03 - 0.1
			Sharpness	JSS	SH725	50 - 180	0.1 - 1.5	0.03 - 0.1
	M	Stainless steel (Austenitic) SUS304, etc. X5CrNi18-9, etc. Stainless steel (Martensitic and ferritic) SUS430, etc. X6Cr17, etc. Stainless steel (Precipitation hardened) SUS630, etc. X5CrNiCuNb16-4, etc.	First choice	JS	SH725	50 - 180	0.1 - 1.25	0.03 - 0.1
			Sharpness	JSS	SH725	50 - 180	0.1 - 1.5	0.03 - 0.1
Small CNC lathes	P	Low carbon steel SS400, etc. E275A, etc. Carbon steel S45C, etc. C45, etc. Low alloy steel SCM415, etc. 18CrMo4, etc. Alloy steel SCM440, etc. 42CrMo4, etc.	First choice	SS	AH725	50 - 180	0.15 - 1.5	0.05 - 0.2
				TS	AH725	50 - 180	0.3 - 2	0.08 - 0.3
			Surface quality	SS	NS9530	50 - 200	0.15 - 1.5	0.05 - 0.2
				TS	NS9530	50 - 200	0.3 - 2	0.08 - 0.3
	M	Stainless steel (Austenitic) SUS304, etc. X5CrNi18-9, etc. Stainless steel (Martensitic and ferritic) SUS430, etc. X6Cr17, etc. Stainless steel (Precipitation hardened) SUS630, etc. X5CrNiCuNb16-4, etc.	Wear resistance	SS	GT9530	50 - 250	0.15 - 1.5	0.05 - 0.2
				TS	GT9530	50 - 250	0.3 - 2	0.08 - 0.3
			First choice	SS	AH725	50 - 150	0.15 - 1.5	0.05 - 0.2
			Fracture resistance	TS	AH725	50 - 150	0.3 - 2	0.08 - 0.3

DIMPLEFX

ISO	Workpiece material	Grade	Cutting speed Vc (m/min)	Depth of cut ap (mm)	Feed f (mm/rev)
K	Grey cast irons	FX105	700 (300 - 1000)	1 (0.05 - 3)	0.3 (0.05 - 0.6)
	Ductile cast irons	FX105	200 (100 - 300)	1 (0.05 - 3)	0.2 (0.05 - 0.4)

Reference pages: CCLNR/L-RD → **C022**, JSWLXR/L, JSWL2XR/L → **C029**,
 CDJNR/L-RD → **C040**, JSDJXR/L, JSDJ2XR/L → **C045**
 JSVJXR/L, JSVJ2XR/L → **C047**, CVVNN-RD → **C051**, CDNNN-RD → **C072**,
 CSSNR/L → **C082**, CHSNR/L → **C083**, JS-SDUXL, JS-SVUXL → **C114**

STANDARD CUTTING CONDITIONS

TURNTEC

LNMX1204

*Values in red are for facing.

ISO	Workpiece material	Chip breaker	Grade	Cutting speed Vc (m/min)	Depth of cut: ap (mm)		Feed: f (mm/rev)	
					RE : 0.8	RE : 1.2	RE : 0.8	RE : 1.2
P	Steel S45C, SCM415, etc. C45, 18CrMo4, etc.	TDR	T9115	120 - 250	0.5 - 5 0.5 - 2.2	0.8 - 5 0.8 - 2.2	0.15 - 0.6	0.25 - 0.8
		TDR	T9125	80 - 180	0.5 - 5 0.5 - 2.2	0.8 - 5 0.8 - 2.2	0.15 - 0.6	0.25 - 0.8
M	Stainless steel SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	TDR	T9115	100 - 180	0.5 - 5 0.5 - 2.2	0.8 - 5 0.8 - 2.2	0.15 - 0.6	0.25 - 0.8
		TDR	T9125	80 - 180	0.5 - 5 0.5 - 2.2	0.8 - 5 0.8 - 2.2	0.15 - 0.6	0.25 - 0.8

LNMX1606

ISO	Workpiece material	Chip breaker	Grade	Cutting speed Vc (m/min)	Depth of cut: ap (mm)			Feed: f (mm/rev)		
					RE : 0.8	RE : 1.2	RE : 1.6	RE : 0.8	RE : 1.2	RE : 1.6
P	Steel S45C, SCM415, etc. C45, 18CrMo4, etc.	TDR	T9115	120 - 250	0.5 - 5 0.5 - 3.2	0.8 - 6 0.8 - 3.2	1 - 8 1 - 3.2	0.15 - 0.6	0.25 - 0.8	0.3 - 1
		TDR	T9125	80 - 180	0.5 - 5 0.5 - 3.2	0.8 - 6 0.8 - 3.2	1 - 8 1 - 3.2	0.15 - 0.6	0.25 - 0.8	0.3 - 1
		TWR	T9115	120 - 250	1 - 8 1 - 3.2	0.8 - 6 0.8 - 3.2	-	0.15 - 0.6	0.25 - 0.8	-
		TWR	T9125	80 - 180	1 - 8 1 - 3.2	0.8 - 6 0.8 - 3.2	-	0.15 - 0.6	0.25 - 0.8	-
M	Stainless steel SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	TDR	T9115	100 - 180	0.5 - 5 0.5 - 3.2	0.8 - 6 0.8 - 3.2	1 - 8 1 - 3.2	0.15 - 0.6	0.25 - 0.8	0.3 - 1
		TDR	T9125	80 - 180	0.5 - 5 0.5 - 3.2	0.8 - 6 0.8 - 3.2	1 - 8 1 - 3.2	0.15 - 0.6	0.25 - 0.8	0.3 - 1
		MDR	T9115	100 - 150	1.5 - 6 0.5 - 3.2	1.5 - 7 0.8 - 3.2	-	0.1 - 0.5	0.15 - 0.7	-
		MDR	AH725	50 - 150	1.5 - 6 0.5 - 3.2	1.5 - 7 0.8 - 3.2	-	0.1 - 0.5	0.15 - 0.7	-
		TWR	T9115	100 - 180	0.5 - 5 0.5 - 3.2	0.8 - 6 0.8 - 3.2	-	0.15 - 0.6	0.25 - 0.8	-
		TWR	T9125	80 - 180	0.5 - 5 0.5 - 3.2	0.8 - 6 0.8 - 3.2	-	0.15 - 0.6	0.25 - 0.8	-

LNMX2410

ISO	Workpiece material	Chip breaker	Grade	Cutting speed Vc (m/min)	Depth of cut: ap (mm)		Feed: f (mm/rev)	
					RE : 1.6	RE : 2.4	RE : 1.6	RE : 2.4
P	Steel S45C, SCM415, etc. C45, 18CrMo4, etc.	TDR	T9115	120 - 250	4 - 15 1 - 4.5	5 - 15 1 - 4.5	0.3 - 1	0.3 - 1.1
		TDR	T9125	80 - 150	4 - 15 1 - 4.5	5 - 15 1 - 4.5	0.3 - 1	0.3 - 1.1
M	Stainless steel SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-2, etc.	TDR	T9115	100 - 180	4 - 15 1 - 4.5	5 - 15 1 - 4.5	0.3 - 1	0.3 - 1.1
		TDR	T9125	80 - 150	4 - 15 1 - 4.5	5 - 15 1 - 4.5	0.3 - 1	0.3 - 1.1

TURNFEED

ISO	Workpiece material	Grade	Chipbreaker	Cutting speed Vc (m/min)	Depth of cut ap (mm)	Feed f (mm/rev)
P	Mild and low carbon steels SS400, SM490, etc. E275A, C15E4, etc. < 180 HB	T9225	ML	100 - 300	0.5 - 2.5	0.5 - 2.5
	Carbon and alloy steels S55C, SCM440, etc. C55, 42CrMo4, etc. < 300HB	T9215	ML	120 - 350	0.5 - 2.5	0.5 - 2.5
M	Stainless steels SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-3, etc. < 250 HB	T9225	ML	100 - 300	0.5 - 2.5	0.5 - 2.5
K	Grey and ductile cast irons FC250, FCD400, etc. 250, 400-15S, etc.	AH120	ML	100 - 250	0.5 - 2.5	0.5 - 2.5

Note: When the side cutting edge is used for facing, the maximum feed is limited to within 1 mm/rev.

Reference pages: TLANR/L → C054, XWXPR/L → C068,
TLFNR/L → C090, TLBNR/L → C103

Technical Guide

STANDARD CUTTING CONDITIONS

Y-PRO SERIES

For negative insert

ISO	Operation	Chipbreaker	Grades	Depth of cut <i>ap</i> (mm)	Feed <i>f</i> (mm/rev)	Cutting speed: <i>Vc</i> (m/min)		
						Low carbon steels, alloy steels	Medium carbon steels, alloy steels	High carbon steels, alloy steels
P	Finishing	ZF	GT9530	0.2 - 1.5	0.03 -0.2	150 - 300	150 - 300	150 - 300
			NS9530	0.2 - 1.5	0.03 -0.2	150 - 300	150 - 300	150 - 300
			T9225	0.2 - 1.5	0.03 -0.2	120 - 300	120 - 300	100 - 250
			T9235	0.2 - 1.5	0.03 -0.2	50 - 200	50 - 200	50 - 150
	Finishing to medium	ZM	GT9530	0.7 - 2	0.15 -0.4	150 - 300	150 - 300	150 - 300
			NS9530	0.7 - 2	0.15 -0.4	150 - 300	150 - 300	150 - 300
			T9225	0.7 - 2	0.15 -0.4	120 - 300	120 - 300	100 - 250
			T9235	0.7 - 2	0.15 -0.4	50 - 200	50 - 200	50 - 150
Stainless steels								
M	Finishing	ZF	AH8015	0.2 - 1.5	0.03 -0.2	50 - 150	50 - 150	50 - 150
	Finishing to medium	ZM	AH8015	0.7 - 2	0.15 -0.4	50 - 150	50 - 150	50 - 150
Cast iron								
K	Finishing	ZF	T9225	0.2 - 1.5	0.03 -0.2	140 - 500	140 - 500	140 - 500
	Finishing to medium	ZM	T9225	0.7 - 2	0.15 -0.4	140 - 500	140 - 500	140 - 500
Heat-resistant alloys								
S	Finishing	ZF	AH8015	0.2 - 1.5	0.03 -0.2	20 - 80	20 - 80	20 - 80
	Finishing to medium	ZM	AH8015	0.7 - 2	0.15 -0.4	20 - 80	20 - 80	20 - 80

For positive insert

ISO	Operation	Chipbreaker	Grades	Depth of cut <i>a</i> _p (mm)	Feed <i>f</i> (mm/rev)	Cutting speed: <i>V</i> _c (m/min)		
						Low carbon steels, alloy steels	Medium carbon steels, alloy steels	High carbon steels, alloy steels
	Finishing to medium	ZF	GT9530	0.2 - 1.5	0.05 -0.25	150 - 300	150 - 300	150 - 300
			T9225	0.2 - 1.5	0.05 -0.25	100 - 300	80 - 300	80 - 250
		ZM	GT9530	0.5 - 2	0.05 -0.3	150 - 300	150 - 300	150 - 300
			T9225	0.5 - 2	0.05 -0.3	100 - 300	80 - 300	80 - 250
Stainless steels								
	Finishing to medium	ZF	AH8015	0.2 - 1.5	0.05 -0.25	50 - 150	50 - 150	50 - 150
		ZM	AH8015	0.5 - 2	0.05 -0.3	50 - 150	50 - 150	50 - 150
Cast iron								
	Finishing to medium	ZF	T9225	0.2 - 1.5	0.05 -0.25	140 - 500	140 - 500	140 - 500
		ZM	T9225	0.5 - 2	0.05 -0.3	140 - 500	140 - 500	140 - 500
Heat-resistant alloys								
	Finishing to medium	ZF	AH8015	0.2 - 1.5	0.05 -0.25	20 - 80	20 - 80	20 - 80
		ZM	AH8015	0.5 - 2	0.05 -0.3	20 - 80	20 - 80	20 - 80

FIXTURN

ISO	Workpiece material	Chipbreaker	Grade	Cutting Speed Vc (m/min)	Depth of cut ap (mm)	Feed f (mm/rev)
P	Steels S45C, SCM415, etc. C45, 18CrMo4, etc.	6RS	T9215	120 - 350	0.5 - 2	0.5 - 1
		6RS	T9225	100 - 300	0.5 - 2	0.5 - 1
		6RS	NS9530	150 - 250	0.5 - 2	0.5 - 1
		6RM	T9215	120 - 350	1 - 3	0.5 - 1
		6RM	T9225	100 - 300	1 - 3	0.5 - 1
		6RM	NS9530	150 - 250	1 - 3	0.5 - 1

Reference pages: SYJBR/L → **C049**, SYIBN → **C053**, SRGCR/L-6F → **C064**, SRDCR/L-6F → **C078**
SYQBR/L, SVHCR/L → **C098**