


User's Guide

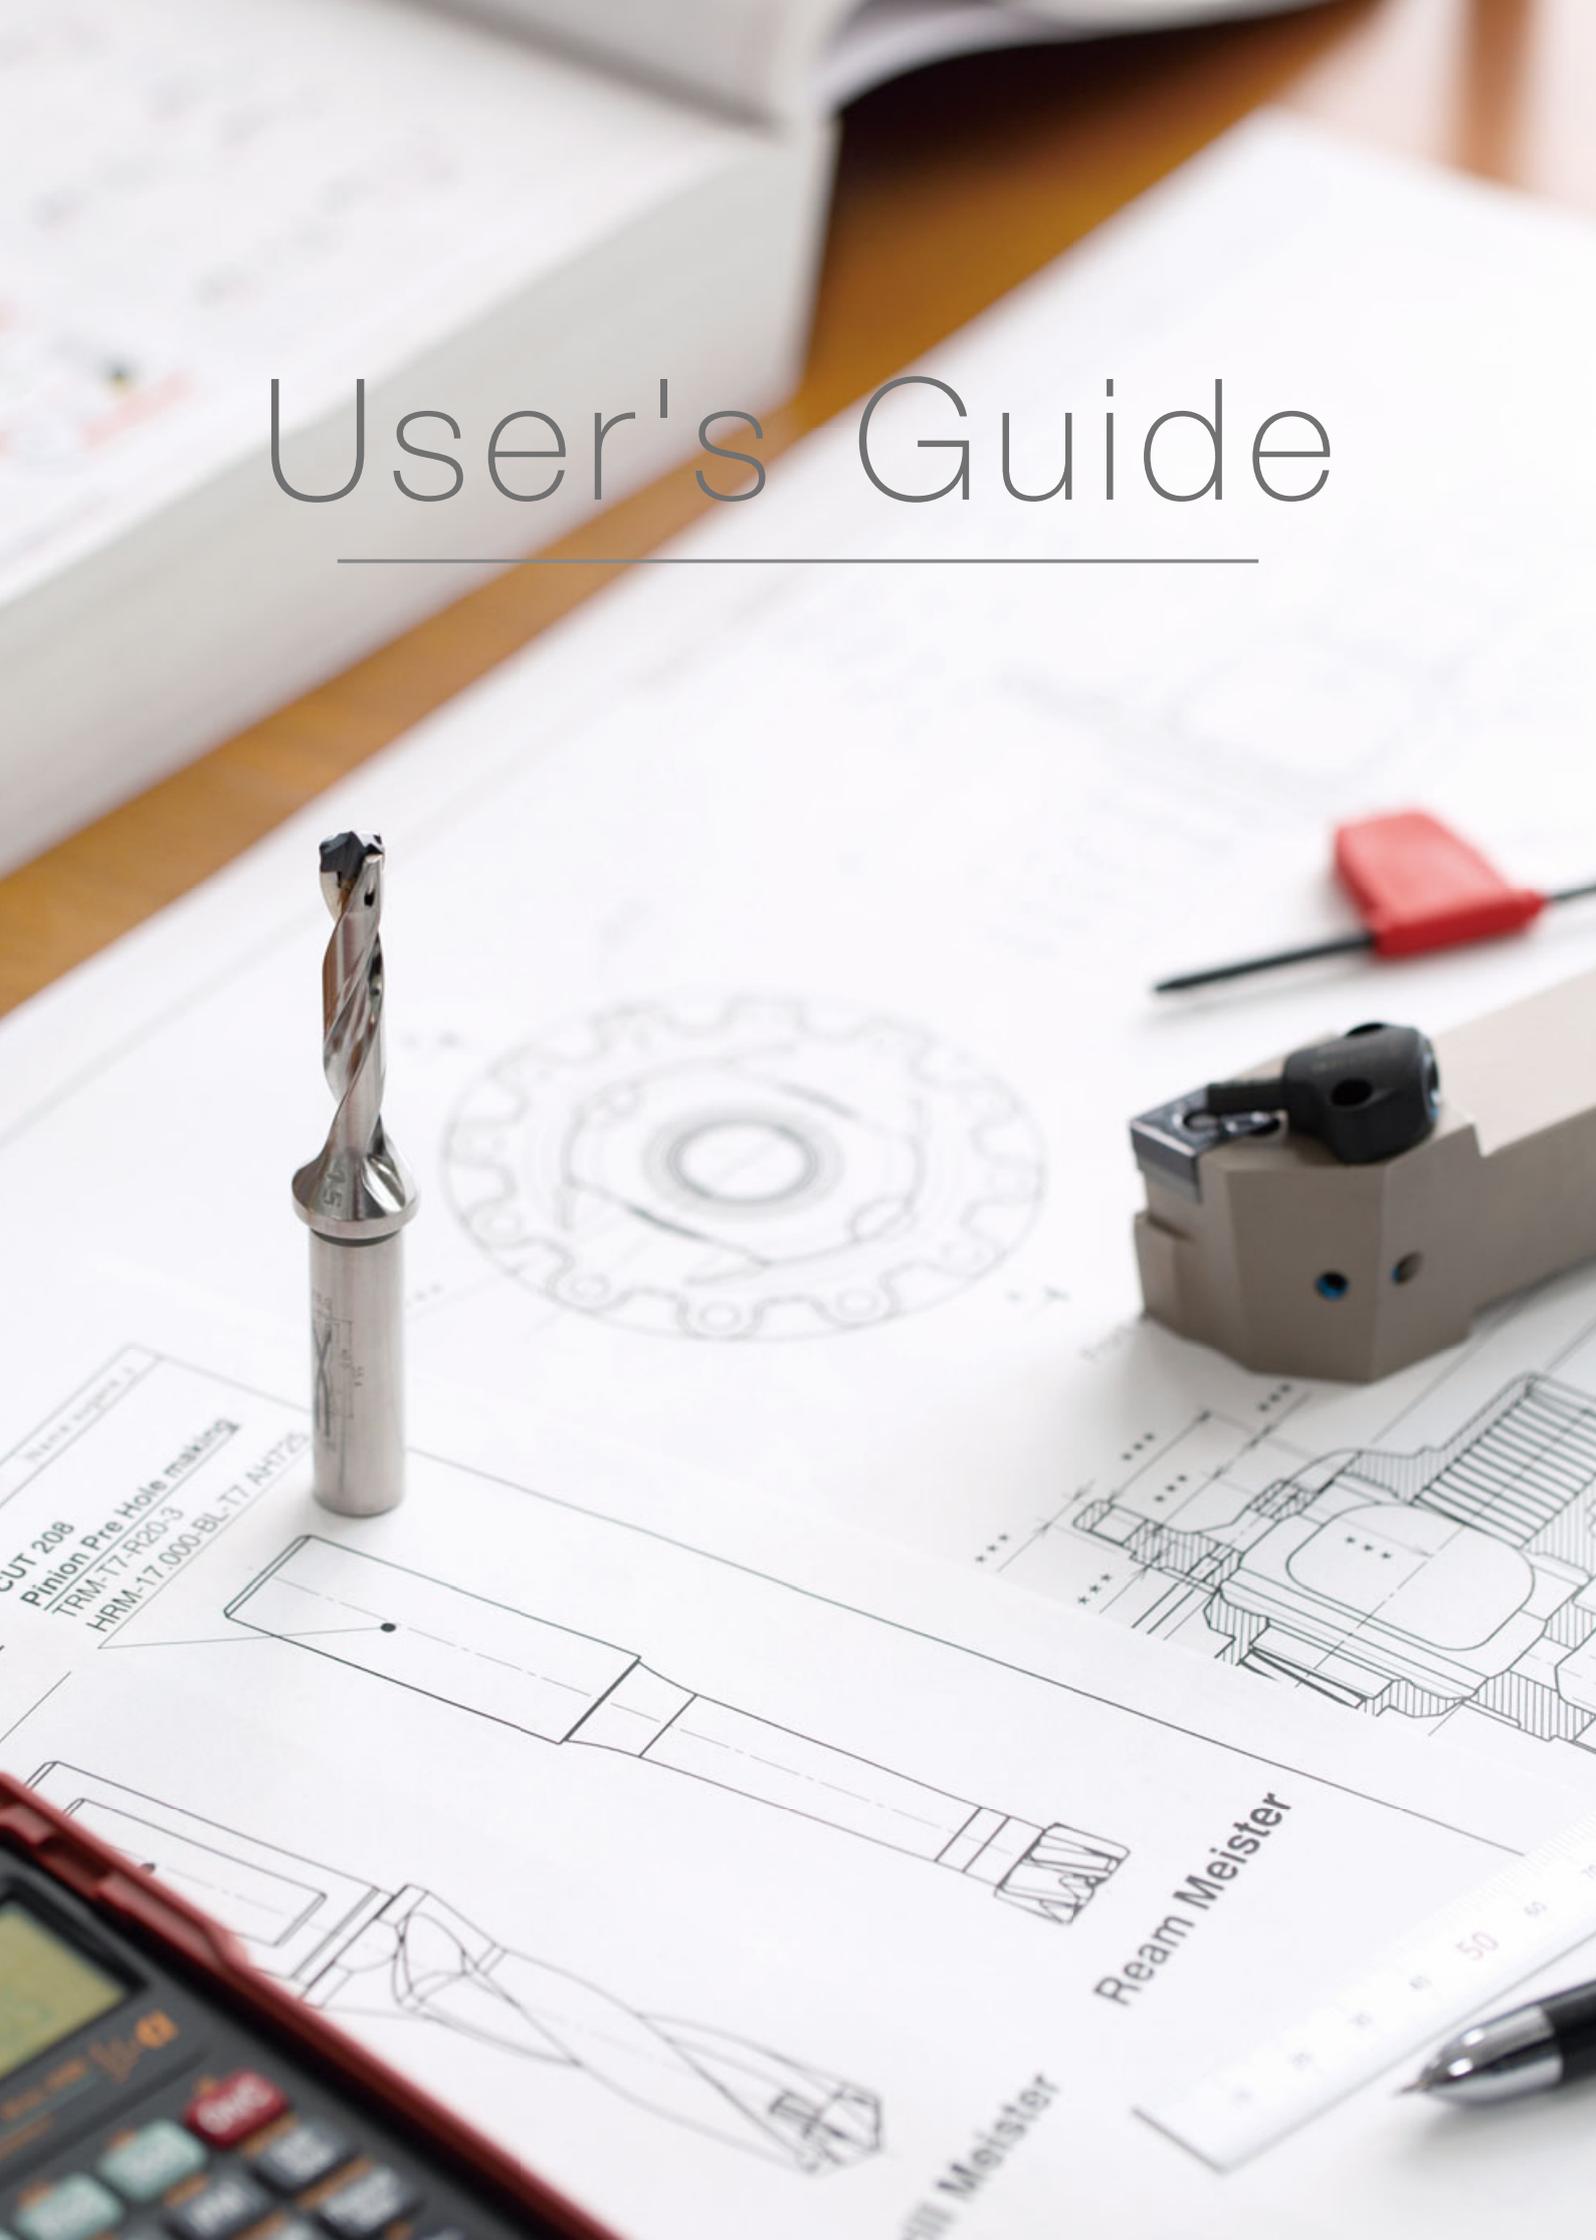

CUT 208
Pinion Pre Hole marking
TRM-T7-R20-3
HRM-17.000-BL-T7 AH125

Ream Meister

Mill Meister

USER'S GUIDE

Technical Reference


L003 -

Parts for Tools


L118 -

Turning Tools

Name of tools parts

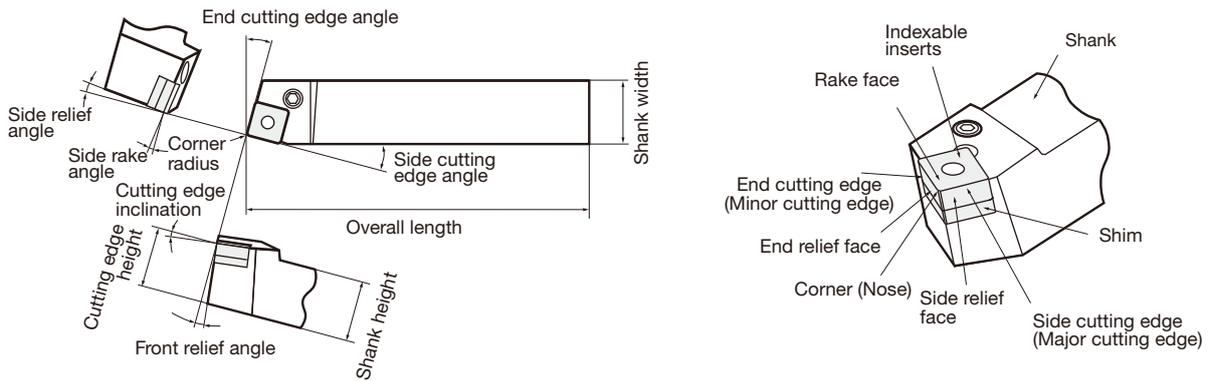


Relating angles between tool and workpiece

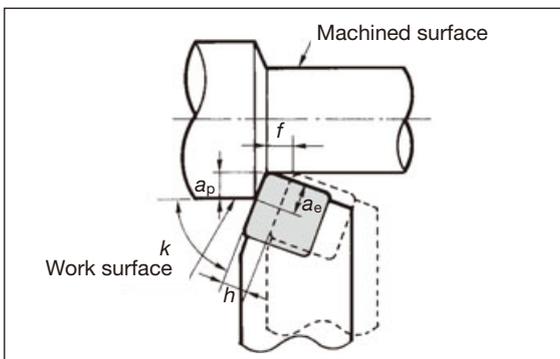

- a_p ... Depth of cut (Distance between work surface and machined surface)
- a_e ... Length of cutting edge engaging in cutting.
- k ... Cutting edge angle (Angle to be made by cutting edge and work surface)
- f ... Feed per revolution
- h ... Thickness to be cut per revolution
- Machined surface ... Workpiece surface after having machined.
- Work surface ... Workpiece surface to be cut.

Effect of side cutting edge angle

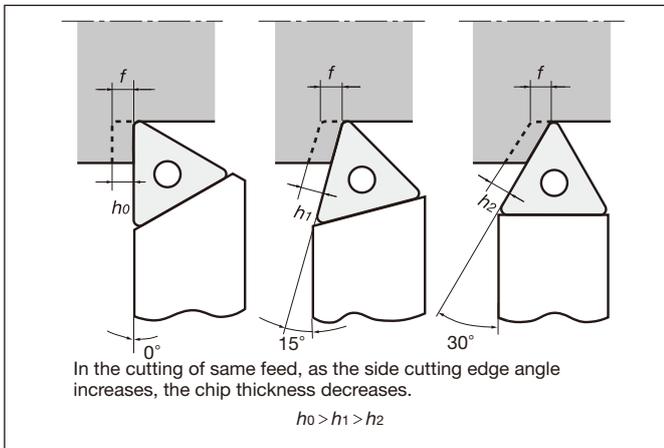

Honing

TAC indexable inserts of steel cutting grades are honed. Honing specifications are shown in the following table.

Edge condition	Shape
Sharp edge	
Round honing	
Chamfered honing	

Effects of tool geometry on cutting phenomena

Phenomena	Flank wear	Crater wear	Edge strength	Cutting force	Surface finish	Chattering	Cutting edge temperature	Chip shape and flow
Increasing								
Cutting edge inclination	-	Decrease	Lower	Radial force decrease	-	Less tendency	Lower	Effect on flow direction
Side rake angle	-	Decrease	Lower	Decrease	-	-	Lower	Effect on shape
Relief angle	Decrease	-	Lower	Decrease	-	Likely to occur	Lower	-
End cutting edge angle	Decrease	-	Lower	Radial force decrease	Roughen	Less tendency	Lower	-
Side cutting edge angle	Decrease	Decrease	Increase	Radial force decrease	-	Likely to occur	Increase	Decrease thickness
Nose radius	Decrease to some level		Increase	Increase	Improve	Likely to occur	Increase	Effect on flow direction
Honing width	Increase	-	Increase	Increase	-	Likely to occur	Increase	-

Turning Tools


Relations between cutting force and cutting conditions or cutting phenomena

Condition	Grey cast iron (HB130)	Stainless steel (HB145)	Carbon steel (HB230)
Cutting speed and cutting force $f = 0.008$ ipr $a_p = 0.079$ " Side cutting edge angle 0° Corner radius $RE = 0.016$ "			
Depth of cut and cutting force $V_c = 330$ SFM $f = 0.008$ ipr Side cutting edge angle 0° Corner radius $RE = 0.016$ "			
Feed and cutting force $V_c = 330$ SFM $a_p = 0.079$ " Side cutting edge angle 0° Corner radius $RE = 0.016$ "			
Corner radius and cutting force $V_c = 330$ SFM $f = 0.008$ ipr $a_p = 0.047$ " Side cutting edge angle 0°			
Side cutting edge angle and cutting force $V_c = 330$ SFM $f = 0.008$ ipr $a_p = 0.079$ " Corner radius $RE = 0.016$ "			
Side rake angle and cutting force $V_c = 330$ SFM $f = 0.008$ ipr $a_p = 0.079$ " Side cutting edge angle 0° Corner radius $RE = 0.008$ "			

* 9.8N = 1kgf

Calculation formulas for turning

● Cutting speed

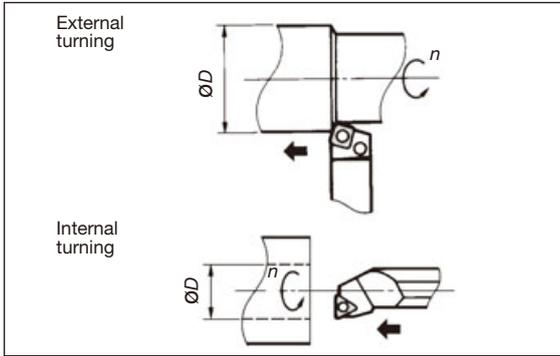

When calculating cutting speed from number of revolutions:

$$V_c = \frac{\pi \times \varnothing D \times n}{3.82}$$


V_c : Cutting speed (sfm)
 n : Number of revolution (rpm)
 $\varnothing D$: Diameter of workpiece (in)
 $\pi \approx 3.14$

When calculating required number of revolutions from cutting speed:

$$n = \frac{V_c \times 3.82}{\pi \times \varnothing D}$$

Example : Calculating the cutting speed when turning a $\varnothing 6$ mm-diameter workpiece at 250 rpm
 $V_c = \frac{3.14 \times 6 \times 250}{3.82} = 392 \text{ sfm}$

● Cutting time on external and internal turning

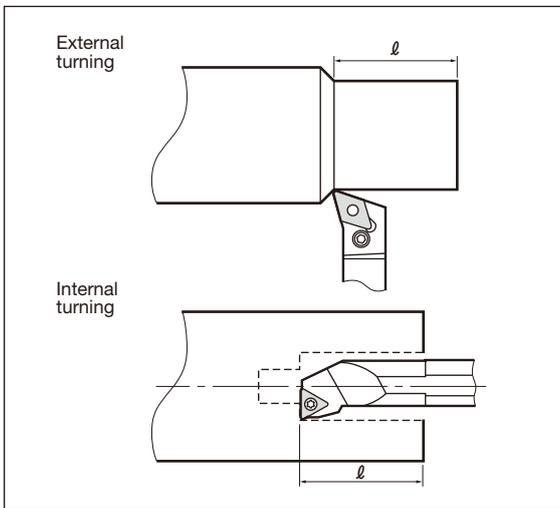


$$T = \frac{\ell}{f \times n}$$

(min)

T : Cutting time (min)
 ℓ : Cutting length (in)
 f : Feed (ipr)
 n : Number of revolution (rpm)

● Cutting time on face turning

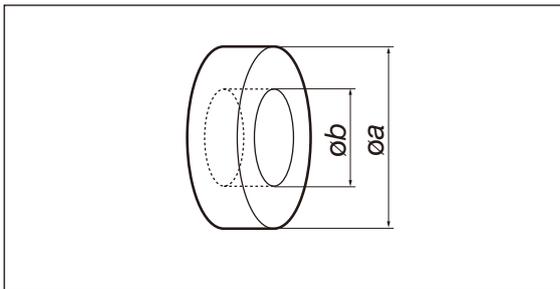


$$T = \frac{\pi \times (\varnothing a^2 - \varnothing b^2)}{4000 \times v_c \times f}$$

(min)

V_c : Cutting speed (sfm)
 f : Feed (ipr)
 T : Cutting Time (min)

● Theoretical surface roughness

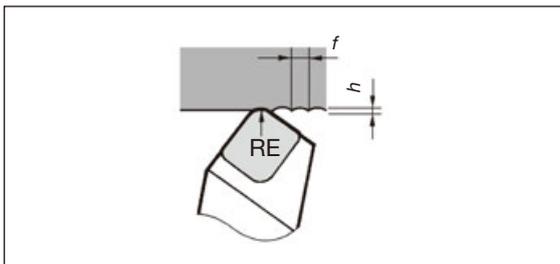

$$h = \frac{f^2}{8 \times r} \times 1000$$

(μm)

h : Surface roughness (μm)
 f : Feed (ipr)
 r : Nose radius (in) (RE)

() The notation in the brackets is the one used in the catalog (ISO compliant)

● Power consumption

$$P_c = \frac{F \times V_c}{33000}$$

(HP)


P_c : Power requirement (HP)
 F : Cutting force (N)
 V_c : Cutting speed (sfm)

Turning Tools

Cutting forces

- (1) Finding from the diagram based on experimental data.
- (2) In case determining by simplified equation:

Cutting force in turning

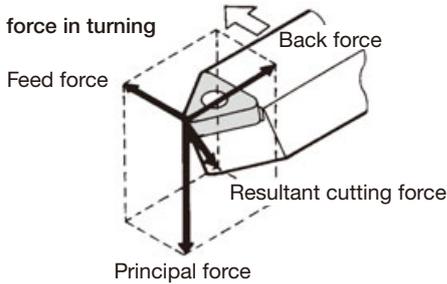

$$F = k_c \times a_p \times f \times 1000$$

(lb-force)

F : Cutting force (lb-force)
 k_c : Specific cutting force
 KPI (Kilo pound force)
 a_p : Depth of cut (in)
 f : Feed (ipr)

Example :
 Calculating the cutting force when
 cutting a high carbon steel (1055)
 at $f = 0.007$ ipr and $a_p = 0.118$ ".
 $F = 499 \times 0.118 \times 0.0078 \times 1000$
 $= 460$ lb-force

Calculating power requirement

$$P_c = \frac{k_c \times a_p \times v_c \times f}{33}$$


(kW)

c : Net power requirement (H)
 k_c : Specific cutting force (KPI)
 [Refer to the Table below]
 v_c : Cutting speed (sfm)
 a_p : Depth of cutting (in)
 f : Feed (ipr)

Value of specific cutting force (k_c)

Workpiece material (JIS)	Tensile strength (PSI)	Hardness (HB)	Value of specific cutting force on feed k_c (KPI)				
			0.0016 (ipr)	0.004 (ipr)	0.008 (ipr)	0.016 (ipr)	0.039 (ipr)
SS400, S15C	56,565	100	497	412	355	302	247
S35C, S40C	85,572	170	612	506	426	363	302
S50C, SCr430	113,855	230	711	583	497	426	348
SCM440, SNCM439	142,137	300	782	640	548	470	384
SDK	225,992 (56HRC)	56HRC	1,217	996	853	725	598
FC200	(160HB)	160	370	284	236	194	149
FCD600	(200HB)	200	483	370	306	254	194
Aluminum alloy	(89HB)	89	196	164	138	117	97
Aluminum			152	126	107	93	75
Magnesium alloy			57	57	57	57	57
Brass			157	157	157	157	157

Bending stress and tool deflection

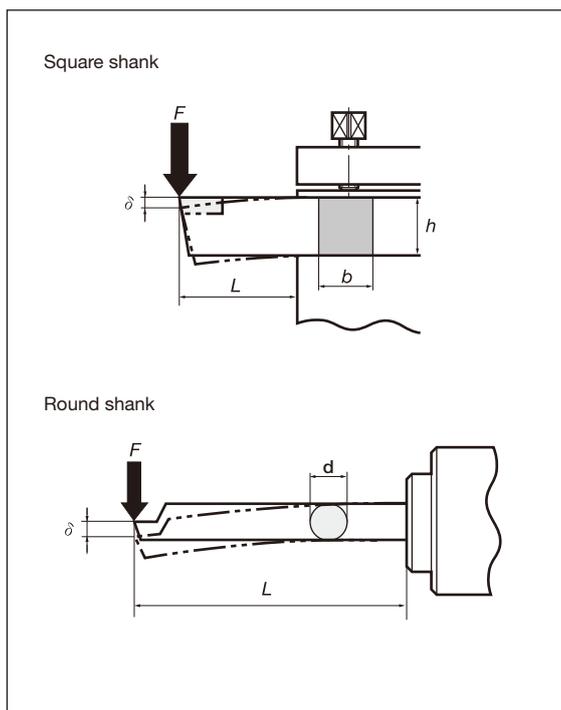

Bending stress

(1) Square shank

$$S = \frac{6 \times F \times L \times 145}{b \times h^2}$$

(PSI)

(2) Round shank

$$S = \frac{32 \times F \times L \times 145}{\pi \times d^3}$$

(PSI)

S : Bending stress in shank (PSI)
 F : Cutting force (lb)
 L : Overhang length of tool (in)
 b : Shank width (in) : (B)
 h : Shank height (in) : (H)
 d : Shank diameter (in) : (DCONMS)
 E : Modulus of elasticity of shank material (lb/in²)

Tool deflection (in)

(1) Square shank

$$\delta = \frac{4 \times F \times L^3}{E \times b \times h^3}$$

(in)

(2) Round shank

$$\delta = \frac{64 \times F \times L^3}{3 \times \pi \times E \times d^4}$$




(in)

() The notation in the brackets is the one used in the catalog (ISO compliant)

(Ref.) Values of E

Material	MPa (SPI)	{kgf/mm ² }
Steel	30,457,980	30,457,980
Cemented Carbide	81,221,280 ~ 89,923,560	81,221,280 ~ 89,923,560

Troubleshooting in turning

Typical tool failure		Countermeasure		
		Tool grade	Cutting conditions	
Flank wear		<ul style="list-style-type: none"> Change to more wear resistant grades P, M, K30 → 20 → 10 	<ul style="list-style-type: none"> Reduce cutting speed Change to appropriate feed Change to wet cutting 	<ul style="list-style-type: none"> Decrease honing width Increase relief angle Increase end cutting edge angle Increase corner radius Select free-cutting chipbreaker Increase rake angle
				
Crater wear		<ul style="list-style-type: none"> Change to more wear resistant grades P, M, K30 → 20 → 10 	<ul style="list-style-type: none"> Reduce cutting speed Reduce feed Reduce depth of cut Change to wet cutting 	<ul style="list-style-type: none"> Increase rake angle Select an appropriate chipbreaker Increase side cutting edge angle Increase corner radius
				
Notch wear		<ul style="list-style-type: none"> Change to more wear resistant grades P, M, K30 → 20 → 10 	<ul style="list-style-type: none"> Reduce cutting speed Reduce feed 	<ul style="list-style-type: none"> Increase rake angle Increase side cutting edge angle
				
Fracture		<ul style="list-style-type: none"> Change to tougher grades Change to thermal-shock resistant grades P, M, K10 → 20 → 30 	<ul style="list-style-type: none"> Reduce feed Reduce depth of cut Improve holding rigidity of work and tool Reduce overhang length of toolholder Improve looseness in machine 	<ul style="list-style-type: none"> Reduce rake angle Select a chipbreaker with high edge strength Increase honing width Increase side cutting edge angle Select larger shank size Increase corner radius
				
Chipping		<ul style="list-style-type: none"> Change to tougher grades P, M, K10 → 20 → 30 	<ul style="list-style-type: none"> Reduce cutting speed Reduce feed Reduce depth of cut Improve holding rigidity of work and tool Reduce overhang length of toolholder Improve looseness in machine 	<ul style="list-style-type: none"> Reduce rake angle Select a chipbreaker with high edge strength Increase honing width Increase side cutting edge angle Select larger shank size
				
Flaking		<ul style="list-style-type: none"> Change to tougher grades P, M, K10 → 20 → 30 	<ul style="list-style-type: none"> Reduce cutting speed Reduce feed 	<ul style="list-style-type: none"> Reduce rake angle Increase corner radius Increase honing width
				
Plastic deformation		<ul style="list-style-type: none"> Change to more wear resistant grade P, M, K30 → 20 → 10 	<ul style="list-style-type: none"> Reduce cutting speed Change to appropriate feed Reduce depth of cut Supply cutting fluid in adequate volume 	<ul style="list-style-type: none"> Increase relief angle Increase rake angle Reduce corner radius Reduce side cutting edge angle Select a free-cutting chipbreaker
				
Chip welding		<ul style="list-style-type: none"> Use a grade which has a low tendency to adhere to workpiece material Cemented carbide → Coated carbide or cermet 	<ul style="list-style-type: none"> Increase cutting speed Increase feed Change to water-insoluble cutting fluid Change to wet cutting 	<ul style="list-style-type: none"> Increase rake angle Select a free-cutting chipbreaker Decrease honing width
				
Built-up edge		<ul style="list-style-type: none"> Change to tougher grades Change to thermal-shock resistant grades P, M, K10 → 20 → 30 	<ul style="list-style-type: none"> Reduce cutting speed Reduce feed Change to dry cutting Supply cutting fluid in adequate volume Reduce depth of cut Change to water-insoluble cutting fluid 	<ul style="list-style-type: none"> Increase rake angle Select a free-cutting chipbreaker Decrease honing width
Thermal cracking		<ul style="list-style-type: none"> Change to tougher grades Change to thermal-shock resistant grades P, M, K10 → 20 → 30 	<ul style="list-style-type: none"> Reduce cutting speed Reduce feed Change to dry cutting Supply cutting fluid in adequate volume Reduce depth of cut Change to water-insoluble cutting fluid 	<ul style="list-style-type: none"> Increase rake angle Select a free-cutting chipbreaker Decrease honing width

Turning Tools

Troubleshooting in turning

Problem	Cause	Countermeasure	
		Tool	Cutting conditions and others
Deteriorated surface roughness	<ul style="list-style-type: none"> Increased tool wear 	<ul style="list-style-type: none"> Select a more wear resistant grade Use an insert with a larger rake angle Select a freer-cutting chipbreaker type Use an insert with a larger nose radius Use a more lightly honed insert Use an insert of closer tolerance (from M class to G class) 	<ul style="list-style-type: none"> Select a proper feed Decrease the cutting speed Use a cutting fluid
	<ul style="list-style-type: none"> Edge chipping 	<ul style="list-style-type: none"> Use a tougher grade Select a chipbreaker with strong cutting edges Use a largely honed insert Increase the side cutting edge angle Use a larger shank size 	<ul style="list-style-type: none"> Decrease the depth of cut Decrease the feed Use a more rigid machine Improve the holding rigidity of the tool and workpiece Shorten the overhang of the toolholder Improve the machine looseness
	<ul style="list-style-type: none"> Chip welding Built-up-edge 	<ul style="list-style-type: none"> Select a grade with less affinity with the Workpiece material Use an insert with a larger rake angle Select a freer-cutting chipbreaker type Use a more lightly honed insert Use an insert of closer tolerance (from M class to G class) 	<ul style="list-style-type: none"> Increase the cutting speed Increase the feed Use a water-insoluble cutting fluid Use a cutting fluid
	<ul style="list-style-type: none"> Vibration and chatter 	<ul style="list-style-type: none"> Use a tougher grade Use an insert with a larger rake angle Select a freer-cutting chipbreaker type Use an insert with a smaller nose radius Decrease the side cutting edge angle Use a more lightly honed insert Use a larger shank size 	<ul style="list-style-type: none"> Use a proper cutting speed Decrease the feed Decrease the depth of cut Improve the holding rigidity of the tool and workpiece Shorten the overhang of the toolholder Improve the machine looseness
Deteriorated dimensional accuracy	<ul style="list-style-type: none"> Improper insert accuracy 	<ul style="list-style-type: none"> Use an insert of closer tolerance (from M class to G class) 	
	<ul style="list-style-type: none"> Incomplete engagement of tool and workpiece 	<ul style="list-style-type: none"> Use an insert with a larger rake angle Select a freer-cutting chipbreaker type Use an insert with a smaller nose radius Use a more lightly honed insert 	<ul style="list-style-type: none"> Improve the holding rigidity of the tool and workpiece Shorten the overhang of the toolholder Improve the machine looseness
Burr occurrence	<ul style="list-style-type: none"> Unsuitable cutting speed 		<ul style="list-style-type: none"> Decrease the cutting speed Increase the feed Use a cutting fluid
	<ul style="list-style-type: none"> Worn tool or improper cutting edge geometry 	<ul style="list-style-type: none"> Use a harder grade Use an insert with a larger rake angle Select a freer-cutting chipbreaker type Increase the relief angle Use an insert with a smaller nose radius Decrease the side cutting edge angle Use a more lightly honed insert 	
Edge breakout	<ul style="list-style-type: none"> Improper cutting speed 		<ul style="list-style-type: none"> Decrease the feed Decrease the depth of cut
	<ul style="list-style-type: none"> Worn tool or improper cutting edge geometry 	<ul style="list-style-type: none"> Use a harder grade Use an insert with a larger rake angle Select a freer-cutting chipbreaker type Increase the side cutting edge angle Use an insert with a larger nose radius Use a more lightly honed insert Use a larger shank size 	<ul style="list-style-type: none"> Improve the holding rigidity of the tool and workpiece Shorten the overhang of the toolholder Improve the machine looseness
Fuzzy surface finish	<ul style="list-style-type: none"> Improper cutting conditions 		<ul style="list-style-type: none"> Increase the cutting speed Select a proper feed Use a water-insoluble cutting fluid Use a cutting fluid
	<ul style="list-style-type: none"> Worn tool or improper cutting edge geometry 	<ul style="list-style-type: none"> Use a harder grade. Select a grade with less affinity with the Workpiece material Use an insert with a larger rake angle Select a freer-cutting chipbreaker type Use a more lightly honed insert 	

Chipbreakers

Chip controllability

Necessity of chip control

- ① Why is chip control needed?
- ② Effect of improper chip control

① Why is chip control needed?

What is chip?

For making a product from a workpiece, removed objects produced by a tool which is set to cut to a specified depth with the relative motion of the tool and the workpiece.

Problems when chips are not properly controlled

Necessity of chip control (Problems and effects)

Problems	Effects
1. Scattering of chips and coolant. 2. Wrapping around the workpiece and the tool. 3. Accumulation on the tool, jig, and machining facilities.	1. Disturbs unmanned and automated machining. 2. Disturbs high-speed and high-efficiency machining. 3. Degrades finished surface. 4. Threatens operator's safety. 5. Reduced operation rate.

Additional problems when chips are not properly controlled

② Effect of improper chip control

Effects on quality

- Defective work.
- Defective surface finish
- Chip entangling

Effects on operation


- Increased number of man-hours for handling.
- Increased tool costs.
- Troublesome chip handling.
- Machine stoppage and reduced operation rate.

Effect on safety and health.

- Stain and damage on machine caused from improper carrying-out of chips.
- Dangerous effects on the human body. (Injury and burns on hand, etc.)


Effective measures

"Chipbreaker"

Classification	Chip shape		Description of chip shape	Acceptability	Effect
	Depth of cut: small	Depth of cut: large			
Shape A			Chips irregularly entangled	Not acceptable	<ul style="list-style-type: none"> • Wrapping around the tool or workpiece or accumulation around the cutting point, hindering cutting • Possible damage to the machined surface
Shape B			Long continuous spiral chips $l > 2"$	 Acceptable	<ul style="list-style-type: none"> • Bulky during transport in the automatic line • May be preferred when one operator handles one machine
Shape C			Short spiral chips $l < 2"$		<ul style="list-style-type: none"> • Smooth chip flow • Difficult to scatter • Favorable shape
Shape D			"C" or "9" shaped chips (Around one coiling)		<ul style="list-style-type: none"> • Favorable shape if not scattering • Not bulky and easy to transport
Shape E			Excessively broken chips. Thin pieces or connected in a form of wave as shown in the figure left	Not acceptable	<ul style="list-style-type: none"> • Readily scattering. If scattering is the only trouble, it may be acceptable because the chip cover, etc. may be used. • Tend to cause chatter, causing harm on the finished surface roughness or tool life.


Chipbreakers

Factors affecting chip control





- Of these, feed has the greatest effect followed by depth of cut and cutting speed in order listed.
- Feed is proportionate to the thickness of chips.
- Depth of cut is proportionate to the width of chips.
- There are optimum values (effective range) in feed and depth of cut.
- Cutting speed is in inverse proportion to chip thickness. Effective range becomes narrow at high speed.

● Effect of cutting speed on chipbreaker effective range

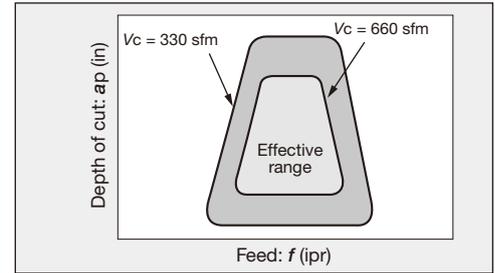



- These are related to thickness of chips and ease of curling.
- Mild steel chips are thicker than those of hard steel.
- Hard steel chips are liable to curl more than those of mild steel.
- Chips that do not curl are thin. As an exception, in case of mild steel even if thick, may not curl.

● Effect of material type on chipbreaker effective range

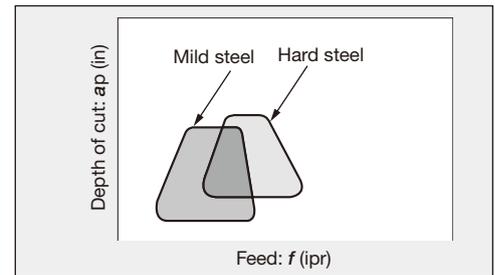



- Side cutting edge angle is relative to chip thickness and width
- Side cutting edge angle is preferably small.
- Nose radius is relative to thickness and width and the direction of flowing out.
- In finishing, small nose radius, whilst for rough cutting, large nose radius is better.

● Effect of tool geometry on chipbreaker effective range

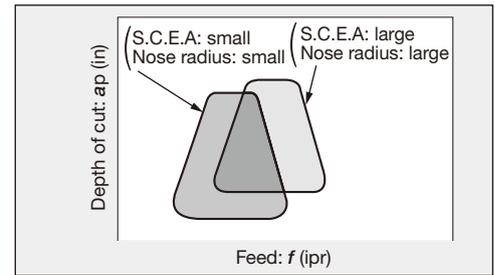



- Rake angle is in inverse proportion to chip thickness.
- Depending on the Workpiece material, there is an optimum value.
- Chipbreaker width is selected proportionately to feed.
- Narrow at low feed and wide at high feed.
- Chipbreaker depth is to be selected so as to be inversely proportionate to feed.
- Deep at low feed and shallow at high feed.

● Effect of chipbreaker shape on chipbreaker effective range

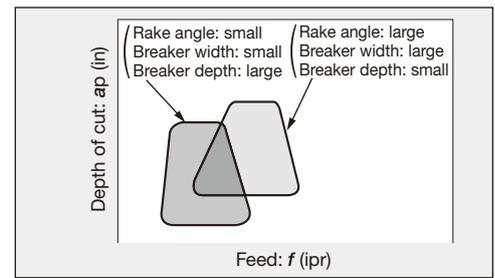

- Effective range is wider with wet cutting.
- Especially at low feed range is liable to curl.

● Effect of with/without of coolant on chipbreaker effective range

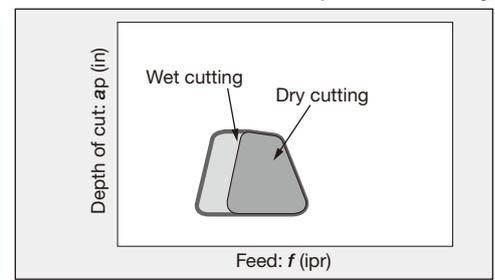

- The machine has enough power and mechanical strength.
- Select the machine consistent with the size of Workpiece material to be used.

Wiper Insert




Machining program compensation for wiper -SW / -FW insert


The nose radius on a wiper insert has a different configuration from that on standard ISO insert's. Machining program adjustments are, therefore, required to generate a correct offset for the wiper insert to machine the correct workpiece dimension. No compensation is needed, however, for the positive, CCMT-SW wiper insert.

Wiper effectiveness (surface finish quality improvement) by applications

CNMG or WNMG insert

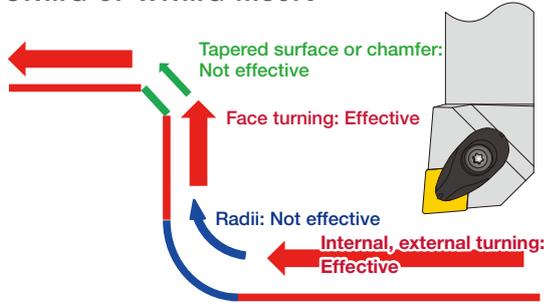

DNMG or TNMG insert

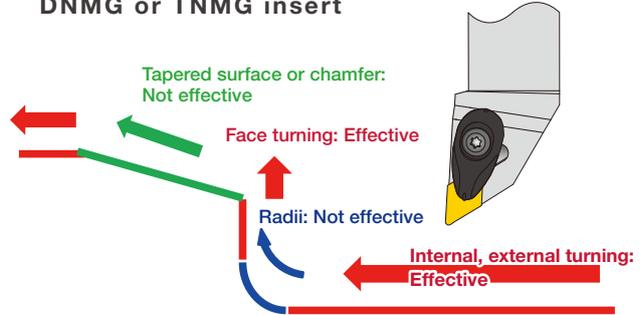

Program compensations by insert shapes and applications

Match your insert shape and application to find the proper compensation method.

Application \ Insert shape	CNMG/WNMG -SW/FW	DNMG/TNMG -SW/FW	CCMT-SW
	Type L	Type J, G, F	Type L
Internal, External and Face turning 	Proceed to Compensation ① (See Page L012)	Proceed to Compensation ④ (See Page L013)	No compensation needed
Including tapered surface 	Proceed to Compensation ①, ② (See Page L012)	Proceed to Compensation ④, ⑤ (See Page L013 - L014)	↑
Including corner radius 	Proceed to Compensation ①, ③ (See Page L012)	Proceed to Compensation ④ (See Page L013) Proceed to Compensation ⑥ (See Page L014)	↑
Including tapered surface and corner radius 	Proceed to Compensation ①, ②, ③ (See Page L012)	Proceed to Compensation ④, ⑤, ⑥ (See Page L013 - L014)	↑

Wiper Insert

Compensations for CNMG / WNMG -SW / -FW

Compensations ① Tool offsets (Compensations for X- and Z-axis)

Match the insert approach angle and the insert style to find the value and compensate the machining program for the insert radius.
 *This compensation procedure will not be necessary if the insert is compensated with the built-in tool presetter after insert replacement.

CNMG/WNMG-SW/-FW (Type L)

Nose Radius	X-axis direction	Z-axis direction
R0.016	0.001	0.001
R0.031	0.002	0.002
R0.047	0.002	0.002

(Unit: in)

Compensations ② Program compensations for tapered surface (proceed after ①) (in)

To machine tapered surfaces, compensate the nose radius position in the x-axis position to obtain the correct workpiece dimension.


Compensations for x-axis when using CNMG or WNMG-SW/-FW (Tool approach angle: L) insert

Match the insert nose radius and the angle of the surface taper to find the value in Table 1 below to compensate the **x-axis position**.

For CNMG/WNMG-SW/-FW (Type L)

Compensation values for x-axis (in)

Nose radius (in)	Taper angle α (θ)																			
	0	0.197	0.394	0.591	0.787	0.984	1.181	1.378	1.575	1.772	1.969	2.165	2.362	2.559	2.756	2.953	3.150	3.346	3.543	
R0.016	0	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0
R0.031	0	0.001	0.002	0.002	0.003	0.003	0.004	0.004	0.004	0.004	0.005	0.006	0.006	0.007	0.007	0.007	0.007	0.005	0.005	0
R0.047	0	0.001	0.002	0.002	0.003	0.003	0.004	0.004	0.004	0.004	0.005	0.006	0.006	0.007	0.007	0.007	0.007	0.006	0.006	0

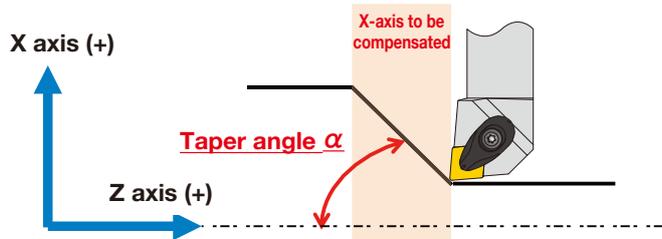

Compensations ③ Program compensation for corner radii (proceed after ①) (in)

To achieve the correct corner radius dimension on the workpiece, compensate the tool position, using the values listed below for respective insert styles.

CNMG/WNMG-SW/-FW (Type L)

Nose Radius	Deviation on the corner radius	Compensate radius by
R0.016	0.002	+0.005
R0.031	0.003	+0.007
R0.047	0.003	+0.007

(Unit: in)



Compensations for DNMG / TNMG -SW / -FW

● Compensations ④ Tool offsets (Compensations for X- and Z-axis)

Match the insert approach angle and the insert style to find the value and compensate the machining program for the insert radius.
*This compensation procedure will not be necessary if the insert is compensated with the built-in tool presetter after insert replacement.

DNMG-SW/-FW (Type J)

Nose Radius	X-axis direction	Z-axis direction
R0.016	0.009	0.001
R0.031	0.009	0.002
R0.047	0.005	0.001

(Unit: in)

TNMG-SW/-FW (Type J)

Nose Radius	X-axis direction	Z-axis direction
R0.016	0.009	0.002
R0.031	0.008	0.002
R0.047	0.006	0.002

(Unit: in)

TNMG-SW/-FW (Type G)

Nose Radius	X-axis direction	Z-axis direction
R0.016	0.009	0.001
R0.031	0.008	0.001
R0.047	0.006	0.001

(Unit: in)


TNMG-SW/-FW (Type F)

Nose Radius	X-axis direction	Z-axis direction
R0.016	0.001	0.009
R0.031	0.001	0.008
R0.047	0.001	0.006

(Unit: in)

● Compensations ⑤ Program compensations for tapered surface (proceed after ④) (in)

To machine tapered surfaces with DNMG or TNMG-SW/-FW insert, compensate both the x-axis and z-axis positions. Since these inserts are commonly used for profiling, to machine a tapered surface with a gradual reduction in diameter, the z-axis position has to be compensated in the negative direction.

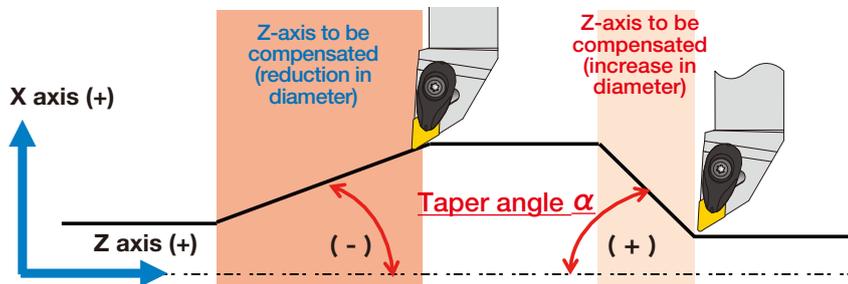

Compensations for x- and z-axes when using DNMG or TNMG-SW/-FW

Match the insert nose radius and the angle of the surface taper to find the value in below to compensate the x-axis and/or z-axis positions.

For DNMG-SW/-FW (Type J)

X-axis compensation values for plus-tapered surface (increase in diameter)(in)

(Unit: in)

Nose radius (in)	Taper angle α (θ)																			
	0	0.197	0.394	0.591	0.787	0.984	1.181	1.378	1.575	1.772	1.969	2.165	2.362	2.559	2.756	2.953	3.150	3.346	3.543	
R0.016	0	-0.0004	-0.0004	-0.0004	-0.0004	-0.0008	-0.0012	-0.0016	-0.0024	-0.0031	-0.0039	-0.0055	-0.0075	-0.0079	-0.0079	-0.0075	-0.0075	-0.0075	-0.0075	0
R0.031	0	0.0004	0.0008	0.0008	0.0012	0.0012	0.0008	0.0004	0.0000	-0.0008	-0.0020	-0.0035	-0.0059	-0.0067	-0.0059	-0.0051	-0.0047	-0.0043	-0.0043	0
R0.047	0	0.0008	0.0016	0.0020	0.0024	0.0028	0.0028	0.0024	0.0016	0.0008	-0.0008	-0.0035	-0.0067	-0.0075	-0.0063	-0.0055	-0.0051	-0.0051	-0.0051	0

Z-axis compensation values for minus-tapered surface (reduction in diameter)(in)

Nose radius (in)	Taper angle α (θ)				
	-0.984	-0.787	-0.591	-0.394	-0.197
R0.016	0.013	0.013	0.013	0.013	0.013
R0.031	0.012	0.013	0.013	0.013	0.013
R0.047	0.013	0.014	0.015	0.016	0.016

(Unit: in)

* Match the taper angle and insert nose radius to find the value in Table 2 and compensate the NC program by either adding or deducting the value.

Example:
Tapering a surface of +45° (increase in diameter) with a R0.031" insert.
Current NC program: X3.937"
Compensation value: -0.001"
Parameter after compensation: X3.936"

Wiper Insert

Compensations for DNMG / TNMG -SW / -FW

● Compensations ⑤ Program compensations for tapered surface (proceed after ④) (in)

For TNMG-SW/-FW (Type J)



X-axis compensation values for plus-tapered surface (increase in diameter) (in)

Nose radius (in)	Taper angle α (θ)																		
	0	0.197	0.394	0.591	0.787	0.984	1.181	1.378	1.575	1.772	1.969	2.165	2.362	2.559	2.756	2.953	3.150	3.346	3.543
R0.016	0	0	0	-0.0004	-0.0004	-0.0008	-0.0012	-0.0016	-0.0020	-0.0028	-0.0039	-0.0055	-0.0071	-0.0098	-0.0110	-0.0110	-0.0106	-0.0106	0
R0.031	0	0.0004	0.0008	0.0012	0.0016	0.0016	0.0016	0.0012	0.0008	0	-0.0008	-0.0024	-0.0043	-0.0075	-0.0087	-0.0079	-0.0075	-0.0083	0
R0.047	0	0.0008	0.0020	0.0028	0.0031	0.0035	0.0039	0.0035	0.0031	0.0024	0.0012	-0.0008	-0.0039	-0.0087	-0.0102	-0.0098	-0.0098	-0.0122	0

(Unit: in)

Z-axis compensation value for minus-tapered surface (reduction in diameter) (in)

Nose radius (in)	Taper angle α (θ)				
	-0.984	-0.787	-0.591	-0.394	-0.197
R0.016	0.0165	0.0165	0.0165	0.0161	0.0157
R0.031	0.0138	0.0126	0.0130	0.0134	0.0130
R0.047	0.0165	0.0142	0.0150	0.0154	0.0146

(Unit: in)

For TNMG-SW/-FW (Type G)




X-axis compensation values for plus-tapered surface (increase in diameter) (in)

Nose radius (in)	Taper angle α (θ)																		
	0	0.197	0.394	0.591	0.787	0.984	1.181	1.378	1.575	1.772	1.969	2.165	2.362	2.559	2.756	2.953	3.150	3.346	3.543
R0.016	0	0	-0.0004	-0.0004	-0.0008	-0.0012	-0.0016	-0.0020	-0.0028	-0.0035	-0.0047	-0.0063	-0.0087	-0.0110	-0.0114	-0.0114	-0.0114	-0.0126	0
R0.031	0	0.0004	0.0008	0.0008	0.0012	0.0008	0.0008	0.0004	-0.0004	-0.0012	-0.0024	-0.0039	-0.0067	-0.0098	-0.0098	-0.0098	-0.0110	-0.0157	0
R0.047	0	0.0012	0.0024	0.0031	0.0035	0.0039	0.0043	0.0039	0.0035	0.0028	0.0016	-0.0004	-0.0035	-0.0071	-0.0071	-0.0071	-0.0079	-0.0134	0

(Unit: in)

For TNMG-SW/-FW (Type F)



X-axis compensation values for plus-tapered surface (increase in diameter) (in)

Nose radius (in)	Taper angle α (θ)																		
	0	0.197	0.394	0.591	0.787	0.984	1.181	1.378	1.575	1.772	1.969	2.165	2.362	2.559	2.756	2.953	3.150	3.346	3.543
R0.016	0	-0.0012	-0.0020	-0.0031	-0.0039	-0.0051	-0.0051	-0.0043	-0.0039	-0.0035	-0.0031	-0.0028	-0.0024	-0.0020	-0.0020	-0.0016	-0.0012	-0.0008	0
R0.031	0	-0.0016	-0.0020	-0.0028	-0.0035	-0.0047	-0.0039	-0.0028	-0.0020	-0.0012	-0.0004	0.0004	0.0012	0.0020	0.0028	0.0035	0.0043	0.0051	0
R0.047	0	-0.0012	-0.0016	-0.0020	-0.0028	-0.0035	-0.0020	-0.0004	0.0012	0.0028	0.0043	0.0059	0.0071	0.0087	0.0098	0.0110	0.0126	0.0138	0

(Unit: in)

● Compensations ⑥ Program compensation for corner radii (proceed after ④) (in)

To achieve the correct corner radius dimension on the workpiece, compensate the tool position, using the values listed below for respective insert styles.

DNMG-SW/-FW (Type J)

Nose Radius	Deviation on the corner radius	Compensate radius by
R0.016	0	0
R0.031	0.0008	+0.0079
R0.047	0.0039	+0.0134

(Unit: in)

TNMG-SW/-FW (Type J)

Nose Radius	Deviation on the corner radius	Compensate radius by
R0.016	0	0
R0.031	0.0012	+0.0051
R0.047	0.0043	+0.0142

(Unit: in)

TNMG-SW/-FW (Type G, Type F)

Nose Radius	Deviation on the corner radius	Compensate radius by
R0.016	0	0
R0.031	0.0008	+0.0059
R0.047	0.0035	+0.0150

(Unit: in)

Additional information on offsetting -SW / -FW wiper inserts


● Compensations ①, ④ Tool offsets (Compensations for X- and Z-axis)

Why need to offset ?

Ex. When using DNMG433


The wiper insert does not provide the exact corner radius. A deviation from the standard nose radius shape as shown below will always occur when going into a corner. An additional program adjustment is, therefore, required to achieve the correct corner radius or tapered surface dimension on the workpiece.

Before offset

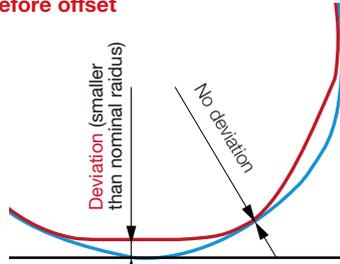

Wiper nose radius' contour is slightly smaller than the nominal radius.
→ The nose radius profile deviates from the required corner radius, thus the actual corner profile will be **incorrect**.

After offset

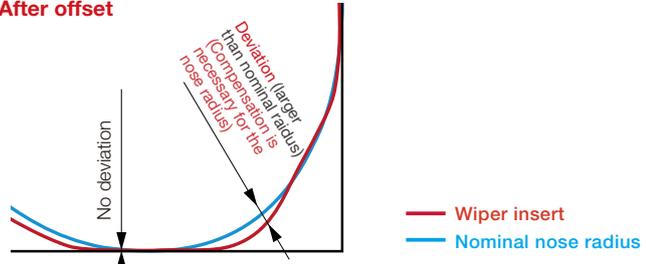

Wiper nose radius' contour is partially larger than the nominal radius.
→ No compensations necessary for ID, OD, or face turning.
Meanwhile, **due to these deviations, compensations to the NC program are necessary when turning corners and tapered surfaces** for the correct workpiece dimensions.

● Compensations ③, ⑥ Program compensation for corner radii (proceed after ①, ④) (in)

Compensation for corner radius

Ex. When using DNMG433

Example: to machine a corner radius = R0.079", using insert nose radius = R0.047".


For standard ISO insert: DNMG433-**

Input R0.8 for G2 or G3 (circular interpolation) to compensate the nose radius deviation.

Wiper insert

For wiper insert: DNMG433-SW/-FW


Input **R0.055"** (= R0.031" + 0.013" from the list) for the nose radius, instead of R0.8, to compensate the nose radius deviation.

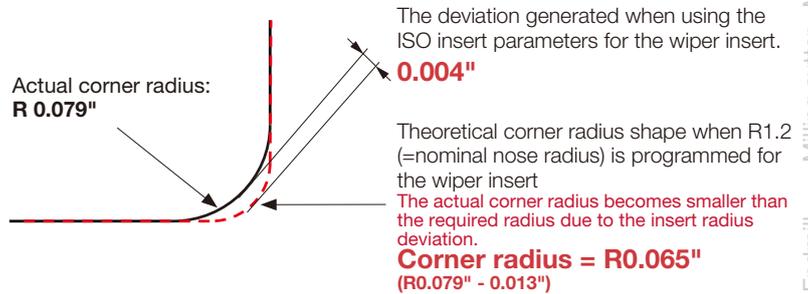

Designation system for Insert

Symbol	Shape	Nose angle (degree)	Figure
H	Hexagonal	120°	
O	Octagonal	135°	
P	Pentagonal	108°	
S	Square	90°	
T	Triangular	60°	
C	Rhombic	80°	
D		55°	
E		75°	
F		50°	
G	G-shape (Tungaloy's symbol)	70°	
M	Rhombic	86°	
V		35°	
Y	Y-shape (Tungaloy's symbol)	25°	
W	Trigon	80°	
L	Rectangular	90°	
A	Parallelogram	85°	
B		82°	
K		55°	
R	Round	-	

Symbol	Relief angle
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°
O	Others
X	Special



Symbol (class)	Tolerance (inch)		
	Cutting point	Thickness (S)	I.C. dia. (IC)
A	±0.0002	±0.0001	±0.0001
F	±0.0002	±0.0001	±0.0005
C	±0.0005	±0.0001	±0.0001
H	±0.0005	±0.0001	±0.0005
E	±0.001	±0.001	±0.001
G	±0.001	±0.005	±0.001
J	±0.0002	±0.001	±0.002 ~ ±0.005
K	±0.0005	±0.001	±0.002 ~ ±0.005
L	±0.001	±0.001	±0.002 ~ ±0.005
M	±0.003 ~ ±0.007	±0.005	±0.002 ~ ±0.005
N	±0.003 ~ ±0.007	±0.001	±0.002 ~ ±0.005
U	±0.005 ~ ±0.015	±0.005	±0.003 ~ ±0.01

1 Shape

Note: For rhombic and parallelogram inserts, use the smaller nose angle.

1

T

[Example]

C

1

2

N

[Example]

C

2

3

M

G

3

4

G

T

4

5

3

3

4 Groove and hole					
Symbol	Hole	Shape of hole	Chip-breaker	Shape	
N	Without	-	Without		
R			Single-sided		
F			Double-sided		
A	With	Cylindrical hole	Without		
M			Single-sided		
G			Double-sided		
W			Partly cylindrical hole, single-side 40° - 60° Counter sink	Without	
T				Single-sided	
Q			Partly cylindrical hole, double-side 40° - 60° Counter sink	Without	
U	Double-sided				
B	Partly cylindrical hole, single-side 70° - 90° Counter sink	Without			
H		Single-sided			
C	Partly cylindrical hole, double-side 70° - 90° Counter sink	Without			
J					
X					

5 Size (I.C)			
Symbol		Dimensions (in)	
Normal series	Small series	I.C.	Fraction
(1.2)	5	0.156	5/32
(1.5)	6	0.187	3/16
(1.8)	7	0.219	7/32
2	(8)	0.250	1/4
(2.5)	0	0.313	5/16
3		0.375	3/8
4		0.500	1/2
5		0.625	5/8
6		0.750	3/4
7		0.875	7/8
8		1.000	1
(10)		1.250	1-1/4

ANSI Designation


● Detailed accuracy

Corner angles larger than 55°

Inscribed circle	Tolerance on inscribed circle dia. (IC)		Tolerance on corner height (M)		Shape
	J,K,M,N (class)	U (class)	J,K,M,N (class)	U (class)	
0.250	±0.002	±0.003	±0.003	±0.005	H W
0.375					O R
0.500	±0.003	±0.005	±0.005	±0.008	P
0.625					S
0.750					T
1.000	±0.005	±0.010	±0.007	±0.015	C,E,M


● Note on insert thickness

Thickness of insert with chipbreaker grooves is defined as shown to the right.

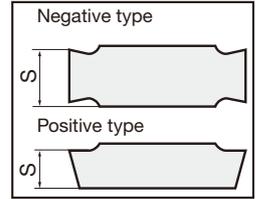


For angles at 55° (M-Class)

Inscribed circle	Tolerance on inscribed circle dia. (IC)	Tolerance on corner height (M)	Applicable insert shape
0.250	±0.002	±0.004	D
0.375			
0.500	±0.003	±0.006	
0.625	±0.004	±0.007	
0.750			

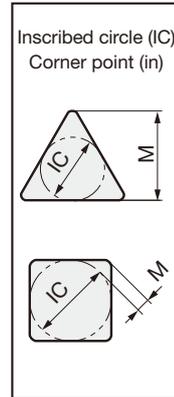

Symbol		Thickness (in)	
Normal series	Small series		
-	2	0.062	1/16
1.5	3	0.094	3/32
2	4	0.125	1/8
2.5	5	0.156	5/32
3	6	0.187	3/16
3.5	-	0.219	7/32
4	-	0.250	1/4
5	-	0.313	5/16
6	-	0.375	3/8

[Example]

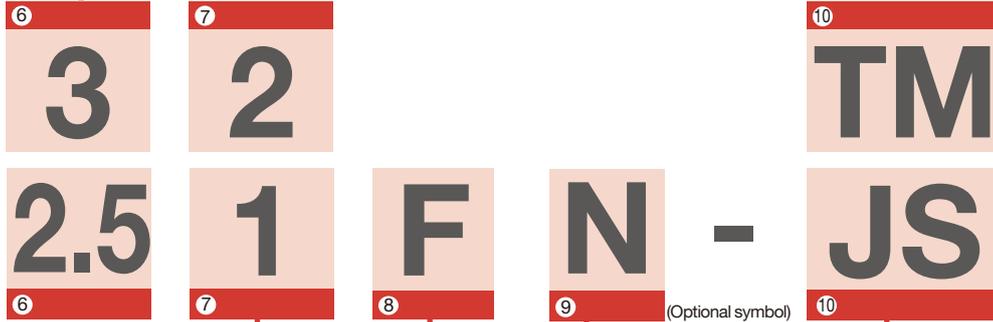

7 Corner radius


Symbol	Corner radius RE (in)	
V	0.001	-
0	0.004	1/256
0.5	0.008	1/128
1	0.016	1/64
2	0.031	1/32
3	0.047	3/64
4	0.062	1/16
5	0.078	5/64
6	0.094	3/32
7	0.109	7/64
8	0.125	1/8

8 Major cutting edge

Symbol	Cutting edge	Shape
F	Sharp	

9 Hand of insert

Symbol	Hand
R	Right
L	Left
N	Neutral

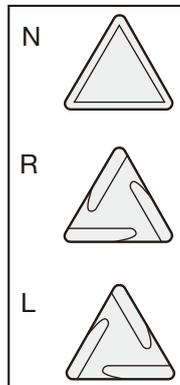

10 Our company's own symbols showing cutting edge conditions. For details, refer to page B007.

Insert hole size chart

Insert hole size		
	I.C.	Diameter
Negatives	1/4	0.089
	3/8	0.150
	1/2	0.203
	5/8	0.250
	3/4	0.312
	1	0.359
Positives	1 1/4	0.346
	5/32	0.087
	3/16	0.087
	13/64	0.110
	7/32	0.094
	1/4	0.110
	5/16	0.134
	3/8	0.173
1/2	0.217	
5/8	0.217	



Designation System for ISO Inserts

● How to decide the insert designation (conforms to JIS B4120-1998, ISO 1832 / AM1:1998)

Symbol	Shape	Nose angle (degree)	Figure
H	Hexagonal	120°	
O	Octagonal	135°	
P	Pentagonal	108°	
S	Square	90°	
T	Triangular	60°	
C	Rhombic	80°	
D		55°	
E		75°	
F		50°	
G	G-shape (Tungaloy's symbol)	70°	
M	Rhombic	86°	
V		35°	
Y	Y-shape (Tungaloy's symbol)	25°	
W	Trigon	80°	
L	Rectangular	90°	
A	Parallelogram	85°	
B		82°	
K		55°	
R	Round	-	

1 Shape

Note: For rhombic and parallelogram inserts, use the smaller nose angle.

Symbol	Relief angle
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°
O	Others
X	Special

2 Relief angle

Symbol (class)	Tolerance (mm)		
	Corner height (M)	Thickness (S)	I.C. dia. (IC)
A	±0.005	±0.025	±0.025
F	±0.005	±0.025	±0.013
C	±0.013	±0.025	±0.025
H	±0.013	±0.025	±0.013
E	±0.025	±0.025	±0.025
G	±0.025	±0.13	±0.025
J	±0.005	±0.025	±0.005 ~ ±0.13
K	±0.013	±0.025	±0.05 ~ ±0.13
L	±0.025	±0.025	±0.05 ~ ±0.13
M	±0.08 ~ ±0.18	±0.13	±0.05 ~ ±0.13
N	±0.08 ~ ±0.18	±0.025	±0.05 ~ ±0.13
U	±0.13 ~ ±0.38	±0.13	±0.08 ~ ±0.25

3 Accuracy

4 Groove and hole					
Symbol	Hole	Shape of hole	Chip-breaker	Shape	
N	Without	-	Without		
R			Single-sided		
F			Double-sided		
A	With	Cylindrical hole	Without		
M			Single-sided		
G			Double-sided		
W			Partly cylindrical hole, single-side 40° - 60° Counter sink	Without	
T			Single-sided		
Q			Partly cylindrical hole, double-side 40° - 60° Counter sink	Without	
U	Double-sided				
B	Special	Partly cylindrical hole, single-side 70° - 90° Counter sink	Without		
H			Single-sided		
C			Without		
J			Double-sided		
X					

5 Cutting edge length and I.C. symbol																
* (R)		(S)		(C)		(W)		(T)		(D)		(V)		(K)		I.C. dia.
Symbol	Length	Symbol	Length	Symbol	Length	Symbol	Length	Symbol	Length	Symbol	Length	Symbol	Length	Symbol	Length	
		03	3.97	03	4.0			06	6.9	04	4.8					3.97
		04	4.76	04	4.8			08	8.2	05	5.8	08	8.3			4.76
05	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5
		05	5.56	05	5.6	03	3.8	09	9.6	06	6.8					5.56
06	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6
		06	6.35	06	6.5	04	4.3	11	11	07	7.8	11	11.2			6.35
		07	7.94	08	8.1	05	5.4	13	13.8	09	9.7					7.94
08	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	8
09	9.525	09	9.525	09	9.7	06	6.5	16	16.5	11	11.6	16	16.6	16	19.7	9.525
10	10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	10
12	12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	12
12	12.7	12	12.7	12	12.9	08	8.7	22	22	15	15.5	22	22.1			12.7
15	15.875	15	15.875	16	16.1	10	10.9	27	27.5	19	19.4					15.875
16	16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	16
19	19.05	19	19.05	19	19.3	13	13	33	33	23	23.3					19.05
20	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	20
		22	22.225	22	22.6			38	38.5	27	27.1					22.225
25	25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	25
25	25.4	25	25.4	25	25.8			44	44	31	31					25.4
31	31.75	31	31.75	32	32.2			55	55	38	38.8					31.75
32	32	-	-	-	-	-	-	-	-	-	-	-	-	-	-	32

*When M0 is included in Designation, the inscribed-circle diameter is metric size. (mm)

● Detailed accuracy for J,K,L,M,N and U classes

For inserts with nose corner angles larger than 55°


Inscribed circle	Tolerance on inscribed circle dia. (IC)		Tolerance on corner height (M)		Applicable insert shape
	J,K,L,M,N (class)	U (class)	J,K,L,M,N (class)	U (class)	
6.35	±0.05	±0.08	±0.08	±0.13	H W
9.525					
12.7	±0.08	±0.13	±0.13	±0.2	O R
15.875					
19.05	±0.1	±0.18	±0.15	±0.27	P
25.4					
31.75	±0.13	±0.25	±0.18	±0.38	S
32					
	±0.15	±0.25	±0.2	±0.38	T
					C,E,M

For M-type inserts with nose corner angles of 55° (Shape: D), 35° (Shape: V), 25° (Shape: Y)



Inscribed circle	Tolerance on inscribed circle dia. (IC)		Tolerance on corner height (M)	Applicable insert shape
	J,K,L,M,N (class)	U (class)		
6.35	±0.05	±0.08	±0.11	D
9.525				
12.7				
15.875	±0.1	±0.18	±0.15	
19.05				
6.35	±0.05	±0.08	±0.16	V
9.525				Y

● Insert thickness

For many of the inserts with chipbreaker, the insert height of the cutting edge is lower. In that case, the insert thickness outlined in the drawing of external dimensions is equivalent of "S" in the figure on the right.

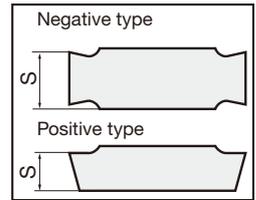

Symbol	Thickness (mm)
X1	1.39
01	1.59
T1	1.98(1.79)
02	2.38
T2	2.78
03	3.18
T3	3.97
04	4.76
05	5.56
06	6.35
07	7.94
09	9.52

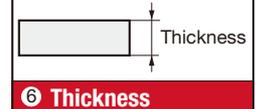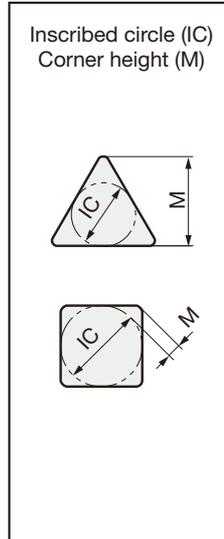

[Example]

6 **04** 7 **08** - 10 **TM**

6 **T3** 7 **04** 8 **F** 9 **N** - 10 **JS**

7 **Corner radius**

Symbol	Corner radius RE (mm)
00	0.03
02	0.2
04	0.4
08	0.8
12	1.2
16	1.6
20	2
24	2.4
28	2.8
32	3.2

8 **Major cutting edge**

Symbol	Cutting edge	Shape
F	Sharp	
E	Rounded	
W.T	Chamfered	
S	Combination	

9 **Hand of insert**

Symbol	Hand
R	Right
L	Left
N	Neutral

10 **Chipbreaker**

Symbol	Applications	Symbol	Applications
01(TF)	Precision finishing (Basic selection)	AFW	Small depth of cut and high feed (Wiper type Inserts)
TS	Finishing (Basic selection)	ASW	Small depth of cut and high feed (Wiper type Inserts)
TSF	Finishing (Basic selection)	CB	Medium cutting
TM	Medium cutting (Basic selection)	CM	Medium cutting of cast irons
THS	Medium to heavy cutting (Basic selection)	All-round	Medium cutting
TRS	Medium to heavy cutting	A	Finishing (Right and left hand)
TUS	Heavy cutting	B	Finishing (Right and left hand)
DM	Medium cutting	C	Finishing (Right and left hand)
HRF	Finishing	D	Finishing (Right and left hand)
HRM	Finishing to medium cutting	P	Finishing of Aluminum alloys
HMM	Finishing to medium cutting	W	Finishing (Angular type)
SF	Finishing of stainless steels	PSF	Finishing (Positive type)
SS	Finishing of stainless and mild steels	PSS	Finishing to light cutting (Positive insert)
SM	Medium cutting of stainless steels	PS	Finishing to medium cutting (Positive type Basic selection)
S	Medium cutting of stainless steels	PM	Medium cutting (Positive type)
SH	Medium to heavy cutting of stainless steels	AL	Finishing to medium cutting of aluminum alloys
SA	For heat-resisting alloys and stainless steels	RS	Medium cutting (For round inserts)
ZF	Finishing and profiling	W□□	Finishing (Angular type)
ZM	Finishing to medium cutting and profiling	H□□	Finishing to medium cutting (Parallel)
NS	Finishing and profiling	11	Finishing
NM	Finishing to medium cutting and profiling	61	Small depth of cut and high feed (For round inserts)
AS	Small depth of cut and high feed	S1	Finishing (For KNMX type)
TA	Medium cutting	J08,J10	For small lathes
TQ	Medium cutting	JS	For small lathes
AM	Small depth of cut and high feed	JRP	For small lathes
FW	Finishing (Wiper type)	JPP	For small lathes
SW	Finishing to medium cutting (Wiper type)	JSP	For small lathes

Designation system for Toolholders

A,C	Clamp-on
D	Double clamp ("One Double")
E	Eccentric pin lock
M	Multi-clamp
P	Pin-lock
S	Screw-on
T	Taper-lock
W	Wedge-on
1 Clamping system	

Symbol	Shape	Offset						
A		Without	G		With	R		Without
			J			S		With
B		Without	K		With	X*		With
C		Without	L		With	Y		With
D		Without	N		Without	*mark: Tungaloy's symbol		
E		Without	P		Without			
F		Without	Q		With			
3 Cutting edge style								


(Example)



2 Insert shape	
C	80° Rhombic
D	55° Rhombic
K	55° Parallelogram
R	Round
S	Square
T	Triangular
V	35° Rhombic
W	Trigon

4 Relief angle of insert	
C	0°
B	5°
C	7°
D	15°
E	20°
P	11°

ANSI Designation

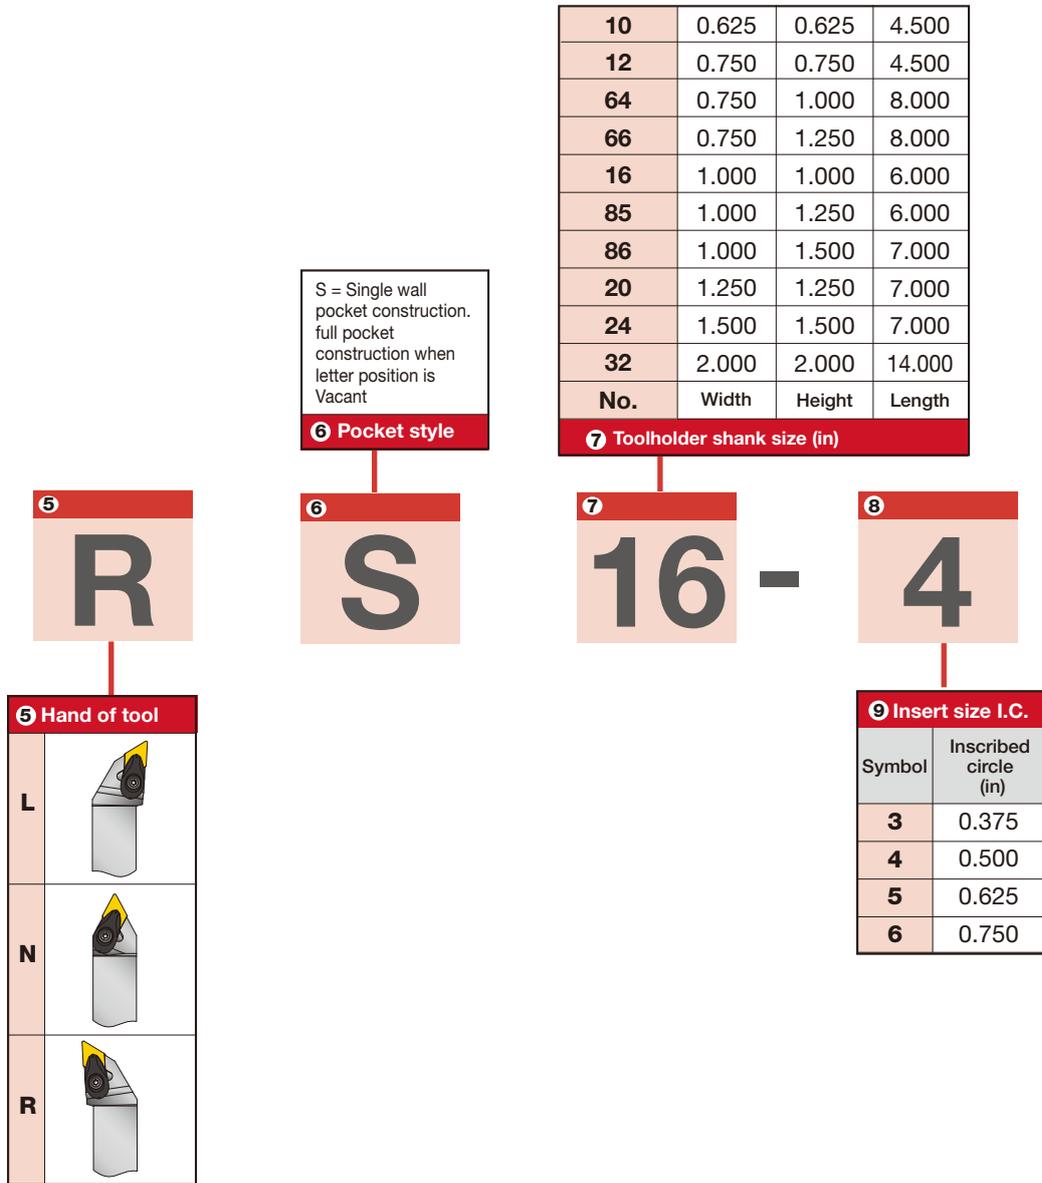

Designation System for External Toolholders

A Double Clamping		JP Side lever clamping	
C Clamp-on		JS Screw-on	
D One-Double		JT Side clamping	
P Lever-lock		M Multi clamping	
		X Double Clamping	
		S Screw-on	
		T Taper-lock	

1 Clamping system

Symbol	Shape	Offset	H	With	P	*	With	
A		Without	I		With	P		Without
			J		Without	Q		With
			J2		With	S		With
B		Without	J2		Without	V		Without
			K		With	U		With
C		Without	L		With	X		With
D		Without	L2		Without	Y		With
E		With	N		Without	Z		Without
G		With	N3		With	No mark: ISO symbol		
			P		Without	*mark: Tungaloy's symbol		

3 Cutting edge style

(Example)

1
A

2
W

3
L

4
N

5
R

(Example)

P

T

G

N


R

2 Insert shape	
C	80° Rhombic
D	55° Rhombic
K	55° Parallelogram
R	Round
S	Square
T	Triangular
V	35° Rhombic
W	Trigon

4 Relief angle of insert	
C	
B	
N	
P	

5 Hand of tool	
L	
N	
R	

ISO Designation

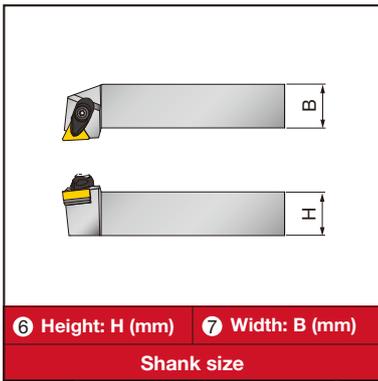

6

25

20

7

25

20

F	80	*MiniForceTurn
F	85*	
H	100	
X	120	
K	125	
M	150	
P	170	
Q	180	
R	200	
S	250	
T	300	
U	350	

8 Holder length

8

M

K

08

3

9

RD	Ceramic insert with dimple
C	For ceramic insert
A	Turning A

11 Added symbol

11

A

3

10


9 Insert size

Symbol	Inscribed circle (mm)	
3	9.525	<p>In the ISO metric system, edge length of inserts is expressed by L in 2 digits.</p>
4	12.7	
5	15.875	
6	19.05	
8	25.4	

10 Insert thickness


Symbol	Thickness (mm)	
2	3.18	
3	4.76	

Designation system for Toolholders

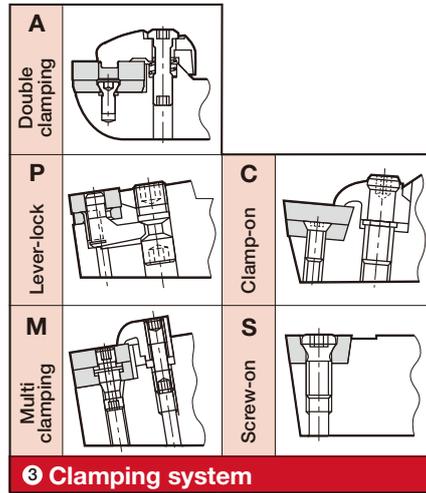

C		80° Rhombic
D		55° Rhombic
K		55° Parallelogram
R		Round
S		Square
T		Triangular
V		35° Rhombic
Y		25° Rhombic (Non ISO)
W		Trigon

4 Insert shape

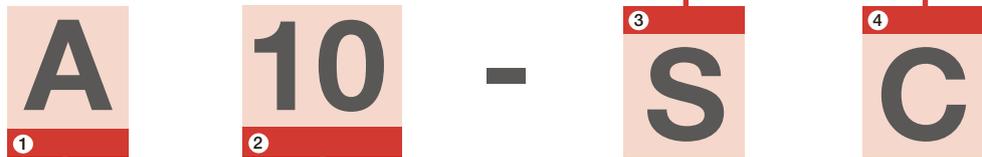

1 Bar composition

A	Steel shank with oil hole
E	Carbide shank with steel head & oil hole
C	Carbide shank with steel head
S	Steel shank

2 Bar diameter (in)


06	0.375
08	0.500
10	0.625
12	0.750
16	1.000
20	1.250

Metric: The diameter of the bar is shown in mm.

ANSI Designation

Symbol	Style	Offset						
A		Without	G		With	S		With
			J		Without	V		Without
B		Without	K		With	U		With
			L		Without	X*		With
C		Without	L		With	Y		With
D		Without	N		Without	Z		Without
E		Without	P*		Without	Note *mark: Tungaloy standard No mark: ISO standard		
F		With	Q*		With			

6 Relief angle of insert	
N	0°
B	5°
C	7°
D	15°
E	20°
P	11°

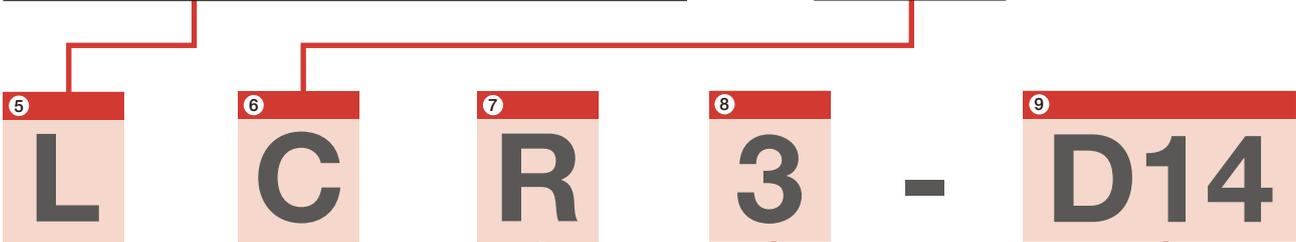


7 Hand of tool	
R	
L	
N	Neutral

8 Insert size I.C.	
Symbol	Inscribed circle (in)
3	0.375
4	0.500
5	0.625
6	0.750

9 Min. bore diameter (in)	
Stream Jet Bar	
D14	14/16 (ø0.875)

Designation System for Internal Toolholders

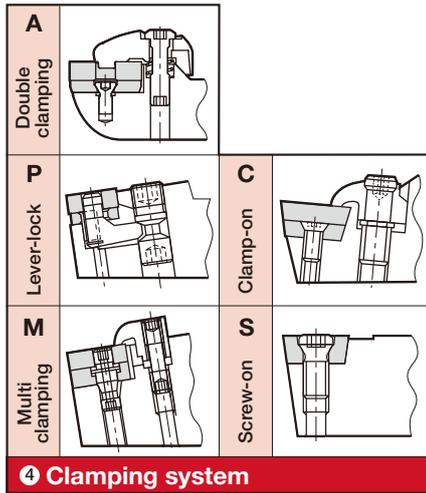

C		80° Rhombic
D		55° Rhombic
K		55° Parallelogram
R		Round
S		Square
T		Triangular
V		35° Rhombic
Y		25° Rhombic (Non ISO)
W		Trigon

5 Insert shape



1 Bar composition	
A	Steel shank with oil hole
E	Carbide shank with steel head & oil hole
C	Carbide shank with steel head
S	Steel shank
T	Steel shank reinforced with carbide plates ("Tsuppari-Ichiban")
JS	J series Steel shank

2 Bar diameter
Bar diameter is shown in mm.



3 Toolholder length (mm)	
F	80
G	90
H	100
J	110
K	125
L	130
M	150
P	170
Q	180
R	200
S	250
T	300
U	350

ISO Designation

Symbol	Style	Offset						
A		Without	G		With	S		With
			J			V		Without
B		Without	K		With	X*		With
C		Without	L		With	Y		With
D		Without	N		Without	Z		Without
E		Without	P*		Without	Note *mark: Tungaloy standard No mark: ISO standard		
F		With	Q*		With			

C	
B	
N	
P	
X	Special

6 U **7** P **8** R **9** 1102 **10** C - **11** D140

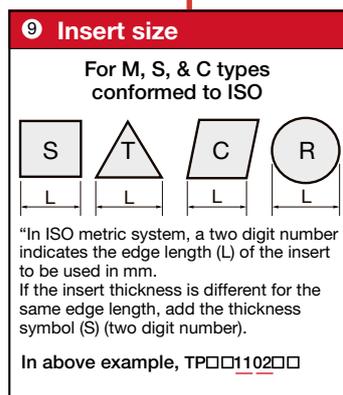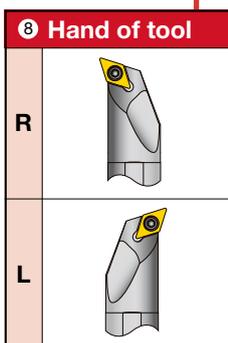

11 Min. bore diameter (mm)

Stream Jet Bar		Tsuppari-Ichiban	
D140	ø14	D14	ø14

Designation System for CBN / PCD Inserts

■ CBN Insert
Regular type

T 2 QP - CNGA120404 -L

1 2 3 4 5

2 Number of corners

3 Type

QP	Flat-brazed type inserts
QS	WavyJoint

4 ISO symbol

5 Special feature & chipbreaker

Without, SR	Standard cutting edge	SP	Standard cutting edge (MiniForce-Turn)
F	Sharp edge	-HP	With chipbreaker
-L	Excellent wear resistance	-HS	With chipbreaker
-LF	Lower cutting force, superior sharpness	-HF	With chipbreaker
-LC	Excellent crater wear resistance	-HM	With chipbreaker
-H, HC	Excellent fracture resistance	W	With wiper
-E	Lower cutting force	W□	With wiper
LT	For smooth machining with lower cutting force		

1 "T" means 10 pieces per package.

Regrindable type

TNGA 330.5 - QBN

1 2

1 ANSI symbol

2 CBN inserts

For **TUNGCUT**

S G N 200 - 020 -S

1 2 3 4 5

1 Number of edge

S	Single corner
---	---------------

2 Application

G	Grooving
T	Turning·Grooving

3 For use

N	Non breaker
H	High feed

4 Groove width (mm)

200	2
-----	---

5 Corner radius: RE (mm)

020	0.2
-----	-----

5

Without	Lower cutting force
-S, -SR	Standard cutting edge
-H	Excellent fracture resistance

For XG R/L

XG R 63 15 S - QBN

1 2 3 4 5

1 For grooving tool GX-type

2 Hand of Insert

L	Left	10	1
R	Right	15	1.5

3 Groove width (mm)

4 Corner radius: RE (mm)

S	0.2
---	-----

5 CBN inserts

For **TUNGTHREAD**

1 QP - 16 E R 60 - 014 -SP

1 2 3 4 5 6 7 8

1 Number of corners

2 Type

QP	Flat-brazed type inserts
----	--------------------------

3 Type

16	9.525
----	-------

4 Internal/External

E	External
---	----------

5 Hand of Insert

R	Right
---	-------

6 Thread profile

60	60°
----	-----

7 Corner radius: RE (mm)

014	0.14
-----	------

8 Special feature & chipbreaker

-SP	Standard cutting edge (TungThread)
-----	------------------------------------

PCD Insert


Regular type



Regrindable type



For **DUO J CUT**

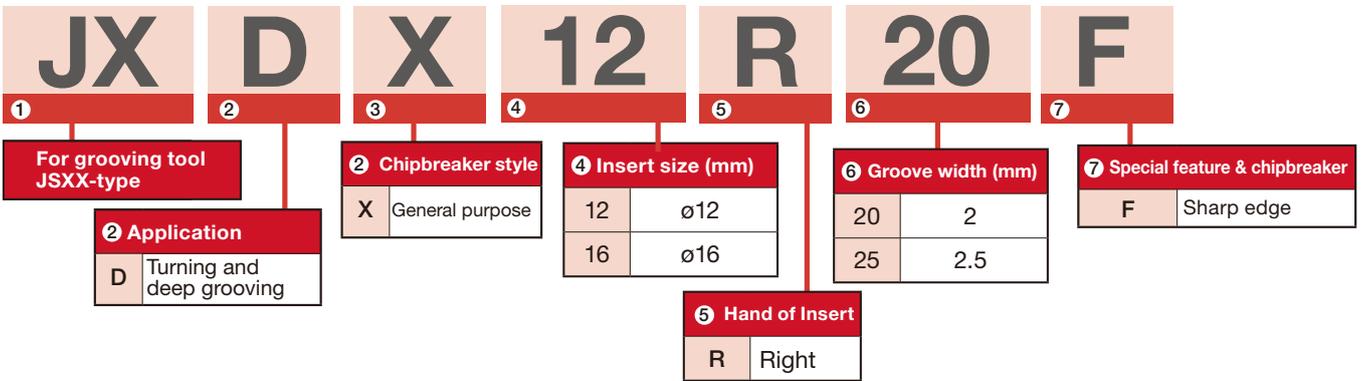

CBN Inserts

Edge preparation specifications

CBN inserts with special edge preparation specifications are made to order. Refer to the following description.


Designation system for edge specifications

Example:
Negative land width: 0.13 mm
Negative land angle: -25°
With R-honing



Shape Negative land width: W Negative land angle: α

- T ... Chamfered
- S ... Chamfered + R-honing
- E ... R-honing alone
- F ... Sharp edge

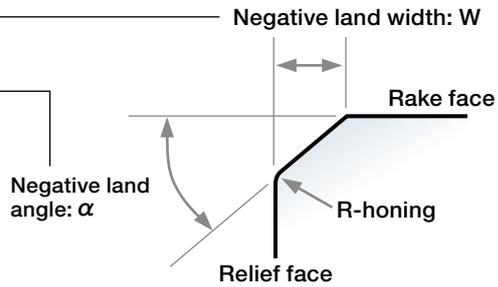


Standard edge specifications

Grade	BXA10	BXA20	BR35F	BXM10	BXM20	BXC50	BX310	BX330	BX360	BX380	BX470	BX480	BX910	BX930
Negative insert	S01325	T01315	S01325	S01315	S01315									
Positive insert	S01325	S01325	S01325	S01325	S01325	-	S00515	S00515	S00515	-	T01315	S00515	S01315	S00515


5 edge preparation options covering various hard turning

Edge preparations turning applications

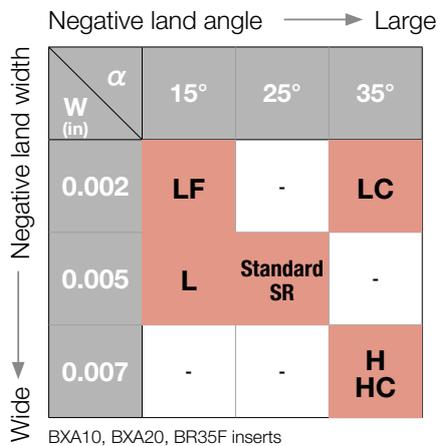


Selections of edge preparations

Allows you to select the most suited types of edge prep for your applications

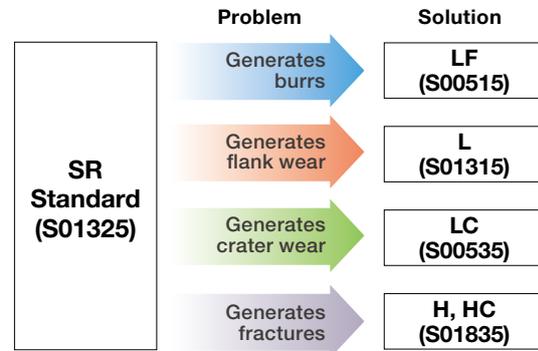

Cutting loads


The -L and -LF provide reduced cutting loads over the standard edge prep type

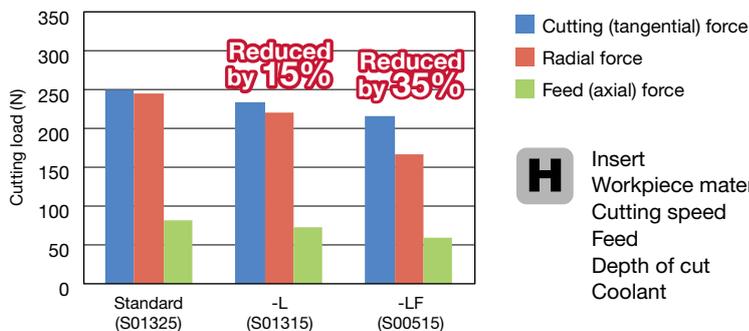

H Insert : 2QP-CNGA 432
 Workpiece material : 4140 (Alloy steel, 60HRC)
 Cutting speed : $V_c = 328$ sfm
 Feed : $f = 0.012$ ipr
 Depth of cut : $a_p = 0.008$ "
 Coolant : Dry


● Flank wear

The -L and -LF provide reduced flank wear over the standard edge prep type

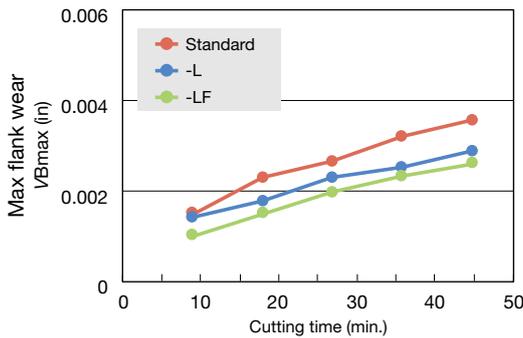

H Insert : 2QP-CNGA 432
 Workpiece material : 4140 (Alloy steel, 60HRC)
 Cutting speed : $V_c = 427$ sfm
 Feed : $f = 0.006$ ipr
 Depth of cut : $a_p = 0.008$ "
 Coolant : Wet

■ Relationship between negative land angle and tool life in interrupted turning

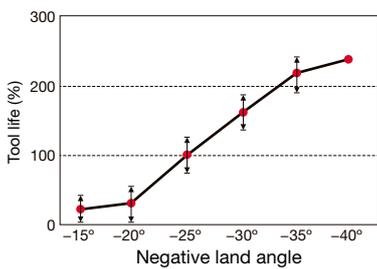

Insert : TNGN 331 QBN BX270
 Edge preparation : □□°+ R-honing
 Workpiece material : 4140 (Alloy steel, 60HRC)
 Cutting speed : $V_c = 328$ sfm
 Feed : $a_p = 0.01$ "
 Depth of cut : Dry
 Coolant : Dry


● For interrupted cutting, large negative land angle is favorable to minimize fracture.

■ Wiper insert


● A finishing edge (wiper edge) is formed at the point of intersection between corner radius and straight cutting edge.

● Effect of wiper edge

- Doubles the productivity → Reduced machining time
 The wiper edge can double the feed rate and moreover does not deteriorate the surface roughness. (Note: Feed rate: $*f < 0.3$ mm/rev)
- Superior surface roughness → By integrating roughing and finishing into one process, productivity can be increased.
 Compared with conventional inserts only with corner radius, surface roughness can be improved with the wiper edge.

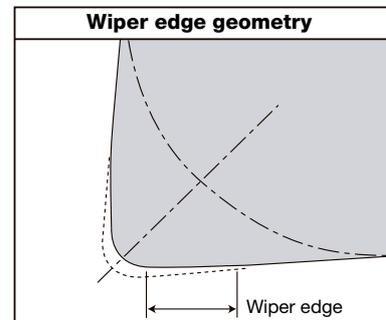

■ Profiles of surface roughness

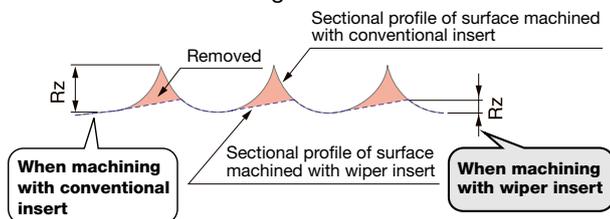

■ Recommended toolholders for wiper inserts

	2QP-CNGA 43* FW	3QP-WNGA 43* FW	2QP-DNGA 43*-WJ	3QP-TNGA 33*-WG
End cutting angle	95°		93°	91°
External toolholder	ACLNR/L**4-A	AWLNR/L**4-A	ADJNR/L**4-A	ATGNR/L**3-A
	DCLNR/L**12	DWLNR/L**08	DDJNR/L**15	DTGNR/L**16
Internal toolholder	A**-ACLNR/L4-D...	A**-AWLNR/L**4-D...	A**-ADUNR/L4-D...	A**-ATFNR/L3-D...

CBN Grades

H CBN series for hardened steel and hard material

Application area

Necessity of CBN grades

The condition necessary to cut the work: **Material is: Hardness of tool ≥ Hardness of tool X 3**

- Hardened steel (60HRC) → 700 Hv
- CBN (BX360) → 3300 Hv
- Cemented carbide → 1600 Hv

Relation of CBN grain size, surface roughness, and cutting speed

[Fine-grained CBN]

Fine grained CBN provided with sharp cutting edge.
Good surface roughness

[Rough-grained CBN]

Rough grained CBN. CBN particles are hold firmly.
Allows high speed machining

Features of CBN grades for machining hardened steel and other hard materials

Fewer CBN content ⇨ Increasing wear resistance
Much CBN content ⇨ Increasing impact resistance

Basic selection of CBN grades in machining of hardened steel and hard material

● Coated CBN grades

- BXA10** For continuous and light interrupted cutting
- BXA20** For general purpose, less than $V_c = 590$ sfm
- BR35F** For Interrupted cutting
- BXM10** For high speeds cutting
- BXM20** For general purpose, more than $V_c = 590$ sfm

● Uncoated CBN grades


- BX310** For high speeds / Priority on wear resistance in continuous cutting
- BX330** For medium speeds / Priority on surface quality
- BX360** For low to medium speeds / General purpose grade with excellent fracture resistance
- BX380** For low to medium speeds / Priority on fracture resistance in heavy interrupted cutting

Application area of coated CBN grades

Continuous cutting

Interrupted cutting

Effects of Coated CBN grades





Coated on hard CBN
Hardness:
CBN > Coating layer

- **Protect CBN from oxidation wear**
Since the coating layer intercepts air, oxidation wear of CBN can be prevented.
- **Peeling of coating layer can be prevented**
Hard and deformation resistant CBN is excellent substrate material.



Improved resistance to flank wear

Effects of coolant in machining of hardened steel

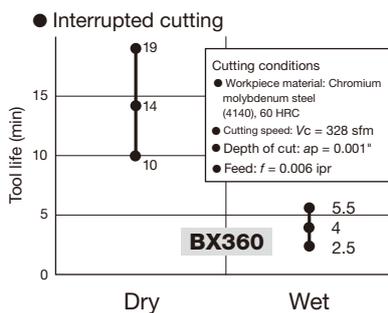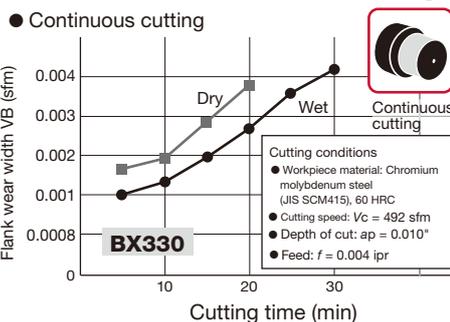





Heavy interrupted



- In continuous cutting, wet cutting is superior to dry cutting in tool life for wear.
- In interrupted cutting, dry cutting is superior to wet cutting in tool life for fracture.






CBN series for sintered metal

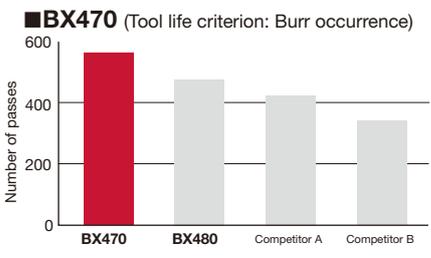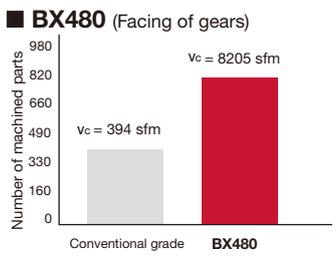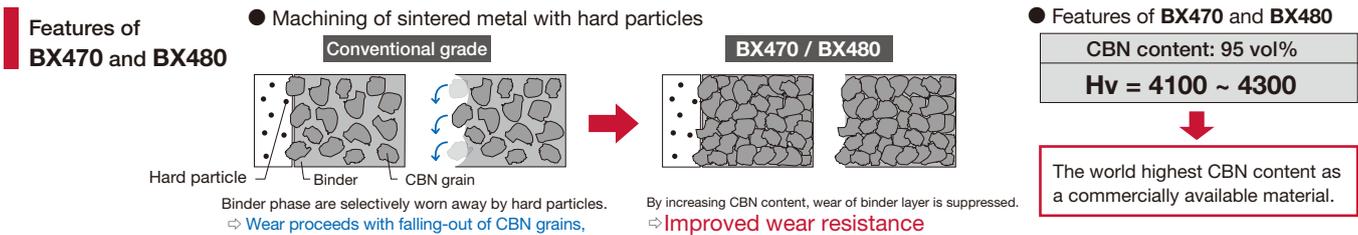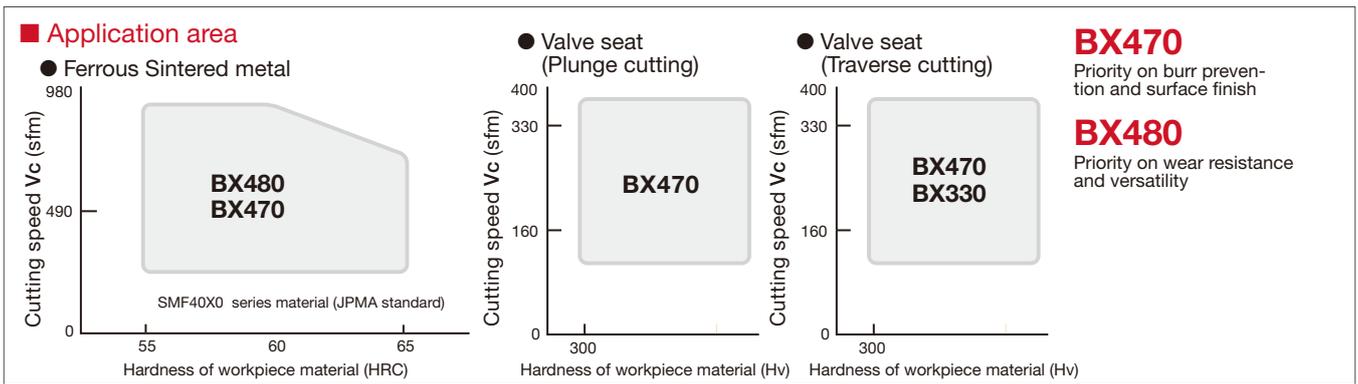


- Cutting conditions**
- Workpiece material: Sintered metal (> HRA60)
 - Insert: DCMW11T308
 - Depth of cut: ap = 0.008" ~ 0.020"
 - Feed: f = 0.003 ipr
 - Coolant: Water soluble type
 - Interrupted cutting
- Cutting conditions**
- Workpiece material: Sintered metal (> HRA60), Nitriding, Hard particles included
 - Cutting speed: Vc = 361 sfm
 - Depth of cut: ap = 0.006"
 - Feed: f = 0.004 ipr
 - Coolant: Water soluble type
 - Interrupted cutting
- Cutting conditions**
- Workpiece material: Ferrous Sintered metal
 - Cutting speed: Vc = 328 sfm
 - Depth of cut: ap = 0.006" ~ 0.012"
 - Feed: f = 0.003 ~ 0.010 ipr
 - Dry and interrupted cutting

CBN series for grey cast iron and ductile cast iron

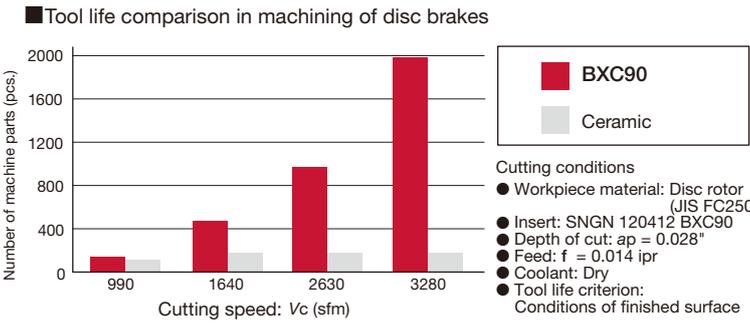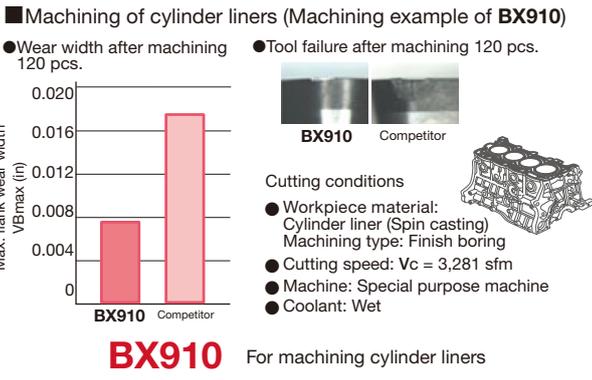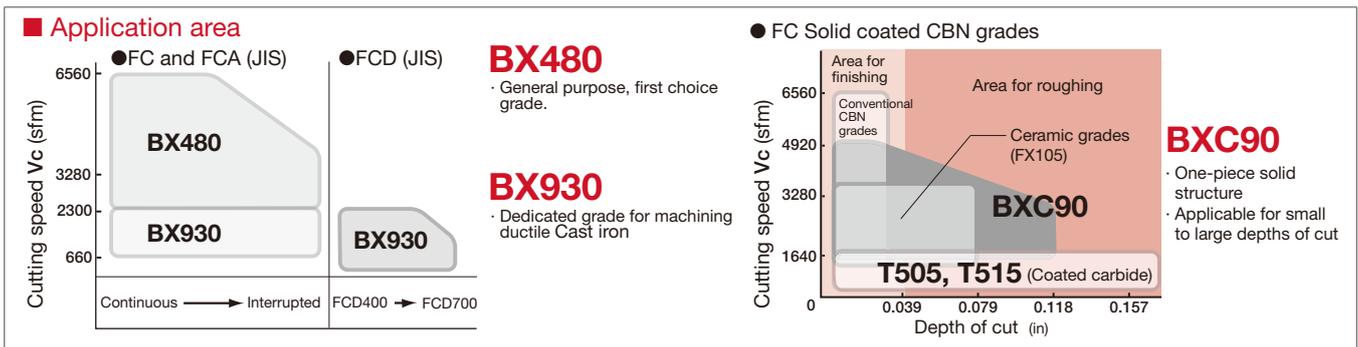

PCD grade, DIA series


Expanded product line allows DIA tools to be applied to wider workpiece materials and cutting conditions.

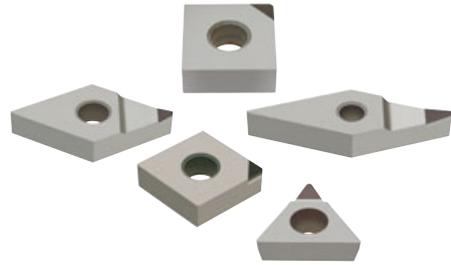


Features and applications (Physical and mechanical properties)

	DX110	DX120	DX140	DX160
Grade				
Property	Super fine grained grade. Excels in surface finish.	Fine grained grade. Excels in surface finish.	General purpose grade	High purity grade for hard materials
Approx. grain size of diamond (µm)	< 1	5	13	28
Hardness (Hv)	8500	→		10000 (Harder)
Wear resistance	→			Higher
Grindability (Cutting edge sharpness)	Better	←		

Cutting performance (Wear resistance)

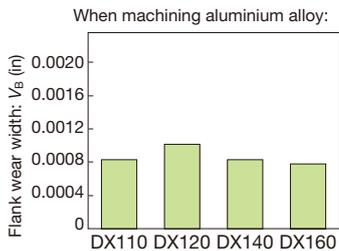


- Continuous external turning**
- Workpiece material: 10 % Si, aluminum alloy
 - Insert: SPGN120308-DIA
 - Toolholder: CSBPR2525M4
 - Cutting speed: $v_c = 1,640$ sfm
 - Feed: $f = 0.004$ ipr
 - Depth of cut: $a_p = 0.020$ "
 - Coolant: Dry cutting
 - Cutting time: 30 min

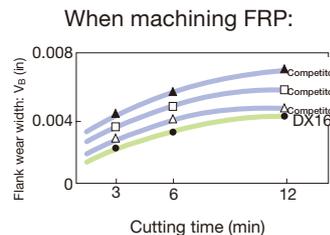

- Face milling**
- Workpiece material: Fiber reinforced plastics (FRP)
 - Insert: SFCN42ZFN-DIA
 - Milling cutter: THF4408RIA
 - Cutting speed: $v_c = 3,091$ sfm
 - Feed: $f = 0.004$ ipr
 - Depth of cut: $a_p = 0.059$ "
 - Coolant: Dry cutting

Grade selection guide

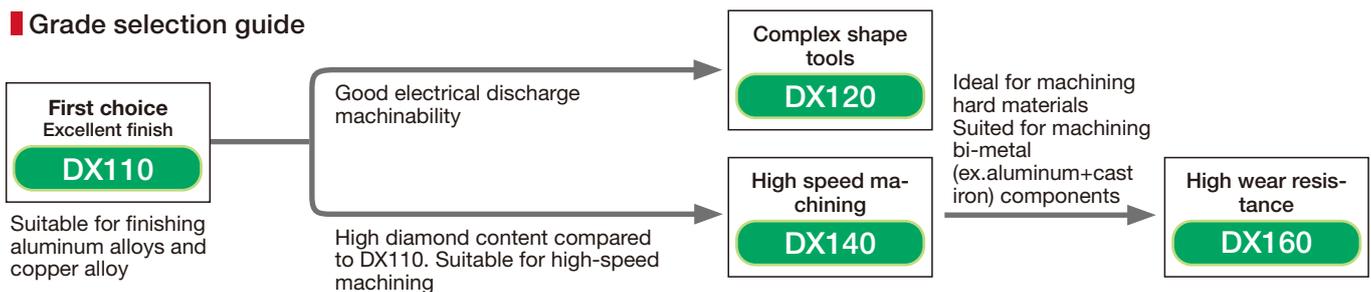

STANDARD CUTTING CONDITIONS


ISO	Workpiece material	Grade				Cutting speed v_c (sfm)	Depth of cut a_p (in)	Feed f (ipr)
		DX110	DX120	DX140	DX160			
N	Aluminum alloys (Si < 12 %)	◎	○	○		4921 (3281 - 8202)	0.020 (0.002 - 0.079)	0.004 (0.002 - 0.008)
	Aluminum alloys (Si ≥ 12 %)	◎	○	○	○	1969 (1312 - 2625)	0.020 (0.002 - 0.079)	0.004 (0.002 - 0.008)
	Copper, brass	◎	○	○		2625 (1640 - 4921)	0.020 (0.002 - 0.079)	0.004 (0.002 - 0.008)
	Phosphor bronze	◎	○	○		1312 (984 - 1640)	0.020 (0.002 - 0.079)	0.004 (0.002 - 0.008)
	Carbon, graphite		○	○	◎	1312 (984 - 1640)	0.020 (0.002 - 0.079)	0.004 (0.002 - 0.008)
	FRP		○	○	◎	2297 (1640 - 3281)	0.008 (0.002 - 0.020)	0.002 (0.001 - 0.004)
	Plastics	◎	○	○		2297 (1640 - 3281)	0.008 (0.002 - 0.020)	0.001 (0.0004 - 0.002)
	Cemented carbides			○	◎	49 (33 - 66)	0.004 (0.002 - 0.008)	0.001 (0.0004 - 0.002)
	Green ceramics			○	◎	427 (328 - 492)	0.020 (0.002 - 0.079)	0.002 (0.001 - 0.004)

(Note) ◎ : First choice ○ : Second choice

Fundamentals of screw threads


● Relationship between lead, lead angle and pitch

1. Lead is the axial distance a screw advances in one rotation. In single start screw, the lead is equal to the pitch.
2. The inclination angle of a threaded groove is called lead angle. In screws of the same diameter, the lead angle increases as the pitch increases.
3. The side face of a completed thread groove is called flank. The distance between the crest and the root is called thread height.

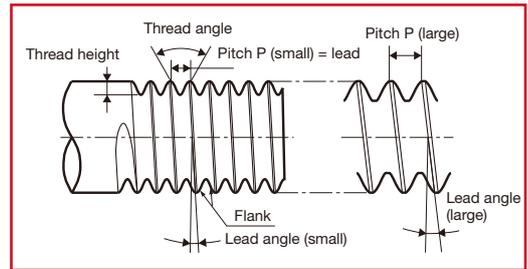

● Single and multi start thread

1. The single start thread has a single groove. Two start thread or three start thread has two grooves or three grooves respectively.
2. The pitch of multi start thread is the distance of adjoining groove.
3. When viewing the section of the multi start thread, the pitch is same as that of the single start thread. The lead of the two or three start thread is twice or three times the pitch. The multi start thread is mainly used for trapezoidal threads.

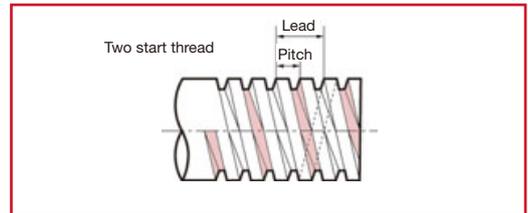

● Tolerance class of threads

Tolerance classes of screw threads are expressed as follows:
Metric coarse external thread: 6h, 6g Metric coarse internal thread: 5H, 6H

These classes are ranked with tolerances of thread diameter, pitch, thread angle, etc. For fastening applications, 6H- and

6g-class (former JIS second class) threads, manufactured by cutting or rolling, are generally used. 5H- and 4h-class threads (former JIS first class) are generally finished by grinding.

For example, M8-6g means metric coarse external thread of 6g tolerance class.

TAC threading insert


● Difference between full-profile and partial-profile insert

● Full-profile insert


In the full-profile insert, the major diameter of the thread is finished by the profiled finishing edge as shown in Figure below. Therefore, about 0.1 mm of finishing stock must be left on the outer surface of the workpiece before threading. In trapezoidal threads, since slants of 15° to 30° are left on the crest of the

thread as shown in Figure below, these portions must be finished by another tool later.

Full-profile insert could produce no burr and good thread by the profiled finishing edge.

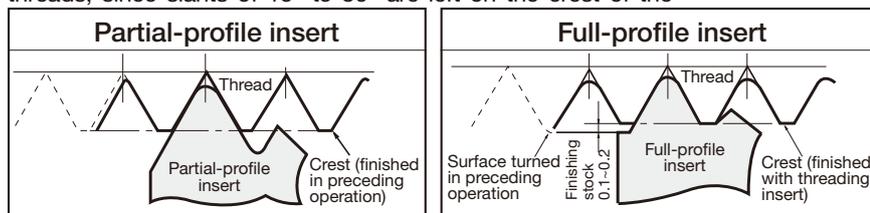

● When machining trapezoidal threads:

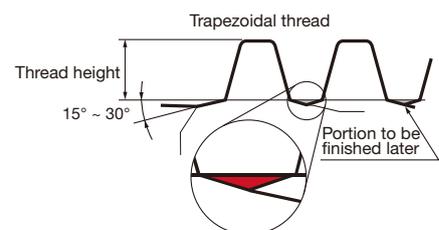

● Partial-profile insert

Partial-profile inserts can not be used for finishing of the crest, but can be applied to a wide range of pitches.

For example

Designation	Pitch (mm)	TPI	Insert radius RE (mm)
16ERA60	0.5 ~ 1.5	48 ~ 16	0.06
16ERG60	1.75 ~ 3	14 ~ 8	0.22

Corner radii of inserts are fitted to the thread of the smallest pitch.

● Difference between external and internal use inserts

In full-profile inserts for metric and unified threads, the corner radius and thread height differ from those for the external and internal use insert respectively. Therefore, the right hand insert for external use and the left hand insert for internal use are not the same tool.

Since the rake angles of toolholders are -10° for external toolholders and -15° for internal toolholders, the external / internal toolholders can not be used for machining internal / external thread.

In Whitworth thread, though the external thread and internal thread have the same thread form, the external and internal toolholders are incompatible because of the different rake angle.

For example

Designation	Applicable inserts	Insert radius R RE (in)	Thread height (in)	Rake angle of holders
16ER20ISO	External	0.010	0.060	-10°
16IL20ISO	Internal	0.006	0.051	-15°



Shim replacement method of ST-type tools

Compensated lead angle of tool and tool relief angle

When the pitch is large or the screw diameter is small, the lead angle becomes large and the effective relief angle on the advance flank side β_2 becomes small. In particular, this will cause shorter life of the insert in the case of trapezoidal screw with small flank angle. It is ideal without any interference for the thread cutting insert to have an equal relief angle on both right and left. Replace the shim so that the rake face of insert faces the thread groove direction (that is, $\beta = \beta_3$).

Calculating the thread lead angle

The thread lead angle is calculated as follows:

$$\beta = \tan^{-1}(\ell / \pi d) = \tan^{-1}(nP / \pi d)$$

β : Thread lead angle
 ℓ : Lead
 n : No. of threads
 P : Pitch
 d : Pitch diameter

Calculating the relief angle of tool

The relief angle β_1 is calculated as follows:

$$\beta_1 = \tan^{-1}(\tan \theta \cdot \tan \alpha)$$

The α of a standard toolholder is 10° for external threading and 15° for internal threading.

Included angle 2θ	θ	β_1	
		External threading tool	Internal threading tool
60°	30°	5.8°	8.8°
55°	27.5°	5.2°	7.9°
30°	15°	2.7°	4.1°
29°	14.5°	2.6°	4°



Accordingly, the effective relief angle is calculated as follows:

$$\beta_2 = \beta_1 + \beta_3 - \beta$$

β : Thread lead angle
 β_2 : Effective relief angle of tool
 β_3 : Compensated lead angle of tool

In other words, $\beta_1 = \beta_2$ when the thread lead angle is equal to the compensated lead angle of tool. Namely, the relief angle of the tool itself is equal to the effective relief angle. If the wrong compensated lead angle is used, $\beta_1 > \beta_2$. The effective relief angle becomes smaller and cause the interference between the flank side of insert and the thread groove. Therefore, carry out compensation of the lead angle so that the following range is obtained:


$\pm 1^\circ$ when the thread angle is 60° and 55°
 $\pm 0.5^\circ$ when the thread angle is 30° and 29°

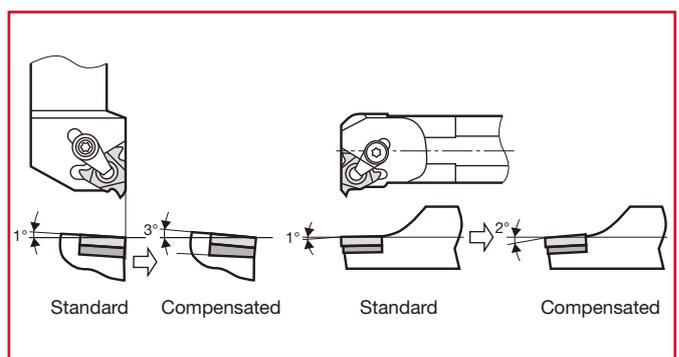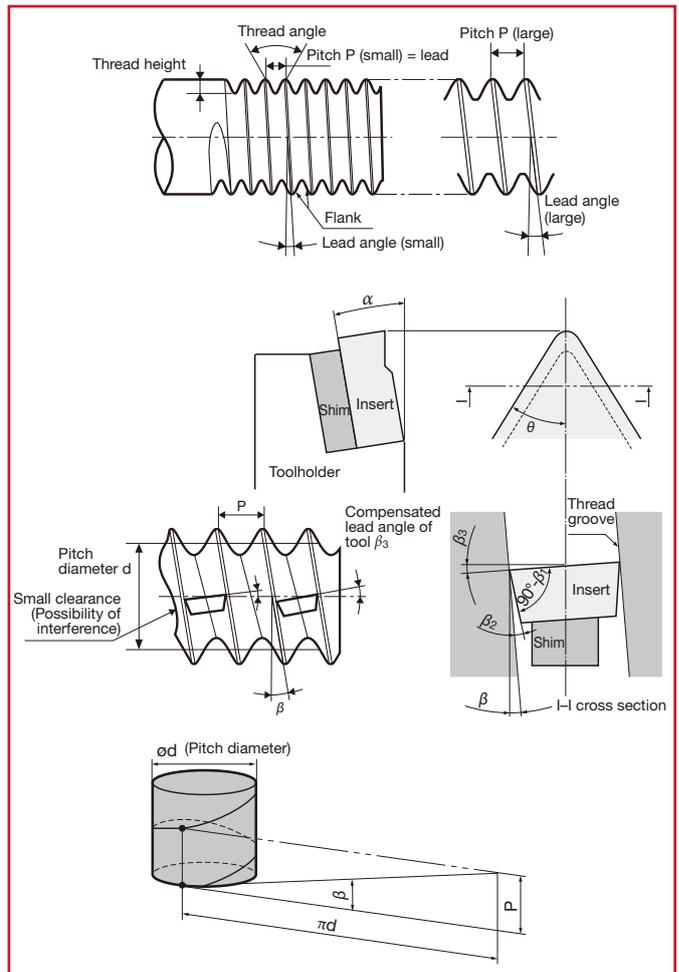

Compensation of lead angle for shim less internal toolholders

When using internal threading toolholders without shim, the above-mentioned method can not be applied for lead angle compensation. Therefore, special toolholders for large lead angles are available as

shown below. The final figure of the designation (-2 or -3) indicates 2° or 3° lead angle to be used respectively. For the toolholders without these figures, please check GAMP of toolholders by catalog.

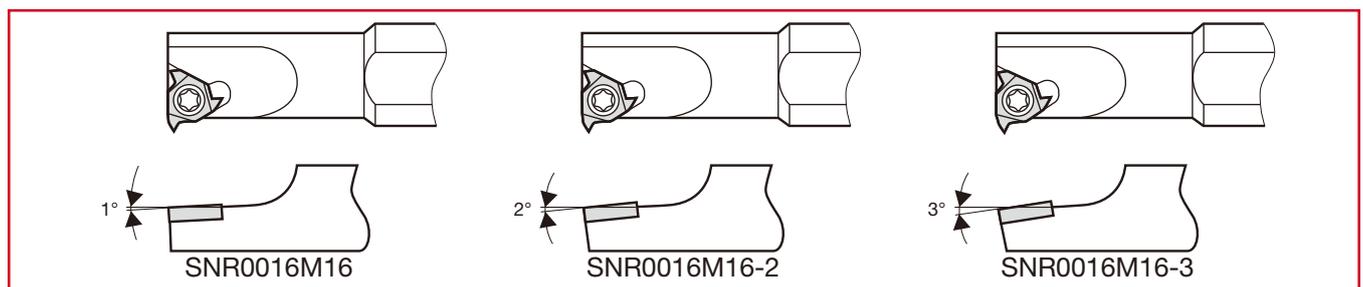

Type of shim and compensated lead angle of tool

The designation of the shim and compensated lead angles of tool are shown in the table.

Compensated lead angles of tool β_3	-2°	-1°	0°	1°	2°	3°	4°
Shim	□□□-98	□□□-99	□□□-0	□□□-1	□□□-2	□□□-3	□□□-4

Note: The last numeral of the shim designation is the compensated lead angle.

Toolholders and applicable shims

Shim replacement method of ST-type tools
Screw-on / clamp-on dual toolholders

Toolholder designation	Shim	
	R	L
CER/L □□□□□ 16DT	AE16-□DT	AN16-□DT
CER/L □□□□□ 22DT	GXE22-□DT	GXN22-□DT
TCNR/L □□□□□ 16DT	AN16-□DT	AE16-□DT
TCNR/L □□□□□ 22DT	GXN22-□DT	GXE22-□DT


Note: Standard shim is AE16-1DT or GX22-1DT. Other types are optional.

Clamp-on type toolholders

Toolholder designation	Shim	
	R	L
CER/L □□□□□ 16-T	AE16-□	AN16-□
CER/L □□□□□ 22-T	NXE22-□	NXN22-□
CER/L □□□□□ 27-T	NXE27-□	NXN27-□
CNR/L □□□□□ 16	AN16-□	AE16-□
CNR/L □□□□□ 22	NXN22-□	NXE22-□
CNR/L □□□□□ 27	NXN27-□	NXE27-□
B-CER/L □□□□□ 16	AE16-□	AN16-□


Note: Standard shim is □□□□□-1. Other types are optional.

Shim selection guide for screw-on / clamp-on dual ST-type tools

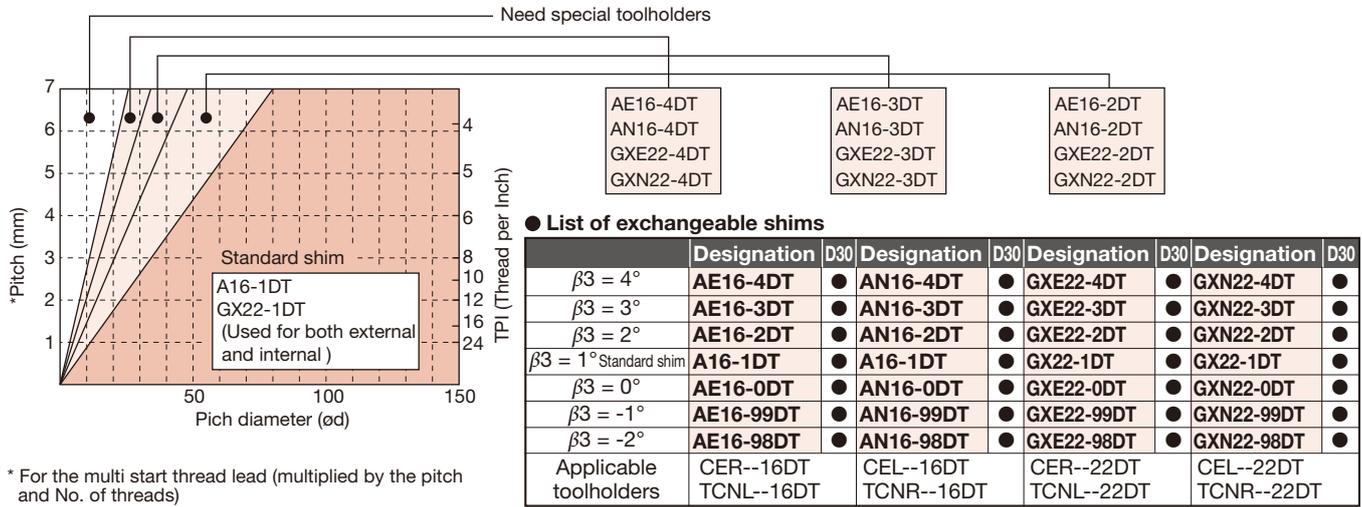

* For the multi start thread lead (multiplied by the pitch and No. of threads)









Shim selection guide for clamp-on type ST-tools




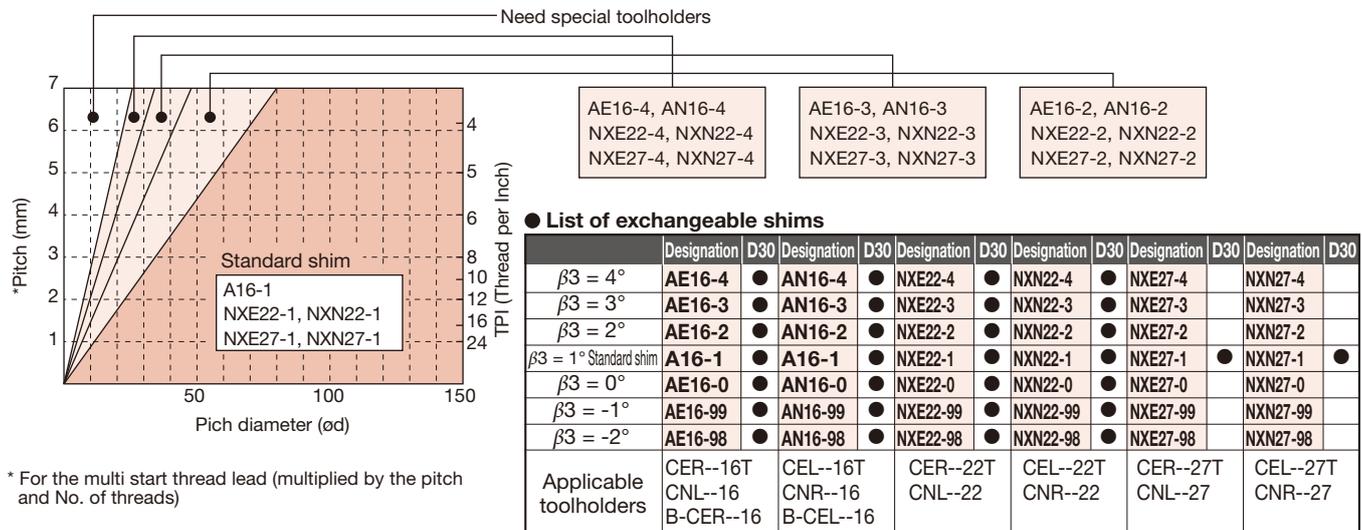


* For the multi start thread lead (multiplied by the pitch and No. of threads)

● : Line up

Threading Methods and Combinations

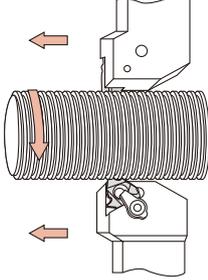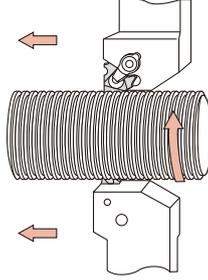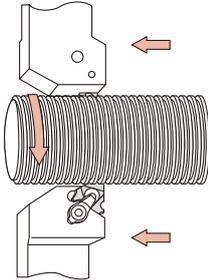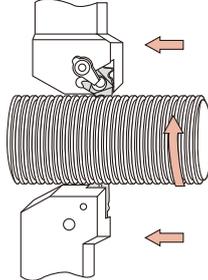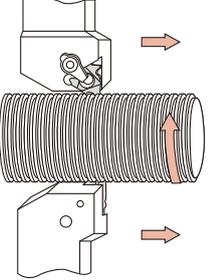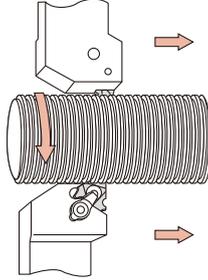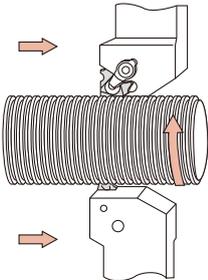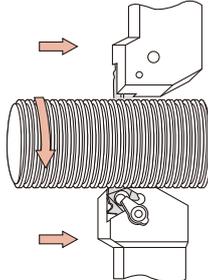External threading																					
Right hand thread	Left hand thread																				
 <table border="1"> <tr><td>Work rotation</td><td>Regular</td></tr> <tr><td>Feed direction</td><td>Push</td></tr> <tr><td>Hand of toolholder</td><td>Right</td></tr> <tr><td>Hand of insert</td><td>Right</td></tr> <tr><td>Standard shim</td><td>①</td></tr> </table>	Work rotation	Regular	Feed direction	Push	Hand of toolholder	Right	Hand of insert	Right	Standard shim	①	 <table border="1"> <tr><td>Work rotation</td><td>Reverse</td></tr> <tr><td>Feed direction</td><td>Push</td></tr> <tr><td>Hand of toolholder</td><td>Left</td></tr> <tr><td>Hand of insert</td><td>Left</td></tr> <tr><td>Standard shim</td><td>②</td></tr> </table>	Work rotation	Reverse	Feed direction	Push	Hand of toolholder	Left	Hand of insert	Left	Standard shim	②
Work rotation	Regular																				
Feed direction	Push																				
Hand of toolholder	Right																				
Hand of insert	Right																				
Standard shim	①																				
Work rotation	Reverse																				
Feed direction	Push																				
Hand of toolholder	Left																				
Hand of insert	Left																				
Standard shim	②																				
 <table border="1"> <tr><td>Work rotation</td><td>Regular</td></tr> <tr><td>Feed direction</td><td>Pull</td></tr> <tr><td>Hand of toolholder</td><td>Left</td></tr> <tr><td>Hand of insert</td><td>Left</td></tr> <tr><td>Standard shim</td><td>④</td></tr> </table>	Work rotation	Regular	Feed direction	Pull	Hand of toolholder	Left	Hand of insert	Left	Standard shim	④	 <table border="1"> <tr><td>Work rotation</td><td>Reverse</td></tr> <tr><td>Feed direction</td><td>Pull</td></tr> <tr><td>Hand of toolholder</td><td>Right</td></tr> <tr><td>Hand of insert</td><td>Right</td></tr> <tr><td>Standard shim</td><td>③</td></tr> </table>	Work rotation	Reverse	Feed direction	Pull	Hand of toolholder	Right	Hand of insert	Right	Standard shim	③
Work rotation	Regular																				
Feed direction	Pull																				
Hand of toolholder	Left																				
Hand of insert	Left																				
Standard shim	④																				
Work rotation	Reverse																				
Feed direction	Pull																				
Hand of toolholder	Right																				
Hand of insert	Right																				
Standard shim	③																				
 <table border="1"> <tr><td>Work rotation</td><td>Reverse</td></tr> <tr><td>Feed direction</td><td>Push</td></tr> <tr><td>Hand of toolholder</td><td>Right</td></tr> <tr><td>Hand of insert</td><td>Right</td></tr> <tr><td>Standard shim</td><td>①</td></tr> </table>	Work rotation	Reverse	Feed direction	Push	Hand of toolholder	Right	Hand of insert	Right	Standard shim	①	 <table border="1"> <tr><td>Work rotation</td><td>Regular</td></tr> <tr><td>Feed direction</td><td>Push</td></tr> <tr><td>Hand of toolholder</td><td>Left</td></tr> <tr><td>Hand of insert</td><td>Left</td></tr> <tr><td>Standard shim</td><td>②</td></tr> </table>	Work rotation	Regular	Feed direction	Push	Hand of toolholder	Left	Hand of insert	Left	Standard shim	②
Work rotation	Reverse																				
Feed direction	Push																				
Hand of toolholder	Right																				
Hand of insert	Right																				
Standard shim	①																				
Work rotation	Regular																				
Feed direction	Push																				
Hand of toolholder	Left																				
Hand of insert	Left																				
Standard shim	②																				
 <table border="1"> <tr><td>Work rotation</td><td>Reverse</td></tr> <tr><td>Feed direction</td><td>Pull</td></tr> <tr><td>Hand of toolholder</td><td>Left</td></tr> <tr><td>Hand of insert</td><td>Left</td></tr> <tr><td>Standard shim</td><td>④</td></tr> </table>	Work rotation	Reverse	Feed direction	Pull	Hand of toolholder	Left	Hand of insert	Left	Standard shim	④	 <table border="1"> <tr><td>Work rotation</td><td>Regular</td></tr> <tr><td>Feed direction</td><td>Pull</td></tr> <tr><td>Hand of toolholder</td><td>Right</td></tr> <tr><td>Hand of insert</td><td>Right</td></tr> <tr><td>Standard shim</td><td>③</td></tr> </table>	Work rotation	Regular	Feed direction	Pull	Hand of toolholder	Right	Hand of insert	Right	Standard shim	③
Work rotation	Reverse																				
Feed direction	Pull																				
Hand of toolholder	Left																				
Hand of insert	Left																				
Standard shim	④																				
Work rotation	Regular																				
Feed direction	Pull																				
Hand of toolholder	Right																				
Hand of insert	Right																				
Standard shim	③																				

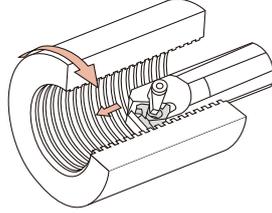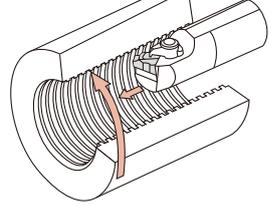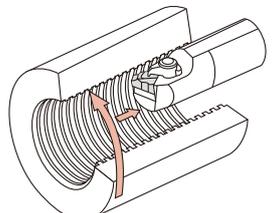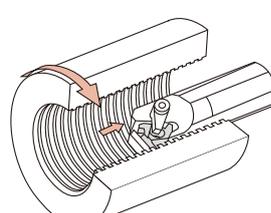Internal threading																					
Right hand thread	Left hand thread																				
 <table border="1"> <tr><td>Work rotation</td><td>Regular</td></tr> <tr><td>Feed direction</td><td>Push</td></tr> <tr><td>Hand of toolholder</td><td>Right</td></tr> <tr><td>Hand of insert</td><td>Right</td></tr> <tr><td>Standard shim</td><td>②</td></tr> </table>	Work rotation	Regular	Feed direction	Push	Hand of toolholder	Right	Hand of insert	Right	Standard shim	②	 <table border="1"> <tr><td>Work rotation</td><td>Reverse</td></tr> <tr><td>Feed direction</td><td>Push</td></tr> <tr><td>Hand of toolholder</td><td>Left</td></tr> <tr><td>Hand of insert</td><td>Left</td></tr> <tr><td>Standard shim</td><td>①</td></tr> </table>	Work rotation	Reverse	Feed direction	Push	Hand of toolholder	Left	Hand of insert	Left	Standard shim	①
Work rotation	Regular																				
Feed direction	Push																				
Hand of toolholder	Right																				
Hand of insert	Right																				
Standard shim	②																				
Work rotation	Reverse																				
Feed direction	Push																				
Hand of toolholder	Left																				
Hand of insert	Left																				
Standard shim	①																				
 <table border="1"> <tr><td>Work rotation</td><td>Reverse</td></tr> <tr><td>Feed direction</td><td>Pull</td></tr> <tr><td>Hand of toolholder</td><td>Left</td></tr> <tr><td>Hand of insert</td><td>Left</td></tr> <tr><td>Standard shim</td><td>③</td></tr> </table>	Work rotation	Reverse	Feed direction	Pull	Hand of toolholder	Left	Hand of insert	Left	Standard shim	③	 <table border="1"> <tr><td>Work rotation</td><td>Regular</td></tr> <tr><td>Feed direction</td><td>Pull</td></tr> <tr><td>Hand of toolholder</td><td>Right</td></tr> <tr><td>Hand of insert</td><td>Right</td></tr> <tr><td>Standard shim</td><td>④</td></tr> </table>	Work rotation	Regular	Feed direction	Pull	Hand of toolholder	Right	Hand of insert	Right	Standard shim	④
Work rotation	Reverse																				
Feed direction	Pull																				
Hand of toolholder	Left																				
Hand of insert	Left																				
Standard shim	③																				
Work rotation	Regular																				
Feed direction	Pull																				
Hand of toolholder	Right																				
Hand of insert	Right																				
Standard shim	④																				

Standard shim			
No.	New	No.	New
①	A16-1DT	②	A16-1DT
	A16-1		A16-1
	GX22-1DT		GX22-1DT
	NXE22-1		NXN22-1
③	AE16-99DT	④	AN16-99DT
	AE16-99		AN16-99
	GXE22-99DT		GXN22-99DT
	NXE22-99		NXN22-99
	NXE27-99		NXN27-99

Infeed per Pass and Number of Passes

ISO metric full-profile inserts (for external)

Pitch		0.5	0.75	1	1.25	1.5	1.75	2	2.5	3	3.5	4	4.5	5	5.5	6							
Height of thread		0.32	0.47	0.63	0.79	0.95	1.11	1.27	1.58	1.9	2.21	2.53	2.85	3.16	3.48	3.8							
Total depth of cut		0.42	0.57	0.73	0.89	1.05	1.21	1.37	1.68	2	2.31	2.63	2.95	3.26	3.58	3.9							
Number of passes	1	0.15	0.18	0.25	0.25	0.3	0.3	0.3	0.3	0.35	0.35	0.4	0.4	0.45	0.5	0.5							
	2	0.12	0.12	0.2	0.2	0.25	0.25	0.25	0.25	0.3	0.3	0.35	0.35	0.35	0.35	0.4							
	3	0.1	0.12	0.13	0.15	0.2	0.2	0.2	0.25	0.25	0.3	0.3	0.3	0.3	0.3	0.3							
	4	0.05	0.1	0.1	0.14	0.15	0.16	0.2	0.23	0.2	0.25	0.25	0.25	0.25	0.25	0.25							
	5		0.05	0.05	0.1	0.1	0.15	0.15	0.2	0.2	0.21	0.2	0.2	0.25	0.23	0.25							
	6				0.05	0.05	0.1	0.12	0.15	0.15	0.2	0.2	0.2	0.2	0.2	0.2							
	7						0.05	0.1	0.15	0.15	0.15	0.15	0.2	0.2	0.2	0.2							
	8							0.05	0.1	0.15	0.15	0.15	0.15	0.18	0.15	0.15							
	9								0.05	0.1	0.15	0.15	0.15	0.15	0.15	0.15							
	10									0.1	0.1	0.13	0.15	0.15	0.15	0.15							
	11										0.05	0.1	0.1	0.15	0.13	0.15							
	12											0.05	0.1	0.1	0.15	0.15							
	13												0.1	0.1	0.1	0.15							
	14													0.05	0.1	0.1							
	15														0.1	0.1							
	16															0.05							
	17																0.1						
	18																	0.05					
	19																		0.1				
	20																			0.05			
	21																				0.1		
	22																					0.05	
	23																						0.05
	24																						

(Unit: mm)

ISO metric full-profile inserts (for internal)

Pitch		0.5	0.75	1	1.25	1.5	1.75	2	2.5	3	3.5	4	4.5	5	5.5	6							
Height of thread		0.29	0.43	0.58	0.72	0.87	1.01	1.16	1.45	1.74	2.03	2.32	2.61	2.9	3.19	3.48							
Total depth of cut		0.39	0.53	0.68	0.82	0.97	1.11	1.26	1.55	1.84	2.13	2.42	2.71	3	3.29	3.58							
Number of passes	1	0.08	0.1	0.14	0.15	0.2	0.2	0.2	0.25	0.25	0.3	0.3	0.35	0.35	0.4	0.4							
	2	0.07	0.09	0.13	0.13	0.16	0.18	0.18	0.22	0.22	0.25	0.25	0.25	0.25	0.25	0.25							
	3	0.07	0.08	0.11	0.12	0.14	0.16	0.17	0.2	0.2	0.22	0.22	0.22	0.22	0.22	0.22							
	4	0.06	0.08	0.1	0.11	0.12	0.14	0.16	0.18	0.18	0.2	0.2	0.2	0.2	0.2	0.2							
	5	0.06	0.07	0.08	0.1	0.12	0.12	0.14	0.16	0.16	0.18	0.18	0.18	0.2	0.2	0.19							
	6	0.05	0.06	0.07	0.09	0.1	0.1	0.12	0.15	0.15	0.16	0.18	0.18	0.18	0.18	0.18							
	7		0.05	0.05	0.07	0.08	0.09	0.1	0.1	0.14	0.14	0.16	0.16	0.16	0.16	0.17							
	8				0.05	0.05	0.07	0.08	0.1	0.13	0.13	0.14	0.14	0.14	0.14	0.16							
	9						0.05	0.06	0.08	0.12	0.12	0.14	0.14	0.14	0.14	0.15							
	10							0.05	0.06	0.1	0.11	0.12	0.12	0.13	0.13	0.14							
	11								0.05	0.08	0.1	0.12	0.12	0.13	0.13	0.14							
	12									0.06	0.1	0.1	0.12	0.12	0.13	0.13							
	13										0.05	0.07	0.1	0.11	0.12	0.13							
	14											0.05	0.09	0.1	0.12	0.13							
	15												0.07	0.1	0.11	0.12							
	16													0.05	0.09	0.1							
	17														0.08	0.1							
	18															0.08	0.1						
	19																0.08	0.1					
	20																	0.05	0.1				
	21																			0.08	0.1		
	22																				0.05	0.1	
	23																					0.08	0.1
	24																						0.05

(Unit: mm)

Unified full-profile inserts

		For external								For internal							
TPI		24	20	18	16	14	12	8	24	20	18	16	14	12	8		
Height of thread		0.67	0.8	0.89	1.01	1.15	1.34	2.01	0.61	0.74	0.82	0.92	1.05	1.23	1.84		
Total depth of cut		0.77	0.9	0.99	1.11	1.25	1.44	2.11	0.71	0.84	0.92	1.02	1.15	1.33	1.94		
Number of passes	1	0.25	0.25	0.28	0.3	0.3	0.3	0.35	0.2	0.2	0.2	0.2	0.25	0.25	0.3		
	2	0.22	0.2	0.23	0.25	0.25	0.25	0.3	0.16	0.16	0.18	0.18	0.2	0.2	0.25		
	3	0.15	0.16	0.18	0.18	0.23	0.21	0.25	0.12	0.13	0.15	0.16	0.18	0.18	0.22		
	4	0.1	0.14	0.15	0.15	0.18	0.18	0.22	0.1	0.12	0.14	0.14	0.16	0.16	0.2		
	5	0.05	0.1	0.1	0.1	0.14	0.15	0.2	0.08	0.1	0.1	0.11	0.13	0.13	0.18		
	6		0.05	0.05	0.08	0.1	0.12	0.2	0.05	0.08	0.1	0.1	0.1	0.1	0.16		
	7				0.05	0.05	0.1	0.16		0.05	0.05	0.08	0.08	0.1	0.14		
	8						0.08	0.16				0.05	0.05	0.08	0.12		
	9							0.05	0.12					0.08	0.12		
	10								0.1						0.05	0.1	
	11									0.05						0.1	
	12																0.05
	13																
	14																

(Unit: mm)

Whitworth full-profile inserts

		For external								For internal										
TPI		20	19	18	16	14	12	11	10	8	20	19	18	16	14	12	11	10	8	
Height of thread		0.83	0.88	0.92	1.04	1.19	1.39	1.51	1.66	2.08	0.83	0.88	0.92	1.04	1.19	1.39	1.51	1.66	2.08	
Total depth of cut		0.93	0.98	1.02	1.14	1.29	1.49	1.61	1.76	2.18	0.93	0.98	1.02	1.14	1.29	1.49	1.61	1.76	2.18	
Number of passes	1	0.25	0.28	0.3	0.3	0.3	0.3	0.3	0.35	0.35	0.2	0.2	0.22	0.22	0.25	0.25	0.25	0.3	0.35	
	2	0.2	0.22	0.24	0.25	0.25	0.25	0.3	0.3	0.3	0.18	0.18	0.18	0.18	0.21	0.21	0.21	0.25	0.3	
	3	0.18	0.18	0.18	0.18	0.23	0.2	0.2	0.23	0.25	0.16	0.16	0.17	0.17	0.2	0.2	0.2	0.22	0.25	
	4	0.15	0.15	0.15	0.14	0.2	0.18	0.18	0.2	0.23	0.14	0.16	0.16	0.16	0.18	0.18	0.18	0.2	0.22	
	5	0.1	0.1	0.1	0.12	0.16	0.15	0.15	0.15	0.22	0.12	0.13	0.14	0.14	0.16	0.16	0.16	0.16	0.2	
	6	0.05	0.05	0.05	0.1	0.1	0.14	0.14	0.14	0.2	0.08	0.1	0.1	0.12	0.14	0.14	0.14	0.14	0.18	
	7				0.05	0.05	0.12	0.12	0.12	0.18	0.05	0.05	0.05	0.1	0.1	0.1	0.12	0.12	0.16	
	8						0.1	0.12	0.12	0.16				0.05	0.05	0.1	0.1	0.12	0.14	
	9							0.05	0.1	0.14						0.1	0.1	0.1	0.12	
	10								0.05	0.05	0.1					0.05	0.1	0.1	0.11	
	11									0.05							0.05	0.05	0.1	
	12																			0.05
	13																			
	14																			
	15																			

(Unit: mm)

Infeed per Pass and Number of Passes

■ 30° Trapezoidal (TR) inserts

		For external					For internal				
Pitch		2	3	4	5	6	2	3	4	5	6
Height of thread		1.25	1.75	2.25	2.75	3.5	1.25	1.75	2.25	2.75	3.5
Total depth of cut		1.35	1.85	2.35	2.85	3.6	1.35	1.85	2.35	2.85	3.6
Number of passes	1	0.25	0.25	0.3	0.3	0.3	0.2	0.22	0.25	0.25	0.25
	2	0.2	0.22	0.25	0.25	0.25	0.18	0.2	0.22	0.22	0.22
	3	0.2	0.2	0.22	0.2	0.23	0.18	0.18	0.2	0.2	0.21
	4	0.18	0.18	0.2	0.2	0.2	0.16	0.16	0.2	0.18	0.2
	5	0.15	0.17	0.18	0.18	0.18	0.15	0.16	0.17	0.18	0.18
	6	0.12	0.16	0.16	0.16	0.18	0.13	0.16	0.16	0.16	0.18
	7	0.1	0.14	0.15	0.16	0.16	0.1	0.14	0.16	0.16	0.16
	8	0.1	0.14	0.14	0.15	0.16	0.1	0.14	0.14	0.15	0.16
	9	0.05	0.12	0.14	0.14	0.16	0.1	0.12	0.14	0.14	0.16
	10		0.12	0.12	0.14	0.16	0.05	0.12	0.12	0.14	0.16
	11		0.1	0.12	0.14	0.16		0.1	0.12	0.14	0.16
	12		0.05	0.12	0.12	0.15		0.1	0.12	0.12	0.15
	13			0.1	0.12	0.15		0.05	0.1	0.12	0.15
	14			0.1	0.12	0.15			0.1	0.12	0.15
	15			0.05	0.12	0.14			0.1	0.12	0.14
	16				0.1	0.14			0.05	0.1	0.14
	17				0.1	0.12				0.1	0.12
	18				0.1	0.12				0.1	0.12
	19				0.05	0.12				0.1	0.12
	20					0.12				0.05	0.12
	21					0.1					0.1
	22					0.1					0.1
	23					0.05					0.1
	24										0.05
	25										
	26										

(Unit: mm)

■ 29° Trapezoidal (TR) inserts

		For external			For internal		
TPI		8	6	5	8	6	5
Height of thread		1.88	2.41	2.92	1.88	2.41	2.92
Total depth of cut		1.98	2.51	3.02	1.98	2.51	3.02
Number of passes	1	0.25	0.25	0.25	0.22	0.22	0.22
	2	0.22	0.22	0.22	0.2	0.2	0.2
	3	0.2	0.2	0.2	0.18	0.18	0.18
	4	0.18	0.18	0.18	0.16	0.18	0.18
	5	0.16	0.17	0.18	0.16	0.16	0.16
	6	0.16	0.16	0.16	0.16	0.15	0.15
	7	0.16	0.16	0.16	0.16	0.15	0.15
	8	0.14	0.14	0.14	0.14	0.14	0.14
	9	0.14	0.14	0.14	0.14	0.14	0.14
	10	0.12	0.14	0.14	0.12	0.14	0.14
	11	0.1	0.14	0.14	0.1	0.14	0.14
	12	0.1	0.12	0.14	0.1	0.12	0.14
	13	0.05	0.12	0.12	0.1	0.12	0.12
	14		0.12	0.12	0.05	0.12	0.12
	15		0.1	0.12		0.1	0.12
	16		0.1	0.12		0.1	0.12
	17		0.05	0.12		0.1	0.12
	18			0.12		0.05	0.12
	19			0.1			0.1
	20			0.1			0.1
	21			0.05			0.1
	22						0.05
	23						
	24						
	25						
	26						

(Unit: mm)

■ PT full-profile inserts

		For external				For internal		
TPI		28	19	14	11	19	14	11
Height of thread		0.6	0.86	1.16	1.48	0.86	1.16	1.48
Total depth of cut		0.7	0.96	1.26	1.58	0.96	1.26	1.58
Number of passes	1	0.25	0.28	0.3	0.3	0.22	0.25	0.25
	2	0.2	0.2	0.25	0.25	0.2	0.22	0.22
	3	0.1	0.18	0.2	0.22	0.18	0.18	0.18
	4	0.1	0.15	0.15	0.18	0.16	0.14	0.18
	5	0.05	0.1	0.11	0.15	0.1	0.12	0.15
	6		0.05	0.1	0.12	0.05	0.1	0.13
	7			0.1	0.11	0.05	0.1	0.12
	8			0.05	0.1		0.1	0.1
	9				0.1		0.05	0.1
	10				0.05			0.1
	11							0.05
	12							
	13							
	14							
	15							
	16							
	17							
	18							
	19							
	20							
	21							
	22							
	23							
	24							
	25							
	26							

(Unit: mm)

■ NPT full-profile inserts

		For external				For internal		
TPI		18	14	11.5	8	14	11.5	8
Height of thread		1.14	1.47	1.79	2.58	1.47	1.79	2.58
Total depth of cut		1.24	1.57	1.89	2.68	1.57	1.89	2.68
Number of passes	1	0.2	0.25	0.25	0.3	0.22	0.22	0.25
	2	0.18	0.22	0.22	0.25	0.2	0.2	0.2
	3	0.17	0.2	0.2	0.2	0.18	0.18	0.2
	4	0.16	0.18	0.18	0.2	0.18	0.18	0.2
	5	0.14	0.17	0.18	0.2	0.16	0.16	0.2
	6	0.12	0.16	0.17	0.2	0.14	0.16	0.2
	7	0.12	0.12	0.16	0.18	0.12	0.16	0.18
	8	0.1	0.12	0.14	0.18	0.12	0.14	0.18
	9	0.05	0.1	0.12	0.16	0.1	0.12	0.16
	10		0.05	0.12	0.16	0.1	0.12	0.16
	11			0.1	0.14	0.05	0.1	0.14
	12			0.05	0.14		0.1	0.14
	13				0.12		0.05	0.12
	14				0.1			0.1
	15				0.1			0.1
	16				0.05			0.1
	17							0.05
	18							
	19							
	20							
	21							
	22							
	23							
	24							
	25							
	26							

(Unit: mm)

Threading guidelines





Determine the infeed per pass and number of threads whilst referring to the table and description below.

Pitch (mm)	0.5	0.75	1	1.25	1.5	1.75	2	2.5	3	3.5	4	4.5	5 ~
TPI	48	32	24	20	16	14	12	10	8	7	6	5.5	5 ~
No. of passes	4 ~ 6	4 ~ 7	4 ~ 8	5 ~ 9	6 ~ 10	7 ~ 12	7 ~ 12	8 ~ 14	10 ~ 16	11 ~ 18	11 ~ 18	11 ~ 19	12 ~ 24

Note:

- When using the full-profile insert, set the total infeed amount by taking the finish stock of 0.1mm into account.
- Set the first infeed to 150 ~ 200% of nose R and do not allow it to exceed 0.5 mm.
- The infeed amount during the final pass must be a minimum of 0.05 mm. No zero cuts should be made. (Extra small infeed or zero cutting of work hardened surfaces will reduce tool life.)
- The partial-profile insert or inside diameter insert has small nose R. Reduce the infeed per pass and increase the no. of passes.
- Regarding standard infeed per passes and no. of passes, please refer to page **L039**.

Infeed methods for threading tools

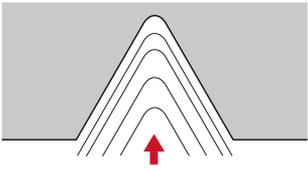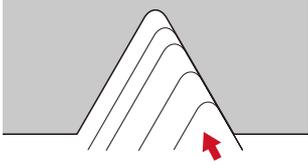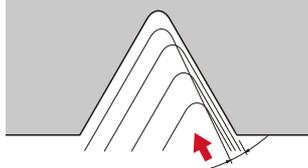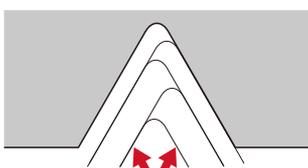Infeed method	Features
 <p>Straight infeed (radial infeed)</p>	<ul style="list-style-type: none"> • Most simple and usual method • Suitable for relatively small pitch threads of easily machinable material. • Chip contact length on right and left is longer, causing chattering, with increased load on the nose end. • When the half included angle is not symmetrical to the right and left, infeeding in the direction of 1/2 of the included angle will ensure equal machining with right and left cutting edges.
 <p>Single edge infeed (flank infeed)</p>	<ul style="list-style-type: none"> • Suitable for large pitch threads or easy to tear materials. Effectively prevents chattering. • Chips are discharged in one direction only. Satisfactory chip control. • Edge on the right (with zero infeed) tends to be worn heavily.
 <p>Modified single-edge infeed (flank infeed)</p>	<ul style="list-style-type: none"> • Suitable for large pitch threads or easy to tear materials. Effectively prevents chattering. • Chips are discharged in one direction only. Satisfactory chip control. • Edge on the right performs some cutting, therefore wear of this edge can thus be suppressed.
 <p>Alternating flank infeed</p>	<ul style="list-style-type: none"> • Suitable for large pitch threads or easy to tear material. Effectively prevents chattering. • Chips are discharged alternately in right and left directions, resulting possibly in entanglement. • Right and left edges are used alternately, ensuring uniform wear and extending tool life.

Selection of ST-type Toolholders

Selection of internal threading toolholders

Relation between internal toolholders and machinable threads

In the tables starting from next page, the relationships between toolholders, inserts, threads to be machined, and shims to be replaced are shown. In these tables, the criteria are set as follows.


- The minimum machining diameter.
- The L/D ratio of the toolholder.
- The lead angle of the thread.
- Cutting conditions

Especially when machining near the minimum machining diameter, the compensation for the lead angle should be done carefully. Moreover, in threading, because chips generally can not be broken into small pieces, the shank size should be selected in consideration of adequate clearance (C₁).

Symbols

- Recommended
- ◻ Usable
- ② Needs replacing of the shim. "2" indicates "Change to the shim for 2° lead angle".
- Unusable

Clearance C ₁	<p>Internal diameter of thread</p>	$C_1 \geq 3 \text{ mm}$ (1 mm for 6IR insert holders)	
	Overhang ratio L/D		Steel shank
			Carbide shank

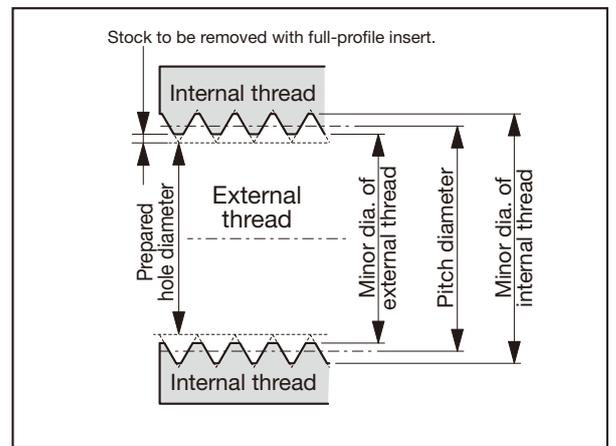

How to use the tables

- 1 Firstly, find the nominal thread diameter. Example: M35 X 1.5
- 2 The table indicates that the lead angle is 0°48'.
- 3 The Cat. No. of the insert to be used corresponds with IR15ISO.
- 4 By following the row to the right, ◻ and ○ marks are found. The ○ mark indicates the optimum toolholder type. The toolholders of ◻ mark are usable, but less rigid because the shank diameter against the threading diameter is smaller than those of ○ marked toolholder. In this example, CNR0025R16 and TCNR0020R16DT are the optimum toolholders. The insert Cat.No. is 16IR15ISO.
- 5 In the case of M33 X 3 thread, the lead angle is 1°46'. By following the row to the right, ② mark is found. This indicates that the shim should be replaced to 2° type. For calculation of the lead angle, refer to page L036.

Metric fine screw thread (ISO)

(For full size of this table, see page L044.)

Nominal size	Pitch	Effective diameter	Lead angle	Shank material																																
				Steel shank				Carbide shank				"Tsuppari-Ichiban"																								
				Insert size				Insert size				Insert size																								
				Holder Cat. No.				Holder Cat. No.				Holder Cat. No.																								
				6IR	11IR	16IR	22IR	6IR	11IR	16IR	16IR	22IR																								
M33×1.5	1.5	32.03	0°51'	SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR0020Q22	CNR0020Q22-2	CNR0025R22	CNR0032S22	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0012P11SC	SNR0012P11SC-2	SNR0016R16SC	SNR0016R16SC-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	TCNR0032T16DT	TSNR0020R22	TCNR0025S22DT			
M33×2	2	31.7	1°09'		◻	◻		◻	◻	◻	◻	◻	◻																							
M33×3	3	31.05	1°46'																																	
M35×1.5	1.5	34.03	0°48'																																	
M36×1.5	1.5	35.03	0°47'																																	
M36×2	2	34.7	1°03'																																	
M36×3	3	34.05	1°20'																																	
M38×1.5	1.5	37.03	0°47'																																	

Selection of Internal Toolholders—Relationship between thread sizes, toolholders, and inserts—Part 1

Metric coarse screw thread (ISO)

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material Insert size Holder Cat. No. Insert Cat. No.	Steel shank								Carbide shank					^{Tsuppari-tchiban}														
					6IR		11IR		16IR	22IR		27IR	6IR		11IR	16IR	22IR															
					SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11-2	SNR0010K11-3	SNR0013L11-2	SNR0013L11-3	SNR0016M16-2	SNR0016M16-3	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22		CNR0032S22	(CNR0040T22)	CNR0040T27	(CNR0050U27)	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC-2	SNR0010M11SC-3	SNR0016R16SC-2	(SNR0016R16SC-3)	TCNR0025S22DT	(TCNR0032T22DT)
M10	1.5	9.03	3°02'	IR15ISO																												
M11	1.5	10.03	2°44'	IR15ISO			○														○											
M12	1.75	10.86	2°56'	IR175ISO																	○											
M14	2	12.7	2°52'	IR20ISO			•	○													•		○									
M16	2	14.7	2°29'	IR20ISO	•		○														•		○									
M18	2.5	16.38	2°47'	IR25ISO																												
M20	2.5	18.38	2°29'	IR25ISO																												
M22	2.5	20.38	2°14'	IR25ISO																												
M24	3	22.05	2°29'	IR30ISO																												
M27	3	25.05	2°11'	IR30ISO								○														○						
M30	3.5	27.73	2°18'	IR35ISO																												
M33	3.5	30.73	2°05'	IR35ISO									○																			
M36	4	33.4	2°11'	IR40ISO									○																			
M39	4	36.4	2°00'	IR40ISO									•		[2]												[2]					
M42	4.5	39.08	2°06'	IR45ISO									•		[2]												[2]					
M45	4.5	42.08	1°57'	IR45ISO									•		[2]												[2]					
M48	5	44.75	2°02'	IR50ISO									•		[2]	[2]											[2]	[2]				
M52	5	48.75	1°52'	IR50ISO									•		[2]	[2]											[2]	[2]				
M56	5.5	52.43	1°55'	IR55ISO																												
M60	5.5	56.43	1°47'	IR55ISO																												
M64	6	60.1	1°49'	IR60ISO																												
M68	6	64.1	1°42'	IR60ISO																												

[2] : Change the shim to NXN22-2 ←

[2] : Change the shim to NXN27-2 ←

[2] : Change the shim to GXN22-2DT ←

Metric fine screw thread (ISO)

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material Insert size Holder Cat. No. Insert Cat. No.	Steel shank								Carbide shank															
					6IR		11IR			6IR			11IR															
					SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11	SNR0010K11-2	SNR0010K11-3	SNR0013L11	SNR0013L11-2	SNR0013L11-3	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0010M11SC-3	SNR0012P11SC	SNR0012P11SC-2	SNR0012P11SC-3				
M9×0.75	0.75	8.51	1°36'	IR075ISO																								
M9×1	1	8.32	2°11'	IR10ISO																								
M10×0.75	0.75	9.51	1°26'	IR075ISO																								
M10×1	1	9.35	1°57'	IR10ISO	○										○													
M10×1.25	1.25	9.19	2°29'	IR125ISO																								
M11×0.75	0.75	10.51	1°18'	IR075ISO																								
M11×1	1	10.35	1°46'	IR10ISO	○										○													
M12×1	1	11.35	1°36'	IR10ISO	•		○								•								○					
M12×1.25	1.25	11.19	2°02'	IR125ISO	○										○													
M12×1.5	1.5	11.03	2°29'	IR15ISO	○										○													
M14×1	1	13.35	1°22'	IR10ISO																								
M14×1.25	1.25	13.19	1°44'	IR125ISO	•		○								•								○					
M14×1.5	1.5	13.03	2°06'	IR15ISO	•		○								•								○					
M15×1	1	14.35	1°16'	IR10ISO																								
M15×1.5	1.5	14.03	1°57'	IR15ISO	•		○								•								○					
M16×1	1	15.35	1°11'	IR10ISO					○																			
M16×1.5	1.5	15.03	1°49'	IR15ISO	•		○								•								○					
M17×1	1	16.35	1°07'	IR10ISO					○																			
M17×1.5	1.5	16.03	1°42'	IR15ISO	•		•		○						•								○					
M18×1	1	17.35	1°03'	IR10ISO					○																			
M18×1.5	1.5	17.03	1°36'	IR15ISO	•		•		○						•								○					
M18×2	2	16.7	2°11'	IR20ISO	•		•		○						•								○					
M20×1	1	19.35	0°57'	IR10ISO					•				○									•				○		
M20×1.5	1.5	19.03	1°26'	IR15ISO					•				○									•				○		
M20×2	2	18.7	1°57'	IR20ISO	•		•		○						•							•				○		

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Selection of ST-type Toolholders

■ Metric fine screw thread (ISO)

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material		Steel shank												Carbide shank									"Tsuppari-ichiban"											
				Insert size Holder Cat. No. Insert Cat. No.	6IR			11IR			16IR			6IR			11IR			16IR			16IR															
					SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0013L11-3	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0010M11SC-3	SNR0012P11SC	SNR0012P11SC-2		SNR0012P11SC-3	SNR0016R16SC	SNR0016R16SC-2	(SNR0016R16SC-3)	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT				
																																			Steel shank			
M22x1	1	21.35	0°51'	IR10ISO																																		
M22x1.5	1.5	21.03	1°18'	IR15ISO																																		
M22x2	2	20.7	1°46'	IR20ISO																																		
M24x1	1	23.35	0°47'	IR10ISO																																		
M24x1.5	1.5	23.03	1°11'	IR15ISO																																		
M24x2	2	22.07	1°39'	IR20ISO																																		
M25x1	1	24.35	0°45'	IR10ISO																																		
M25x1.5	1.5	24.03	1°08'	IR15ISO																																		
M25x2	2	23.7	1°32'	IR20ISO																																		
M26x1.5	1.5	25.03	1°06'	IR15ISO																																		
M27x1	1	26.35	0°42'	IR10ISO																																		
M27x1.5	1.5	26.03	1°03'	IR15ISO																																		
M27x2	2	25.7	1°25'	IR20ISO																																		
M28x1	1	27.35	0°40'	IR10ISO																																		
M28x1.5	1.5	27.03	1°01'	IR15ISO																																		
M28x2	2	26.7	1°22'	IR20ISO																																		
M30x1	1	29.35	0°37'	IR10ISO																																		
M30x1.5	1.5	29.03	0°57'	IR15ISO																																		
M30x2	2	28.7	1°16'	IR20ISO																																		
M30x3	3	28.05	1°57'	IR30ISO																																		
M32x1.5	1.5	31.03	0°53'	IR15ISO																																		
M32x2	2	30.07	1°11'	IR20ISO																																		

■ Metric fine screw thread (ISO)

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material		Steel shank													Carbide shank						"Tsuppari-ichiban"													
				Insert size Holder Cat. No. Insert Cat. No.	6IR			11IR			16IR			22IR			6IR			11IR			16IR			22IR												
					SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	SNR0020Q22	SNR0020Q22-2	CNR0025R22	CNR0032S22	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0012P11SC	SNR0012P11SC-2	SNR0016R16SC	SNR0016R16SC-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)	TSNR0020R22	TCNR0025S22DT
M33x1.5	1.5	32.03	0°51'	IR15ISO																																		
M33x2	2	31.7	1°09'	IR20ISO																																		
M33x3	3	31.05	1°46'	IR30ISO																																		
M35x1.5	1.5	34.03	0°48'	IR15ISO																																		
M36x1.5	1.5	35.03	0°47'	IR15ISO																																		
M36x2	2	34.7	1°03'	IR20ISO																																		
M36x3	3	34.05	1°36'	IR30ISO																																		
M38x1.5	1.5	37.03	0°44'	IR15ISO																																		
M39x1.5	1.5	38.03	0°43'	IR15ISO																																		
M39x2	2	38.7	0°58'	IR20ISO																																		
M39x3	3	37.05	1°29'	IR30ISO																																		
M40x1.5	1.5	39.03	0°42'	IR15ISO																																		
M40x2	2	37.8	0°57'	IR20ISO																																		
M40x3	3	38.05	1°26'	IR30ISO																																		
M42x1.5	1.5	41.03	0°40'	IR15ISO																																		
M42x2	2	40.7	0°54'	IR20ISO																																		
M42x3	3	40.05	1°22'	IR30ISO																																		
M42x4	4	39.4	1°51'	IR40ISO																																		
M45x1.5	1.5	44.03	0°37'	IR15ISO																																		
M45x2	2	43.7	0°50'	IR20ISO																																		
M45x3	3	43.05	1°16'	IR30ISO																																		
M45x4	4	42.4	1°43'	IR40ISO																																		
M48x1.5	1.5	47.03	0°35'	IR15ISO																																		
M48x2	2	46.7	0°47'	IR20ISO																																		
M48x3	3	46.05	1°11'	IR30ISO																																		
M48x4	4	45.4	1°36'	IR40ISO																																		

② : Change the shim to AN16-2 ← ② : Change the shim to AN16-2DT ←
 ② : Change the shim to NXN22-2 ← ② : Change the shim to GXN22-2DT ←

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.



Metric fine screw thread (ISO)

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material		Steel shank												Carbide shank						"Tsuyari-Ichiban"																		
				Insert size	Holder Cat. No.	6IR			11IR			16IR			22IR			6IR		11IR		16IR	16IR	22IR																		
				Insert Cat. No.	Holder Cat. No.	SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR0020P16	CNR0025R16	CNR0032S16	(CNR0040T16)	(CNR0050U16)	SNR0020Q22	SNR0020Q22-2	CNR0025R22	CNR0032S22	(CNR0040T22)	SNR0006K06SC-2	SNR0008K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0012P11SC	SNR0012P11SC-2	SNR0016R16SC	SNR0016R16SC-2	SNR0016R16SC-3	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)	TSNR0020R22	TCNR0025S22DT
M50×1.5	1.5	49.03	0°33'	IR15ISO						•	•	•	•	•	•	•	•																									
M50×2	2	48.7	0°45'	IR20ISO																																						
M50×3	3	48.05	1°08'	IR30ISO																																						
M52×1.5	1.5	51.03	0°32'	IR15ISO																																						
M52×2	2	50.7	0°43'	IR20ISO																																						
M52×3	3	50.05	1°06'	IR30ISO																																						
M52×4	4	49.4	1°29'	IR40ISO																																						
M55×1.5	1.5	54.03	0°30'	IR15ISO																																						
M55×2	2	53.7	0°41'	IR20ISO																																						
M55×3	3	53.05	1°02'	IR30ISO																																						
M55×4	4	52.4	1°24'	IR40ISO																																						
M56×1.5	1.5	55.03	0°30'	IR15ISO																																						
M56×2	2	54.7	0°40'	IR20ISO																																						
M56×3	3	54.05	1°01'	IR30ISO																																						
M56×4	4	53.4	1°22'	IR40ISO																																						
M58×1.5	1.5	57.03	0°29'	IR15ISO																																						
M58×2	2	56.7	0°39'	IR20ISO																																						
M58×3	3	56.05	0°59'	IR30ISO																																						
M58×4	4	55.4	1°19'	IR40ISO																																						
M60×1.5	1.5	59.03	0°28'	IR15ISO																																						
M60×2	2	58.7	0°37'	IR20ISO																																						
M60×3	3	58.05	0°57'	IR30ISO																																						
M60×4	4	57.4	1°16'	IR40ISO																																						

Unified coarse screw thread (UNC)

Nominal size	TPI	Pitch diameter	Lead angle	Shank material		Steel shank												Carbide shank						"Tsuyari-Ichiban"																	
				Insert size	Holder Cat. No.	11IR			16IR			22IR			27IR			11IR		16IR		22IR																			
				Insert Cat. No.	Holder Cat. No.	SNR0010K11	SNR0010K11-2	SNR0010K11-3	SNR0013L11	SNR0013L11-2	SNR0013L11-3	SNR0016M16	SNR0016M16-2	SNR0016M16-3	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	(CNR0040T22)	CNR0040T27	(CNR0050U27)	(CNR0063V27)	SNR0010M11SC	SNR0010M11SC-2	SNR0010M11SC-3	SNR0012P11SC	SNR0012P11SC-2	SNR0012P11SC-3	SNR0016R16SC	SNR0016R16SC-2	(SNR0016R16SC-3)	TCNR0025S22DT	(TCNR0032T22DT)							
7/16-14UNC	14	9.93	3°20'	(IR14UN)																																					
1/2-13UNC	13	11.43	3°07'	(IR13UN)																																					
9/16-12UNC	12	12.91	2°59'	IR12UN																																					
5/8-11UNC	11	14.38	2°56'	(IR11UN)																																					
3/4-10UNC	10	17.4	2°40'	(IR10UN)																																					
7/8-9UNC	9	20.39	2°31'	IR9UN																																					
1-8UNC	8	23.34	2°29'	IR8UN								○																													
1 1/8-7UNC	7	26.22	2°31'	(IR7UN)																																					
1 1/4-7UNC	7	29.39	2°15'	(IR7UN)										○																											
1 3/8-6UNC	6	32.17	2°24'	(IR6UN)																																					
1 1/2-6UNC	6	35.35	2°11'	(IR6UN)																																					
1 3/4-5UNC	5	41.15	2°15'	(IR5UN)																																					
2-4 1/2UNC	4.5	47.14	2°11'	(IR45UN)																																					
2 1/4-4 1/2UNC	4.5	53.49	1°55'	(IR45UN)																																					
2 1/2-4UNC	4	59.38	1°57'	(IR4UN)																																					
2 3/4-4UNC	4	65.73	1°46'	(IR4UN)																																					
3-4UNC	4	72.08	1°36'	(IR4UN)																																					
3 1/4-4UNC	4	78.43	1°29'	(IR4UN)																																					
3 1/2-4UNC	4	84.78	1°22'	(IR4UN)																																					
3 3/4-4UNC	4	91.13	1°16'	(IR4UN)																																					
4-4UNC	4	97.48	1°11'	(IR4UN)																																					

② : Change the shim to NXN22-2 ← ② : Change the shim to GXN22-2DT ←
 ② : Change the shim to NXN27-2 ←

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Selection of ST-type Toolholders

Unified fine screw thread (UNF)

Nominal size	TPI	Pitch diameter	Lead angle	Shank material	Steel shank									Carbide shank							"Tsuppari-Ichiban"						
				Insert size	6IR			11IR			16IR			6IR			11IR		16IR		16IR						
				Holder Cat. No.	SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11-2	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR020P16	CNR025R16	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0012P11SC	SNR0012P11SC-2	SNR0016R16SC	SNR0016R16SC-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT
				Insert Cat. No.																							
3/8-24UNF	24	8.84	2°11'	(IR24UN)																							
				IRA60																							
7/16-20UNF	20	10.29	2°15'	(IR20UN)																							
				IRA60	○																						
1/2-20UNF	20	11.87	1°57'	(IR20UN)																							
				IRA60	•	○																					
9/16-18UNF	18	13.37	1°55'	(IR18UN)																							
				IRA60	•	○																					
5/8-18UNF	18	14.96	1°43'	(IR18UN)																							
				IRA60	•	○																					
3/4-16UNF	16	18.02	1°36'	IR16UN																							
7/8-14UNF	14	21.05	1°34'	IR14UN																							
1-12UNF	12	24.03	1°36'	IR12UN																							
1 1/8-12UNF	12	27.2	1°25'	IR12UN																							
1 1/4-12UNF	12	30.38	1°16'	IR12UN																							
1 3/8-12UNF	12	33.55	1°09'	IR12UN																							
1 1/2-12UNF	12	36.73	1°03'	IR12UN																							

Unified extra fine screw thread (UNEF)

Nominal size	TPI	Pitch diameter	Lead angle	Shank material	Steel shank									Carbide shank							"Tsuppari-Ichiban"					
				Insert size	6IR			11IR			16IR			6IR			11IR		16IR		16IR					
				Holder Cat. No.	SNR0006H06-2	SNR0008H06-2	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR020P16	CNR025R16	CNR032S16	SNR0006H06SC-2	SNR0008H06SC-2	SNR0010K11	SNR0010K11-2	SNR0012L11	SNR0012L11-2	SNR0016M16	SNR0016M16-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT
				Insert Cat. No.																						
3/8	32	9.01	1°61'	IR32UN																						
7/16	28	10.52	1°57'	IR28UN	○																					
1/2	28	12.11	1°37'	IR28UN																						
9/16	24	13.6	1°42'	IR24UN																						
5/8	24	15.19	1°27'	IR24UN																						
11/16	24	16.77	1°15'	IR24UN																						
3/4	20	18.22	1°27'	IR20UN																						
13/16	20	19.81	1°17'	IR20UN																						
7/8	20	21.4	1°08'	IR20UN																						
15/16	20	22.99	1°01'	IR20UN																						
1	20	24.57	0°94'	IR20UN																						
1 1/16	18	26.07	0°99'	IR18UN																						
1 1/8	18	27.66	0°93'	IR18UN																						
1 3/16	18	29.25	0°88'	IR18UN																						
1 1/4	18	30.83	0°84'	IR18UN																						
1 5/16	18	32.42	0°79'	IR18UN																						
1 3/8	18	34.01	0°76'	IR18UN																						
1 7/16	18	35.6	0°72'	IR18UN																						
1 1/2	18	37.18	0°69'	IR18UN																						
1 9/16	18	38.77	0°66'	IR18UN																						
1 5/8	18	40.36	0°64'	IR18UN																						
1 11/16	18	41.95	0°61'	IR18UN																						

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Whitworth British Standard (BSW) (for pipe)

Nominal size	TPI	Pitch diameter	Lead angle	Shank material		Steel shank												Carbide shank		"Tsuppari-Ichiban"			
				Insert size		16IR						22IR						16IR		16IR		22IR	
				Holder Cat. No.	Insert Cat. No.	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	SNR0016M16	SNR0016M16-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	TSNR0020R22	TCNR0025S22DT
				IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR
7/16	14	9.95	3°32'	IR14W																			
1/2	12	11.34	3°40'	IR12W																			
9/16	12	12.93	2°98'	IR12W																			
5/8	11	14.4	2°92'	IR11W																			
11/16	11	15.98	2°63'	IR11W																			
3/4	10	17.42	2°66'	IR10W																			
7/8	9	20.42	2°52'	IR9W																			
1	8	23.37	2°48'	IR8W																			
1 1/8	7	26.25	2°52'	IR7W																			
1 1/4	7	29.43	2°25'	IR7W																			
1 1/2	6	35.39	2°18'	IR6W																			
1 3/4	5	41.2	2°25'	IR5W																			

[2] : Change the shim to NXN22-2 ← [2] : Change the shim to GXN22-2DT ←

Whitworth British Standard Fine (BSF) (for pipe)

Nominal size	TPI	Pitch diameter	Lead angle	Shank material		Steel shank												Carbide shank		"Tsuppari-Ichiban"											
				Insert size		6IR						11IR						16IR						6IR		16IR		16IR		22IR	
				Holder Cat. No.	Insert Cat. No.	SNR0006H06-2	SNR0008H06-2	SNR0010K11	SNR0010K11-2	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	SNR0006H06SC-2	SNR0008H06SC-2	SNR0016M16	SNR0016M16-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	TSNR0020R22	TCNR0025S22DT			
				IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR	IR			
7/16	18	10.21	2°52'	IR18W																											
1/2	16	11.68	2°48'	IR16W	○													○													
9/16	16	13.27	2°18'	IR16W	•	○												•	○												
5/8	14	14.71	2°25'	IR14W																											
11/16	14	16.3	2°03'	IR14W																											
3/4	12	17.69	2°18'	IR12W																											
7/8	11	20.75	2°03'	IR11W																											
1	10	23.77	1°95'	IR10W																											
1 1/8	9	26.77	1°92'	IR9W																		○									
1 1/4	9	29.94	1°72'	IR9W																		○		[2]							
1 3/8	8	32.89	1°76'	IR8W																		○		[2]							
1 1/2	8	36.07	1°61'	IR8W																		○		•	[2]						
1 5/8	8	39.24	1°48'	IR8W																		○		•	○						
1 3/4	7	42.13	1°57'	IR7W																					[2]						
2	7	48.48	1°37'	IR7W																					•	○					
2 1/4	6	54.44	1°42'	IR6W																						•	○				
2 1/2	6	60.79	1°27'	IR6W																							•	○			
2 3/4	6	67.14	1°15'	IR6W																								•	○		
3	5	72.95	1°27'	IR5W																									•	○	
3 1/4	5	79.3	1°17'	IR5W																										•	○

[2] : Change the shim to AN16-2 ← [2] : Change the shim to AN16-2DT ←

[2] : Change the shim to NXN22-2 ← [2] : Change the shim to GXN22-2DT ←

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Selection of ST-type Toolholders

30° trapezoidal thread (TR) (for machine parts)

1/2

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material Insert size Holder Cat. No. Insert Cat. No.	Steel shank												Carbide shank			"Tsuppari-Ichiban"									
					16IR						22IR				27IR		16IR			16IR		22IR							
					SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	CNR0040T16	CNR0050U16	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	CNR0040T27	(CNR0050U27)	SNR0016R16SC	SNR0016R16SC-2	(SNR0016R16SC-3)	TSNR0016G16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)	TSNR0020R22	TCNR0025S22DT	(TCNR0032T22DT)
					IR30TR																								
TR22×3	3	20.5	2°40'	IR30TR																									
TR24×5	5	21.5	4°14'	IR50TR																									
TR24×3	3	22.5	2°26'	IR30TR																									
TR26×5	5	23.5	3°52'	IR50TR																									
TR26×3	3	24.5	2°14'	IR30TR		○																							
TR28×5	5	25.5	3°34'	IR50TR																									
TR28×3	3	26.5	2°04'	IR30TR		•											○												
TR30×6	6	27	4°03'	IR60TR																									
TR30×3	3	28.5	1°55'	IR30TR		•											○												
TR32×6	6	29	3°46'	IR60TR																									
TR32×3	3	30.5	1°48'	IR30TR		•		②									•				②								
TR34×6	6	31	3°32'	IR60TR																									
TR34×3	3	32.5	1°41'	IR30TR		•		②									•				②								
TR36×6	6	33	3°19'	IR60TR																									
TR36×3	3	34.5	1°35'	IR30TR		•		②	②								•				②	②							
TR38×3	3	36.5	1°30'	IR30TR		•		②	②								•				②	②							
TR40×3	3	38.5	1°25'	IR30TR	•			•	○								○				•	○							
TR42×3	3	40.5	1°21'	IR30TR	•			•	○								○				•	○							
TR44×3	3	42.5	1°17'	IR30TR	•			•	•	○							○				•	•	○						
TR46×3	3	44.5	1°14'	IR30TR	•			•	•	○							○				•	•	○						
TR48×3	3	46.5	1°11'	IR30TR	•			•	•	○							○				•	•	○						
TR50×3	3	48.5	1°08'	IR30TR	•			•	•	○							○				•	•	○						
TR52×3	3	50.5	1°05'	IR30TR	•			•	•	○							○				•	•	○						
TR55×3	3	53.5	1°01'	IR30TR	•			•	•	○							○				•	•	○						
TR60×3	3	58.5	0°56'	IR30TR	•			•	•	○							○				•	•	○						

② : Change the shim to AN16-2 ←

② : Change the shim to AN16-2DT ←

30° trapezoidal thread (TR) (for machine parts)

2/2

Nominal size	Pitch	Pitch diameter	Lead angle	Shank material Insert size Holder Cat. No. Insert Cat. No.	Steel shank												Carbide shank			"Tsuppari-Ichiban"											
					16IR						22IR				27IR		16IR			16IR		22IR									
					SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	(CNR0040T22)	(CNR0050U22)	(CNR0063V22)	CNR0040T27	(CNR0050U27)	(CNR0063V27)	SNR0016R16SC	SNR0016R16SC-2	(SNR0016R16SC-3)	TSNR0016G16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)	TSNR0020R22	TCNR0025S22DT	(TCNR0032T22DT)
					IR40TR																										
TR65×4	4	63	1°09'	IR40TR																											
TR70×4	4	68	1°04'	IR40TR																											
TR75×4	4	73	1°00'	IR40TR																											
TR80×4	4	78	0°56'	IR40TR																											
TR85×4	4	83	0°53'	IR40TR																											
TR90×4	4	88	0°50'	IR40TR																											
TR95×4	4	93	0°47'	IR40TR																											
TR100×4	4	98	0°45'	IR40TR																											
TR105×4	4	103	0°42'	IR40TR																											
TR110×4	4	108	0°41'	IR40TR																											
TR115×6	6	112	0°59'	IR60TR																											
TR120×6	6	117	0°56'	IR60TR																											
TR125×6	6	122	0°54'	IR60TR																											
TR130×6	6	127	0°52'	IR60TR																											
TR135×6	6	132	0°50'	IR60TR																											
TR140×6	6	137	0°48'	IR60TR																											
TR145×6	6	142	0°46'	IR60TR																											
TR150×6	6	147	0°45'	IR60TR																											
TR155×6	6	152	0°43'	IR60TR																											
TR160×6	6	157	0°42'	IR60TR																											
TR165×6	6	162	0°41'	IR60TR																											
TR170×6	6	167	0°39'	IR60TR																											

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.



Parallel pipe thread (G) (for pipe) This table is also applied to PF, Rp, and PS type threads.

Nominal size	TPI	Pitch	Pitch diameter	Lead angle	Shank material		Steel shank										Carbide shank						"Tsuppari-Ichiban"														
					Insert size	Holder Cat. No.	6IR		11IR				16IR				6IR		11IR		16IR		16IR														
							SNR0006H06-2	SNR0008H06-2	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR0020P16	CNR0025R16	CNR0032S16	(CNR0040T16)	(CNR0050U16)	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0012P11SC	SNR0012P11SC-2	SNR0016R16SC	SNR0016R16SC-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)				
					Insert Cat. No.	Holder Cat. No.																															
G1/4	19	1.34	12.30	1°59'	IR19W	•	○																														
G3/8	19	1.34	15.81	1°33'	IR19W	•	•		○																												
G1/2	14	1.81	19.79	1°40'	IR14W			•			○																										
G5/8	14	1.81	21.75	1°31'	IR14W			•			○																										
G3/4	14	1.81	25.28	1°18'	IR14W			•			○																										
G7/8	14	1.81	29.04	1°08'	IR14W			•			○																										
G1	11	2.31	31.77	1°20'	IR11W																																
G1-1/8	11	2.31	36.42	1°09'	IR11W																																
G1-1/4	11	2.31	40.43	1°02'	IR11W																																
G1-1/2	11	2.31	46.32	0°55'	IR11W																																
G1-3/4	11	2.31	52.27	0°48'	IR11W																																
G2	11	2.31	58.14	0°43'	IR11W																																
G2-1/4	11	2.31	64.23	0°39'	IR11W																																
G2-1/2	11	2.31	73.71	0°34'	IR11W																																
G2-3/4	11	2.31	80.06	0°32'	IR11W																																
G3	11	2.31	86.41	0°29'	IR11W																																
G3-1/2	11	2.31	98.85	0°26'	IR11W																																
G4	11	2.31	111.55	0°23'	IR11W																																
G4-1/2	11	2.31	124.25	0°20'	IR11W																																
G5	11	2.31	136.95	0°18'	IR11W																																
G6	11	2.31	162.35	0°16'	IR11W																																

○ : Change the shim to AN16-0 ←

○ : Change the shim to AN16-0DT ←

Taper pipe thread (PT) (for pipe) This table is also applied to Rc type pipe thread.

Nominal size	TPI	Pitch	Pitch diameter	Lead angle	Shank material		Steel shank										Carbide shank						"Tsuppari-Ichiban"													
					Insert size	Holder Cat. No.	6IR		11IR				16IR				6IR		11IR		16IR		16IR													
							SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0010K11	SNR0010K11-2	SNR0013L11	SNR0013L11-2	SNR0016M16	SNR0016M16-2	CNR0020P16	CNR0025R16	CNR0032S16	(CNR0040T16)	(CNR0050U16)	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0010M11SC	SNR0010M11SC-2	SNR0012P11SC	SNR0012P11SC-2	SNR0016R16SC	SNR0016R16SC-2	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)	
					Insert Cat. No.	Holder Cat. No.																														
PT1/4	19	1.34	12.30	1°59'	IR19PT	○																														
PT3/8	19	1.34	15.81	1°33'	IR19PT	•	○																													
PT1/2	14	1.81	19.79	1°40'	IR14PT																															
PT3/4	14	1.81	25.28	1°19'	IR14PT																															
PT1	11	2.31	31.77	1°20'	IR11PT																															
PT1 1/4	11	2.31	40.43	1°02'	IR11PT																															
PT1 1/2	11	2.31	46.32	0°55'	IR11PT																															
PT2	11	2.31	58.14	0°43'	IR11PT																															
PT2 1/2	11	2.31	73.71	0°34'	IR11PT																															
PT3	11	2.31	86.41	0°29'	IR11PT																															
PT3 1/2	11	2.31	98.85	0°26'	IR11PT																															
PT4	11	2.31	111.55	0°23'	IR11PT																															
PT5	11	2.31	136.95	0°18'	IR11PT																															
PT6	11	2.31	162.35	0°16'	IR11PT																															
PT7	11	2.31	187.75	0°13'	IR11PT																															
PT8	11	2.31	213.15	0°12'	IR11PT																															
PT9	11	2.31	238.55	0°11'	IR11PT																															
PT10	11	2.31	263.95	0°10'	IR11PT																															
PT12	11	2.31	314.75	0°08'	IR11PT																															

○ : Change the shim to AN16-0 ←

○ : Change the shim to AN16-0DT ←

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Selection of ST-type Toolholders

National taper pipe thread (NPT) (for pipe)

Nominal size	TPI	Pitch	Lead angle	Shank material Insert size Holder Cat. No. Insert Cat. No.	Steel shank									Carbide shank						"Tsuppari-Ichiban"							
					6IR			16IR						6IR			16IR			16IR							
					SNR0006H06-2	SNR0006H06-3	SNR0008H06-2	SNR0008H06-3	SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	(CNR0040T16)	(CNR0050U16)	SNR0006K06SC-2	SNR0006K06SC-3	SNR0008K06SC-2	SNR0008K06SC-3	SNR0016R16SC	SNR0016R16SC-2	(SNR0016R16SC-3)	TSNR0016Q16	TCNR0020R16DT	TCNR0025S16DT	(TCNR0032T16DT)
3/8NPT	18	1.41	1°37'	IR18NPT	•		○							•		○											
1/2NPT	14	1.81	1°40'	IR14NPT																							
3/4NPT	14	1.81	1°19'	IR14NPT								○											○				
1NPT	11.5	2.21	1°17'	IR115NPT								○											•	○			
1 1/4NPT	11.5	2.21	1°00'	IR115NPT								○	•	•	○								•	•	•	○	
1 1/2NPT	11.5	2.21	0°52'	IR115NPT								○	•	•	○								•	•	•	○	
2NPT	11.5	2.21	0°41'	IR115NPT								○	•	•	•	•	○						•	•	•	○	
2 1/2NPT	8	3.175	0°50'	IR8NPT								○	•	•	•	•	○						•	•	•	○	
3NPT	8	3.175	0°40'	IR8NPT								○	•	•	•	•	○						•	•	•	○	
3 1/2NPT	8	3.175	0°35'	IR8NPT								○	•	•	•	•	○						•	•	•	○	
4NPT	8	3.175	0°31'	IR8NPT								○	•	•	•	•	○						•	•	•	○	
5NPT	8	3.175	0°25'	IR8NPT									0	0	0	0	0							0	0	0	
6NPT	8	3.175	0°21'	IR8NPT									0	0	0	0	0							0	0	0	
8NPT	8	3.175	0°16'	IR8NPT									0	0	0	0	0							0	0	0	
10NPT	8	3.175	0°13'	IR8NPT									0	0	0	0	0							0	0	0	
12NPT	8	3.175	0°11'	IR8NPT									0	0	0	0	0							0	0	0	
14NPT	8	3.175	0°10'	IR8NPT									0	0	0	0	0							0	0	0	
16NPT	8	3.175	0°09'	IR8NPT									0	0	0	0	0							0	0	0	
18NPT	8	3.175	0°08'	IR8NPT									0	0	0	0	0							0	0	0	
20NPT	8	3.175	0°07'	IR8NPT									0	0	0	0	0							0	0	0	
24NPT	8	3.175	0°06'	IR8NPT									0	0	0	0	0							0	0	0	

○ : Change the shim to AN16-0

○ : Change the shim to AN16-0DT

29° trapezoidal thread (ACME) (for machine parts, pipe)

Nominal size	TPI	Pitch	Pitch diameter	Lead angle	Shank material Insert size Holder Cat. No. Insert Cat. No.	Steel shank									Carbide shank			"Tsuppari-Ichiban"								
						16IR			22IR			27IR			16IR			16IR			22IR					
						SNR0016M16	SNR0016M16-2	SNR0016M16-3	CNR0020P16	CNR0025R16	CNR0032S16	SNR0020Q22	SNR0020Q22-2	SNR0020Q22-3	CNR0025R22	CNR0032S22	CNR0040T27	(CNR0050U27)	SNR0016R16SC	SNR0016R16SC-2	SNR0016R16SC-3	TSNR0016Q16	TCNR0020R16DT	TCNR0025S22DT	(TCNR0032T22DT)	
3/8	12	2.12	8.465	4°33'	IR12ACME																					
7/16	12	2.12	10.053	3°50'	IR12ACME																					
1/2	10	2.54	11.43	4°03'	IR10ACME																					
5/8	8	3.18	14.274	4°03'	IR8ACME																					
3/4	6	4.23	16.934	4°33'	IR6ACME																					
7/8	6	4.23	20.109	3°50'	IR6ACME																					
1	5	5.08	22.86	4°03'	IR5ACME																					
1-1/8	5	5.08	26.035	3°33'	IR5ACME																					
1-1/4	5	5.08	29.21	3°10'	IR5ACME																					
1-3/8	4	6.35	31.75	3°39'	IR4ACME																					
1-1/2	4	6.35	34.925	3°19'	IR4ACME																					
1-3/4	4	6.35	41.275	2°48'	IR4ACME																					
2	4	6.35	47.625	2°26'	IR4ACME																					

Because this thread standard is characterized with large pitch and small diameter, (that is a large lead angle) the standard inserts and toolholders can not be used for machining this thread type. The application is limited to outside of the standard.

Note : The above tables show correspondence of internal toolholders at the time of setting clearance between thread and toolholder to 3 mm (1 mm in case of SN type) and the finishing stock to 0.1 mm.

Threading Inserts





Edge Orientation and Description of Threading Inserts

	Edge Orientation		
	Type A	Type B	Type N
Right hand			
Left hand			

JXTG 12 F R - 60 A - 005



Insert shape: JXTG
 Insert size: 12
 Hand: F (sharp edge)
 Thread angle: R - 60
 Edge orientation: A
 Corner radius: 005

When to Use Type A Threading Insert or Type B

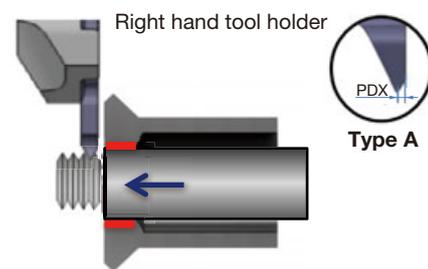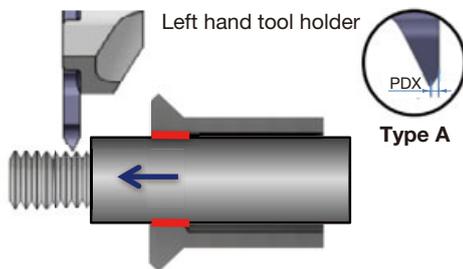



Threading close to the wall

Threading operation following back-turning

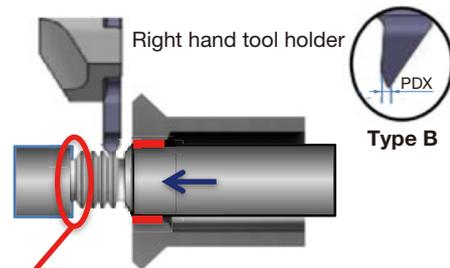
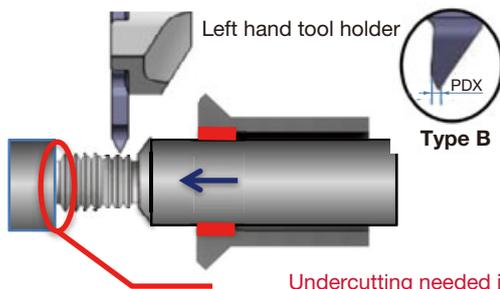


Undercutting needed in previous process

Threading Workpiece in Main Spindle

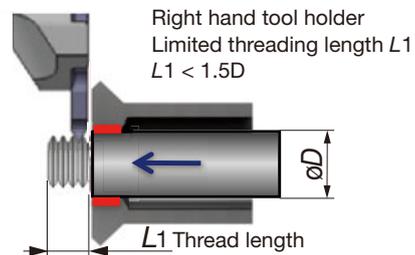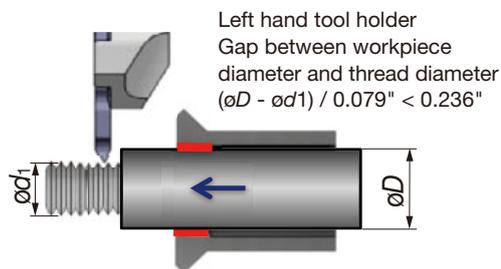

Threading operation following back-turning

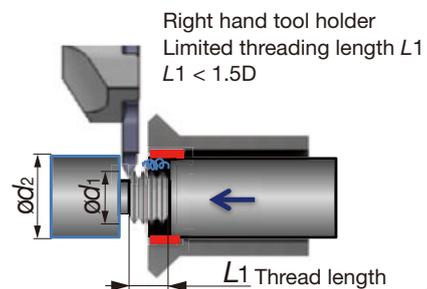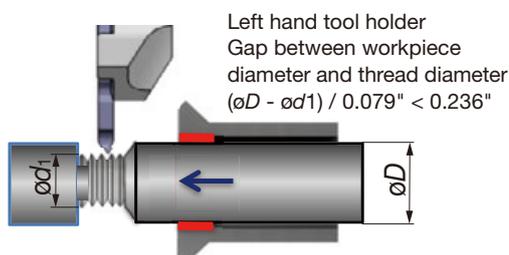

Designation system for Threading Inserts

Designation system for TT-type insert

Insert

TT	R	42	M	-005	
①	①	②	③	④	
① Hand		② Insert size (mm)		③ Thread type	
R	Right	Inscribed circle	12.7	M	60° thread angle
L	Left	Thickness	3.2	W	55° thread angle
				④ Corner radius (mm)	
				Blank	0
				-005	0.05

Toolholder

TT-	20	20	R	E	
①	②	②	③	④	
① Shank height (mm)		② Shank width (mm)		③ Hand	
				R	Right
				L	Left
				④ External or Internal	
				E	External
				I	Internal

Designation system for ST-type insert

16	I	R	175	ISO	-	B	
①	②	③	④	⑤	⑤	⑥	
① Insert size		② External or Internal		③ Hand of cut		④ Thread type	
Symbol	I. C. dia (mm)	E	External	R	Right hand	⑤ Thread type	
I	Internal	L	Left hand				
6	-					⑥ Chipbreaker	
11	6.35						
16	9.525					B	With (Basic selection)
22	12.7					M	With
27	15.875					CB	With
						-	Without

④ Thread type	
Partial-profile inserts	
A	Pitch: 0.5 ~ 1.5 mm TPI: 48 ~ 16
AG	Pitch: 0.5 ~ 3 mm TPI: 48 ~ 8
G	Pitch: 1.75 ~ 3 mm TPI: 14 ~ 8
N	Pitch: 3.5 ~ 5 mm TPI: 7 ~ 5
Z	Pitch: 4 ~ 6 mm TPI: 6 ~ 4
Full-profile inserts	
pitch (mm)×10 or 100 TPI (Thread Per Inch) (Examples) 05: 0.5 mm pitch×10 175: 1.75 mm pitch×100 14: 14 TPI	

⑤ Thread type	
Partial-profile inserts	
60°	60° thread angle
55°	55° thread angle
TR	30° trapezoidal
ACME	29° trapezoidal
Full-profile inserts	
ISO	Metric
UN	Unified
W	Whitworth
PT	Taper pipe
NPT	National taper pipe
NPTF	National taper pipe
RAPI	API round
RD	
BAPI	API buttress
RD	Round (DIN405)
UNJ	UNJ
MJ	

Thread Milling CNC Program for Internal Thread

THREADMILLING

Right-hand thread (climb milling) from bottom up. Program is based on tool center.

This method of programming needs no tool radius compensation value, other than an offset for wear.

$$A = \frac{D_o - D}{2}$$

A = Radius of tool path
 D_o = Major thread diameter
 D = Cutting diameter

General Program

```

G90 G00 G54 G43 H1X0 Y0 Z10 S (n : Number of revolutions)
G00 Z-(to thread depth)
G01 G91 G41 D1 X (A/2) Y-(A/2) Z0 F (Center of tool)
G03 X(A/2) Y(A/2) R (A/2) Z(1/8 pitch) F (Cutting edge)
G03 X0 Y0 I -(A) J0 Z (pitch)
G03 X-(A/2) Y(A/2) R (A/2) Z(1/8 pitch)
G01 G40 X -(A/2) Y-(A/2) Z0
G90 X0 Y0 Z0
    
```

Internal Thread

Example: M20x2.0 IN-RH (Thread depth 20 mm)

Tool : MTEC1010C27 2.0ISO

(Cutting dia. 10 mm)


$A = (D_o - D) / 2 = (20 - 10) / 2 = 5$

$A/2 = 2.5$

(Tool compensation of radius=0)

```

G90 G0 G54 G43 G17 H1X0 Y0 Z10 S4000
G0 Z-20
G01 G91 G41 D1X 2.5 Y-2.5 Z0 F840
G03 X2.5 Y2.5 R2.5 Z0.25 F420
G03 X0 Y0 I-5.0 J0 Z2.0
G03 X-2.5 Y2.5 R2.5 Z0.25
G01 G40 X-2.5 Y-2.5 Z0
G90 G0 X0 Y0 Z0
M30
%
    
```

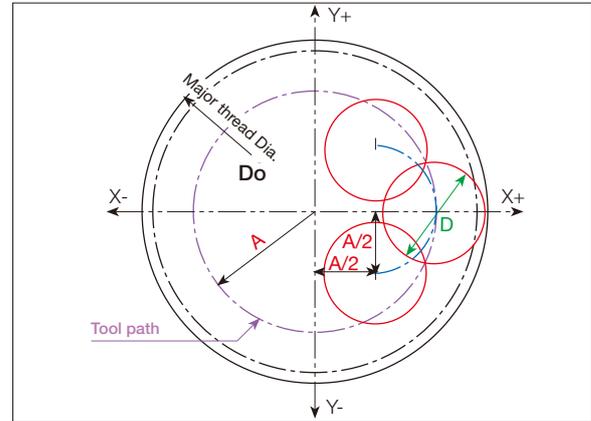


$$F \text{ (Center of tool)} = n \times f \times z$$


$$F \text{ (Cutting edge)} = \frac{D_o - D}{D_o} \times n \times f \times z$$

n : Number of revolutions
 f : rev / tooth
 z : Number of edge

Internal Thread

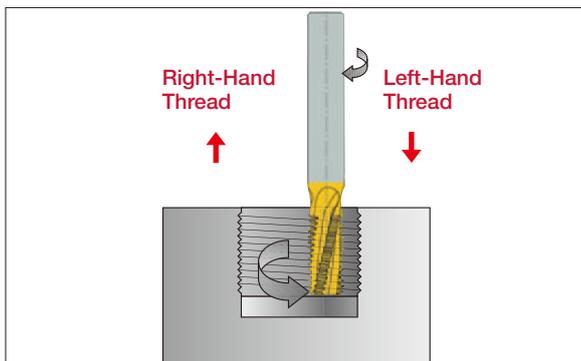

External Thread

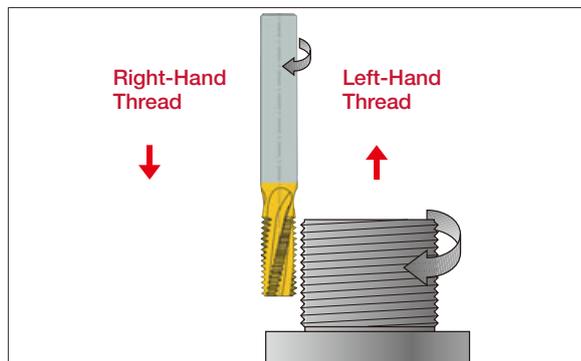


A thread milling operation is applicable for thread cutting in non-symmetrical parts utilizing the advantage of helical interpolation programs on modern machining centers.



For more details, please check ThreadMilling advisor.

SOLIDTHREAD Designation system

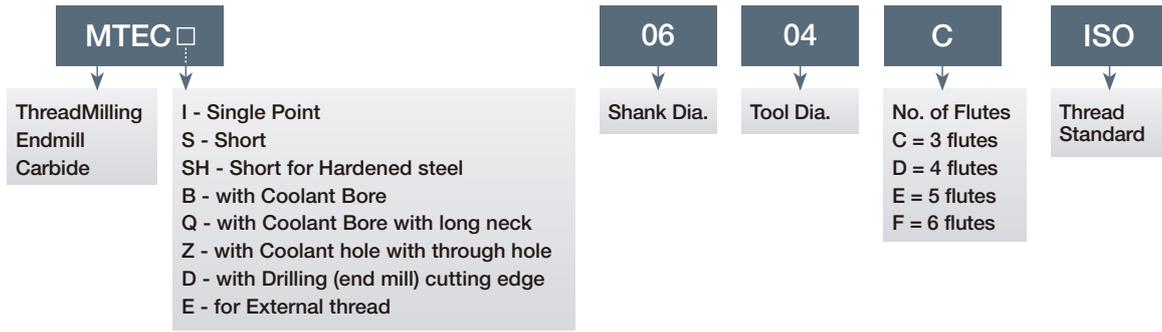


Grooving and Parting Tools

TUNGCUT

Features of TungCut

● Multi-functional grooving system

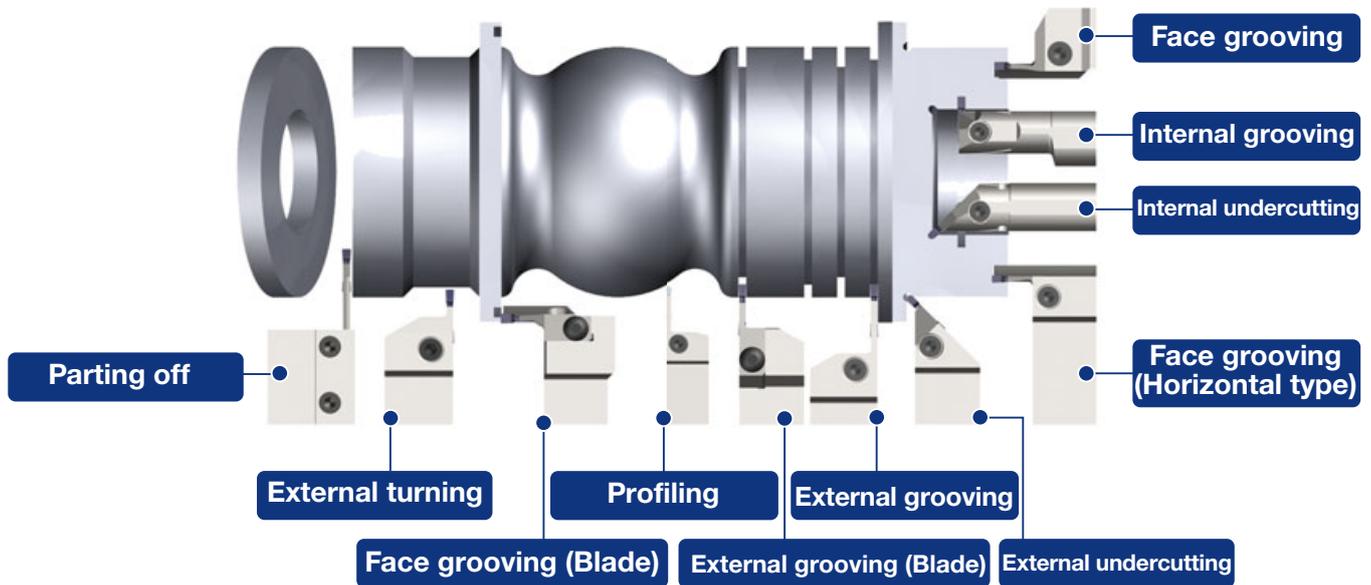

Mono block toolholders

High rigidity !



Adaptor

Available for various machining !



Blades with tool blocks

Suitable for large diameter machining !



● Insert Application

Insert	Application						
	Grooving			Parting	Turning		
	External	Internal	Face		External	Internal	Face
DGM / SGM	●		●	●			
DGS / SGS	●		●	●			
DGG	●		●	●			
DGL	●		●	●			
DGE	●		●	●			
DTM	●		●	●	●		●
DTE	●		●	●	●		●
DTX	●	●	●	●	●	●	●
DTR / STR	●		●		●		●
DTIU	●	●					
DTI	Undercutting	Undercutting				●	
DGIM / DGIS		●					
DTF			●				●
DTA					●	●	
SGN	●				Al wheel machining	Al wheel machining	
STH					●	●	●



Grooving and Parting Tools

TUNGCUT


■ Ideal chip forms of TungCut inserts

Carbon steel
(1045)




GROOVING AND PARTING


DGM4-030

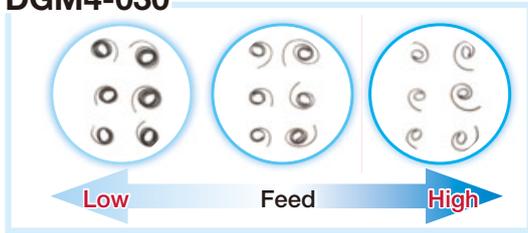


DGS4-030

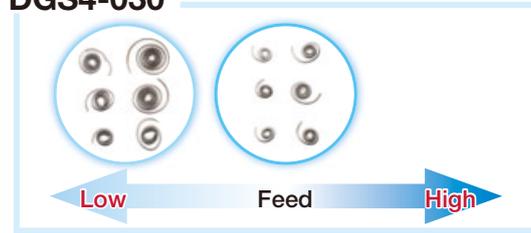


DTE4-040

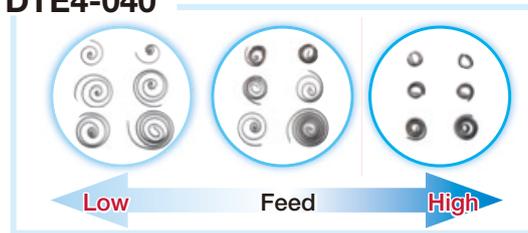


DTX4-040

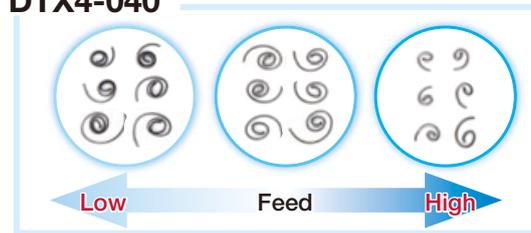

DTE400-040

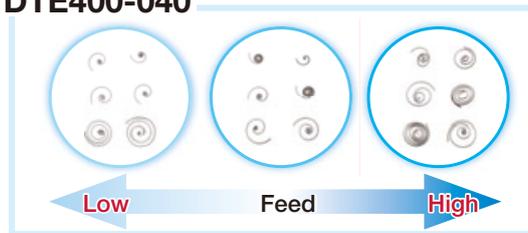

DTM4-040

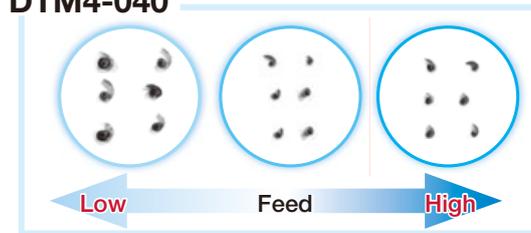


GROOVING AND PARTING


Stainless steel
(304)




DGM4-030

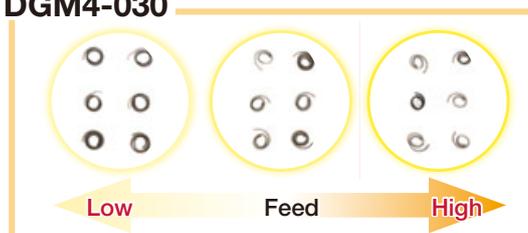


DGS4-030

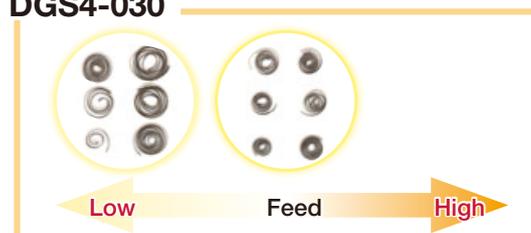


DTE4-040

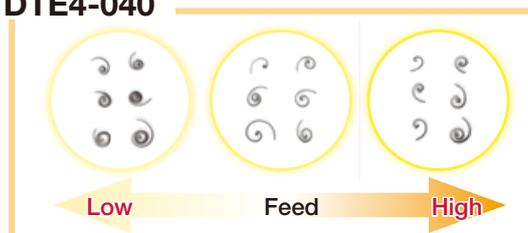


DTX

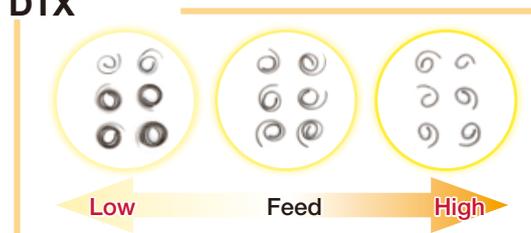

DTE400-040

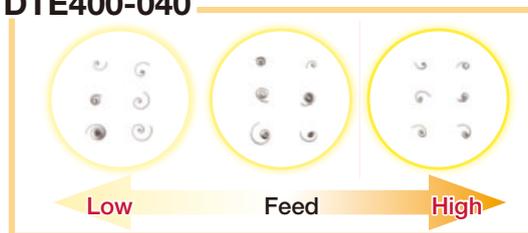

DTM4-040

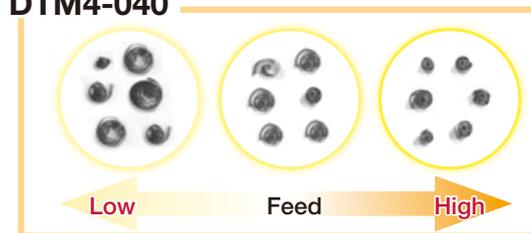



GROOVING, PARTING, AND TURNING

DTE

Its wide cutting edge is designed to provide good chip control at high feed rates



DTM

First choice chipbreaker for various applications. Optimized geometry for smooth chip breaking and flow



DTX

Provides good cutting performance in grooving. Its narrow cutting edge width provides excellent chip formation at low feed rates




Carbon steel
(1045)




Stainless steel
(304)


DTE4-040

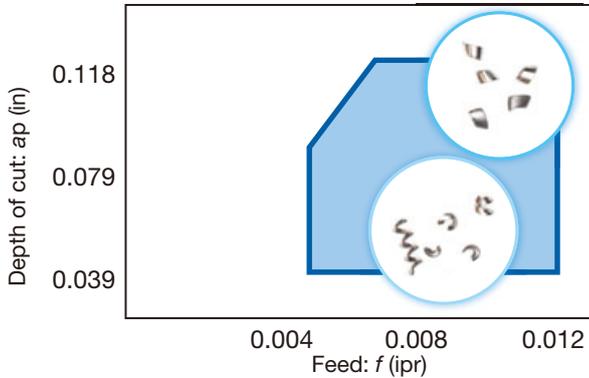


DTE4-040

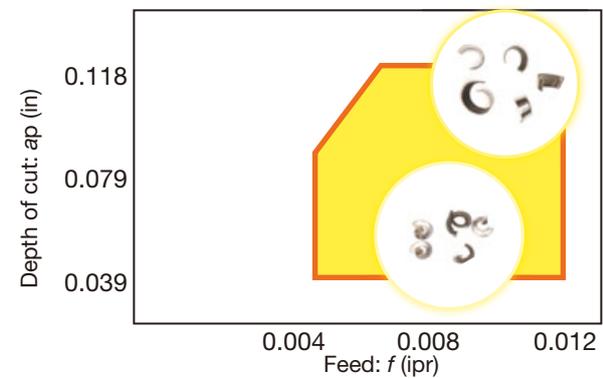


DTM4-040

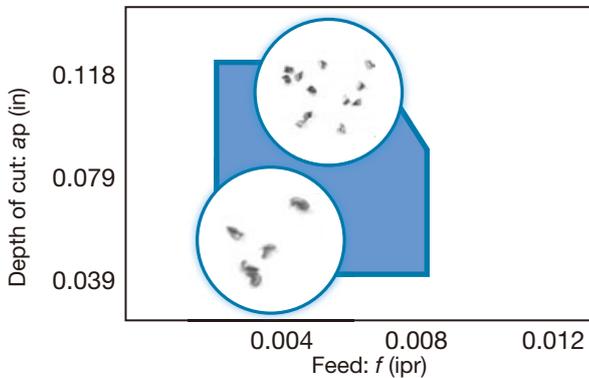


DTM4-040

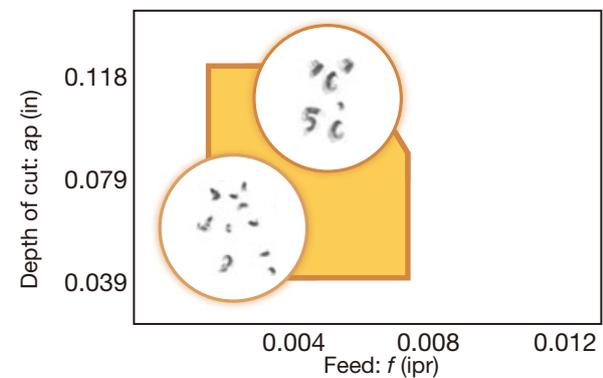

DTX4-040

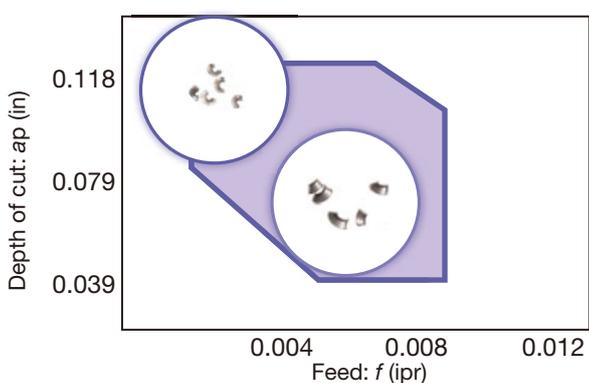

DTX4-040

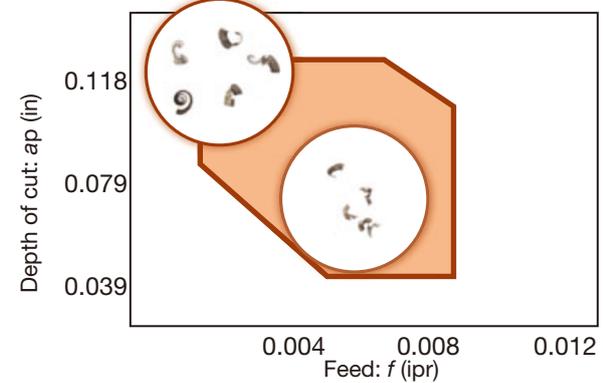

Grooving and Parting Tools



■ Ideal chip forms of TungCut inserts

● Excellent chip control at low feed rates

P Bearing steel
(52100)

DGL
First choice chipbreaker for bearing steel. Excellent chip control at low feed rates.



Material : SUJ2
Holder : CTER16-3T09
Insert : DGL3-025
Cutting speed : Vc = 164, 328 sfm
Groove width : 0.118"



	$f = 0.001$ ipr	$f = 0.002$ ipr	$f = 0.003$ ipr	$f = 0.004$ ipr
Vc = 164				
Vc = 328				

■ Notes when using STH insert

Since the wiper geometry consists of a long arc, TungCut CBN insert provides wavy surface finishing, despite the results with excellent Ra values.

TUNG CUT
Feed: $f = 0.039$ ipr

ISO turning insert
(with 0.031" nose radius)
Feed: $f = 0.004$ ipr




Surface quality
Ra = 0.3 μm (11.8Uin)

Surface quality
Ra = 0.4 μm (15.75Uin)

H Insert : STH500-SR BXA10
: 2QP-CNGA120408 BXA10
Holder : CTEL16-5T12
: ACLNL164-A
Workpiece material : 4140 (60HRC)
Cutting speed : Vc = 492 sfm
Feed : $f = 0.004, 0.039$ ipr
Depth of cut : $a_p = 0.004$ "
Application : External turning, continuous cut
Coolant : Wet

Due to the wiper geometry, ensure machine is programmed so that the wiper section of the cutting edge completely passes over the workpiece edge when external turning or face turning, otherwise, material will be left uncut on the workpiece. When cutting towards the wall or bottom, provide proper undercutting, as listed below, at the wall or bottom to eliminate uncut material.

Designation	CW ± 0.0 (in)	Application	Minimum undercutting required (in)
STH300-SR	0.118	External	0.059
		Face	0.016
STH500-SR	0.197	External	0.098
		Face	0.028

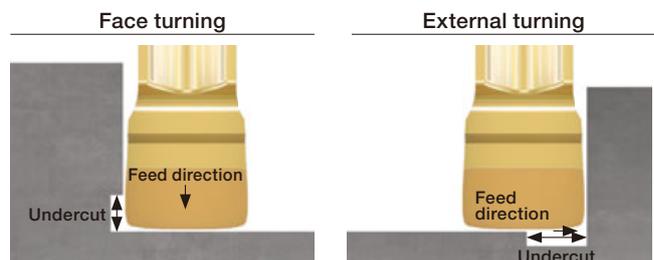


TUNG M^{OBULAR} SYSTEM

How to install and remove the blade and insert


● Assembly




1 Remove all 4 screws and ensure the O rings are all in place.



2 Place the blade and tighten 2 bottom clamping screws.




3 Place the insert in the pocket and tighten the fixing screw in the center.




4 Place the long screw in the angular direction and tighten to clamp the insert.

Please follow the installation order as shown above. When the screws are tightened in the **4**→**3** order, the insert clamping may be insufficient and unstable.

● Disassembly




1 First loosen the long screw in the angular direction.



2 Loosen the Fixing screw in the center and remove the insert.



Loosening the long screw alone may not release the insert.

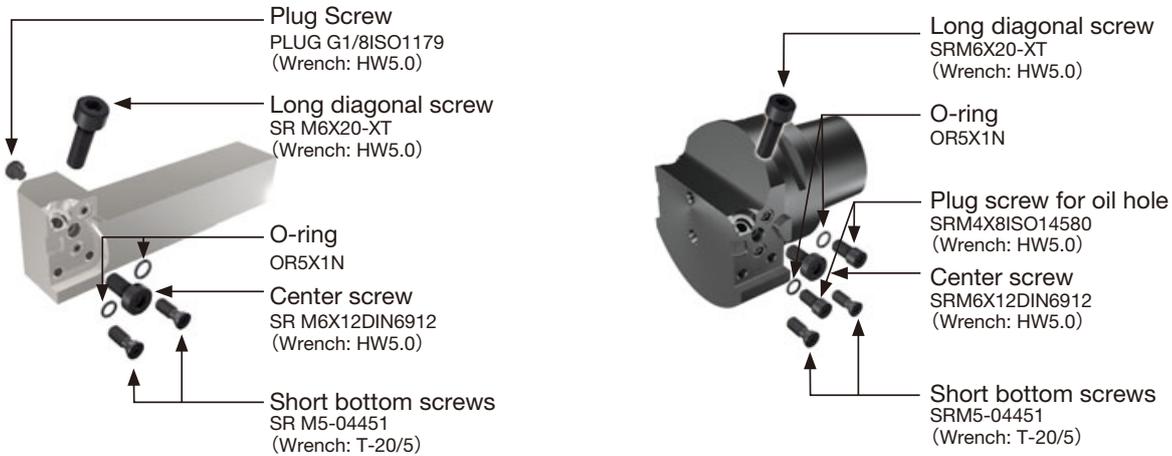

All parts listed here are included in the tool holder.

EASY M^{ULTI} CUT

Procedure to clamp and unclamp insert

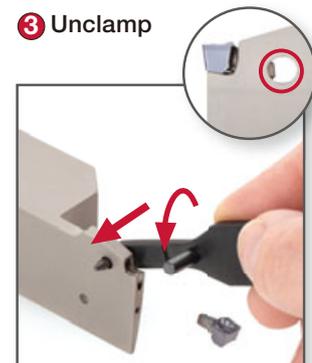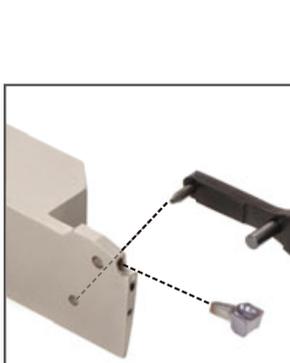


Grooving and Parting Tools

Points to consider for grooving and parting operations

Application	Points
<p>Groove-turning</p>	<ul style="list-style-type: none"> To achieve best wiper effect, aP must be greater than the corner radius of the insert. Do not use no more than 80% of the cutting edge length. Use a chipbreaker geometry best suited for turning. Use the toolholder with the shortest possible CDX (cutting depth maximum) to ensure maximum tool rigidity and process security. The insert may be deflected by axial cutting force during turning, causing the workpiece diameter to be smaller than the required dimension(See Fig. 1). A minor tool length compensation may, therefore, be required. Exact amount of change can be measured by running a test workpiece. Refer to the charts in Fig. 2 below for diameter compensation values. <div style="display: flex; justify-content: space-around; align-items: center;"> <div data-bbox="343 616 582 884"> <p>Fig. 1</p> </div> <div data-bbox="694 616 1045 929"> <p>Insert : DTE300-040 Toolholder: CTER16-3T09</p> <p>Fig. 2 Value of compensation</p> </div> <div data-bbox="1061 616 1460 929"> <p>Insert : DTE400-040 Toolholder: CTER16-4T10</p> </div> </div>
<p>Parting off</p>	<ul style="list-style-type: none"> Adjustment of the cutting edge height is crucial to obtain the best possible part quality in parting operations. Adjust so that the center height is not off by more than ± 0.004". Setting the parting tool upside down aids in better chip evacuation and preventing parts from flying when parted off. If the center height is set too low, a pip may remain on the parted surface. Optimize tool life by reducing feed to 30% about 0.197" before the workpiece center. Use a left- or right-handed insert with an angled front and smallest possible corner radii to prevent or minimize pips. Use a parting tool with the thickest shank height (H) as possible for maximum tool rigidity and stability. Use an overhang as short as possible for minimum tool deflection and process security. When the parting distance is greater than the insert length, use a single-ended insert. Use a insert as thin as possible. This minimizes the cutting force and saves material. To avoid part surface from being damaged after the cut, move the tool in the axial direction to keep the cutting edge off the part before retreating the tool in the radial direction.
<p>Face grooving</p>	<ul style="list-style-type: none"> Chip control during face grooving operations is, generally, more challenging than general grooving operations. Optimize the insert geometry considering whether the application involves grooving or groove-and-turning. DAXMIN (axial groove inside diameter minimum) and DAXX (axial groove outside diameter maximum) in the lists indicate the diameter range of face groove width machinable from the first cut. Choose the diameter range of the first cut (DAXMIN and DAXX). Use the tool for the largest diameter that fits your groove and turn from the outside towards the center to expand, and never cut the other way around. Use the same feed and aP as for O.D. grooving. For effective chip evacuation, use peck grooving method or set the tool upside down to eliminate chip nesting and chip re-cutting.
<p>Internal grooving</p>	<ul style="list-style-type: none"> DMIN indicates minimum bore diameter that can be machined with no interference. Optimize the insert geometry considering whether the application involves grooving or groove-and-turning. Chip evacuation is challenging in internal grooving operations. Use coolant-through toolholder whenever possible. Use a toolholder as thick as possible or use a vibration-resistant carbide shank to increase tool rigidity for chatter-free machining. Always turn from the bore end towards the entrance to reduce chip nesting inside the bore and promote better chip evacuation.

Milling tools

Nomenclature for face milling cutter

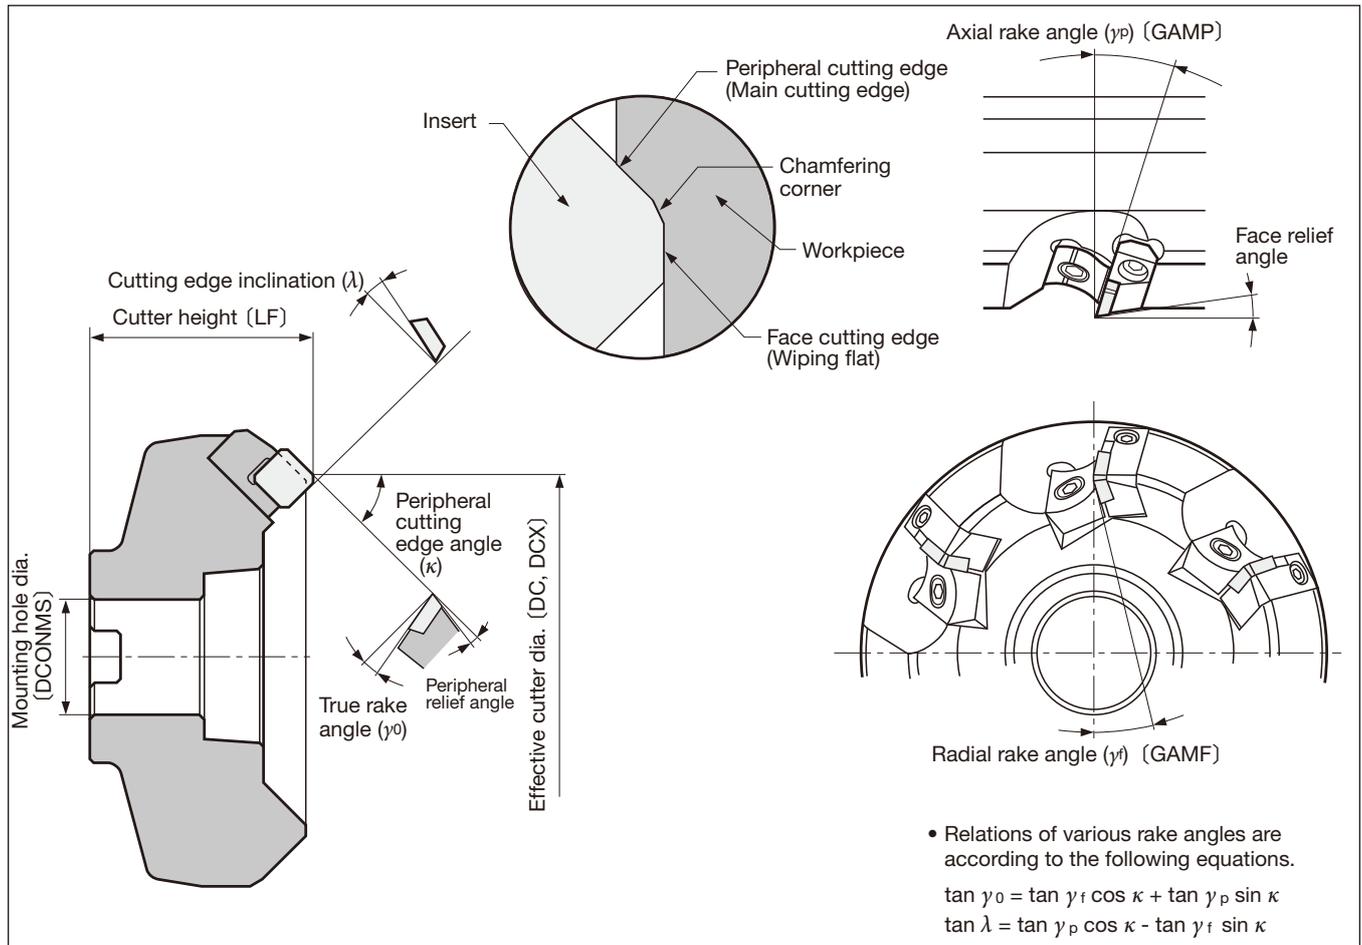


() The notation in the brackets is the one used in the catalog (ISO compliant)

Cutter geometry and applications

Condition		Rake angle combination and applicability		
		Negative-Negative	Negative-Positive	Positive-Positive
Shapes of cutting edge	γ_p (GAMP)	-	+	+
	γ_r (GAMF)	-	-	+
	γ_0	-	+	+
Workpiece material	Carbon steels, alloy steels (< 300HB)	△	⊙	⊙
	Stainless steels (< 300HB)	×	⊙	○
	Die steels (< 300HB)	△	⊙	○
	Cast irons Ductile cast irons	⊙	○	○
	Aluminum alloys	×	○	⊙
	Copper and its alloys	×	○	⊙
	Titanium and its alloys	×	○	○
	Hardened steels (40 ~ 55HRC)	○	○	×
Features		· Higher cutting edge strength · Many usable corners of inserts	· Excellent chip removal · Higher cutting edge strength and Freer cutting action	· Most excellent cutting action
Typical examples of mills		DoPent	TungMill DoTriple-Mill	TFE12 DPD09


() The notation in the brackets is the one used in the catalog (ISO compliant)

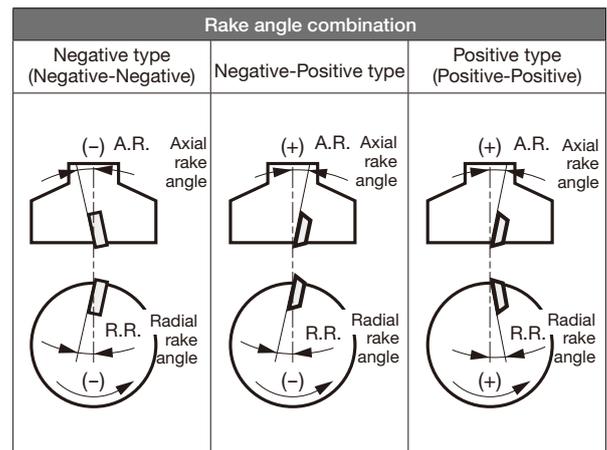

Milling tools

Calculation formulas for milling

● Cutting speed

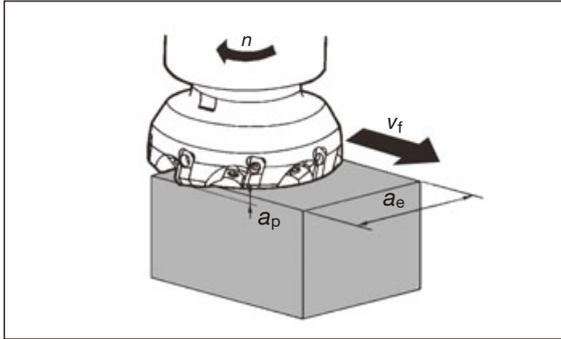

● Cutting speed (Calculated from number of revolutions)

$$SFM = \frac{RPM \times D}{3.82}$$

v_c : Cutting speed (m/min)
 D : Effective diameter (mm) (DC, DCX)
 n : Number of revolutions (min^{-1})
 $\pi \approx 3.14$


● Number of revolution (Calculated from cutting speed)

$$RPM = \frac{SFM \times 3.82}{D}$$

● Feed speed and feed per tooth


$$V_f = f_z \times z \times n$$

v_f : Feed speed (mm/min)
 f_z : Feed per tooth (mm/t)
 z : No. of teeth of the cutter
 n : Number of revolutions (min^{-1})

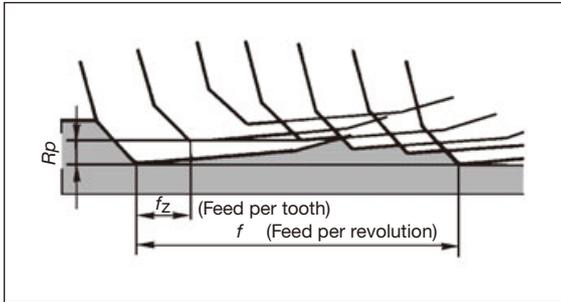

Feed speed is relative speed of cutter and Workpiece material and in the normal milling machine, it is the table speed. In milling, the feed per tooth is very important. The recommended cutting condition is expressed by v_c and f_z and using the above equation calculate n and v_f and input in the machine.


● Cutting time on face milling

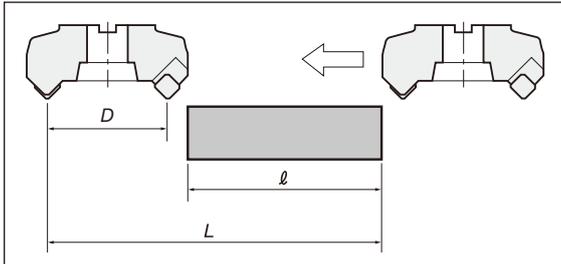

$$T = \frac{L}{V_f}$$

T : Cutting time (min)
 L : Total table feed length.
 (l : Workpieces length (mm) + ϕD_c : Effective cutter diameter (mm) (DC, DCX))
 v_f : Feed speed (mm/min)
 () The notation in the brackets is the one used in the catalog (ISO compliant)


Depth of cut and width of cut

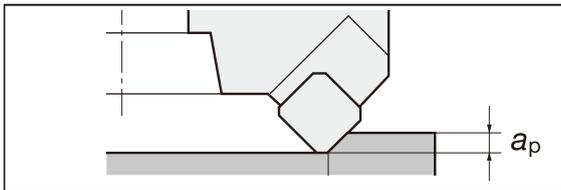

● Depth of cut

Determine by required allowance for machining and capacity of the machine. In case of mill, there are cutting limits according to shape and size of the insert. Please see spec in the catalogue.

a_p : Depth of cut (mm)

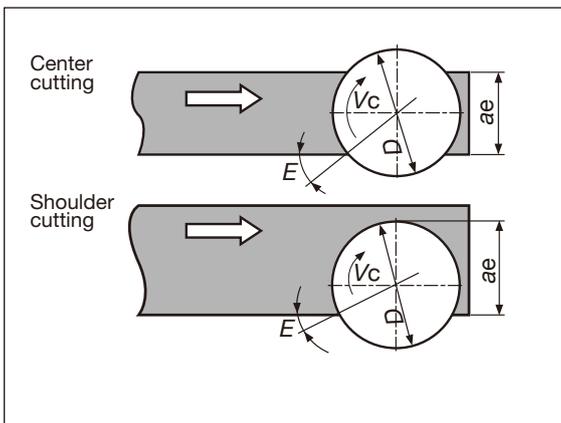

● Width of cut and engagement angle

There is an appropriate engage angle depending on the cutter diameter, cutting position, Workpiece material, etc., and ordinarily the values in the table below are used as a guide.

D : Cutter diameter (mm) (DC, DCX)
 E : Engage angle
 a_e : Width of cut (mm)
 () The notation in the brackets is the one used in the catalog (ISO compliant)

Center cutting

Workpiece material	Appropriate E	Cutter dia. and a_e
Steel	~ 42°	$a_e \approx \frac{2}{3} D$
Cast iron	~ 53°	$a_e \approx \frac{4}{5} D$

Shoulder cutting


Workpiece material	Appropriate E	Cutter dia. and a_e
Steel	~ 30°	$a_e \approx \frac{3}{5} D$
Cast iron	~ 40°	$a_e \approx \frac{3}{4} D$

Roughness of finished surface


(1) Theoretical surface roughness

Theoretical roughness as shown below, is the same as for single point turning

● With corner radius RE

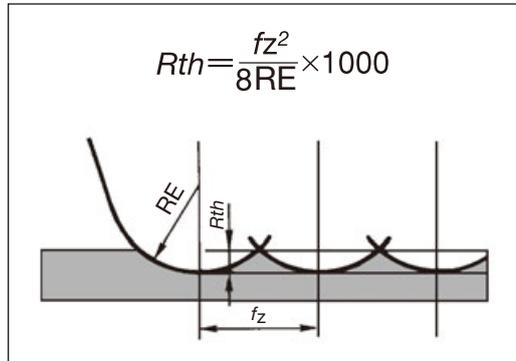

● Without corner radius RE

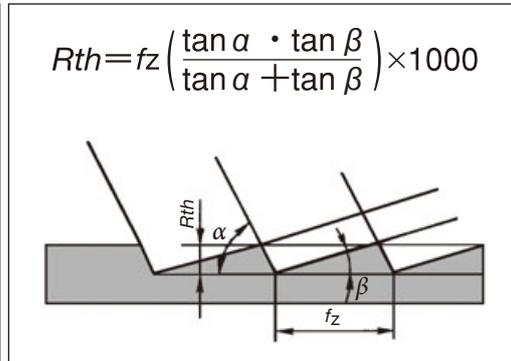


R_{th} : Theoretical roughness (μm)

f_z : Feed per tooth (ipt)

RE : Corner radius (in)

α : Corner angle


β : Face cutting edge angle

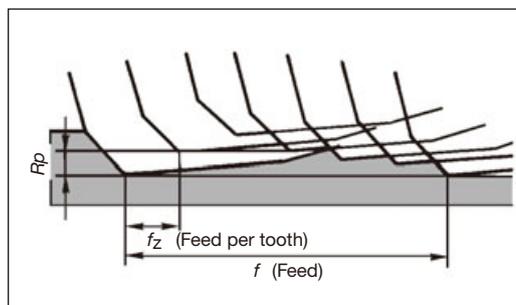

(2) Actual surface roughness

A facemill cutter in practice is composed of multiple point cutting edges and is prone to create uneven peaks, or an axial runout error (R_p) on cutting edges. One or two cutting edges being non-coplanar to the rest invariably create the dominant mark on a face-milled surface, producing periodic patterns corresponding to the feed per revolution f (ipr) superimposing on the feed per tooth f_z (ipt).

Improving surface roughness

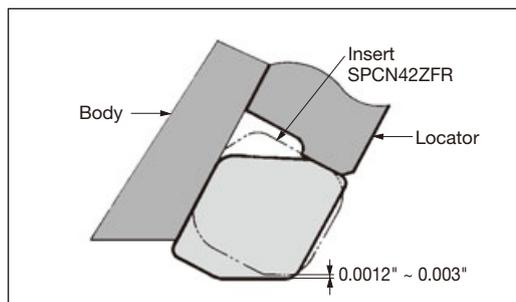

Face run out must be minimized and a low feed and high speed should be used. Also, in order to attain good finished surface at high efficiency, there are the following methods:

- (1) In case of ordinary mill
Use wiper insert as shown in the figure at left.
- (2) Use of super finish mill for finishing.
 - Use of combination mills with finishing insert such as TFD4400-A and TFP4000IA ($a_p < 0.039$ ").
 - Use of super finish mill for finishing such as NMS cutters and SFP4000 etc.

Milling tools

Calculating power requirement

$$P_c = \frac{k_c \times a_p \times a_e \times v_f}{330}$$

(HP)

Because practical power requirements depend on the type of mill (proportional to the true rake angle) and the motor efficiency of the machine used, the result calculated from the above formula should be considered as a rough guide.

P_c : Net power requirement (HP)

k_c : Specific cutting force (KPI)
[Refer to the Table below]

a_p : Depth of cut (in)



a_e : Width of cut (in)

v_f : Feed speed (in/min)

Values of specific cutting force (k_c)

Workpiece material (JIS)	Tensile strength	Value of specific cutting force on feed per tooth k_c (N/mm ²)				
	MPa	0.004 (ipt)	0.006 (ipt)	0.008 (ipt)	0.012 (ipt)	0.016 (ipt)
SS400	75,420	312	290	276	254	239
S55C	111,679	286	270	261	255	235
SCM435	105,878	355	341	319	287	248
SKT4	(HB352)	294	292	263	244	231
SC450	75,420	393	367	350	325	307
FC250	(HB200)	241	210	191	167	149
Al (Si)	29,008	96	84	76	67	59
Brass	72,519	158	139	127	110	99

Values of cutting force

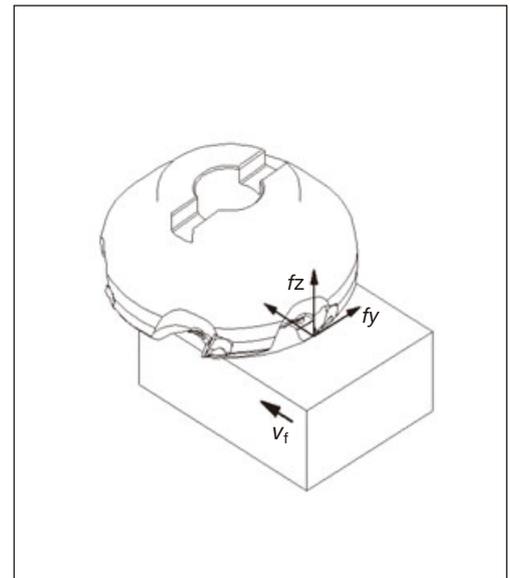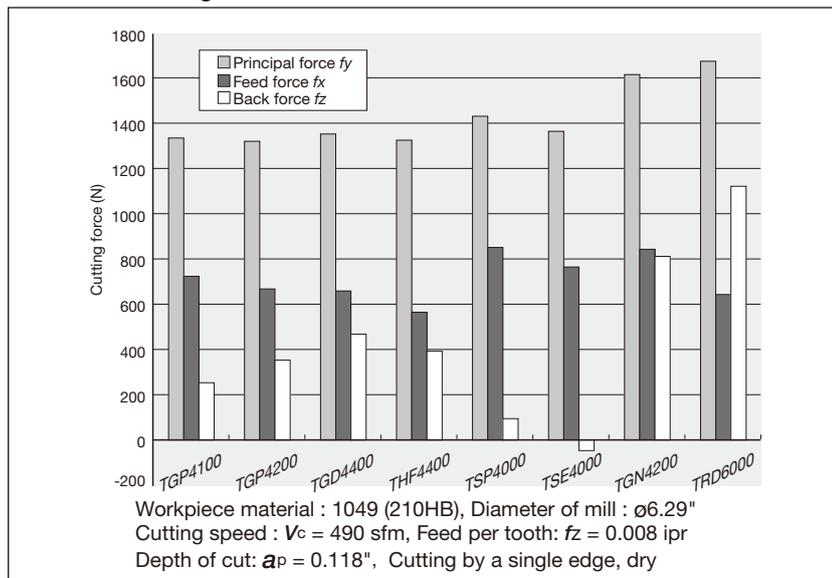

Conversion from cutting speed to number of revolutions

(unit : min⁻¹)

Cutter diameter DC, DCX (in)	Cutting speed : V_c (sfm)												
	33	98	164	328	410	492	656	984	1,640	2,625	3,281	6,562	13,123
0.394	318	955	1,592	3,184	3,980	4,777	6,369	9,554	15,923	25,477	31,847	63,694	127,388
0.472	265	796	1,326	2,653	3,317	3,980	5,307	7,961	13,269	21,231	26,539	53,078	106,157
0.630	199	597	995	1,990	2,488	2,985	3,980	5,971	9,952	15,923	19,904	39,808	79,617
0.787	159	477	796	1,592	1,990	2,388	3,184	4,777	7,961	12,738	15,923	31,847	63,694
0.984	127	382	636	1,273	1,592	1,910	2,547	3,821	6,369	10,191	12,738	25,477	50,955
1.181	106	318	530	1,061	1,326	1,592	2,123	3,184	5,307	8,492	10,615	21,231	42,462
1.260	99	298	497	995	1,244	1,492	1,990	2,985	4,976	7,961	9,952	19,904	39,808
1.378	90	272	454	909	1,137	1,364	1,819	2,729	4,549	7,279	9,099	18,198	36,396
1.575	79	238	398	796	995	1,194	1,592	2,388	3,980	6,369	7,961	15,923	31,847
1.969	63	191	318	636	796	955	1,273	1,910	3,184	5,095	6,369	12,738	25,477
2.480	50	151	252	505	631	758	1,011	1,516	2,527	4,044	5,055	10,110	20,220
3.150	39	119	199	398	497	597	796	1,194	1,990	3,184	3,980	7,961	15,923
3.937	31	95	159	318	398	477	636	955	1,592	2,547	3,184	6,369	12,738
4.921	25	76	127	254	318	382	509	764	1,273	2,038	2,547	5,095	10,191
6.299	19	59	99	199	248	298	398	597	995	1,592	1,990	3,980	7,961
7.874	15	47	79	159	199	238	318	477	796	1,273	1,592	3,184	6,369
9.843	12	38	63	127	159	191	254	382	636	1,019	1,273	2,547	5,095
12.402	10	30	50	101	126	151	202	303	505	808	1,011	2,022	4,044


Note: In this table, the effects of centrifugal force on the rotating balance of the tool and the toolholder, flying risk of cutter parts, and limited value of toolholder destruction are not considered. Therefore, when using the tool at high speeds, be sure to observe the specified condition range.



■ Trouble shooting in face milling

Trouble	Possible causes	Countermeasures
Rapid wear of cutting edge	• Improper insert grade selection (Insufficient wear resistance)	• Use a grade with high wear resistance P30 → P20
	• Excessive cutting speed	• Select cutting speed suited for Workpiece material and insert grade
	• Inadequate feed	• Use standard cutting condition in catalog as guide
Rapid chipping of cutting edge	• Improper Insert grade selection (Insufficient toughness)	• Use a grade with high fracture resistance P10 → P20
	• Cutting hard material and unfavorable surface condition	• Decrease cutting speed • Use cutter with strong cutting edge
	• Excessive feed	• Proper selection of feed conditions, using recommended cutting conditions in catalog as guide
	• Excessive pressure applied on cutting edge	• Proper selection of engaging angle
	• Machining superalloys	• Use a negative-positive type cutter with large corner angle
Fracturing	• Cracking due to thermal shock	• Select insert grade of stronger thermal shock resistance • Decrease cutting speed
	• Continuous use of excessively worn insert	• Shorten replacement standard time of insert
	• Cutting hard material	• Use cutter with stronger cutting edge • Use cutter of larger corner angle
	• Obstruction to chip flow • Recutting of chips after chip welding	• Use cutter with better chip expulsion • Select insert grades difficult for chips to adhere Cemented carbides → cermets, coated grades • Use air blow
	• Excessively slow cutting, too fine feed	• Select cutting speed and feed optimized for insert grade and Workpiece material
Excessive chip welding or build-up on cutting edge	• Cutting soft material such as aluminum, copper, mild steel	• Use cutter with large rake angle
	• Cutting stainless steel	• Coated grades (AH130, AH3135)
	• Use of cutter with negative rake or too small rake angle	• Use cutter with large rake angle
Rough finish	• Effect of built-up edge	• Increase cutting speed • Appropriate cutting depth (finish allowance) • Change insert grade For steels : P → coated → cermet For cast irons : K → coated
	• Effect of face cutting edge run out	• Proper installing of inserts • Use insert of high dimensional accuracy • Cleaning of insert pocket
	• Continuous use of excessively worn insert	• Shorten replacement standard time of insert
	• Remarkable feed marks	• Feed per revolution to be set within flatland width • Use wiper insert type cutter such as T/EAW13 • Use cutter exclusively for finishing
Chattering	• Unstable clamping of workpiece	• Check clamping method of workpiece
	• Cutting of welded construction of thin steel plate	• Use cutter of large rake angle and small corner angle
	• Excessive cutting condition	• Re-examine allowable chip removal rate according to motor HP
	• Face milling of narrow width workpiece	• Use cutter of small cutter diameter and with many teeth
	• Too many simultaneous cutting teeth engagement	• Reduce No. of teeth

New Designation System for Milling Cutters

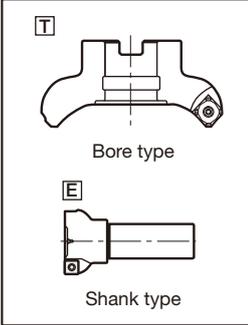


T Bore type
E Shank type

Symbol	Type
T	Bore type
E	Shank type

1 Type

H Hybrid TAC Mill Series



Symbol	Relief angle
C	7°
P	11°
D	15°
E	20°
F	25°
N	0°
Others	Special

3 Relief angle

Symbol	Hand
R	Right
L	Left

5 Direction of cut

Symbol	Unit
M	mm
U	in

7 Unit

Symbol	Type
T--: General type	
-	JIS
E	ISO
A	ANSI
E--: Shank type	
-	Cylindrical
W	Weldon
C	Combination

9 Attachment specification

10 Number of inserts

1 2 3 4 5 6 7 8 9 10


T P A 10 R 200 U 0075 A 04

1 2 3 4 5 6 7 8 9 10 11

E P A 15 R 150 U 0125 W 02 L

2 Angle, Category

Symbol	Cutting edge angle
P	90° ~ 80°
E	80° ~ 70°
D	60° ~ 50°
A	50° ~ 40°
L	With long cutting edge
Others	Special




4 Cutting edge length

Symbol	Size (ℓ)
S	
T	
R	
H	
A	

6 Effective cutter diameter

Symbol	Size
M: Unit in mm	
080	80 mm
200	200 mm
I: Unit in inch	
200	2 in





8 Attachment size

Symbol	Size
M: Unit in mm	
Hole diameter	
20.0	20 mm
25.4	25.4 mm
31.7	31.75 mm
47.6	47.625 mm
I: Unit in inch	
Hole diameter	
0075	0.75 in
0125	1.25 in
0200	2 in
E--: Shank type	
Shank diameter	
10.0	10 mm
12.0	12 mm
16.0	16 mm
25.0	25 mm
32.0	32 mm


11 Additional feature

Symbol	Type
W	Wedge clamp
L	Long shank
LE	Long edge
CS	Carbide shank
N	No coolant hole


Previous products

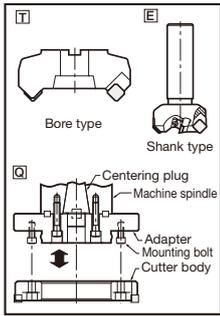

Symbol	Relief angle
C	7°
D	15°
E	20°
F	25°
N	0°
P	11°
X	Others



R		S		C		A		Inscribed circle dia. (in)
Symbol	Size	Symbol	Size	Symbol	Size	Symbol	Size	
		06	0.250	06	0.255	11	0.433	0.250
		07	0.313	08	0.319	13	0.543	0.313
		09	0.375	09	0.375	09	0.382	0.375
		10	0.394	-	-	-	-	0.394
		12	0.472	-	-	-	-	0.472
		12	0.500	12	0.500	12	0.508	0.500
		15	0.625	15	0.625	16	0.634	0.625
		16	0.630	-	-	-	-	0.630
		19	0.750	19	0.750	19	0.760	0.750
		20	0.787	-	-	-	-	0.787
		25	0.984	-	-	-	-	0.984
		25	1.000	25	0.630	25	1.016	1.000
		31	1.250	31	1.250	32	1.268	1.250
						55	2.160	2.150



Symbol	Effective diameter (in)
050	1.97
063	2.480
080	3.150
100	3.937
125	4.921
160	6.299
200	7.874
250	9.843
315	12.402
355	13.976
400	15.748

Symbol	Type
V	Vertical insert
Q	Quick change
E	Shank
T	Bore
S	Special
D	All PCD tipped
Q	All PCBN tipped

Symbol	Cutting edge angle
X	Others
Z	Others
V	Others
P	90° ~ 80°
E	80° ~ 70°
D	60° ~ 50°
A	50° ~ 40°

③ Relief angle

④ Cutting edge length

⑤ Effective cutter diameter

Example

Metric system

1 **2** **3** **4** **5** **6**
T A D 12 063 R


Example

Inch system


1 **8** **3** **9** **10** **11** **6** **7**
T M D 4 4 06 R I

⑧ Application, etc.	
Symbol	Application, geometry etc.
M	For machining centers
F	For finishing
G	General purpose
S	For square shoulder milling
H	High rake geometry
P	Negative axial, positive radial rake geometry
R	Use round inserts
U	For difficult to cut materials
C	For chamfering
L	Long edge type
T	For threading

⑨ Size of applicable insert	
Symbol	I. C. (in)
3	0.375
4	0.500
5	0.625
6	0.750
7	0.875
8	1.000
9	1.250





⑩ Angle	
Symbol	Cutting edge angle
0	90° ~ 80°
1	80° ~ 70°
2	70° ~ 60°
3	60° ~ 50°
4	50° ~ 40°
5	40° ~ 30°
6	30° ~ 20°
7	20° ~ 10°




⑪ Effective cutter diameter	
Symbol	Effective diameter (in)
50	1.970
63	2.480
03	3.150
04	3.937
05	4.921
06	6.299
08	7.874
10	9.843
12	12.402
14	13.976
16	15.748

Note: For diameter of less than 80mm, nominal dimensions (mm) of effective diameter are shown.

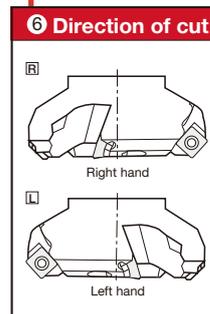

⑥ Direction of cut

⑦ Additional feature	
B	Close pitch
I	Irregular pitch
A(-A)	Modified type
S	For distinguishing shank size
L	Long shank



Note: The above nomenclature is not applicable for VSN6000I, MS cutter, TCB, PES1500 and TBN etc.

Designation System for Milling Inserts

Symbol	Hole	Shape of hole	Chipbreaker	Shape
N	Without	-	Without	
R			Single-sided	
F			Double-sided	
W	With	Partly cylindrical hole, single-side 40° - 60° Counter sink	Without	
T			Single-sided	
Q			Double-sided	
U	With	Partly cylindrical hole, double-side 40° - 60° Counter sink	Without	
B			Single-sided	
H			Double-sided	
C	With	Partly cylindrical hole, single-side 70° - 90° Counter sink	Without	
J			Single-sided	
X			Double-sided	
X	-	-	-	

4 Groove and hole

Shape	Cutting edge length (ℓ)
S	
T	
R	
H	
A	

5 Cutting edge length

Symbol	Thickness (mm)
02	2.38
03	3.18
T3	3.97
04	4.76
05	5.56
06	6.35
07	7.94
09	9.52

Thickness

6 Thickness

(Example)

Metric

1 **P**

2 **N**

3 **C**

4 **U**

5 **09**

(Example)

Inch

1 **S**

2 **D**

3 **K**

4 **N**

5 **4**


1 Shape			
Symbol	Shape	Nose angle (degree)	Figure
H	Hexagonal	120°	
S	Square	90°	
T	Triangular	60°	
C	Rhombic	80°	
E		75°	
G		70°	
L	Rectangular	90°	
A	Parallelogram	85°	
R	Round		
W	Wiper	80°	
W	Special	-	
O	Octagonal	135°	
P	Pentagonal	108°	
X	Special	Others	
Y	Special		
Z	Special		

2 Relief angle	
Symbol	Relief angle
C	7°
D	15°
E	20°
F	25°
G	30°
M	Others
N	0°
P	11°
Q	Other applications
O	Other applications
X	Other applications
S	Other applications
W	2-step relief

3 Accuracy (mm)			
Symbol (class)	Corner height (m)	Thickness (s)	I. C. dia. (ød)
A	± 0.005	± 0.025	± 0.025
C	± 0.013	± 0.025	± 0.025
E	± 0.025	± 0.025	± 0.025
G	± 0.025	± 0.13	± 0.025
H	± 0.013	± 0.025	± 0.013
K	± 0.013	± 0.025	± 0.05 ~ ± 0.13
M	± 0.08 ~ ± 0.18	± 0.13	± 0.05 ~ ± 0.13
N	± 0.08 ~ ± 0.18	± 0.025	± 0.05 ~ ± 0.13


Standard I. C. dia.	I. C. dia. (ød) tolerance		Corner height (mm) tolerance	
	J, K, L, M, N	U	M, N	U
6.35	± 0.05	± 0.08	± 0.08	± 0.13
9.525				
12.7	± 0.08	± 0.13	± 0.13	± 0.2
15.875				
19.05	± 0.1	± 0.18	± 0.15	± 0.27
25.4				
	± 0.13	± 0.25	± 0.18	± 0.38

Symbol	Cutting edge angle
A	45°
D	60°
E	75°
F	85°
G	70°
H	87°
P	90°
U	Special, small entering angle
Z	Special, universal



7 Cutting edge angle

Symbol	Relief angle
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°
Z	Special



8 Wiper relief angle

Symbol	Cutting edge	Shape
F	Sharp	
E	Round	
T	Chamfer	
S	Combination	
P	Combination	

9 Major cutting edge

Symbol	Hand of insert
R	Right
L	Left
N	Without

10 Hand of insert

Symbol	Description
HM	General-purpose high feed milling chipbreaker
MM	General-purpose milling chipbreaker
MW	Milling insert with wiper edge
B	Milling insert for burr removal
D	Insert with diamond sintered body
W	Wiper insert (multiple corners)
WS	Wiper insert (single corner)
WD	Wiper insert (with diamond sintered body)
BD	Wiper for burr removal (diamond sintered body)
MJ	General-purpose milling chipbreaker
MH	Milling chipbreaker with reinforced cutting edge
ML	Milling chipbreaker for low cutting force
MS	Milling chipbreaker for stainless steel
HJ	High feed milling chipbreaker
AJ	Milling chipbreaker for non-ferrous metal
NMJ	General-purpose milling chipbreaker with serration
NAJ	Milling chipbreaker with serration for non-ferrous metal

11 Supplementary symbol

6 05 **7** G **8** N **9** E **10** R **11** MJ
6 2 **7** Z **9** T **10** N **11** 16

4 Groove and hole		
Symbol	Shape of hole	Hole
A	Without	With
F	Double side	Without
G	Double side	With
M	Single side	With
N	Without	With
U	Without	Without
W	Without	With

5 Inscribed circle (I. C.)		
Symbol	I. C. dia. (mm)	
Inch	3	9.525
	4	12.7
	5	15.875
	6	19.05

6 Thickness		
Symbol	Thickness (mm)	
Inch	2	3.18
	3	4.76
	4	6.35
	6	9.52


7 Corner radius	
Symbol	Corner radius (mm)
1	0.4 (0.397)
2	0.8 (0.794)
3	1.2 (1.191)
4	1.6 (1.588)
5	2.0 (1.984)
6	2.4 (2.381)

Symbol	Description
F	Special design (e.g. for MS cutter)
H	 Chamfer for corner angle 60°
S	 Chamfer for corner angle 15°
Z	 Flat chamfer


*For wiper inserts, the designation uses "W" as the shape symbol of inch items. For metric items, the shape symbol is the same as that of regular inserts, and a supplementary symbol, such as W, WS, and WD, is at the end of each designation.

Solid Carbide Endmills

Part details

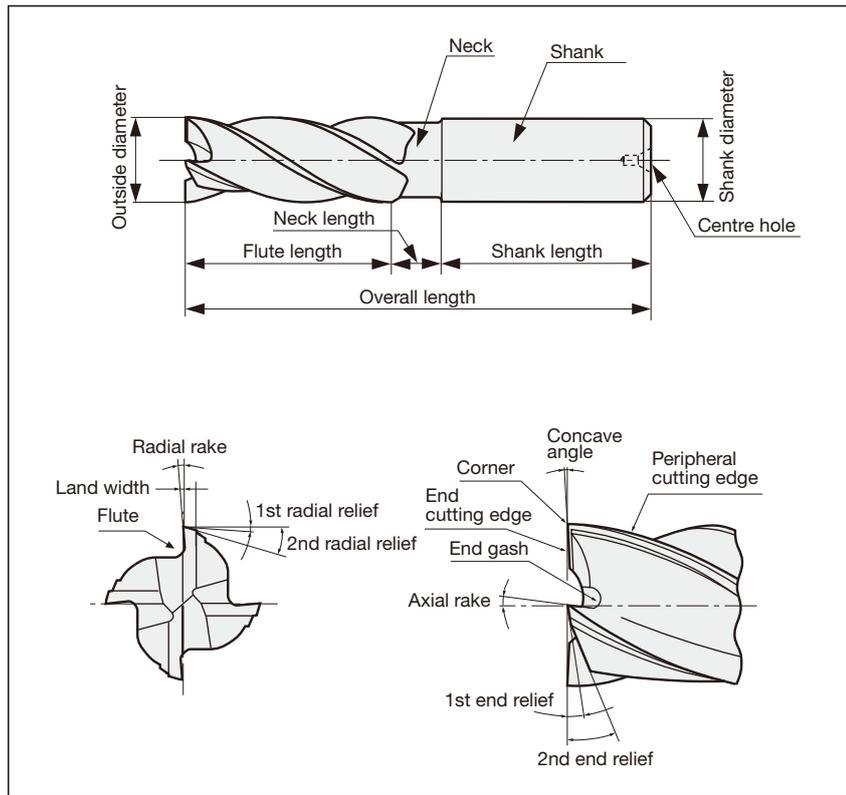


Types

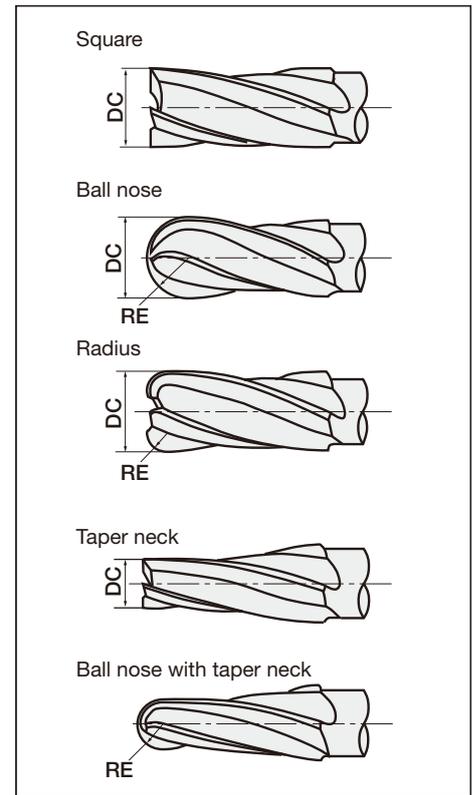

Cutting condition of Endmills

● Cutting speed

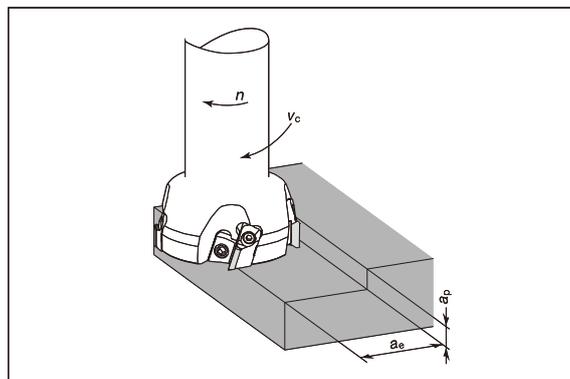

- Cutting speed (Calculated from number of revolutions)

$$SFM = \frac{RPM \times D}{3.82}$$

SFM: Cutting speed

D : Effective diameter (in) (DC)

RPM: Number of revolutions (min⁻¹)

- Number of revolution (Calculated from cutting speed)

$$RPM = \frac{SFM \times 3.82}{D}$$

- Feed speed and feed per tooth

$$V_f = f_z \times z \times n$$

V_f : Feed speed (in/min)

f_z : Feed per tooth (ipt)

z : No. of teeth of the endmills

n : Number of revolutions (min⁻¹)

() The notation in the brackets is the one used in the catalog (ISO compliant)


- Depth of cut

The necessary capacity of the machine is limited by the length of cut edge of the endmill.


- Up milling and down milling

Down milling generally produces better tool life and surface roughness.


In case of cast iron sand inclusion or welding surface, up milling is recommended.

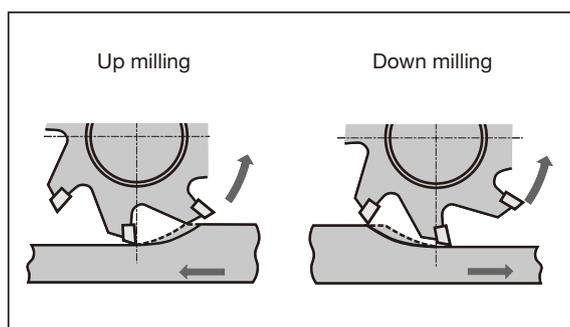


Regrinding procedures of solid carbide endmill

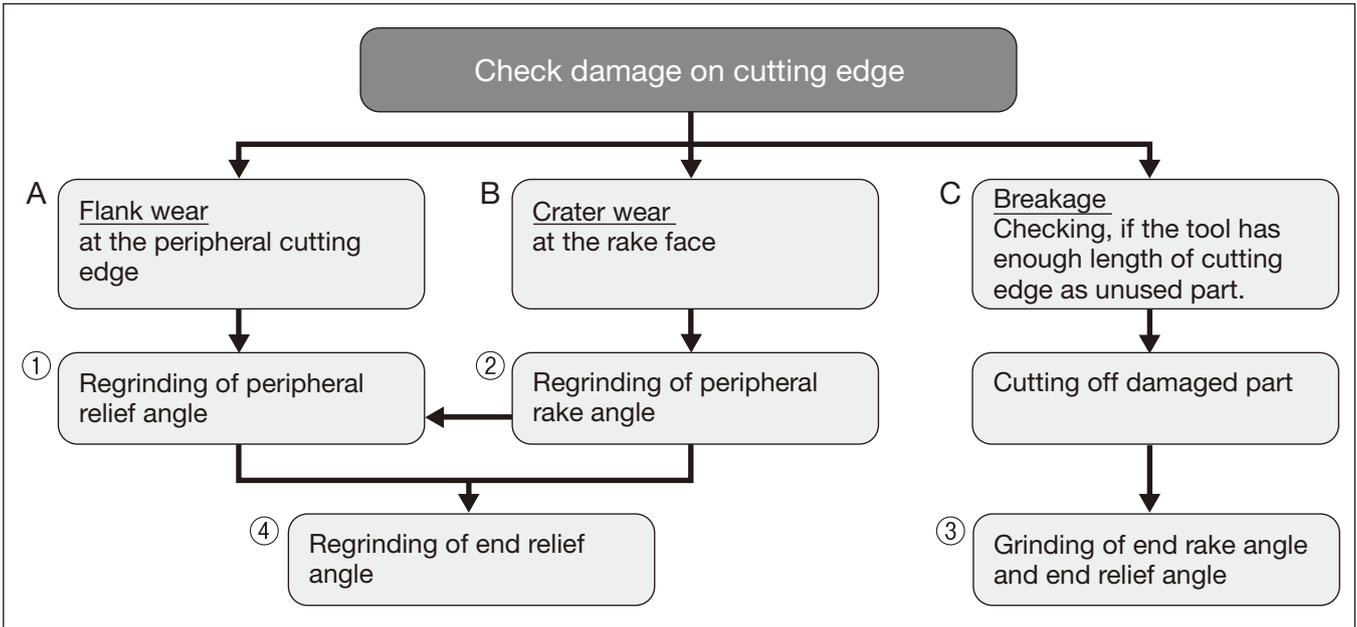


1 Regrinding of end relief angle

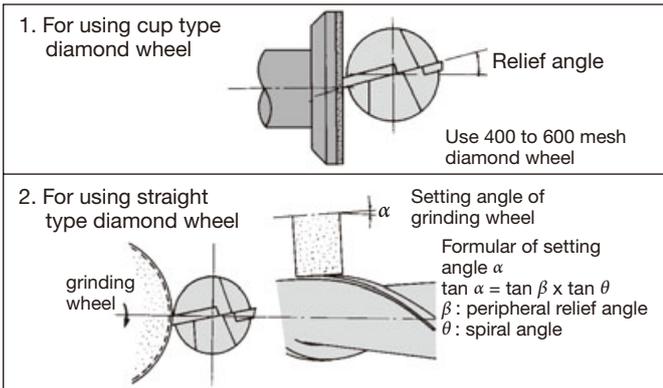


2 Regrinding of peripheral rake angle

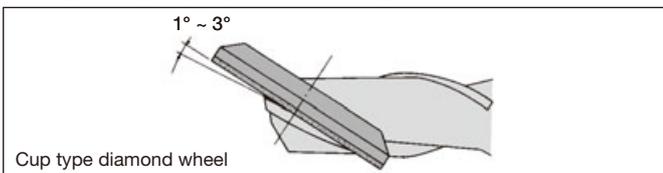

3 Regrinding of end rake angle (End gash)

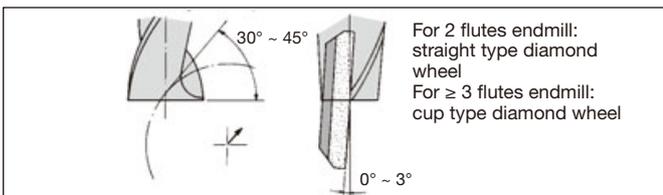

4 Regrinding of end relief angle

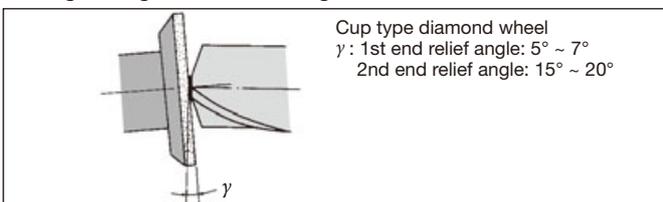

Notice of regrinding

- (1) If, after checking the damage of the cutting edge, the damage is as case "A" or "B" of the flow chart, the tool must be reground.
Too much damage of the cutting edge requires too much stock removal and thus reduces tool life.
- (2) Please use diamond grinding wheel.
- (3) Peripheral relief angle must be ground between 18° and 10°.
Relief angle of small diameter cutters for aluminum machining must be a large degree.
- (4) First check if "C" in flow chart can be adapted for the case of coated endmill or not.
If procedure "C" can be adapted for regrinding, tool life after the grinding would be more improved than new one. The reason is remaining coated layer of cutting edge and shorter tool length will keep much higher rigidity of the tool than before regrinding.
- (5) Please check run out of peripheral cutting edge, face cutting edge, with Vee block after regrinding.
The value of the run out must be controlled within 0.0004".

Notice for regrinding of ball nose endmill

- Regrinding of relief angle only is available. The dimension of nose radius will be smaller after grinding.
- Honing of cutting edge is necessary after regrinding.

Solid Carbide Endmills

■ Trouble shooting in Endmilling


Trouble	Possible causes	Countermeasures
Breakage	<ul style="list-style-type: none"> ● At the start of machining ● At the end of machining 	<ul style="list-style-type: none"> ● Reduce feed. ● Reduce tool overhang length. ● Exchange to short cutting edge tool.
	When usual machining	<ul style="list-style-type: none"> ● Reduce feed. ● Managing tool life → Exchange in shorter time. ● Replace chuck or collet to new one. ● Reduce tool overhang length. ● Make optimum honing on the edge. ● Reduce flutes. E.g. 4 flutes → 3flutes, or 2flutes. ● Use enough coolant. Change direction of supplying coolant.
	When change the direction of feed	<ul style="list-style-type: none"> ● Use the circular interpolation in NC machine. Stop feed shortly before changing. ● Lower feed around changing part. ● Replace chuck or collet to new one.
Fracture on cutting edge	Chipping on corner edge	<ul style="list-style-type: none"> ● Chamfer the corner with hand-stick grinder. ● Down cutting ⇒ Upward milling.
	Chipping on boundary part	<ul style="list-style-type: none"> ● Change cutting direction, Down cutting → Upward milling. ● Reduce cutting speed.
	Chipping on central part or all edges.	<ul style="list-style-type: none"> ● Make slight honing on the edge. Or make honing bigger. ● Change spindle revolution number. ● Increase cutting speed. ● If chattering, increase feed. ● Use coolant or air blast. ● Replace chuck or collet to new one. ● Decrease cutting speed.
	Fracture on cutting edge	<ul style="list-style-type: none"> ● Decrease feed. ● Reduce flutes. E.g. 4 flutes → 3flutes, or 2flutes. ● Make slight honing on the edge. Or make honing bigger. ● Replace chuck or collet to new one. <p>[For Solid carbide endmill]</p> <ul style="list-style-type: none"> ● Decrease cutting speed. ● Use enough coolant. Change direction of supplying coolant.
Large wear in short time		<ul style="list-style-type: none"> ● Decrease cutting speed. ● Change cutting direction, Upward milling → down cutting. ● Increase feed. ● Use coolant or air blast. ● In reground tool, grind flank face with FINER wheel.

(Continued on next page)


Trouble	Possible causes	Countermeasures
Poor surface finish	Bright, but Wavy surface	<ul style="list-style-type: none"> ● Reduce feed per tooth. ● Increase flutes; E.g. 2 flutes → 3flutes, or 4flutes.
	Small chips are welded on surface.	<ul style="list-style-type: none"> ● Increase cutting speed. ● Use coolant or air blast, or increase coolant. ● Make slight honing on the edge. ● Upward milling → Down cutting. ● Increase feed per tooth. Increase Depth of Cut.
	Scratches on the surface	<ul style="list-style-type: none"> ● Make slight honing on the edge. ● Use non-water soluble coolant. ● Down cutting → Upward milling.
	Poor surface by over cutting	<ul style="list-style-type: none"> ● Reduce depth of cut. ● Increase cutting speed. ● Reduce feed per tooth.
Poor accuracy	Finish size becomes a minus tendency.	<ul style="list-style-type: none"> ● Upward milling → Down cutting. ● Reduce depth of cut. ● Replace chuck or collet to new one. ● Reduce overhang length. ● Increase cutting speed.
	Poor straightness	<ul style="list-style-type: none"> ● Reduce depth of cut. ● Replace chuck or collet to new one. ● Reduce overhang length. ● Increase cutting speed. ● Increase flutes; E.g. 2 flutes → 4flutes. ● Reduce feed per tooth. ● Check the edge. Change tool, when needed.
Chattering		<ul style="list-style-type: none"> ● Increase feed per tooth. ● Reduce feed per tooth, when current feed is more than 0.003 ipr. ● Change cutting speed. ● Replace chuck or collet to new one. ● Reduce overhang length. ● Use 2 flutes tool in roughing. Use 4 flutes tool in finishing. ● Down cutting → Upward milling.

■ CAUTIONARY POINTS IN USE

- The cutting heads specified by Tungaloy must be used. Avoid using alternate heads that are not Tungaloy products as this will damage the shank and can cause severe accident or injury.
- Before setting the head, clean the connection screw with an air blast or a wiping cloth to remove chips and other foreign matter that may remain.
- Do not apply the lubricant to the connection screw.
- Please use the correct wrench with the correct cutting head. Tighten the head slowly until the face of the head contacts the shank. (Please refer to the picture shown on the right.) Do not re-tightening or over-tightening. Excessive tightening may cause the cutting head to break.
- Do not apply excessive force or a hammer when tightening or exchanging the cutting heads.

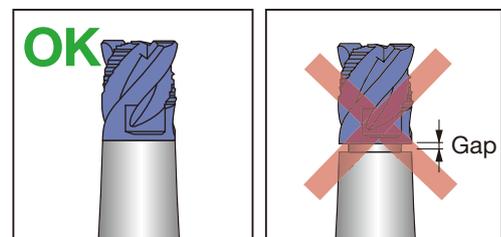

SOLIDMEISTER Designation System

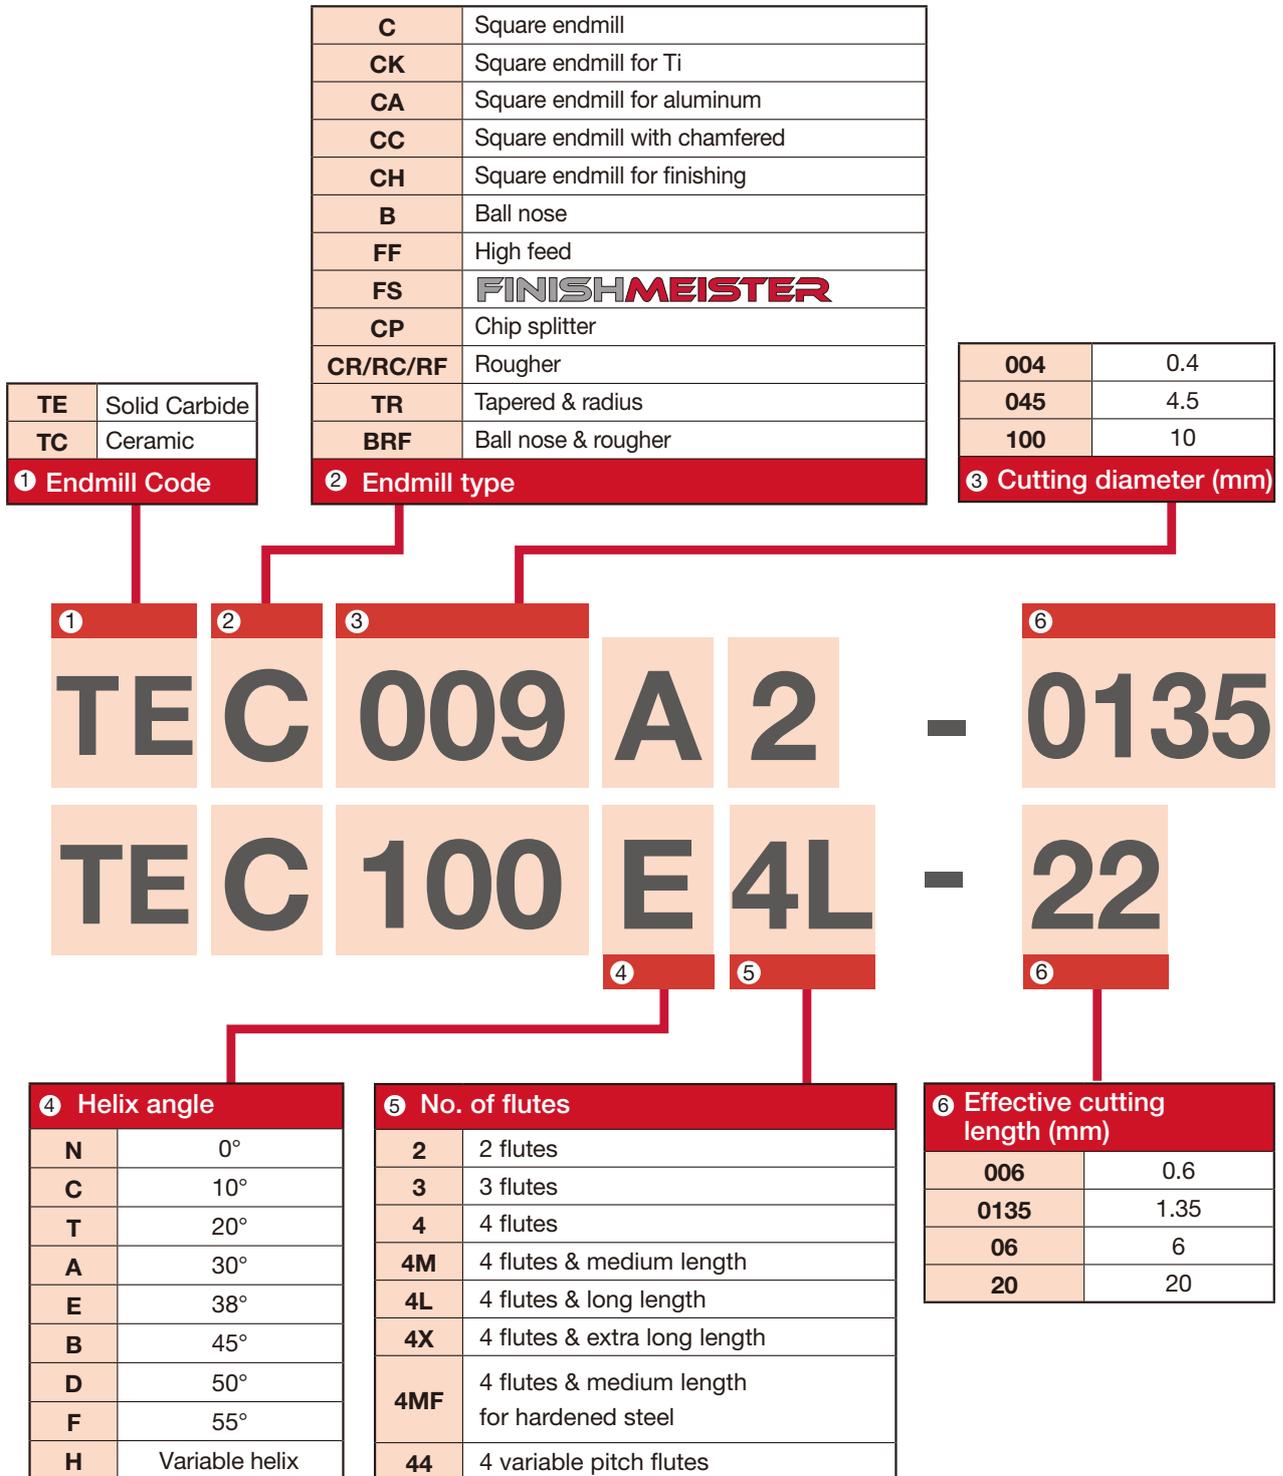

Tolerance

Diameter range	Cutting diameter DC ^{e8}	Shank DCONMS ^{h6}
< 3	-0.014 - 0.028	0 - 0.007
3 - 6	-0.02 - 0.038	0 - 0.008
6 - 10	-0.025 - 0.047	0 - 0.009
10 - 18	-0.032 - 0.059	0 - 0.011
18 - 30	-0.04 - 0.073	0 - 0.013

/04	4
/10 /1.5	10 / 1.5°
/14	14


C	Cylindrical
W	Weldon

055	5.5
08	8
4	4

7 Length of neck / Angle neck (mm)

8 Shank type

9 Shank diameter (mm)

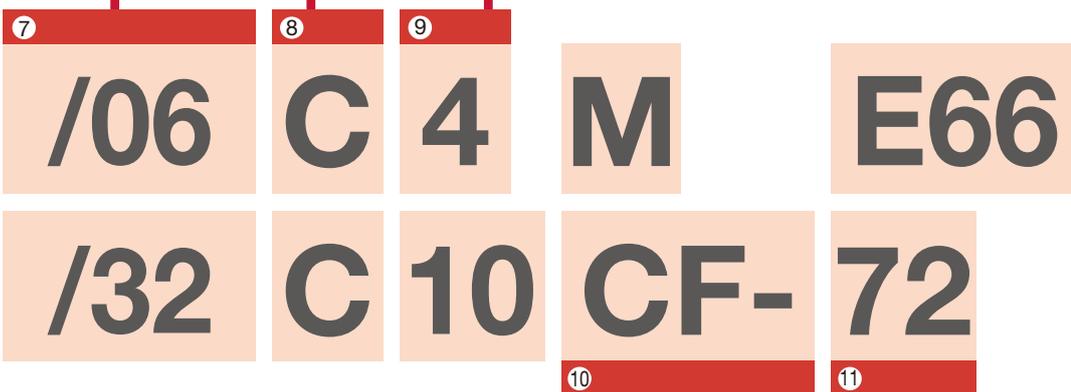

10 Workpiece material / Additional feature	
-	General
S	Stainless steel
M	Steel medium hardness ≤ 55 HRC
H	Steel high hardness ≥ 55 HRC
R02A	Aluminum
CF	VARIABLEMEISTER
R16	Corner radius: 1.6

11 Overall length / Corner radius	
66	66 mm
180	180 mm
E**	Eco type
M	Medium
R08	Corner radius: 0.8

TUNGMEISTER Designation System

Shank

V **SS** **037** **L300** **S** **06** **U** **S**

1 2 3 4 5 6 7 8

1 Series	
V	TungMeister

2 Shank type	
SS	Straight neck
TS	Taper neck
SC	Slotting
ST	for T-Slotting
AD	TungFlex adapter

3 Shank diameter (in)	
031	ø0.315
037	ø0.375
050	ø0.500
062	ø0.625
075	ø0.750
100	ø1.000

4 Length (in)	
L300	3.000

5 Shape of shank	
S	Cylindrical
W	Weldon

6 Connection screw size	
05	S05
06	S06
08	S08
10	S10
12	S12
15	S15

7 Additional feature	
U	Inch

8 Shank material	
S	Steel
C	Carbide
W	Tungsten

Head

- Square endmill

V **EE** **031** **L20** **R000** - **U** **03** **S05**

1 2 3 4 5 6 7 8 9 10

- Ball nose endmill

V **BD** **075** **L62** - **BG** - **U** **04** **S12**

1 2 3 4 5 6 7 8 9 10

1 Series	
V	TungMeister

2 Cutting edge	
E	Square
B	Ball
R	Radius
FX	for high feed
CA	for chamfering
CP	Spot drilling
CW	for chamfering (front and back)
CR	for R chamfering
GC	for counter boring
DP	for center drilling
S	for slotting
T	for T-slot milling

3 Helix angle / Rake face	
B	0°
C	15°
D	30°
E	38° ~ 50°
F	60°
T	Land
H	Variable helix

4 Diameter (in)	
050	ø0.500
100	ø1.000

5 Cutting edge length (in)	
Length	
L37	0.375
L87	0.875

6 Corner shape / Angle	
Chamfer type	
C006	0.006 x 45°
C012	0.012 x 45°
C024	0.024 x 45°
Chamfering head	
A30	30°
A60	60°
Ball nose	
SG	Sphere / high precision
BM	Ball / general purpose
BG	Ball / high precision

7 Additional feature	
I	Irregular pitch
A	for aluminum
R	for roughing
C	Combined edge

8 Additional feature	
U	Inch

9 The number of flutes	
General	
02	2
06	6

10 Connection screw size	
S05	S05
S06	S06
S08	S08
S10	S10
S12	S12
S15	S15

Shank

V **SS** **D10** **L070** **S** **06** - **W** - **A**

1 2 3 4 5 6 7 8

1 Series	
V	TungMeister

2 Shank type	
SS	Straight neck
TS	Taper neck
SC	Slotting
ST	T-slotting
AD	TungFlex adapter
ER	ER collet holder

3 Shank diameter (mm)	
D06	ø6
D08	ø8
D10	ø10
D12	ø12
D16	ø16
D20	ø20
D25	ø25
D32	ø32
VSC, VAD type	
100	ø10
120	ø12
130	ø13
180	ø18
210	ø21
VER type	
11A	Collet size
16A	Collet size

4 Length (mm)	
L070	70

5 Shape of shank	
S	Cylindrical
W	Weldon

6 Connection screw size	
04	S04
05	S05
06	S06
08	S08
10	S10
12	S12
15	S15
21	S21

7 Shank material	
S	Steel
C	Carbide
W	Tungsten

8 Additional feature	
A	with coolant hole
M	Thread size (TungFlex adapters)

Head

• Square endmill

V **E** **E** **080** **L05.0** **R00** - **03** **S05**

1 2 3 4 5 6 7 8 9

• Ball nose endmill

V **B** **D** **200** **L15.0** - **BG** - **04** **S12**

1 2 3 4 5 6 7 8 9

1 Series	
V	TungMeister

2 Cutting edge	
E	Square
B	Ball
R	Radius
FX	High feed
CA	Chamfering
CP	Spot drilling
DS	Spot drill with helical flutes
CW	Chamfering (front and back)
CR	R chamfering
GC	Counterboring
DP	Center drilling
S	Slotting
TB	T-slotting
FM	Face milling
BO	Taper barrel
BN	Bull nose
BL	Lens
MT	Threading (full profile)
TR	Threading (partial profile)

3 Helix angle / Rake face	
B	0°
C	15°
D	30°, 37°, 47°
E	38°, 45°, 50°
F	60°
H	43°
T	Land

4 Diameter (mm)	
060	ø6
200	ø20

5 Cutting edge length (mm)	
Length	
L07.0	7
L15.0	15
Groove width	
W1.50	1.5
W1.57	1.57
W10.0	10

6 Corner shape / Angle	
Nose radius	
R00	Sharp edge
R005	R0.05
R01	R0.1
R05	R0.5
R10	R1.0
Chamfer type	
C15	0.15 x 45°
C30	0.3 x 45°
C60	0.6 x 45°
Chamfering head	
A30	30°
A60	60°
R chamfering head	
R10	R1.0
R16	R1.6
Ball nose	
SG	Sphere / high precision
BM	Ball / general purpose
BG	Ball / high precision
Threading	
IS**	ISO metric, pitch**
UN**	Unified, **TPI
W**	Whitworth, pitch**


7 Additional feature	
I	Irregular pitch (or Intermittent edge)
A	for aluminum
R	Serrated edge
C	Combined edge

8 The number of flutes	
General	
02	2
06	6
Slotting head VST type	
3	3
4	4

9 Connection screw size	
S04	S04
S05	S05
S06	S06
S08	S08
S10	S10
S12	S12
S15	S15
S21	S21

Drill

Nomenclature for solid carbide drills

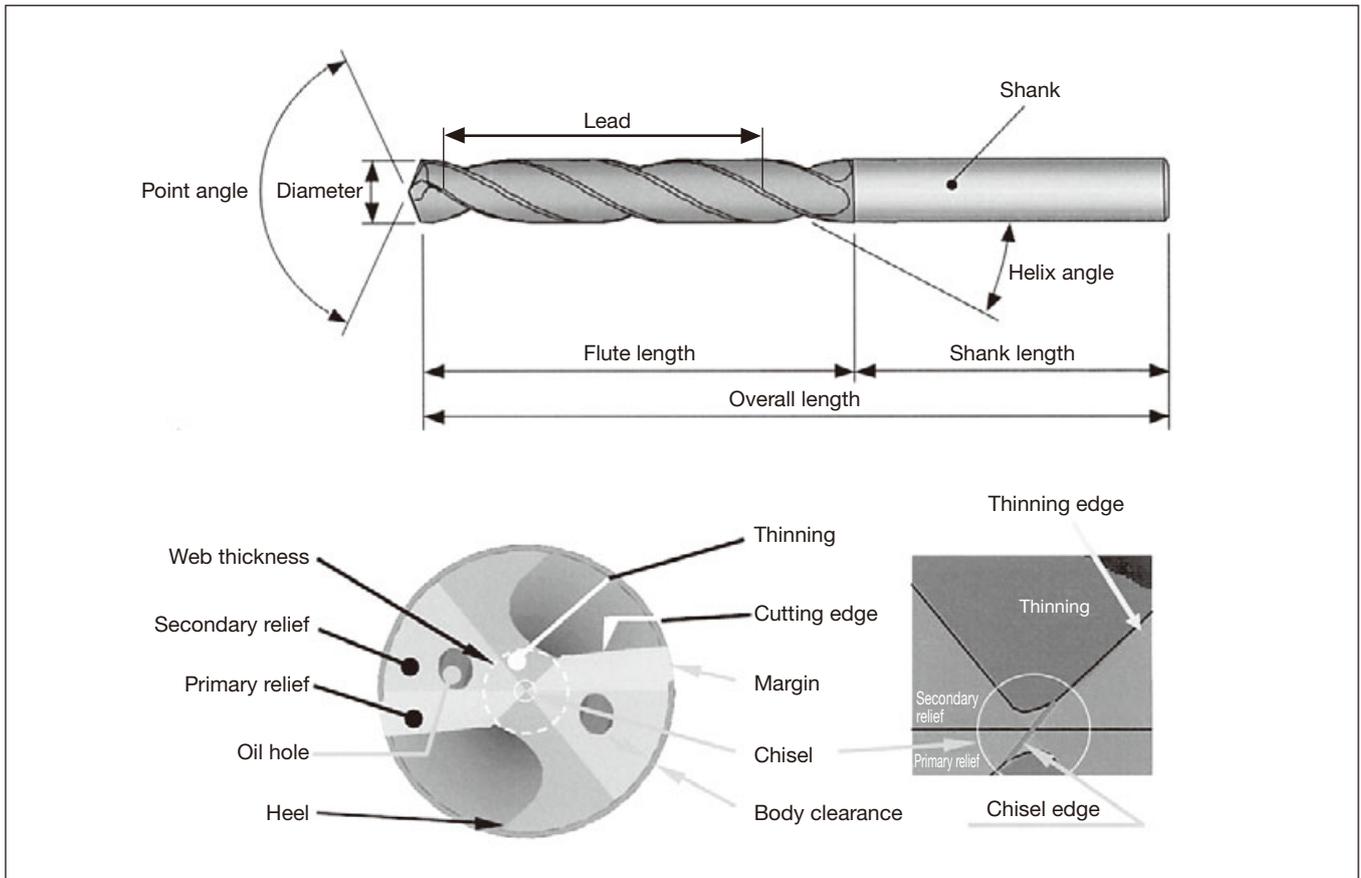

Cutting forces and power requirement

● Twist drill

Power requirement
$P_C = KD^2n (0.647 + 17.29f) \times 10^{-6}$ (kW)
Thrust force
$T_C = 570KDf^{0.85}$ (N)
Torque
$M_C = \frac{KD^2 (0.630 + 16.84f)}{100}$ (N·m)

- P_C : Power requirement (kW)
- T_C : Thrust force (N)
- M_C : Torque (N·m)
- D : Drill diameter (mm) [DC]
- f : Feed (mm/rev)
- n : No. of revolutions (min⁻¹)
- K : Material constant... Refer to the Table at right


() The notation in the brackets is the one used in the catalog (ISO compliant)

● Material constant compensating for power requirement and thrust force

Workpiece material	Tensile strength		Brinell hardness (HB)	Material constant (K)
	MPa(N/mm ²)	{Kg/mm ² }		
Cast iron	210	21	177	1.00
Cast iron	280	28	198	1.39
Cast iron	350	35	224	1.88
Aluminum	250	25	100	1.01
Low carbon steel (JIS S20C)	550	55	160	2.22
Free cutting steel (JIS SUM32)	620	62	183	1.42
Manganese steel (JIS SMn438)	630	63	197	1.45
Nickel chromium steel (JIS SNC236)	690	69	174	2.02
4115 steel Cr0.5, Mo0.11, Mn0.8	630	63	167	1.62
Chromium molybdenum steel (JIS SCM430)	770	77	229	2.10
Chromium molybdenum steel (JIS SCM440)	940	94	269	2.41
Nickel chromium molybdenum steel (JIS SNCM420)	750	75	212	2.12
Nickel chromium molybdenum steel (JIS SNCM625)	1,400	140	390	3.44
Chromium vanadium steel				
Cr0.6, Mn0.6, V0.12	580	58	174	2.08
Cr0.8, Mn0.8, V0.1	800	80	255	2.22



Cutting edge failure of solid carbide drills

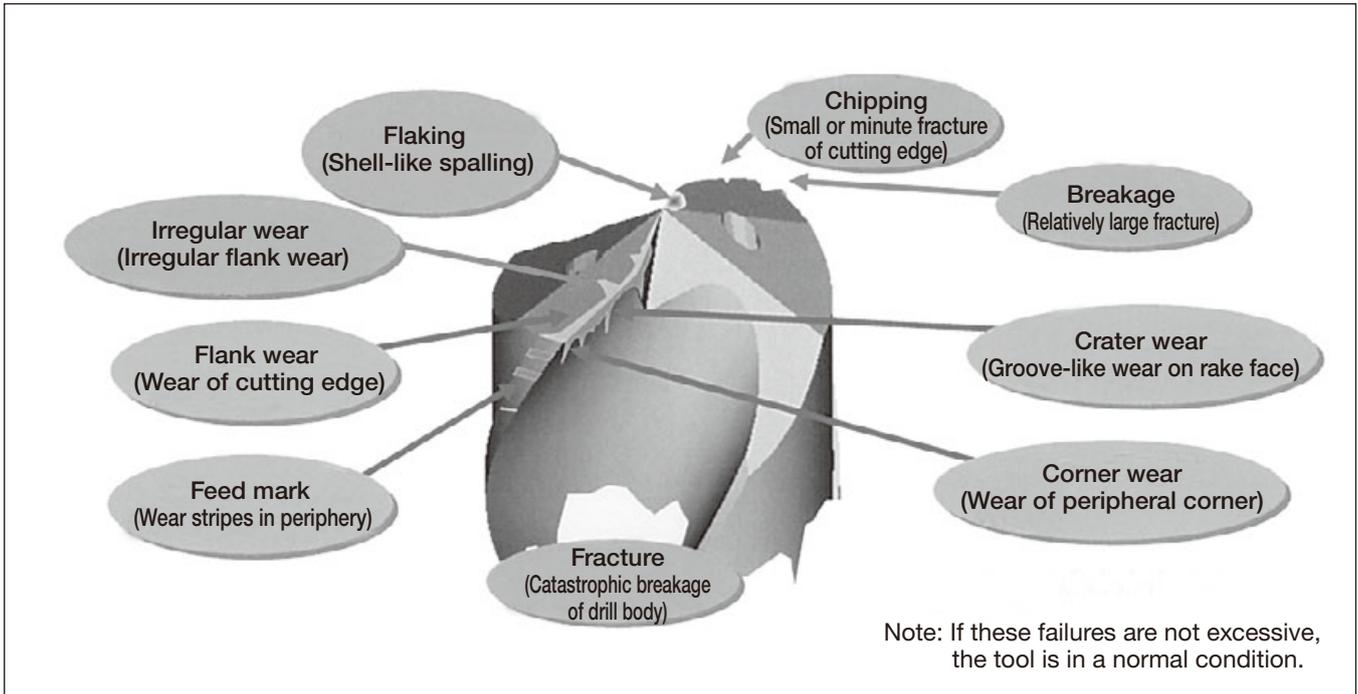


Change of chip shapes in drilling

Change of chip shapes relating to cutting conditions

Photographs below show the change of chip shapes relating to change of the feed and the cutting speed. These chip shapes are all well controlled in a proper condition range.

When the speed and feed are low, the chip shows whitish color and the tail of the chip tends to lengthen gradually. In contrast, as the speed or the feed increases, the chip tends to increase in brightness and becomes a compact shape with a short tail. These changes in the shape depend on the cutting temperature. As the temperature increases, chips tend to be broken.

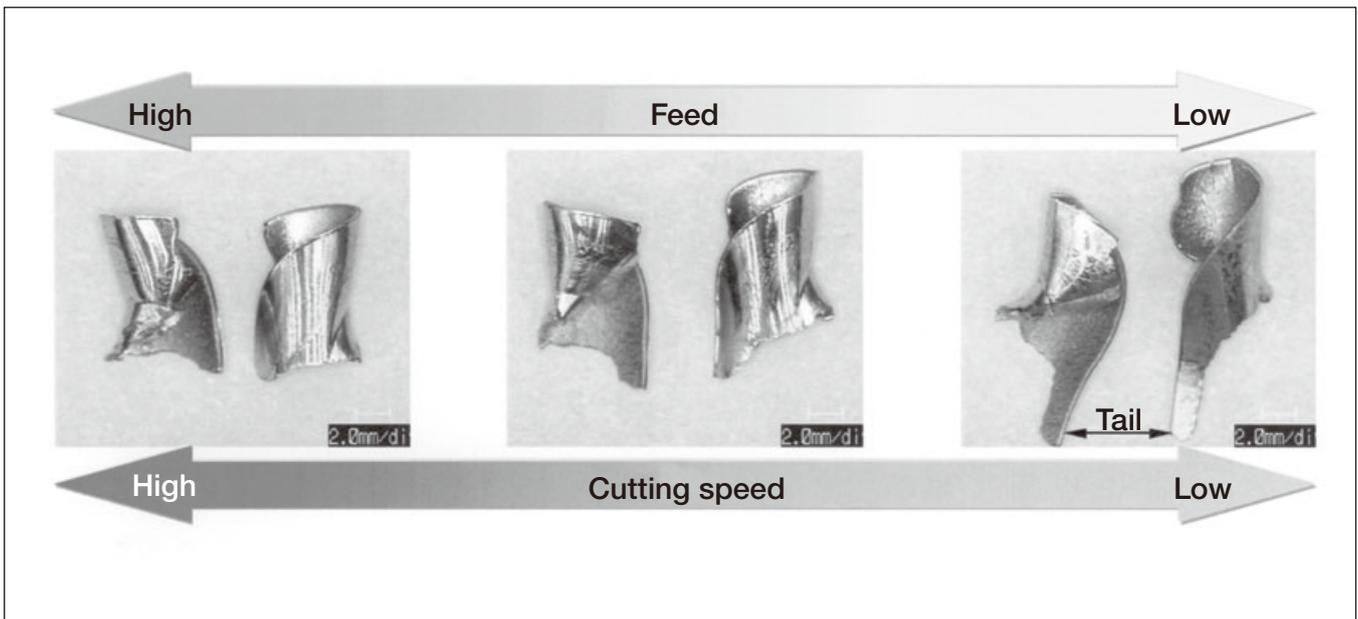

Guidelines for correct usage of carbide drills

● Holders for solid carbide drills:

A collet chuck holder is recommended for use with carbide drills. When using a milling chuck holder, a collet chuck with a straight shank or straight collet should be used.

OK



Collet chuck

X




Drill chuck

● Chucking drills:


■ Radial run out and lip height should be less than 0.001". If run out or lip height is larger (close to 0.002"), machining is possible. However, less accurate holes or short tool life may be a result.

■ Overhang length should be as short as possible.

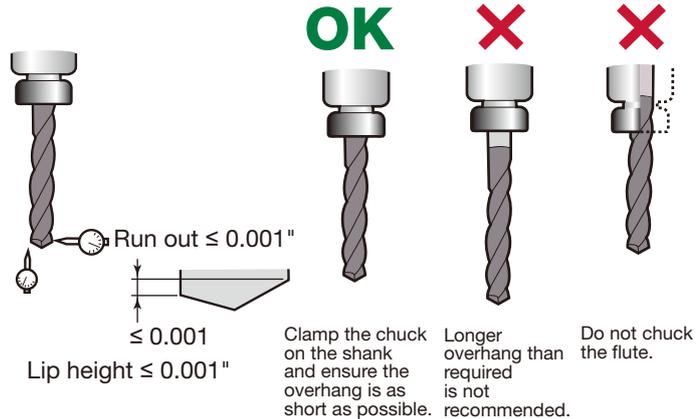


● Coolant Supply:

When using a drill without a coolant hole, such as the DSW-DE type, coolant should always be directed to the entrance of the hole. Maintaining this supplying is very important for stable drilling performance.

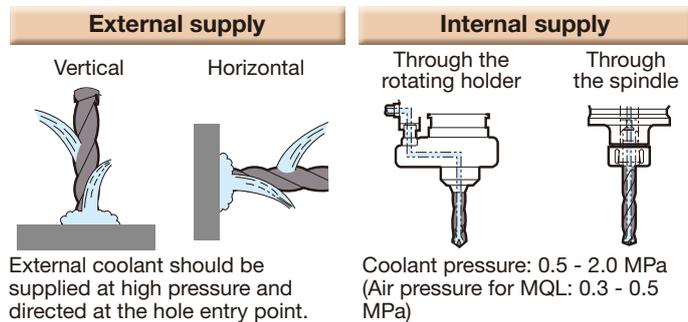


● Clamping workpieces:

As solid carbide drills have a higher thrust force, machining with low rigidity or inadequate support can cause fractures or breakages through vibration. It is important the workpiece is rigidly clamped and has adequate support.

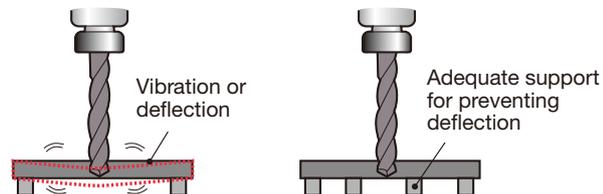


● The criteria of tool life:


- Corner wear width: equal to margin width
- Feed mark: 1 - 2 feed marks on the margin
- Spindle load increase: 30% higher than starting level
- Irregular situation: worse chip control, hole diameter change, worse surface finish, larger burrs, bigger sound.

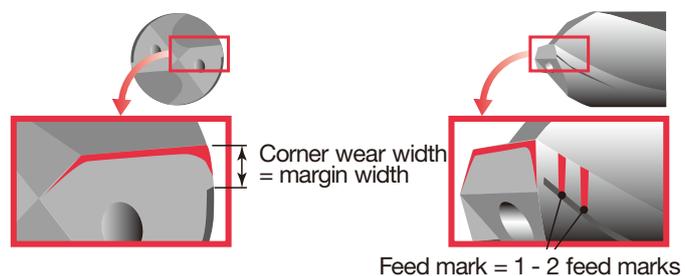


● Drilling head mounting procedure

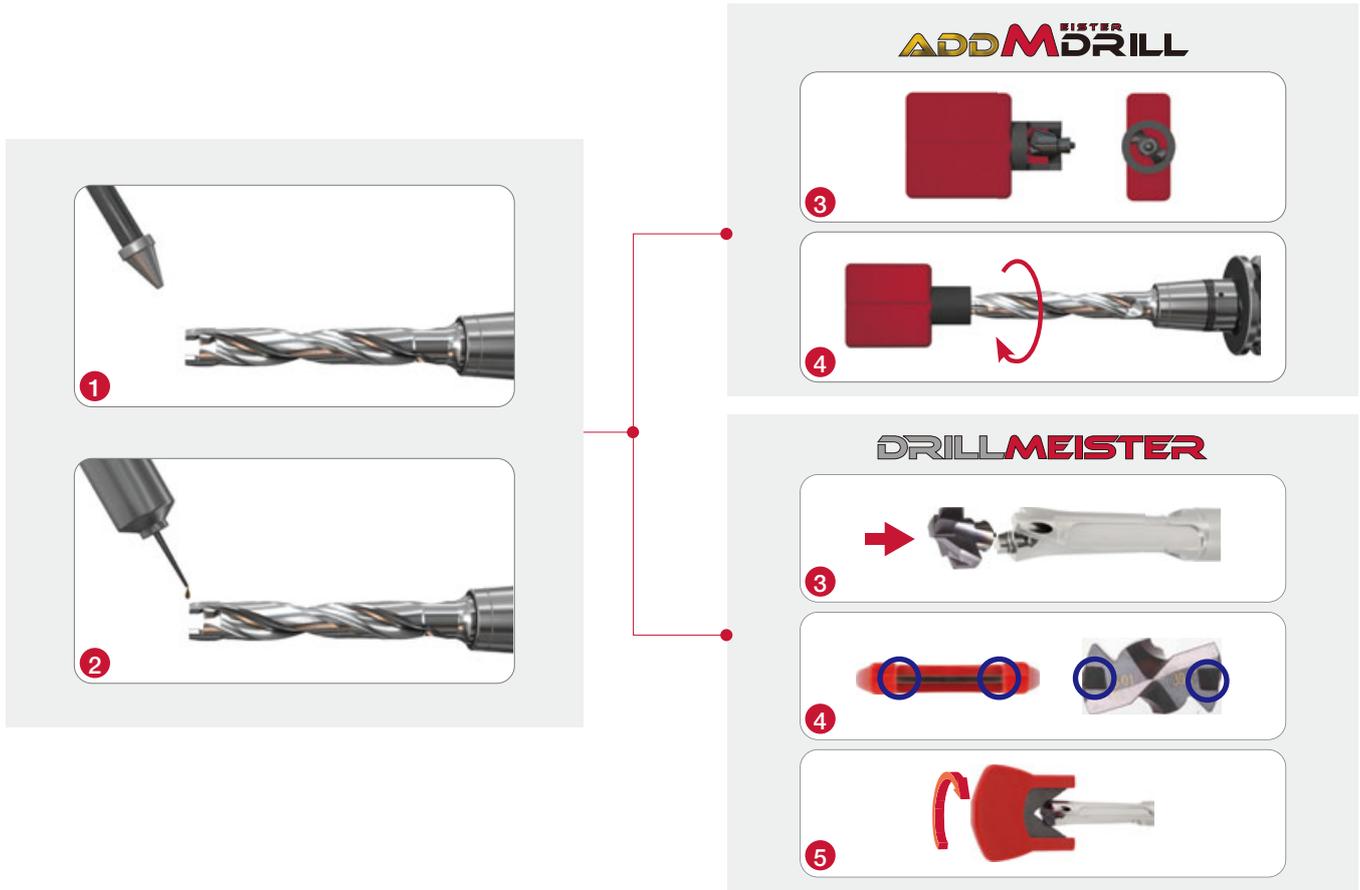

● Instruction for proper head mounting

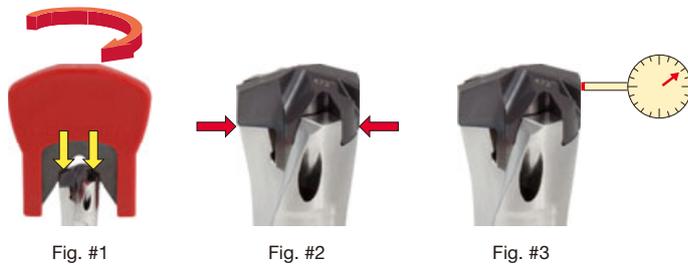

● Alignment recommendation

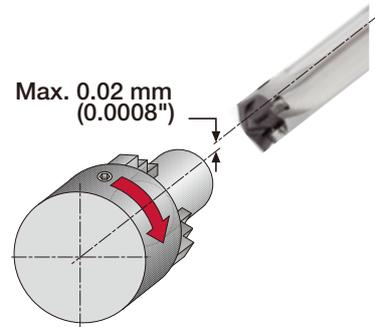

● Runout recommendation




Procedures

- ① Thoroughly clean the contacting areas on the drill body and the head with compressed air, lubricate them, and put the drill head in the pocket.
- ② Place the clamping key in the grooves on the drill head. Push the head in the pocket with equal torque on the right and the left sides. Rotate the clamping key to lock the head in the pocket completely. (Fig. #1).
- ③ Be sure that there is no gap in the contact surfaces between the head and the drill body. Use a 0.0004" shim to check for the gap. (Fig. #2)
- ④ If there is a gap thicker than 0.0004", unclamp the head and return to procedure No. ①.
- ⑤ Measure the run-out at the margin of the drill head. Run-out must be 0.002" or smaller. (Fig. #3) (Recommended value: 0.0008" or smaller)
If the run-out exceeds 0.002", unclamp the head and return to procedure No. ①.



Note: #1: If the clamping torque is not equally applied on the right and the left sides of the drill head, there may be a gap between the head and the body, which increases the run-out of the head.
Note: #2: Low accuracy in holding the drill body may affect the run-out. If the run-out is large, check the accuracy in holding the drill body.

	ADD M ^{FISTER} DRILL	DRILLMEISTER
Max. 0.0008"		
Ideal		≤ 0.0008"
Acceptable		≤ 0.002"
Not acceptable		> 0.002"

● Coolant recommendation

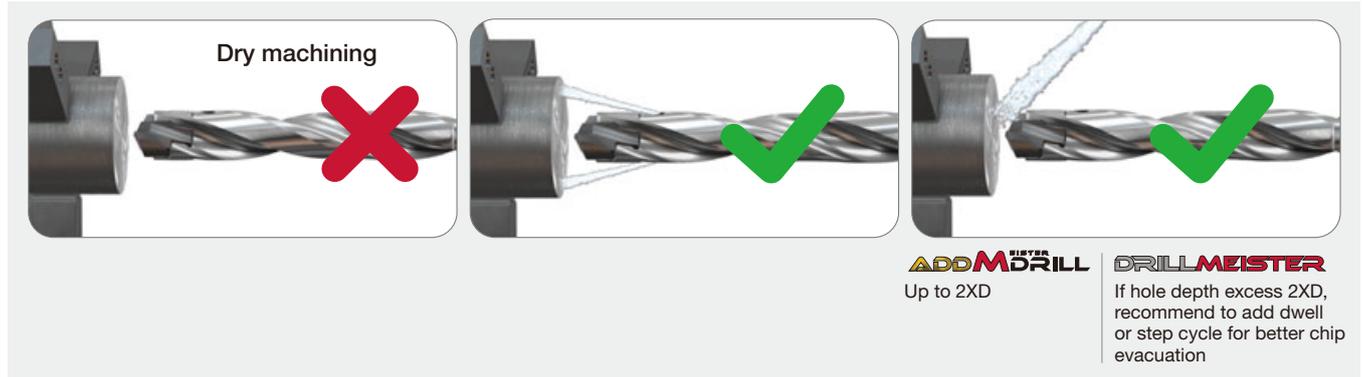

● Recommended coolant flow rate and pressures

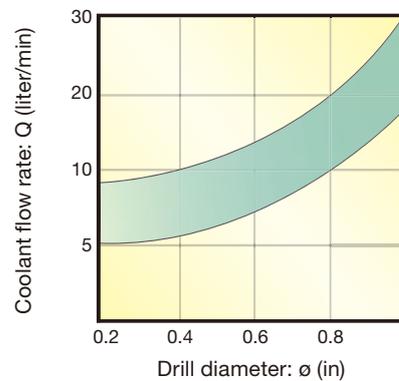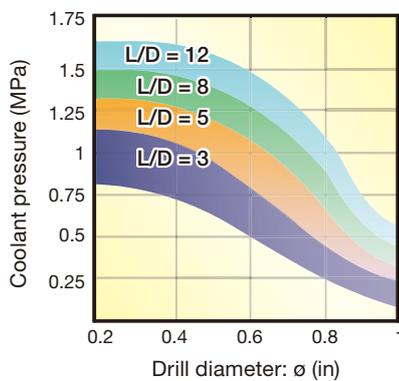


● Application range and recommended tool lengths for application irregularities

Please use the shortest tool length possible

Application	Stacked plate	Complex exit	Rough / cast surface	Inclined surface	OK
					Impossible
ADDM DRILL	X	X	X	X	
DRILLMEISTER	✓	Up to 8xD ✓	Up to 5xD ✓	Up to 3xD ✓	
Application	Curved surface	Hole expansion	Plunging	Counter boring	OK
					Impossible
ADDM DRILL	X	X	X	X	
DRILLMEISTER	Up to 3xD ✓	Up to 3xD ✓	Up to 3xD ✓	X	

● Tips when using 8xD and 12xD drills

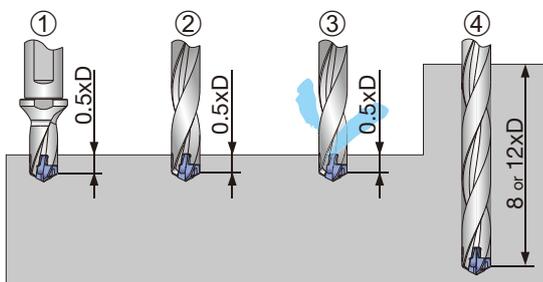

- ① Drill a pilot hole in the depth of 0.5xD.
The same head diameter should be used for the pre-hole and the main drilling process.
 - ② Rotate the drill at a low speed (eg. 100 rpm). While maintaining the drill speed, slowly feed into the pilot hole for several millimeters from the entry.
 - ③ Activate the internal coolant and increase the drill rotation to the required speed.
 - ④ Drill to the required depth using the recommended cutting parameters.
- Note: Use DMC-style drill head for deep holes from 8xD up to 12xD depths without a pilot hole.

● Head combinations of pre-hole to main hole

		Pre-hole		
		DMP	DMC	DMF
Hole	DMP	Good 	Not good 	Not good
	DMC	Good 	Good 	Good
	DMF	Not good 	Not good 	Good

● Holders recommended for M/C

TID-F...




TID-R...




Note: If you need to use a 12xD body with a side-lock holder, the shank will need to have a flat area which may be placed additionally.

● When to change drill heads (Criteria for the end of tool life)


Replace the drill head when the following phenomena occur during the machining:

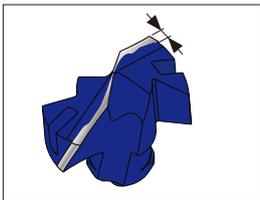


Width of corner wear reaches

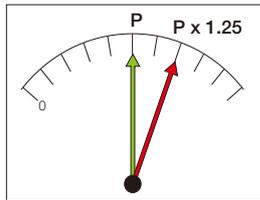


Spindle load exceeds 125% of the normal value

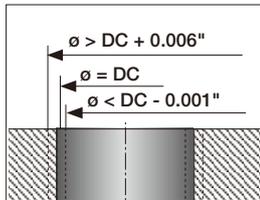

Hole diameter is 0.006" larger or 0.001" smaller than the drill diameter

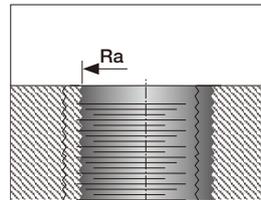

Surface roughness deterioration



Vibration or unusual noise

ADD M DRILL : 0.008" - 0.012"
DRILL MASTER : 0.004" - 0.008"

KEY FOR MEASURING HEAD RELEASE TORQUE

The release torque in unclamping a head is measured with a torque driver to determine the body's tool life. Please refer to the below for the standard release torque value which indicates the end of tool life (The value less than the standard should be judged as the end of tool life).

Dedicated key designation :
KHS-TID10-19.99



*Can be connected with a commercially available torque driver.



Head designation	Release torque value to indicate tool replacement (lbf · ft)
DMP100-109	0.15
DMP110-119	0.15
DMP120-129	0.18
DMP130-139	0.18
DMP140-149	0.22
DMP150-159	0.22
DMP160-169	0.26
DMP170-179	0.26
DMP180-189	0.3
DMP190-199	0.3

● How to change drill head

- Caution when installing the drill head


Install the drill head so that the arrow etched on the drill head should be facing to the arrow on the drill body.



- Tightening and loosening of insert clamping screw

To unclamp rotate the screw 3-5 times counter-clockwise.

No need to remove the screw from the body.

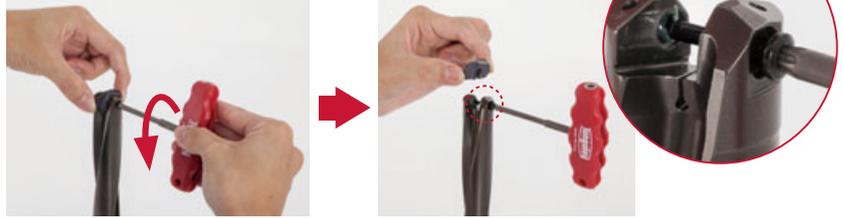

.Please change the screw to new one when the screw does not rotate smoothly

● Application range and recommended tool lengths for application irregularities



Please use the shortest tool length possible.

	Stacked plate	Irregular exit	Rough / cast surface	Inclined surface	✓ OK
Application					
DRILLFMEISTER	✓	Up to 8xD ✓	Up to 5xD ✓	Up to 3xD ✓	
Application					
DRILLFMEISTER	Up to 3xD ✓	Up to 3xD ✓	Up to 3xD ✓	Up to 3xD ✓	

● Drilling of step holes

- Follow the procedures outlined below for efficient drilling of step holes.
- SMF drill head creates a small divot in the center of the hole bottom. The divot will then pilot a drill used in the following process to create a concentric hole.



Recommended procedures

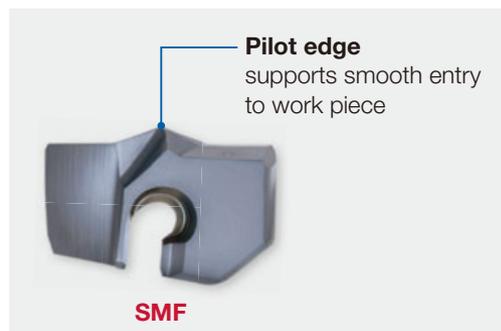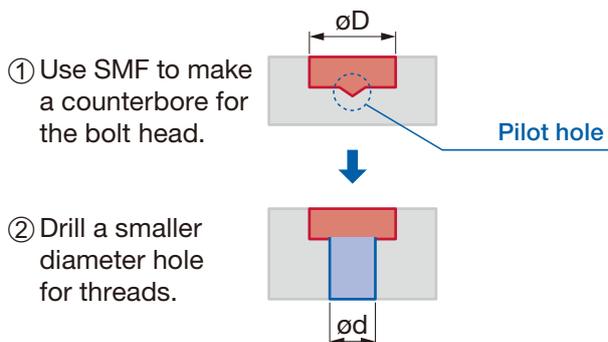

● When using for boring operations



- The above procedures can also be used for boring operations.
- For boring operations, use SMF drill head with flat edges.
- SMF drill head will create long chips in the continuous cuts. For successful chip evacuation, use a dwelling or pecking method.

● Recommended coolant pressure and volume

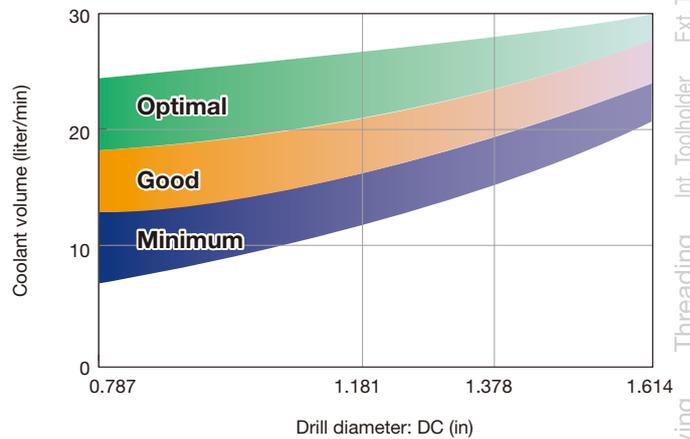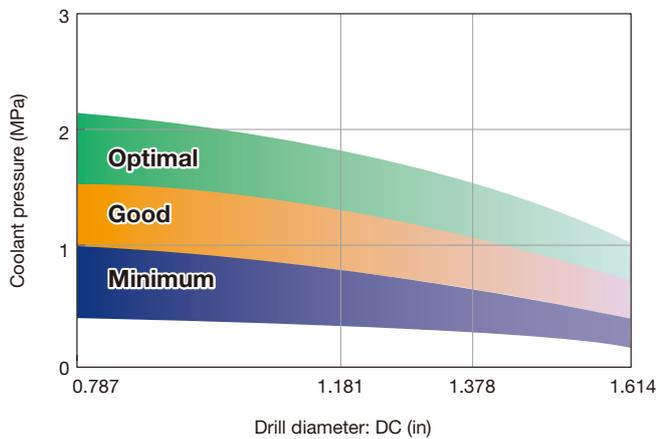

Note: External coolant will also do. For holes exceeding 2xD depth, use dwelling or peck drilling method to promote smooth chip evacuation.

● Required machine power and torque

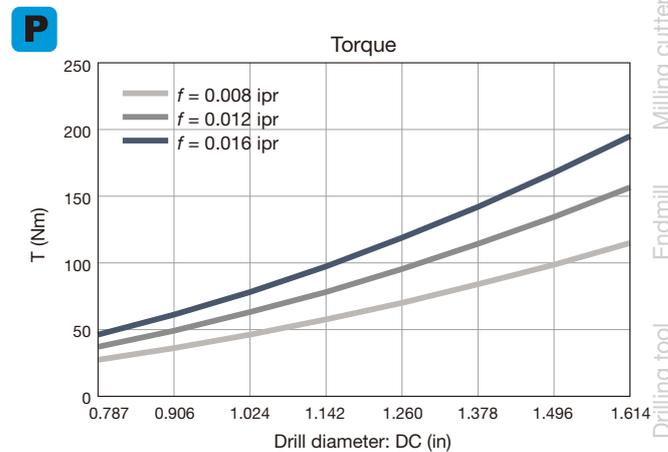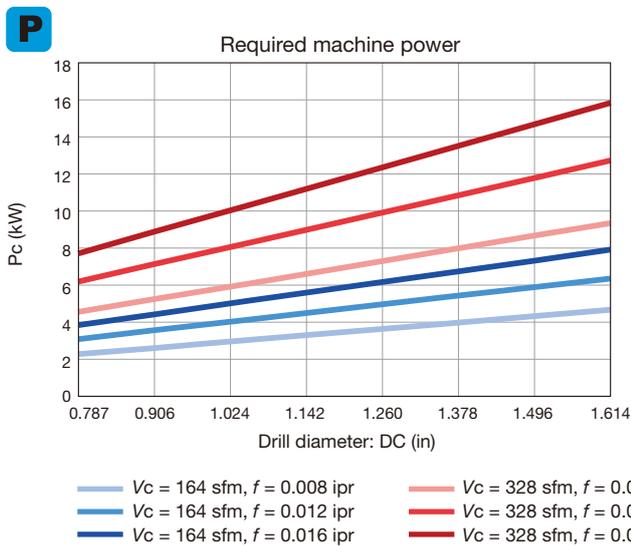

- Please access "Tungaloy machining power" to calculate more detailed cutting forces.

<https://www.imc-i.com/mpwr/Unit/mm/Company/Tungaloy>



Troubleshooting for solid carbide drills

Problem		Cause	Countermeasure
Abnormal wear	Relief surface	Inappropriate cutting speed	<ul style="list-style-type: none"> •Increase the cutting speed by 10 % within standard conditions if abnormal wear is around center. •Lower the cutting speed by 10 % within standard conditions if abnormal wear is on the periphery.
		Inappropriate cutting fluid	<ul style="list-style-type: none"> •Check the filter. •Use the cutting fluid superior in lubricity. (Increase the dilution rate)
	Margin	Inappropriate cutting speed	<ul style="list-style-type: none"> •Lower the cutting speed by 10 %.
		Regrinding timing, insufficient reground amount	<ul style="list-style-type: none"> •Shorten the regrinding timing.
		Insufficient rigidity of the machine and workpiece	<ul style="list-style-type: none"> •Change the clamp method to the one with rigidity.
		Insufficient drill rigidity	<ul style="list-style-type: none"> •Use smallest possible overhang.
		Inappropriate cutting fluid	<ul style="list-style-type: none"> •Check the filter. •Use the cutting fluid superior in lubricity. (increase the dilution rate)
Intermittent cutting when entering	<ul style="list-style-type: none"> •Avoid interruption at entry and exit. •Lower the feed by about 50 % during entering into and leaving from the workpiece. 		
Chipping and fracture	Chisel section (center of drill cutting edge)	Insufficient rigidity of the drill	<ul style="list-style-type: none"> •Reduce the drill overhang as much as possible. •Increase the feed at entry when the low speed feed is selected in standard cutting condition range. •Use a bushing or a center drill.
		Insufficient rigidity of the machine and workpiece	<ul style="list-style-type: none"> •Change the clamp method to the one with rigidity.
		Inappropriate entry into the workpiece	<ul style="list-style-type: none"> •Avoid interruption at entry into the workpiece. •Lower the feed by 10 % at entry.
		High workpiece hardness	<ul style="list-style-type: none"> •Lower the feed by 10 %.
		Inappropriate honing	<ul style="list-style-type: none"> •Check if honing has been made to the center of cutting edge.
	Peripheral cutting edge	Insufficient drill rigidity	<ul style="list-style-type: none"> •Lower the cutting speed by 10 %. •Increase the feed at entry when the low speed feed is selected in standard cutting condition range.
		Inappropriate drill mounting accuracy	<ul style="list-style-type: none"> •Check the run out accuracy after drill installation. (0.0012" or less)
		Insufficient machinery and workpiece rigidity	<ul style="list-style-type: none"> •Change the clamp method to the one with rigidity. •Lower the feed during entering into and leaving from the workpiece.
		Inappropriate honing	<ul style="list-style-type: none"> •Check if honing has been made to the cutting edge periphery.
	Margin	Insufficient machine and workpiece rigidity	<ul style="list-style-type: none"> •Change the clamp method to the one with rigidity.
		Insufficient drill rigidity	<ul style="list-style-type: none"> •Use smallest possible overhang. •Use a bushing or center drill.
		Regrinding timing and insufficient amount of reground stock	<ul style="list-style-type: none"> •Shorten the regrinding timing.
		Intermittent cutting when entering or exiting the cut	<ul style="list-style-type: none"> •Avoid interruption at entry and exit. •Lower the feed by about 50 % during entering into and leaving from the workpiece.
Breakage	Tendency to cause chipping or develop abnormal wear	<ul style="list-style-type: none"> •Check the failure mode condition before breakage and find out the wear and chip countermeasures. 	
	Chip packing in the drill flutes	<ul style="list-style-type: none"> •Review the cutting conditions. •For internal coolant supply, raise the supply pressure of cutting fluid. •Use peck feed for deep holes. 	
	Insufficient machine output	<ul style="list-style-type: none"> •Review the cutting conditions. •Use the machine with high power. 	
Insufficient hole accuracy	Insufficient rigidity of the machinery and workpiece	<ul style="list-style-type: none"> •Change to the clamp method with rigidity 	
	Inappropriate drill installation accuracy	<ul style="list-style-type: none"> •Check the run out accuracy of drill mounting. (0.0012" or less) 	
	Chip packing in the flutes.	<ul style="list-style-type: none"> •Review the cutting conditions. •Raise the cutting oil supply pressure. •Use peck-feed for deep holes. 	
	Inappropriate edge sharpening accuracy	<ul style="list-style-type: none"> •Check the edge shape accuracy. 	
Prolonged chips	Inappropriate cutting conditions	<ul style="list-style-type: none"> •Increase the feed by 10 % within standard conditions. 	
	Inappropriate honing	<ul style="list-style-type: none"> •Provide the appropriate honing. 	
	Cutting edge with chipping or breakage	<ul style="list-style-type: none"> •Lower the cutting speed by 10 %. 	

Regrinding method

Please refer to the following instructions prior to regrinding DSW type drills.


Before regrinding

Check the cutting edge for damage and wear. If any large fracture is found, remove with a silicon carbide wheel.

(1) Grinding the flank

- Use a 280 to 400 grit diamond cup type wheel of 3.937" ~ 7.874" in diameter.
- 1) Grind the relief surface so that primary relief angle (θ) of 2° can be formed as shown in Fig.1. After grinding the other side likewise, do sparkout grinding so that the difference of the lip height will be kept within 0.0008".
 - 2) In the cases of DSW types: After grinding the primary relief angle (θ) 2°, without rotating the drill, grind the secondary relief surface so that the relief angle (θ) of 3° can be formed. In the same way as 2), take care to bring the ridge line formed between the primary and secondary relief surfaces to the drill center. (Values (θ) of 1° ~ 3° are shown in Table 1)

● Fig. 1 Grinding relief angle

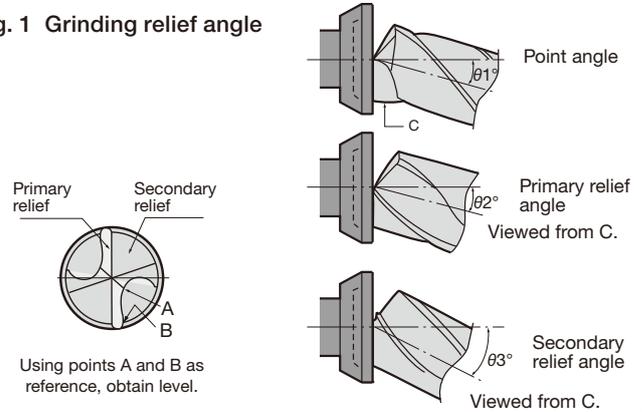


(2) Thinning

- Use a 280 ~ 400 grit diamond straight-type wheel of 3.937" ~ 7.874" in diameter.
- Conduct thinning in the same manner as cross thinning (X-type).
- Values of β_1 to β_3 written in the figures are given in the Table 2.

Table 1	θ_1 (Point angle)	θ_2 (Primary relief angle)	θ_3 (Secondary relief angle)
DSW	-20°	-6° ~ -12°	-23° ~ -27°

Table 2	β_1	β_2	β_3
DSW	147° ~ 153°	30° ~ 42°	95° ~ 110°

● Fig. 2

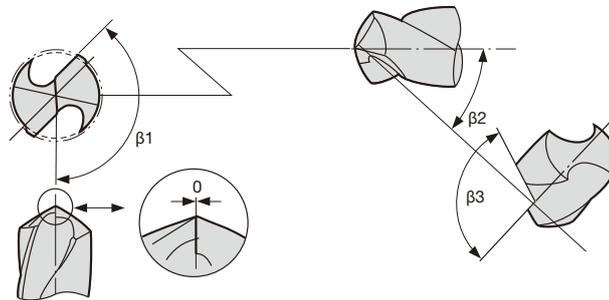

(3) Honing

- The honing angle θ and width H should be varied depending on the drill type, diameter, and work material. Recommended honing specifications are given in the Table below.
- Honing procedures (refer to Fig.3)
 - (1) Round the R portion shown in Fig.3 in large.
 - (2) Then, roughly hone the cutting edge lines by using an electro-deposited diamond file of around 170 grit.
 - (3) Carry out finish honing by using a diamond hand stick of 400 to 600 grit.
- The honing width should be changed depending on the drill diameter. For smaller side of diameters, the width should be in smaller side of values given in the Table.


● Angle honing

	~ $\phi 0.236"$	$\phi 0.236" \sim \phi 0.394"$	$\phi 0.394" \sim \phi 0.630"$
θ	-20°	-20°	-20°
H	0.001" ~ 0.002"	0.002" ~ 0.003"	0.003" ~ 0.004"

● R Honing

Dimensions (in)	R Honing R (in)
DC $\leq \phi 0.236"$	0.0008" ~ 0.0016"
$\phi 0.236" < DC \leq \phi 0.630"$	0.0012" ~ 0.0020"

● Fig.3

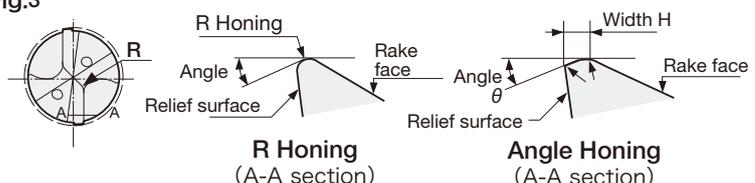

After regrinding, check the following before use.

- The difference of the lip height is kept within 0.0008".
- Any damaged portion on the cutting edges is not left.
- Cutting edges are properly honed.
- Any grinding burr is not left.

Notes:

- For more details on regrinding, consult the nearest Tungaloy sales office.

SOLIDDRILL Designation System

DSW **088** - **035** - **10** - **D** **E** **3**

1 2 3 4 5 6 7

1 Series	
DSW	Series name of solid drill

2 Drill diameter DC (mm)	
088	ø8.8

3 Effective flute length LU (mm)	
035	35

4 Shank diameter DCONMS (mm)	
10	ø10

5 DIN 6535 - Form HA	
----------------------	--


6 Coolant Supply	
E	External (without coolant hole)
I	Internal (with coolant hole)

7 Drilling depth	
Approximate value of L/D ratio.	
Caution: Code may be different from the actual length. This is dependent upon the tool diameter.	

Caution: "Effective flute length" shows the maximum flute length for effective chip evacuation. The actual drilling depth may be shorter than described depending on the work material or cutting conditions.



Indexable Drill

Nomenclature for Indexable drill

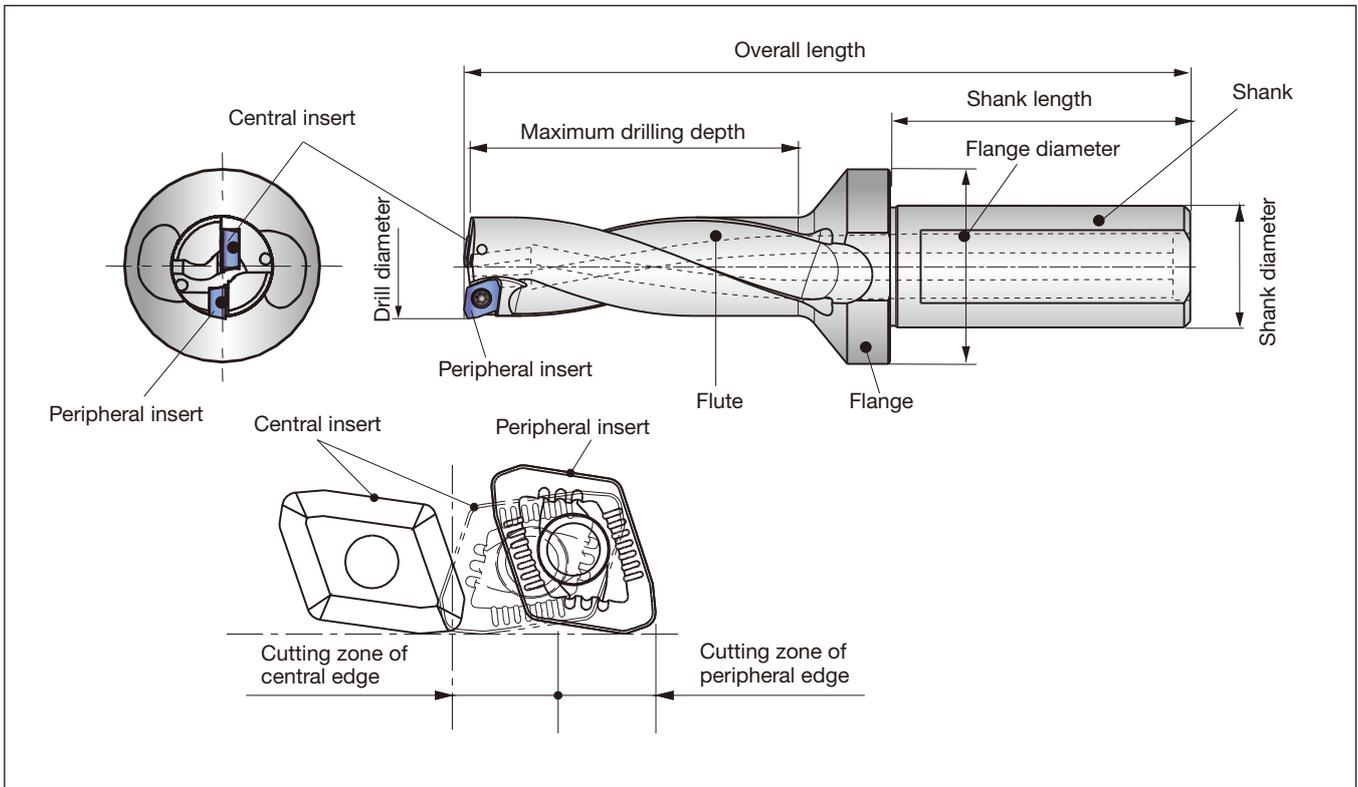

Calculation formulas for Indexable drill

● Cutting speed

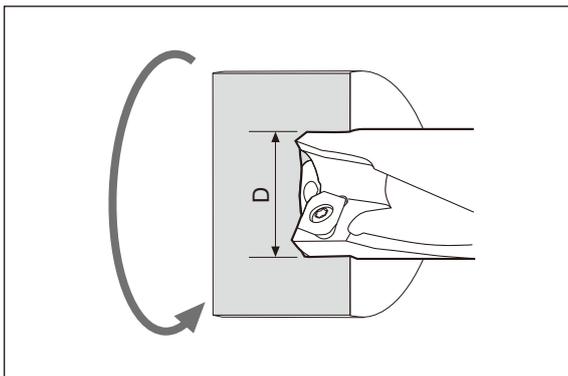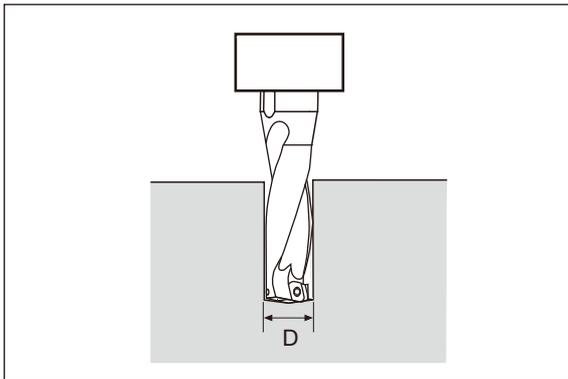

● When calculating cutting speed from number of revolutions: (Drilling formulas)

$$SFM = \frac{RPM \times D}{3.82}$$

SFM: Cutting speed
D : Drill diameter (in) (DC)
RPM: Number of revolution (min⁻¹)

● When calculating required number of revolutions from cutting speed: (Drilling formulas)

$$RPM = \frac{SFM \times 3.82}{D}$$

● When calculating cutting speed from number of revolutions: (Where the workpiece rotates.)

$$V_c = \frac{\pi \times D \times n}{1000}$$

V_c : Cutting speed (sfm)
D : Drilling diameter (in) (DC)
 n : Number of revolutions (min⁻¹)
 $\pi \approx 3.14$

● When calculating required number of revolutions from cutting speed: (Where the workpiece rotates.)

$$n = \frac{1000 \times v_c}{\pi \times D} \text{ (min}^{-1}\text{)}$$

● Calculation of feed speed

$$v_f = f \times n \text{ (mm/min)}$$

v_f : Feed speed (in/min)
f : Feed (ipr)
 n : Number of revolutions (min⁻¹)


() The notation in the brackets is the one used in the catalog (ISO compliant)

Indexable Drill


Chip shapes

Chip shape produced with central insert

- A conical coil shape whose apex point coincides with the rotating center of the drill is the basic shape. The chips are broken into small sections with increases in feed. However, excessively high feed causes the chip to increase in thickness and develops vibration which disturbs stable machining.
- In TDX drills, \bigcirc marked chips shown below are the most preferable shapes. This type of chip is broken into adequate lengths by centrifugal forces when used in tool-rotating condition. On the other hand, when used in work-rotating condition such as on a lathe, a continuously long chip is often produced without entangling.

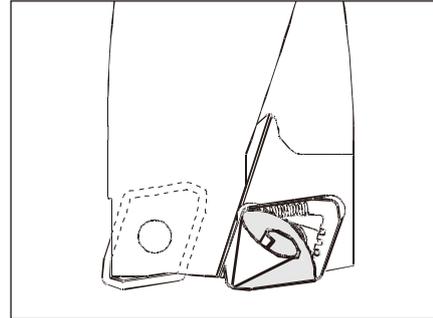


Relation between chip shapes and feeds (In the case of central insert)

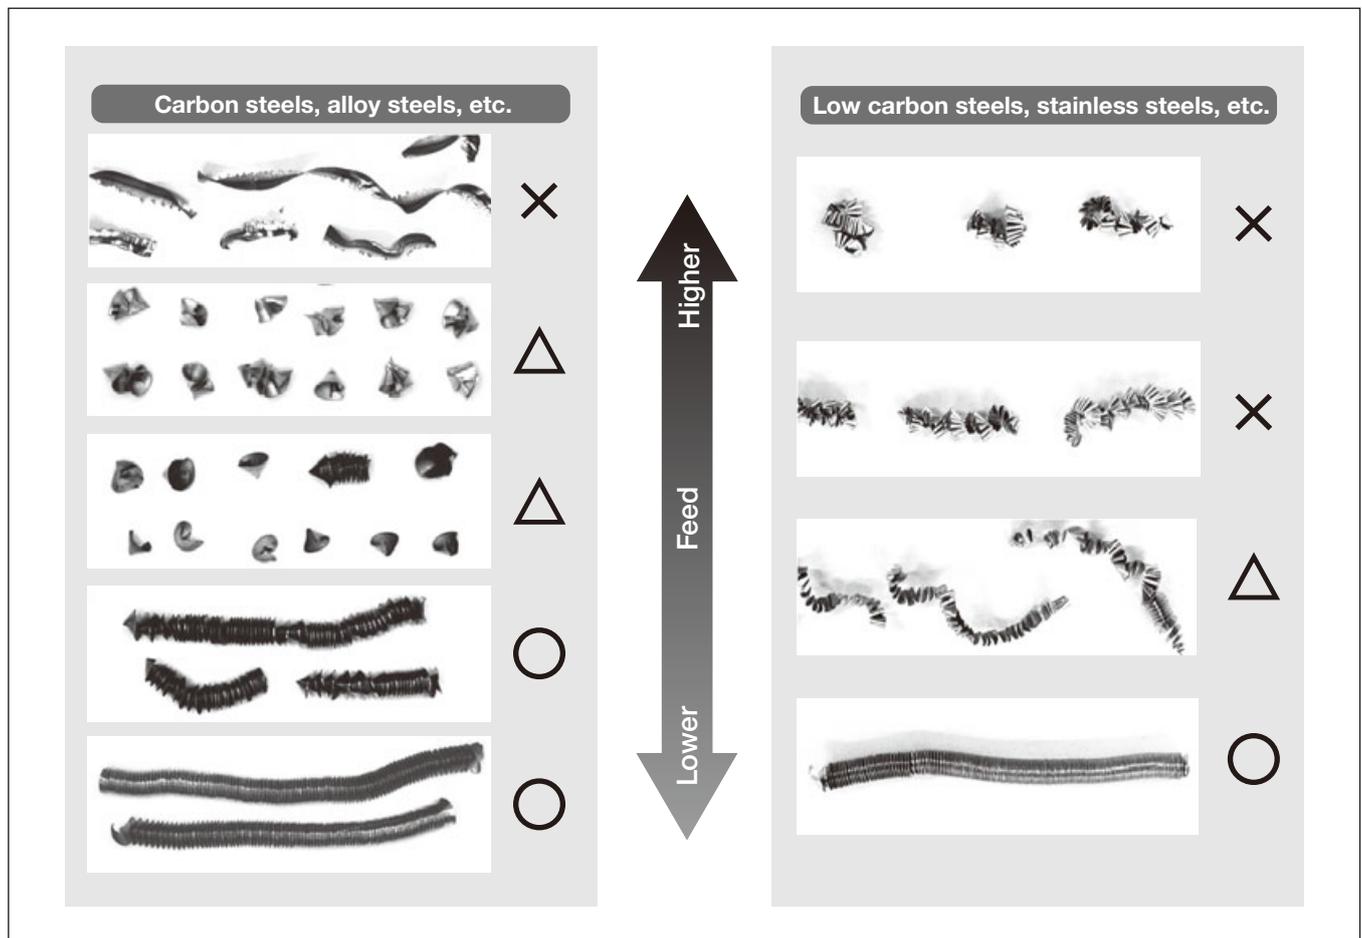


Example of chip shape in work-rotating applications (In the case of central insert)

($\phi 1.024''$, 1.045, $V_c = 330$ sfm, $f = 0.004$ ipr)

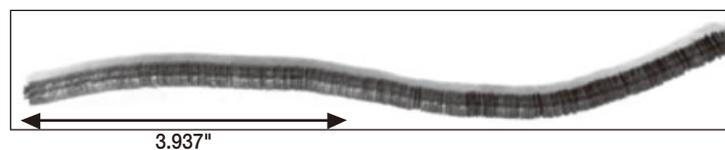

● Chip shape produced with peripheral insert

- Chip problems such as entangling are mainly caused by chips produced with the peripheral insert. These problems are dependent on the types of Workpiece material and the cutting conditions.
- As shown below, when the feed is extremely low, the chips jump over the chipbreaker groove and the continuously long chips may wrap around the drill body.
- When the feed is too high, the chips increase in thickness and can not be curled.
- Therefore, it is important to select proper cutting conditions to suit the machining so that well controlled chips will be formed.

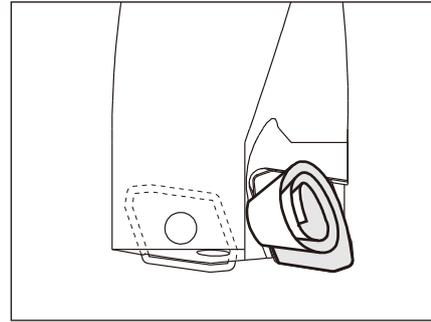


Medium to high carbon steels, alloy steels, etc.

As shown below, several turns of coil are an ideal shape. As the feed increases, the curl radius and the number of turns tend to decrease.

● Typical chip shapes of general steels



● Variation of chip shapes relating to feeds

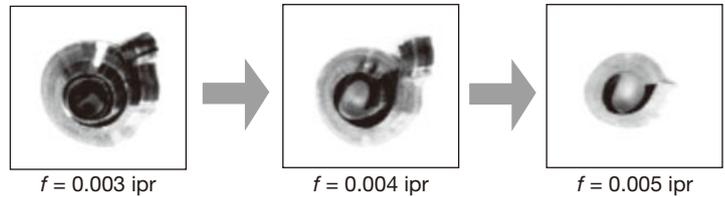

Stainless steels, low-carbon steels, low-alloy steels, etc.

- When machining long-chip materials such as stainless steels and mild steels, the wrong selection of cutting conditions results in chip entangling and tool breakage at worst. Therefore, cutting conditions should be carefully selected.
- “C” shaped, continuous coils of several to ten turns having adequately divided lengths are the ideal shape.

● Ideal chip shapes

	Stainless steel (JIS SUS 304) ($\phi 0.866"$, $V_c = 330$ sfm, $f = 0.004$ ipr)	Mild steel (JIS SS400) ($\phi 0.866"$, $V_c = 530$ sfm, $f = 0.003$ ipr)
DS chipbreaker		
DJ chipbreaker		

For machining stainless steels or low carbon steels, DS chipbreaker is recommended. When using a TDX drill in tool-rotating condition, DS chipbreaker produces compact chips and allows more stable machining than DJ chipbreaker. When using it in work-rotating condition, DS chipbreaker provides outstanding affect on chip control.

Indexable Drill

● Chip shapes which tend to entangle and remedies against them

① Apple-peel-like chips

These chips are often produced in machining mild steels or low-carbon steels at low-speeds and low-feeds.

Remedies

Increase the cutting speed in stages by 20% within the range of standard cutting conditions. If there is no effect, increase the feed by about 10% as the cutting speed is raised by 20%.




Apple-peel-like chips (Without curling)

② Short-lead chips

These chips are often produced in machining stainless steels at low-feeds and tend to entangle on the tool in spite of short length.

Remedies

Increase the feed by about 10%. If there is no effect, increase the cutting speed in stages by 10% within the range of standard cutting conditions.

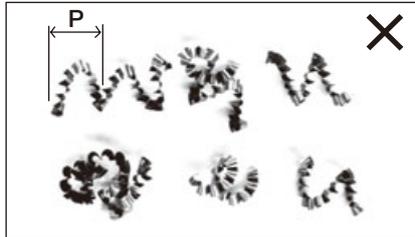

Continuously curled "C" shape chips with short lead (P).

③ Very long chips

Often produced in machining mild steels or low-carbon steels under improper cutting conditions.

Remedies

Increase the cutting speed in stages by 20% within the range of standard cutting conditions. If there is no effect, decrease the feed by about 10% as the cutting speed is raised by 20%.




Continuously coiled long chips

■ Cutting forces

The charts below show a guideline for cutting forces. Use TDX drills on a machine with ample power and sufficient rigidity.

● Guidelines for cutting forces

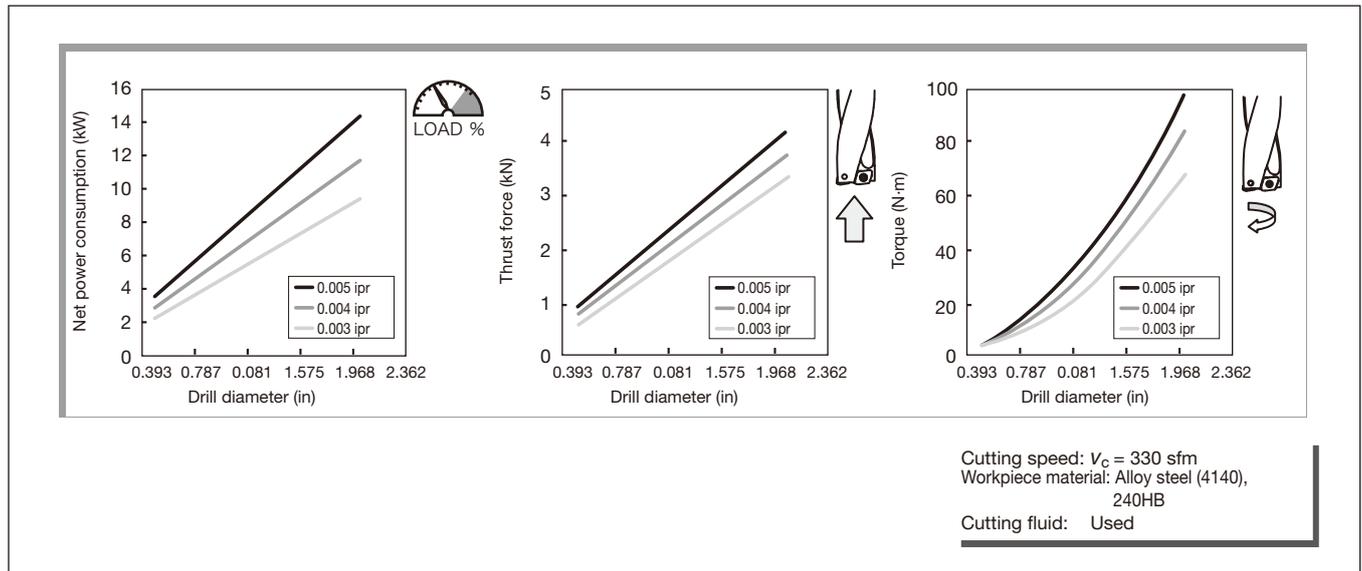

TUNGSIX-DRILL / TUNGDRILLTWISTED

Troubleshooting for indexable drills

Use EZ sleeves for the following purposes

Hole diameter adjustment on the milling machine

Adjusting the finishing diameter when milling

Adjusting the finishing diameter in tool-rotating applications such as on machining centres and milling machines:



By using **EZ sleeve**, the finishing diameter can be adjusted in the range from **+0.024" to -0.008"**.



Scale for adjusting finishing diameter in milling (Periphery of sleeve)

Adjusting cutting edge height on lathe

Lathe


Adjusting of the cutting edge height in work rotating applications such as on lathes:



By using **EZ sleeve**, the cutting edge height can be adjusted in the range from **+0.012" to -0.008"**. It results in eliminating troubles caused by improper cutting-edge height.




Scale for adjusting cutting edge height in turning (Front face of sleeve)

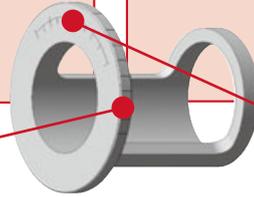


Setting of EZ sleeve

Hole diameter adjustment on the milling machine

As shown in the Figure right, set the EZ sleeve between the drill shank and the toolholder.

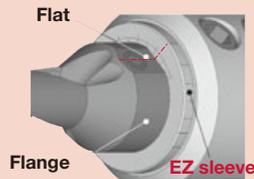


Align the graduated scale on the periphery of the EZ sleeve with the center of the flat of the drill flange. In the Figure shown right, the sleeve is set so that the finishing diameter will be increased by 0.4 mm.

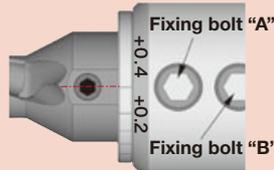


Adjusting cutting edge height on lathe

As shown in the Figure right, set the EZ sleeve between the drill shank and the toolblock.

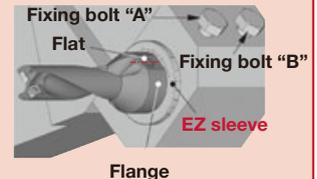

Align the graduated scale on the front face of the Esleeve with the center of the flat of the drill flange. In the Figure shown right, the sleeve is set so that the center of the drill will shift by 0.1 mm to the plus (+) direction.

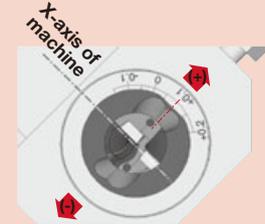

When rotating the EZ sleeve, insert the wrench into the hole at the flange periphery and rotate the EZ sleeve.

Screws A + B have to be loosened.

Secure the drill by screw A.

Secure the EZ sleeve by lightly tightening screw B.

Tighten screw B only lightly otherwise EZ sleeve can be damaged!

Cautious points

- The scale is only a rough guide, so be sure to measure the actual drilling diameter to confirm the result. Especially in turning, test machining is recommended as the drilling diameter will vary according to the adjustment.
- Can not be used for collect chuck holders.
- Over L/D 4 or bigger adjustment, please reduce feed.
- For smaller adjustment, the drill itself will interfere with the hole diameter. It is recommended that hole diameter should be adjusted to a larger diameter than the drill diameter.

Indexable Drill

Troubleshooting for indexable drills


Problem		Cause	Countermeasure	
Abnormal wear	Central cutting edge	Relief surface	Inappropriate cutting conditions	<ul style="list-style-type: none"> ● Increase the cutting speed by 10 % within standard conditions. ● Lower the feed by 10 %.
	Peripheral cutting edge	Relief surface	Inappropriate cutting conditions	<ul style="list-style-type: none"> ● Increase the cutting speed by 10 % within standard conditions. ● When the feed is extremely low or high, set up it within standard conditions.
	Common	Relief surface	Varieties and supply of cutting fluid	<ul style="list-style-type: none"> ● Confirm that the cutting fluid flow is higher than 7 liter/min. ● The concentration of cutting fluid must be higher than 5 %. ● Use the cutting fluid superior in lubricity. ● Change to internal cutting fluid supply from external one.
			Vibration in drilling	<ul style="list-style-type: none"> ● Change to the machine with higher torque. ● Change to the clamp method with rigidity. ● Change the drill setting method.
			Unsuitable for selection of grade	<ul style="list-style-type: none"> ● Change the grade to high wear resistant.
		Crater	Looseness of screws	<ul style="list-style-type: none"> ● Tighten the screw.
			Cutting heat is too high	<ul style="list-style-type: none"> ● Change to internal cutting fluid supply from external one. ● Increase the supply rate of the cutting fluid. (Higher than 10 liter/min.) ● Lower the feed by 20 % within standard conditions. ● Lower the cutting speed by 20 % within standard conditions.
		Excessive chip welding	<ul style="list-style-type: none"> ● Lower the feed by 20 % within standard conditions. ● Lower the cutting speed by 20 % within standard conditions. 	
	Chipbreaker	Chip packing	<ul style="list-style-type: none"> ● Increase the cutting speed by 20% and lower the feed by 20% within standard conditions. ● Raise the fluid pressure (for higher than 1.5 MPa). 	
	Chipping and fracture	Central cutting edge	The rotation center of drill	Misalignment for workpiece rotation
Large offset				<ul style="list-style-type: none"> ● Check the manual and use the tool in the allowable offset range.
No flatness of machined surface				<ul style="list-style-type: none"> ● Flatten the entry surface in pre-machining. ● Set the feed for lower than 0.002 ipr in rough surface area.
High feed				<ul style="list-style-type: none"> ● Lower the feed by 20 ~ 50 % within standard conditions.
Peripheral cutting edge		Peripheral corner area	Using a chipping corner	<ul style="list-style-type: none"> ● Confirm the corner when exchanging inserts.
			Using inserts in excess of tool-life	<ul style="list-style-type: none"> ● Exchange the corner or the insert before the nose wear reaches 0.012".
			No flatness of machined surface	<ul style="list-style-type: none"> ● Flatten the entry surface in pre-machining. ● Set the feed for lower than 0.002 ipr at rough surface area.
			The existence of interrupted area	<ul style="list-style-type: none"> ● Set the feed for lower than 0.002 ipr in interrupted area.
Common		The unused corner area and cutting edge	Using a chipped corner	<ul style="list-style-type: none"> ● Confirm the corner when exchanging inserts.
			High hardness of workpiece	<ul style="list-style-type: none"> ● Increase the cutting speed by 20 % and lower the feed by 20 % within standard conditions. ● Raise the fluid pressure (for higher than 1.5 MPa).
			Chip packing	<ul style="list-style-type: none"> ● Lower the feed by 20 % within standard conditions.
		Contact boundary	Machinery impact	<ul style="list-style-type: none"> ● Change to continuous feed in case of pick feeding.
			Using inserts in excess of tool-life	<ul style="list-style-type: none"> ● Exchange the corner or the insert before the nose wear reaches 0.012".
		Flaking	Vibration in drilling	<ul style="list-style-type: none"> ● Change to the machine with higher rigidity. ● Change to the clamp method with rigidity. ● Change the drill setting method.
			High hardness of workpiece	<ul style="list-style-type: none"> ● Set the feed for lower than 0.002 ipr.
		Common	Thermal impact	High hardness of workpiece
Unsuitable for selection of grade	<ul style="list-style-type: none"> ● Change the grade to toughness. 			
Looseness of screws	<ul style="list-style-type: none"> ● Tighten the screw. 			



Troubleshooting for indexable drills

Problem		Cause	Countermeasure
Scratch marks on the tool	The tool periphery	Misalignment of workpiece rotation	● Set the misalignment to 0 ~ 0.008".
		Offset machining in excess of allowable range	● Use the tool in the allowable offset range.
		Offset direction reduced diameter of workpiece	● Set offset direction extended diameter of workpiece
		No flatness of the entry surface	● Flatten the entry surface in pre-machining. ● Set the feed for lower than 0.002 ipr in rough surface area.
		Chipping of peripheral cutting edge	● Exchange the insert.
		Bend of workpiece	● Change to the clamp method with rigidity.
		Chip packing	● Increase the cutting speed by 20 % and lower the feed by 20 % within standard conditions. ● Raise the fluid pressure (for higher than 1.5 MPa).
Inappropriate hole accuracy	Hole diameter	Misalignment for workpiece rotation	● Set the misalignment to 0 ~ 0.008".
		Inappropriate offset contents	● Adjust offset contents.
		No flatness of the entry surface	● Flatten the entry surface in pre-machining. ● Set the feed for lower than 0.002 ipr at rough surface area.
		Bend of workpiece	● Change to the clamp method with rigidity.
	Roughness	Varieties and supply of cutting fluid	● The concentration of cutting fluid must be higher than 5 %. ● Use the cutting fluid superior in lubricity. ● Change to internal cutting fluid supply from external one.
		Inappropriate cutting conditions	● Increase the cutting speed by 20 % within standard conditions. ● Lower the feed by 20 % within standard conditions.
	Common	Failures of inserts	● Exchange the insert.
		Chip packing	● Increase the cutting speed by 20 % and lower the feed by 20 % within standard conditions. ● Raise the fluid pressure (for higher than 1.5 MPa).
Looseness of screws		● Tighten the screw.	
Chip control	Prolonged and twisted of chips	Inappropriate cutting conditions	● Work within standard conditions. ● Increase the cutting speed by 10 % within standard conditions. ● Increase the feed by 10 % within standard conditions.
		Failures of inserts	● Exchange inserts.
		Machining by external fluid supply	● Change to internal cutting fluid supply from external one. ● Work by step feed. ● Use dwell function for 0.1 sec approximately.
		Chips around the central cutting edge	● There is a tendency to shorten the chips when shifting to higher speed and feed.
	Chip packing	Fluid supply	● Change to internal cutting fluid supply from external one. ● Raise the fluid pressure (for higher than 1.5 MPa).
		Inappropriate cutting conditions	● Increase the cutting speed by 20 % and lower the feed by 20 % within standard conditions. ● Raise the fluid pressure (for higher than 1.5 MPa).
	Common	Large failure of drill holders	● Exchange the drill holder.
		Looseness of screws	● Tighten the screw.
Others	Chatter	Inappropriate cutting conditions	● Lower the cutting speed by 20 % within standard conditions. ● Increase the feed by 10 % within standard conditions.
		Large wear of inserts	● Exchange the insert.
		Vibration in drilling	● Change to the machine with higher torque rigidity. ● Change to the clamp method with rigidity. ● Change the drill setting method.
		Looseness of screws	● Tighten the screw.
	Machine stop	Insufficient machine power and torque	● Use the range of number of revolutions suited machine spec. Lower the feed by 20 ~ 50%.
		Burned inserts	● Exchange inserts before the failure becomes larger. ● Check the oil-hole plug screw is tightly screwed in place. ● Check that the fluid flows powerfully from the drill. ● Lower the cutting speed and the feed by 20 % within standard conditions.
	Large burr	Failures of inserts	● Exchange the insert.
		Inappropriate cutting conditions	● Lower the feed by 20 ~ 50% just before leaving from the workpiece.

Nomenclature for gun drill

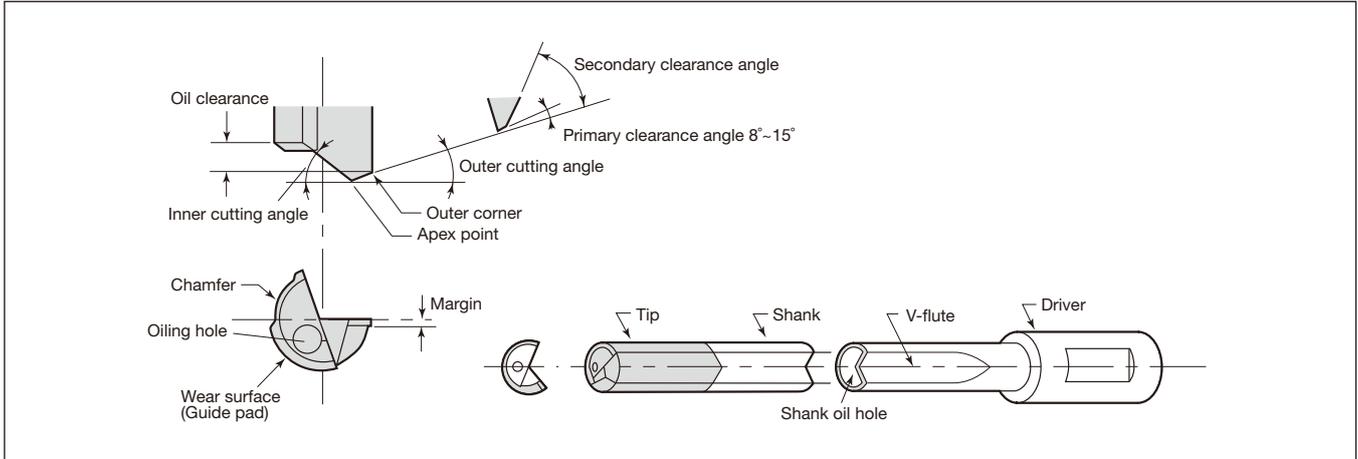







APPLICATION RANGE


Feed f (ipr)	0.001 - 0.002	0.001 - 0.02	0.004 - 0.012
Application	<p>OK Cross hole drilling</p>	<p>OK Inclined exit</p> <p>0.630" or less (for standard drill)</p>	<p>OK Boring</p>

BLIND HOLE SHAPES OF THE HOLE BOTTOM

DC	Insert	Maximum difference PL
0.394 - 0.465	ZSGT06...	0.067
0.465 - 0.551	LOGT06...	0.071
0.551 - 0.630	TOHT07...	0.079
0.630 - 0.709	TOHT08...	0.087
0.709 - 0.787	TOHT09...	0.118
0.788 - 0.866	TOHT10...	0.126
0.866 - 0.984	TOHT11...	0.134
0.985 - 1.102	TOHT12...	0.142

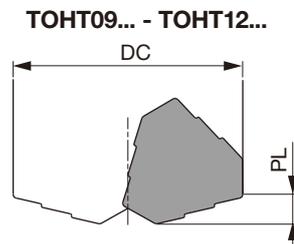


DC	Central	Insert Intermediate	Peripheral	Maximum difference PL
1.103 - 1.135	FBM07**-C	FBM06**-I	FBH06**-P	0.098
1.136 - 1.142	FBM07**-C	FBM06**-I	FBH06**-P	0.102
1.142 - 1.174	FBM07**-C	FBM06**-I	FBH06**-P	0.098
1.175 - 1.181	FBM07**-C	FBM06**-I	FBH06**-P	0.110
1.181 - 1.206	FBM07**-C	FBM07**-I	FBH08**-P	0.110
1.206 - 1.241	FBM07**-C	FBM07**-I	FBH08**-P	0.114
1.242 - 1.276	FBM07**-C	FBM07**-I	FBH08**-P	0.118
1.276 - 1.299	FBM07**-C	FBM07**-I	FBH08**-P	0.122
1.300 - 1.320	FBM07**-C	FBM07**-I	FBH08**-P	0.114
1.320 - 1.356	FBM07**-C	FBM07**-I	FBH08**-P	0.118
1.356 - 1.378	FBM07**-C	FBM07**-I	FBH08**-P	0.122
1.378 - 1.394	FBM08**-C	FBM07**-I	FBH08**-P	0.118
1.395 - 1.417	FBM08**-C	FBM07**-I	FBH08**-P	0.122
1.418 - 1.438	FBM08**-C	FBM07**-I	FBH08**-P	0.114
1.438 - 1.473	FBM08**-C	FBM07**-I	FBH08**-P	0.118
1.474 - 1.496	FBM08**-C	FBM07**-I	FBH08**-P	0.122
1.496 - 1.501	FBM08**-C	FBM07**-I	FBH09**-P	0.130
1.501 - 1.535	FBM08**-C	FBM07**-I	FBH09**-P	0.134
1.536 - 1.544	FBM08**-C	FBM07**-I	FBH09**-P	0.126
1.544 - 1.575	FBM08**-C	FBM07**-I	FBH09**-P	0.130

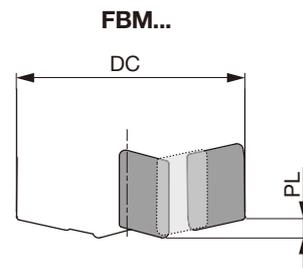

REQUIRED SPINDLE POWER AND COOLANT PRESSURE


Net power

P 1055

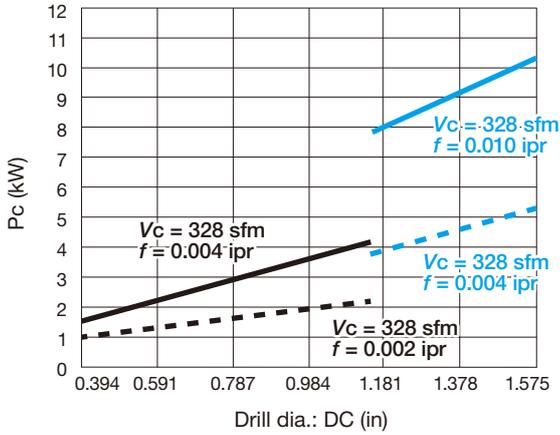


Torque


P 1055

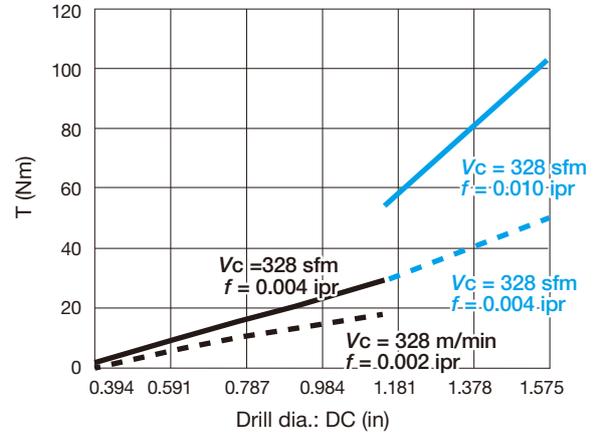

Coolant pressure

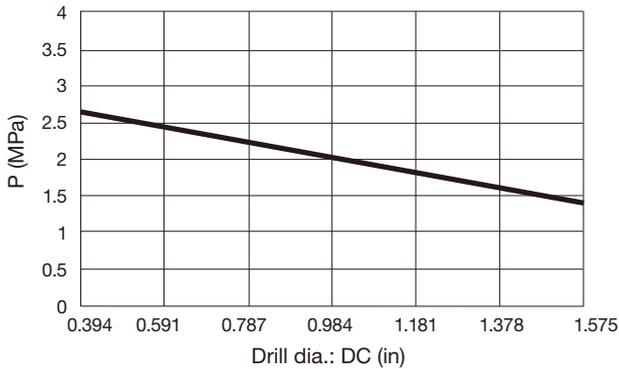


Coolant flow rate

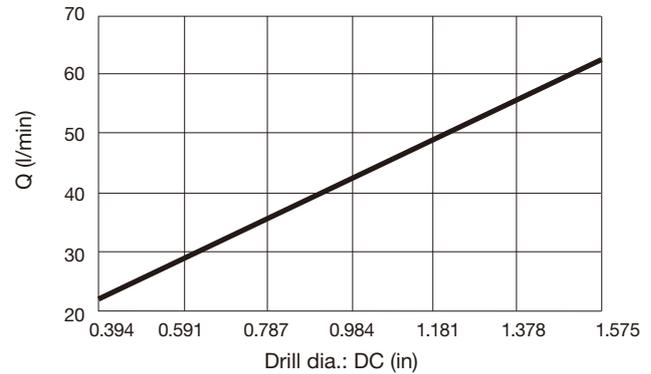

Guide pad grade and the timing for replacement

Guide pads are subject to wear, like inserts

- The guide pad has two sides.
- Each guide pad can be used on two sides. When the first corner wears out to 70% of the width, reverse the guide pad to use the second side.
- Replace with a new guide pad when the second side wears out.

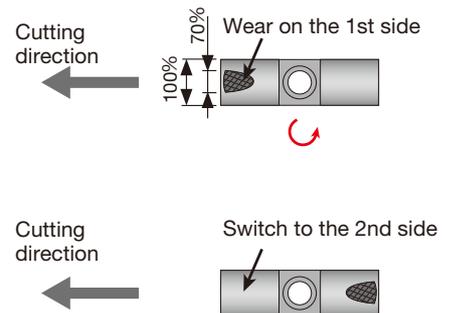

Drilling procedure on machining centers and lathes

Proceed as instructed below in order to maximize the tool performance.

	<p>① Drill a pilot hole Hole diameter tolerance: +0.0004" - +0.002" Hole depth: H = 1.0" Note: Drill H = 1.8" when using an MCTRCH drill (for cross-hole). Please use DrillMeister or DrillForce-Meister for a pilot hole. Use a drill with 3xD or smaller. Note: Recommend to use a drill with 5xD when using an MCTRCH drill.</p>
	<p>② Start coolant ③ Slowly insert DeepTri-Drill into the pilot hole No. of revolution: $n = 50 - 100$ rpm Feed rate: $V_f = 4 - 12$ ipm Note: Do not rotate the drill at full machining speed before engaging the pilot hole.</p>
	<p>④ Stop the drill at H = 0.8" depth Note: Stop at H = 1.6" when using an MCTRCH drill. ⑤ Start rotating at full machining speed</p>
	<p>⑥ Start feeding At the entry (H = 0.8" - 1.2") → Feed: $f = 80\%$ of programmed feed Note: Drill H = 1.6" - 2.0" when using an MCTRCH drill. Hole depth: H ≥ 1.2" → Feed: $f = 100\%$ Note: Drill H = 2.0" or more when using an MCTRCH drill.</p>
	<p>⑦ For a through hole Continue drilling until the drill head passes through the workpiece by 1.0". Note: When machining gummy materials such as low carbon steel, reduce the feed rate to 70% of the normal level right before exiting the material to prevent chips from scattering. ⑧ Stop the rotation and coolant ⑨ Return the drill, and operation finished</p>

How to use a trlg type deeptri-drill on a horizontal machining center or boring machine

When using the TRLG drill on a conventional machining center or horizontal boring machine where there are no drilling-bush supports available, a pilot hole needs to be further deepened with a MCTR drill to better support the long gundrill. A long gundrill such as the TRLG type drill tends to "whip" when the pilot hole is too short to support the gundrill.

	<p>① Drill a pilot hole</p>
	<p>② Expand the pilot hole deeper using a MCTR drill</p>
	<p>③ Drill with a TRLG drill at a reduced rotation and feed. Use the following parameters: No. of revolution: $n = 50 - 100$ rpm Feed speed: $V_f = 4 - 12$ ipm</p>
	<p>④ When DeepTri-Drill reaches all the way to the end of the pilot hole, increase drill rotation to full machining speed.</p>
	<p>⑤ Start feeding to complete the drilling</p>

(Caution)
Always use Step ② to prevent the gundrill from whipping, which may lead to drill breakage and a possible superfluous injury.

Troubleshooting in gun drilling

Problem		Cause	Trigger	Countermeasure
Breaking of drill	At entry into workpiece	Machine	Clamping the workpiece is unstable.	Clamp the workpiece firmly.
			The guide bush is apart from the workpiece surface at the entry.	Contact the guide bush closely with the workpiece.
			The machine's rapid feed is used.	Use cutting feed.
			Whipping effect occurs.	Place a whip guide at the appropriate position.
			The shape of the guide bush is not suitable.	Use the guide bush in the shape suitable for the workpiece.
		Drill	The drill is not set properly.	Set the drill with an appropriate torque, hydraulic pressure, etc.
	Regrinding is in poor quality.		Make sure no damage is left on the drill and that the cutting edge geometry is not changed.	
	Cutting condition	The feed (f) is too high.	Use low feed.	
	Workpiece	The workpiece surface is slanted.	Use low feed.	
	During drilling	Machine	Clamping the workpiece is unstable.	Clamp the workpiece firmly.
			The shape of the guide bush is not suitable.	Modify the shape of the guide bush. See "Chip packing" for the details.
			The feed speed (V_f) varies.	Use mechanical feed.
		Drill	The number of revolutions varies (decreases).	Increase the machine power or adjust the cutting conditions.
			Abnormal damage occurs.	See "Short tool life" for the details.
		Cutting condition	The feed (f) is not suitable.	Use an appropriate feed.
		Workpiece	Interrupted or cross drilling is required.	Change the tool to a standard gundrill.
	Others	Chip packing occurs.	See "Chip packing" for the details.	
	At exit from workpiece	Drill	The tip is too long.	Make the tip length short.
			The selection of the guide pads is not suitable.	Use 2 guide pads instead of 3.
			The clearance of the coolant hole is too large.	Reduce the clearance of the coolant hole.
		Cutting condition	The feed (f) is too high.	Use low feed.
Workpiece	The workpiece surface is slanted.	Use low feed.		
During retracting	Machine	Clamping the workpiece is unstable.	Clamp the workpiece firmly.	
	Cutting condition	Burnishing torque (cutting power) is increased due to reduced hole diameter.	Reduce cutting speed (V_c).	

Troubleshooting in gun drilling

Problem	Cause	Trigger	Countermeasure	
Hole accuracy	Rough surface finish	Machine	Clamping the workpiece is unstable.	Clamp the workpiece firmly.
			The type of coolant is not appropriate.	Use water-insoluble coolant.
			Foreign material is in the coolant.	Thoroughly filtrate the coolant (Use a filter with the filtration accuracy in 10µm or less).
			The run-out of the spindle is too large.	Minimize the run-out of the spindle.
			The clearance between the guide bush and the drill is not appropriate.	Replace the guide bush (The clearance should be between +0.00012" and +0.00031").
			The feed speed (Vf) varies.	Use mechanical feed.
			The number of revolutions varies (decreases).	Increase the machine power or adjust the cutting conditions.
		Drill	Abnormal damage occurs.	See "Short tool life" for the details.
			Regrinding is in poor quality.	Make sure no damage is left on the drill and that the cutting edge geometry is not changed.
		Cutting condition	The feed (f) is too high.	Reduce the feed.
	Others	Chip packing occurs.	See "Chip packing" for the details.	
	Unacceptable circularity, cylindricity, and oversize	Machine	The clearance between the guide bush and the drill is not appropriate.	Replace the guide bush (The clearance should be between +0.00012" and +0.00031").
			The guide bush is apart from the workpiece surface at the entry.	Contact the guide bush closely with the workpiece.
			The type of coolant is not appropriate.	Use water-insoluble coolant.
			The concentricity of the guide bush and the spindle is too large.	Decrease the concentricity of the guide bush and the spindle.
		Drill	Abnormal damage occurs.	See "Short tool life" for the details.
			Regrinding is in poor quality.	Make sure no damage is left on the drill and that the cutting edge geometry is not changed.
		Cutting condition	The feed (f) is not suitable.	Use an appropriate feed.
		Workpiece	Interrupted or cross drilling is required.	Change the tool to a standard gundrill.
		Others	Chip packing occurs.	See "Chip packing" for the details.
		Bending of hole	Machine	Clamping the workpiece is unstable.
	The guide bush is apart from the workpiece surface at the entry.			Contact the guide bush closely with the workpiece.
	The concentricity of the guide bush and the spindle is too large.			Decrease the concentricity of the guide bush and the spindle.
	The clearance between the guide bush and the drill is not appropriate.			Replace the guide bush (The clearance should be between +0.00012" and +0.00031").
	Drill		The selection of the guide pads is not suitable.	Use 2 guide pads instead of 3.
			Regrinding is in poor quality.	Make sure no damage is left on the drill and that the cutting edge geometry is not changed.
	Cutting condition		The feed (f) is too high.	Reduce the feed.
Workpiece	The workpiece has blow holes or unevenness.		Use the workpiece without defect.	
	The workpiece surface is slanted at the entry.		Use low feed.	
	Interrupted or cross drilling is required.		Change the tool to a standard gundrill.	

Troubleshooting in gun drilling

Problem		Cause	Trigger	Countermeasure
Short tool life	Abnormal wear	Machine	The type of coolant is not appropriate.	Use water-insoluble coolant.
			Foreign material is in the coolant.	Thoroughly filtrate the coolant (Use a filter with the filtration accuracy in 10µm or less).
			The clearance between the guide bush and the drill is not appropriate.	Replace the guide bush (The clearance should be between +0.003" and +0.008").
			Whipping effect occurs.	Place a whip guide at the appropriate position.
			The concentricity of the guide bush and the spindle is too large.	Decrease the concentricity of the guide bush and the spindle.
			The coolant temperature is too high.	Increase the capacity of the tank.
		Drill	The selection of the guide pads is not suitable.	Use 2 guide pads instead of 3.
			Regrinding is in poor quality.	Make sure no damage is left on the drill and that the cutting edge geometry is not changed.
			The drill's overall length is excessive.	Reduce the drill's overall length.
			Excessive wear occurs and the chip shape changes.	Regrind the gundrill (ease the tool life criteria).
		Cutting condition	The cutting speed (Vc) is too high.	Reduce the cutting speed.
			The feed (f) is too high.	Reduce the feed.
			The coolant pressure is not high enough.	Increase the coolant pressure.
		Workpiece	The material quality varies.	Reduce the cutting speed (Vc).
Chip control	Chip packing	Machine	The shape of the guide bush is not suitable.	Modify the tip of the guide bush to match the shape of the workpiece surface at the entry.
			The number of revolutions varies (decreases).	Increase the machine power or adjust the cutting conditions.
			The chip box is too small for smooth chip evacuation.	Enlarge the chip box.
		Cutting condition	The feed (f) is not suitable.	Use an appropriate feed.
			The coolant pressure is not high enough.	Increase the coolant pressure.
		Workpiece	Interrupted or cross drilling is required.	Change the tool to a standard gundrill.
	The operation is for stacked plates.		Change the cutting edge shape so that the cores become small.	
	The material quality varies.		Increase the feed.	
	Chip entanglement	Drill	The cutting edge is fractured or chipped.	See "Breakage" for the details.
			Wear on the outer corner is excessive.	Regrind the gundrill (ease the tool life criteria).
		Cutting condition	The feed (f) is too low.	Increase the feed.
Workpiece		Drilling a center hole is required.	Make the center hole as small as the drill diameter and increase the coolant pressure.	

DEEPT^{RI} DRILL Designation system

Designation for tailor-made tools

Special tool code may be created per below according to your specific drilling needs.

1 **MCTR** **2** **18.50** **XM** **3** **25** - **4** **22**

1 Series		2 Drill dia. DC (mm)		3 Driver dia. DCONMS (mm)		4 LU/DC ratio	
MCTR	DeepTri-Drill (For machining centers and lathes)	18.50	18.50	25	25		
MCTRCH	DeepTri-Drill (For cross hole drilling on machining centers and CNC lathes)						

For tailor-made drills, use the guide below to make the designation (Cat. No).

1 **TRLG** **2** **18.50** **X** **3** **900** - **4** **23**


1 Series		2 Drill dia. DC (mm)		3 Overall length: L (mm)		4 Driver code	
TRLG	DeepTri-Drill (For gundrill machines)	18.50	18.50	900	900	23	23
TRLGCH	DeepTri-Drill (For cross hole drilling on gundrilling machines)						

Grade
Insert
Ext. Toolholder
Int. Toolholder
Threading
Grooving
Miniature tool
Milling cutter
Endmill
Drilling tool
Tooling System
User's Guide
Index



Reamer

Nomenclature for gun reamer

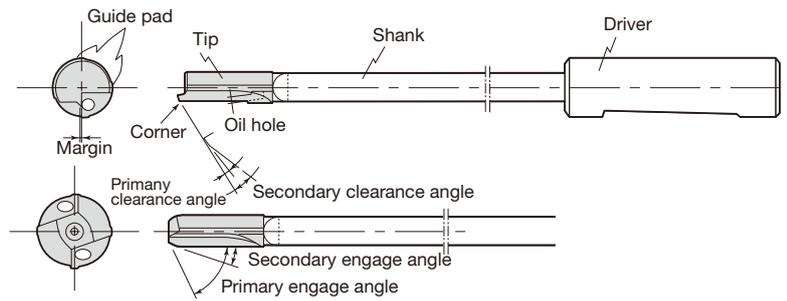

Troubleshooting in gun reaming

Trouble		Possible cause	Countermeasure		
Breaking of reamer	Increased burnishing torque due to excessively small stock allowance	● Chamfer angle small	● Enlarge chamfer angle and increase stock allowance		
		● Excessive wear in peripheral cutting edge.	● Reduce cutting speed to prevent peripheral wear of edge ● Increase lubricity of cutting fluid		
	Sticking	● Faulty filtering of cutting fluid ● Incorrect selection of cutting fluid ● Insufficient cutting fluid pressure	● Improve filtering accuracy ● Change to fluid with higher lubricity ● Increase fluid pressure		
Mechanical trouble			● Repair electrical system ● Improve clamping method of workpiece		
Faulty machining accuracy	Unacceptable surface roughness	Excessive feed rate per tooth	● Reduce fluid pressure ● Increase number of teeth		
		Improper tool specifications	● Excessive chamfer angle ● Excessive back taper ● Peripheral run out excessive	● Reduce chamfer angle ● Reduce back taper ● Improve run out accuracy	
	Too large and inconsistent over size	Faulty regrinding	● Cutting edge run out is large ● Residual damage of preceding process	● Improve run out accuracy ● Remove residual damage completely	
		Improper cutting fluid	● Excessive fluid pressure ● Improper selection of cutting fluid	● Reduce fluid pressure ● Increase activity and lubricity of the fluid	
	Faulty machine accuracy			● Correct spindle run out and bushing clearance and alignment	
	Faulty clamping of workpiece		● Clamping position wrong ● Clamping force inadequate	● Improper clamping position ● Increase clamping force	
	Defective out-of-roundness	Faulty machine accuracy		● Excessive bushing clearance ● Faulty spindle run out and alignment	● Correct bushing clearance ● Correct spindle run out and alignment
		Improper tool specifications		● Outer run out of reamer large ● Insufficient reamer rigidity	● Correct peripheral run out ● Increase reamer rigidity
		Faulty clamping position of workpiece			● Change clamping position
		Unevenness in wall thickness of workpiece			● Reduce reamer guide width (margin width)
	Insufficient oversize allowance	Chamfer angle small		● Increase chamfer angle	
		Excessive wear in peripheral cutting edge	● Too high cutting speed ● Faulty lubricity of cutting fluid	● Decrease cutting speed ● Increase lubricating capacity	
Faulty regrinding (residual damage)			● Increase regrinding stock amount		

International Tolerance

IT (International Tolerance) Grades

IT grades shows a tolerance allowable for difference of the diameters of a hole and a shaft. As the number added after IT increases, the tolerance becomes rough. Depending on the basic size, the tolerance value in each grade varies.

In the catalog, IT grades are shown as a guide of dimensional dispersion in the diameters of holes machined with the drill. For information, H8 tolerance for a $\varnothing 8.0$ hole is 0 to + 0.022 mm, the width of the value is the same as that of IT 8.

In the Table shown below, tolerance areas attainable with typical drilling tools are distinguished by using different colors. Solid drills are generally used for machining holes of IT 9 to 12. For machining a hole of better than IT 8, finishing process such as reaming is required. For a hole better than IT 5, high-precision finishing is required. Above description is based on machining of general steel. In practice, the IT grade attained with the tool varies widely depending on the hardness and the composition of the work material.

Basic size (mm)		International tolerance grade																	
		IT1	IT2	IT3	IT4	IT5	IT6	IT7	IT8	IT9	IT10	IT11	IT12	IT13	IT14	IT15	IT16	IT17	IT18
>	≤							(μm)						(mm)					
-	3	0.8	1.2	2	3	4	6	10	14	25	40	60	0.1	0.14	0.25	0.4	0.6	1	1.4
3	6	1	1.5	2.5	4	5	8	12	18	30	48	75	0.12	0.18	0.3	0.48	0.75	1.2	1.8
6	10	1	1.5	2.5	4	6	9	15	22	36	58	90	0.15	0.22	0.36	0.58	0.9	1.5	2.2
10	18	1.2	2	3	5	8	11	18	27	43	70	110	0.18	0.27	0.43	0.7	1.1	1.8	2.7
18	30	1.5	2.5	4	6	9	13	21	33	52	84	130	0.21	0.33	0.52	0.84	1.3	2.1	3.3
30	50	1.5	2.5	4	7	11	16	25	39	62	100	160	0.25	0.39	0.62	1	1.6	2.5	3.9
50	80	2	3	5	8	13	19	30	46	74	120	190	0.3	0.46	0.74	1.2	1.9	3	4.6
80	120	2.5	4	6	10	15	22	35	54	87	140	220	0.35	0.54	0.87	1.4	2.2	3.5	5.4
120	180	3.5	5	8	12	18	25	40	63	100	160	250	0.4	0.63	1	1.6	2.5	4	6.3
180	250	4.5	7	10	14	20	29	46	72	115	185	290	0.46	0.72	1.15	1.85	2.9	4.6	7.2
250	315	6	8	12	16	23	32	52	81	130	210	320	0.52	0.81	1.3	2.1	3.2	5.2	8.1
315	400	7	9	13	18	25	36	57	89	140	230	360	0.57	0.89	1.4	2.3	3.6	5.7	8.9
400	500	8	10	15	20	27	40	63	97	155	250	400	0.63	0.97	1.55	2.5	4	6.3	9.7
500	630	9	11	16	22	32	44	70	110	175	280	440	0.7	1.1	1.75	2.8	4.4	7	11
630	800	10	13	18	25	36	50	80	125	200	320	500	0.8	1.25	2	3.2	5	8	12.5
800	1000	11	15	21	28	40	56	90	140	230	360	560	0.9	1.4	2.3	3.6	5.6	9	14
1000	1250	13	18	24	33	47	66	105	165	260	420	660	1.05	1.65	2.6	4.2	6.6	10.5	16.5
1250	1600	15	21	29	39	55	73	125	195	310	500	780	1.25	1.95	3.1	5	7.8	12.5	19.5
1600	2000	18	25	35	46	65	92	150	230	370	600	920	1.5	2.3	3.7	6	9.2	15	23
2000	2500	22	30	41	55	78	110	175	280	440	700	1100	1.75	2.8	4.4	7	11	17.5	28
2500	3150	26	36	50	68	96	135	210	330	540	860	1350	2.1	3.3	5.4	8.6	13.5	21	33



Deviations in Commonly Used Fits

Deviations of Shafts to be Used in Commonly Used Fits (JIS B0401 extract)

Basic size step (mm)		Tolerance zone class of shaft (μm)															
>	≤	e9	f6	f7	f8	g5	g6	h5	h6	h7	h8	h9	js5	js6	js7	k5	k6
-	3	-14 -39	-6 -12	-6 -16	-6 -20	-2 -6	-2 -8	0 -4	0 -6	0 -10	0 -14	0 -25	±2	±3	±5	+4 0	+6 0
3	6	-20 -50	-10 -18	-10 -22	-10 -28	-4 -9	-4 -12	0 -5	0 -8	0 -12	0 -18	0 -30	±2.5	±4	±6	+6 +1	+9 +1
6	10	-25 -61	-13 -22	-13 -28	-13 -35	-5 -11	-5 -14	0 -6	0 -9	0 -15	0 -22	0 -36	±3	±4.5	±7	+7 +1	+10 +1
10	14	-32 -75	-16 -27	-16 -34	-16 -43	-6 -14	-6 -17	0 -8	0 -11	0 -18	0 -27	0 -43	±4	±5.5	±9	+9 +1	+12 +1
14	18																
18	24	-40 -92	-20 -33	-20 -41	-20 -53	-7 -16	-7 -20	0 -9	0 -13	0 -21	0 -33	0 -52	±4.5	±6.5	±10	+11 +2	+15 +2
24	30																
30	40	-50 -112	-25 -41	-25 -50	-25 -64	-9 -20	-9 -25	0 -11	0 -16	0 -25	0 -39	0 -62	±5.5	±8	±12	+13 +2	+18 +2
40	50																
50	65	-60 -134	-30 -49	-30 -60	-30 -76	-10 -23	-10 -29	0 -13	0 -19	0 -30	0 -46	0 -74	±6.5	±9.5	±15	+15 +2	+21 +2
65	80																
80	100	-72 -159	-36 -58	-36 -71	-36 -90	-12 -27	-12 -34	0 -15	0 -22	0 -35	0 -54	0 -87	±7.5	±11	±17	+18 +3	+25 +3
100	120																

In every step given in the table, the value on the upper side shows the upper deviation and the value on the lower side, the lower deviation.

Deviations of Holes to be Used in Commonly Used Fits. (JIS B0401 extract)

Basic size step (mm)		Tolerance zone class of hole (μm)																
>	≤	E7	E8	E9	F6	F7	F8	G6	G7	H6	H7	H8	H9	H10	JS6	JS7	K6	K7
-	3	+24 +14	+28 +14	+39 +14	+12 +6	+16 +6	+20 +6	+8 +2	+12 +2	+6 0	+10 0	+14 0	+25 0	+40 0	±3	±5	0 -6	0 -10
3	6	+32 +20	+38 +20	+50 +20	+18 +10	+22 +10	+28 +10	+12 +4	+16 +4	+8 0	+12 0	+18 0	+30 0	+48 0	±4	±6	+2 -6	+3 -9
6	10	+40 +25	+47 +25	+61 +25	+22 +13	+28 +13	+35 +13	+14 +5	+20 +5	+9 0	+15 0	+22 0	+36 0	+58 0	±4.5	±7	+2 -7	+5 -10
10	14	+50 +32	+59 +32	+75 +32	+27 +16	+34 +16	+43 +16	+17 +6	+24 +6	+11 0	+18 0	+27 0	+43 0	+70 0	±5.5	±9	+2 -9	+6 -12
14	18																	
18	24	+61 +40	+73 +40	+92 +40	+33 +20	+41 +20	+53 +20	+20 +7	+28 +7	+13 0	+21 0	+33 0	+52 0	+84 0	±6.5	±10	+2 -11	+6 -15
24	30																	
30	40	+75 +50	+89 +50	+112 +50	+41 +25	+50 +25	+64 +25	+25 +9	+34 +9	+16 0	+25 0	+39 0	+62 0	+100 0	±8	±12	+3 -13	+7 -18
40	50																	
50	65	+90 +60	+106 +60	+134 +60	+49 +30	+60 +30	+76 +30	+29 +10	+40 +10	+19 0	+30 0	+46 0	+74 0	+120 0	±9.5	±15	+4 -15	+9 -21
65	80																	
80	100	+107 +72	+126 +72	+159 +72	+58 +36	+71 +36	+90 +36	+34 +12	+47 +12	+22 0	+35 0	+54 0	+87 0	+140 0	±11	±17	+4 -18	+10 -25
100	120																	


In every step given in the table, the value on the upper side shows the upper deviation and the value on the lower side, the lower deviation.

Deep hole drilling head series

Single Tube System (STS) and Double Tube System (DTS)


Single Tube System (STS)

The STS may also be referred to as the BTA system in the deep hole drilling process. A large volume of coolant is pumped under high pressure to the cutting area in the workpiece. Chips are then forced out through the drill tube at the back and they do not touch workpiece allowing super surface finish. STS is a very good method to obtain holes of high productivity and high accuracy by using a dedicated drilling machine and a sealing with the workpiece.

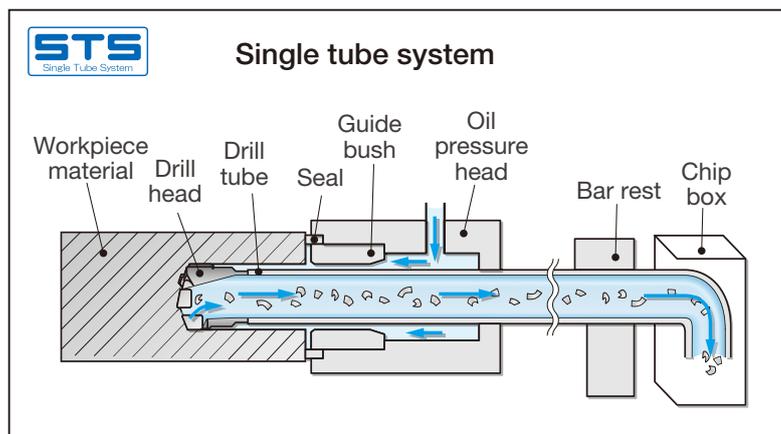

Double Tube System (DTS)

The DTS is characterized by its two tube construction and is therefore known as the double tube system. A sealing system and pressure head, which is required in the Single Tube System (STS) is not necessary for the DTS and it is therefore suitable for conventional general purpose machines such as lathes or machining centers. In general, because of less efficient chip evacuation than the STS the recommended max drilling depth is 1000mm. However, the unique DTC-R tube connector that is capable of supplying high pressure coolant can successfully achieve drilling depths of up to 2000 mm.


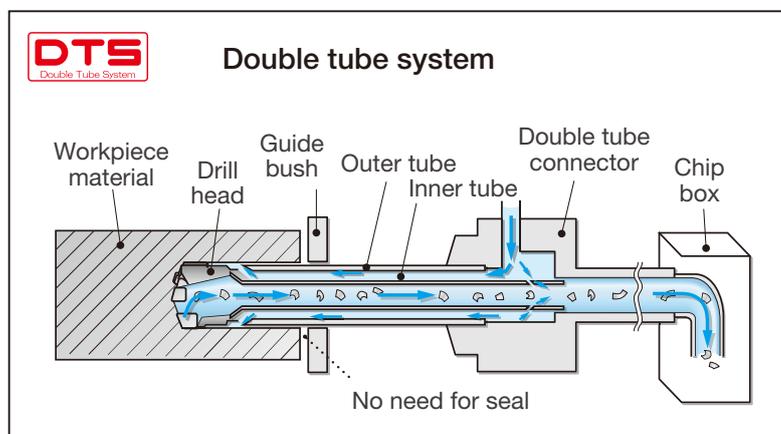


Deep hole drilling head series

Replacing guide pads

Guide pads are subject to wear, like inserts

- The guide pad can be used on two end faces.
- When the first face wears up to 70% of its width, reverse the guide pad to use the second face.
- Replace with a new guide pad when the second face wears out.

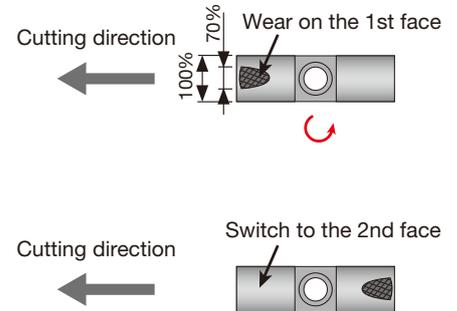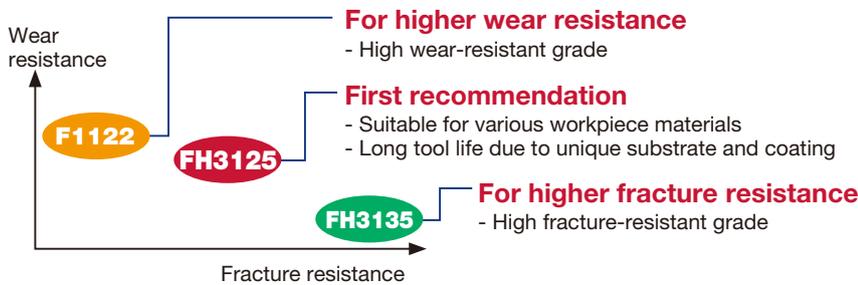


GP	06-085	F1122
Series	Size	Grade

GP	06-20-085	-DC	FH3135
Series	Size	Double chamfer	Grade

Replacing guide pads

Please be sure to use a wrench for a drill head to be clamped firmly.

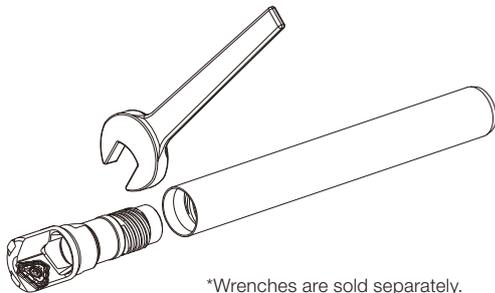

WHEN TO REPLACE THE FILLER WITH A GUIDE PAD AND PROTECTOR


Replace the filler with a guide pad and protector when following is required:



- Higher hole precision
- Deep holes with an L/D ratio of over 50:1
- Drilling parts with a center hole
- A large stock removal that exceeds the marginal DOC* of the peripheral edge as specified in the list below.

*Maximum DOC of peripheral insert

Cartridge	DOC (mm)	Guide pad
OZ402-04	6.4	GP08.../GP10...
OZ402-32	7.2	GP10.../GP14...
OZ402-43	10.4	GP14.../GP18...
OZ402-63	12.0	GP18...

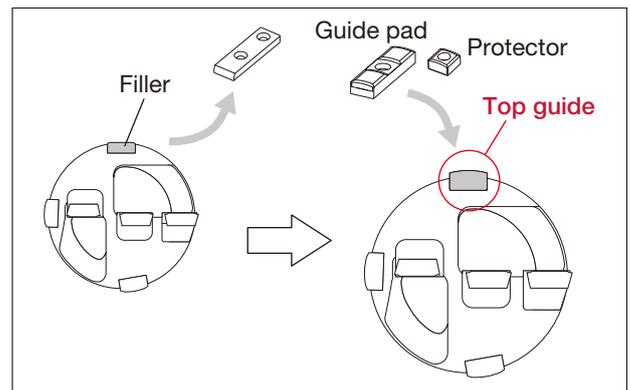

There is no pocket for the top guide pad furnished on the drill heads in diameters smaller than 92 mm.


Please contact your dealer for further information.




Drill diameter calibration

Please note that inserts must be ordered separately as they are not included in the UNIDEX tool. To achieve successful drilling with UNIDEX deep hole drill, it is critical to set and maintain adequate clearance between the tool diameter and guide pad diameter. After installing inserts, make sure to properly calibrate the tool diameter by following the steps outlined below. Always proceed with the same calibration procedures when the inserts are indexed or exchanged. This is especially important when using inserts from a new batch as they may greatly deviate the tool diameter.


⚠ Poor hole precision, abnormal wear of inserts or guide pads, or serious tool damage may occur if the insert and guide pad diameters are not properly calibrated.

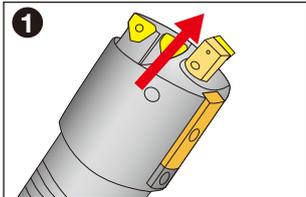

1 Remove the intermediate cartridge to avoid interference with the guide screw.

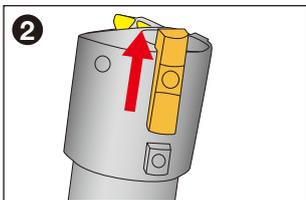


2 Move the dimensional guide pad to the measuring position parallel to the peripheral insert.
2-1 Unscrew the lock screw of the dimensional guide pad and slide the dimensional guide pad to the measuring position.
2-2 Tighten the lock screw to fix the guide pad.

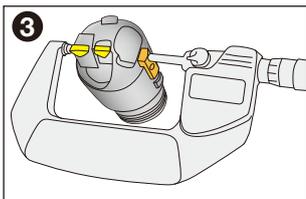


3 Measure the diameter with a micrometer. Use an h8 tolerance for the tool diameter unless otherwise required.


If the diameter at this point is out of tolerance, go to Step **4**.
 If the diameter at this point is in tolerance, go to Step **5**.

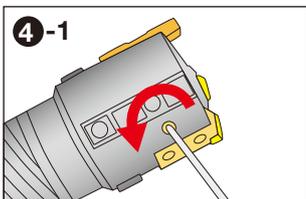

4 Adjust the peripheral cartridge
4-1 First loosen the lock screw of the peripheral cartridge and then slightly re-tighten the lock screw.

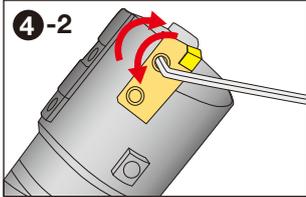


4-2 Adjust the cartridge by loosening or tightening the two adjusting screws on the cartridge and measure the diameter using a micrometer. Repeat steps until the required diameter is attained.

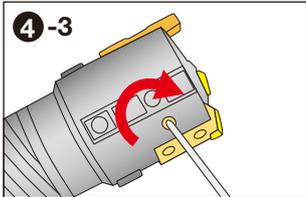

4-3 After attaining the required diameter, securely tighten the lock screw to fix the cartridge.

4-4 Measure the diameter with a micrometer to assure that the required diameter is attained. If not attained, start from Step **4-1**.

⚠ Make sure that the two adjusting screws on the peripheral cartridge are tightened. If the tool is used with either of the screws left loosened, the cartridge will move during machining due to cutting forces and may cause damage.

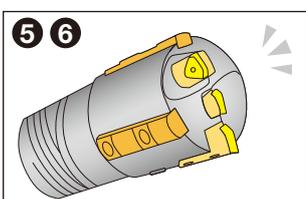

5 Return the dimensional guide pad to the original position and tighten the lock screw.

6 Replace the intermediate cartridge to the original position and tighten the lock screw.

⚠ Whenever inserts are indexed or exchanged, always make sure that all the screws on the drill are securely tightened. If chatter occurred during machining, it may cause the screws to be loosened.

Approximate Conversion Table of Hardness

● Approximate conversion value for Brinell hardness. *1




(The source: JIS HB Ferrous Materials and Metallurgy I -2005)

HB		HV	Rockwell *3				HS	Approx. tensile strength (MPa) *2	HB		HV	Rockwell *3				HS	Approx. tensile strength (MPa) *2
Brinell, 10mm ball, Load 3000kg			HRA	HRB	HRC	HRD			Brinell, 10mm ball, Load 3000kg			HRA	HRB	HRC	HRD		
Standard ball	Tungsten carbide ball								Standard ball	Tungsten carbide ball							
-	-	940	85.6	-	68.0	76.9	97	-	429	429	455	73.4	-	45.7	59.7	61	1510
-	-	920	85.3	-	67.5	76.5	96	-	415	415	440	72.8	-	44.5	58.8	59	1460
-	-	900	85.0	-	67.0	76.1	95	-	401	401	425	72.0	-	43.1	57.8	58	1390
-	(767)	880	84.7	-	66.4	75.7	93	-	388	388	410	71.4	-	41.8	56.8	56	1330
-	(757)	860	84.4	-	65.9	75.3	92	-	375	375	396	70.6	-	40.4	55.7	54	1270
-	(745)	840	84.1	-	65.3	74.8	91	-	363	363	383	70.0	-	39.1	54.6	52	1220
-	(733)	820	83.8	-	64.7	74.3	90	-	352	352	372	69.3	(110.0)	37.9	53.8	51	1180
-	(722)	800	83.4	-	64.0	73.8	88	-	341	341	360	68.7	(109.0)	36.6	52.8	50	1130
-	(712)	-	-	-	-	-	-	-	331	331	350	68.1	(108.5)	35.5	51.9	48	1095
-	(710)	780	83.0	-	63.3	73.3	87	-	321	321	339	67.5	(108.0)	34.3	51.0	47	1060
-	(698)	760	82.6	-	62.5	72.6	86	-	-	-	-	-	-	-	-	-	-
-	(684)	740	82.2	-	61.8	72.1	-	-	311	311	328	66.9	(107.5)	33.1	50.0	46	1025
-	(682)	737	82.2	-	61.7	72.0	84	-	302	302	319	66.3	(107.0)	32.1	49.3	45	1005
-	(670)	720	81.8	-	61.0	71.5	83	-	293	293	309	65.7	(106.0)	30.9	48.3	43	970
-	(656)	700	81.3	-	60.1	70.8	-	-	285	285	301	65.3	(105.5)	29.9	47.6	-	950
-	(653)	697	81.2	-	60.0	70.7	81	-	277	277	292	64.6	(104.5)	28.8	46.7	41	925
-	(647)	690	81.1	-	59.7	70.5	-	-	269	269	284	64.1	(104.0)	27.6	45.9	40	895
-	(638)	680	80.8	-	59.2	70.1	80	-	262	262	276	63.6	(103.0)	26.6	45.0	39	875
-	630	670	80.6	-	58.8	69.8	-	-	255	255	269	63.0	(102.0)	25.4	44.2	38	850
-	627	667	80.5	-	58.7	69.7	79	-	248	248	261	62.5	(101.0)	24.2	43.2	37	825
-	-	677	80.7	-	59.1	70.0	-	-	241	241	253	61.8	100.0	22.8	42.0	36	800
-	601	640	79.8	-	57.3	68.7	77	-	235	235	247	61.4	99.0	21.7	41.4	35	785
-	-	640	79.8	-	57.3	68.7	-	-	229	229	241	60.8	98.2	20.5	40.5	34	765
-	578	615	79.1	-	56.0	67.7	75	-	223	223	234	-	97.3	(18.8)	-	-	-
-	-	607	78.8	-	55.6	67.4	-	-	217	217	228	-	96.4	(17.5)	-	33	725
-	555	591	78.4	-	54.7	66.7	73	2055	212	212	222	-	95.5	(16.0)	-	-	705
-	-	579	78.0	-	54.0	66.1	-	2015	207	207	218	-	94.6	(15.2)	-	32	690
-	534	569	77.8	-	53.5	65.8	71	1985	201	201	212	-	93.8	(13.8)	-	31	675
-	-	553	77.1	-	52.5	65.0	-	1915	197	197	207	-	92.8	(12.7)	-	30	655
-	514	547	76.9	-	52.1	64.7	70	1890	192	192	202	-	91.9	(11.5)	-	29	640
(495)	-	539	76.7	-	51.6	64.3	-	1855	187	187	196	-	90.7	(10.0)	-	-	620
-	-	530	76.4	-	51.1	63.9	-	1825	183	183	192	-	90.0	(9.0)	-	28	615
-	495	528	76.3	-	51.0	63.8	68	1820	179	179	188	-	89.0	(8.0)	-	27	600
(477)	-	516	75.9	-	50.3	63.2	-	1780	174	174	182	-	87.8	(6.4)	-	-	585
-	-	508	75.6	-	49.6	62.7	-	1740	170	170	178	-	86.8	(5.4)	-	26	570
-	477	508	75.6	-	49.6	62.7	66	1740	167	167	175	-	86.0	(4.4)	-	-	560
(461)	-	495	75.1	-	48.8	61.9	-	1680	163	163	171	-	85.0	(3.3)	-	25	545
-	-	491	74.9	-	48.5	61.7	-	1670	156	156	163	-	82.9	(0.9)	-	-	525
-	461	491	74.9	-	48.5	61.7	65	1670	149	149	156	-	80.8	-	-	23	505
444	-	474	74.3	-	47.2	61.0	-	1595	143	143	150	-	78.7	-	-	22	490
-	-	472	74.2	-	47.1	60.8	-	1585	137	137	143	-	76.4	-	-	21	460
-	444	472	74.2	-	47.1	60.8	63	1585	131	131	137	-	74.0	-	-	-	450
-	-	474	74.3	-	47.2	61.0	-	1595	126	126	132	-	72.0	-	-	20	435
-	-	472	74.2	-	47.1	60.8	-	1585	121	121	127	-	69.8	-	-	19	415
-	-	474	74.2	-	47.1	60.8	63	1585	116	116	122	-	67.6	-	-	18	400
-	-	472	74.2	-	47.1	60.8	63	1585	111	111	117	-	65.7	-	-	15	385

Note :
 *1: This table is based on AMS Metals Handbook, the 8th Edition, Volume 1, and includes some information added to "Approx. tensile strength (MPa)," such as the values calculated in metric; and Brinell hardness that exceeds recommended values.
 *2: 1 MPa = 1 N/mm²
 *3: Figures in () are not commonly used. It's just reference.

Surface Roughness

(According to JIS B 0601, 2001 and its explanation.)

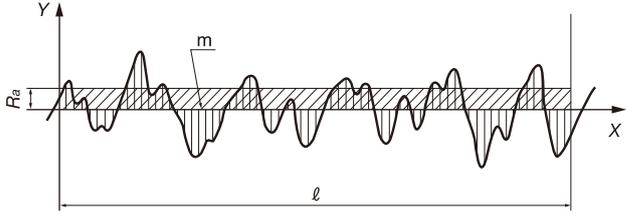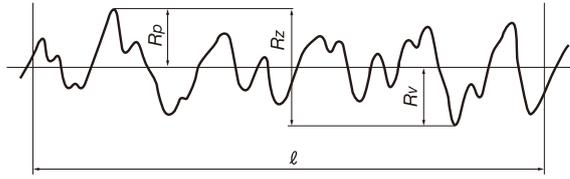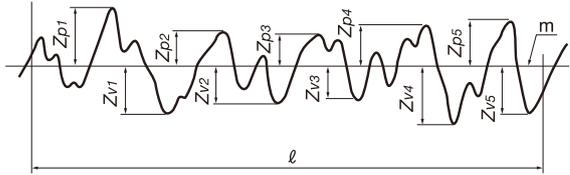Type	Symbol	How to determine	Example (Fig.)
Arithmetic mean roughness	Ra	<p>Ra means the value obtained by the following formula and expressed in micrometer (μm) when sampling only the reference length from the roughness curve in the direction of mean line, taking X-axis in the direction of mean line and Y-axis in the direction of longitudinal magnification of this sampled part and the roughness curve is expressed by $y=f(x)$:</p> $Ra = \frac{1}{\ell} \int_0^{\ell} f(x) dx$ <p>where, ℓ : reference length</p>	
Maximum height	Rz	<p>Rz shall be that only the reference length is sampled from the roughness curve in the direction of mean line, the distance between the top of profile peak line and the bottom of profile valley line on this sampled portion is measured in the longitudinal magnification direction of roughness curve and the obtained value is expressed in micrometer (μm).</p> $Rz = Rp + Rv$	
Ten point mean roughness	Rz_{JIS}	<p>Rz_{JIS} shall be that only the reference length is sampled from the roughness curve in the direction of its mean line, the sum of the average value of absolute values of the heights of five highest profile peaks (Zp) and the depths of five deepest profile valleys (Zv) measured in the vertical magnification direction from the mean line of this sampled portion and this sum is expressed in micrometer (μm)</p> $Rz_{JIS} = \frac{ Zp1 + Zp2 + Zp3 + Zp4 + Zp5 + Zv1 + Zv2 + Zv3 + Zv4 + Zv5 }{5}$	 <p>where, $Zp1, Zp2, Zp3, Zp4, Zp5$: altitudes of the heights of five highest profile peaks of the sampled portion corresponding to the reference length ℓ</p> <p>where, $Zv1, Zv2, Zv3, Zv4, Zv5$: altitudes of the depths of five deepest profile valleys of the sampled portion corresponding to the reference length ℓ</p>

Symbols of Metals

● Carbon steel and alloy steel for structural use

Type	Japan	International	Other countries				
	JIS		ISO	U.S.A. AISI SAE	Great Britain BS BS/EN	Germany DIN DIN/EN	France NF NF/EN
Carbon steel	S10C	C10	1010	C10 C10E C10R	C10E C10R	C10E C10R	-
	S15C	C15E4 C15M2	1015	C15 C15E C15R	C15E C15R	C15E C15R	-
	S20C	-	1020	C22, C22E C22R	C22 C22E C22R	C22 C22E C22R	-
	S25C	C25 C25E4 C25M2	1025	C25 C25E C25R	C25 C25E C25R	C25 C25E C25R	-
	S30C	C30 C30E4 C30M2	1030	C30 C30E C30R	C30 C30E C30R	C30 C30E C30R	30Г
	S35C	C35 C35E4 C35M2	1035	C35 C35E C35R	C35 C35E C35R	C35 C35E C35R	35Г
	S40C	C40 C40E4 C40M2	1039 1040	C40 C40E C40R	C40 C40E C40R	C40 C40E C40R	40Г
	S43C	-	1042 1043	080A42	-	-	40Г
	S45C	C45 C45E4 C45M2	1045 1046	C45 C45E C45R	C45 C45E C45R	C45 C45E C45R	45Г
	S48C	-	-	-	-	-	45Г
	S50C	C50 C50E4 C50M2	1049	C50 C50E C50R	C50 C50E C50R	C50 C50E C50R	50Г
	S53C	-	1050 1053	-	-	-	50Г
	S55C	C55 C55E4 C55M2	1055	C55 C55E C55R	C55 C55E C55R	C55 C55E C55R	-
	S58C	C60 C60E4 C60M2	1059 1060	C60 C60E C60R	C60 C60E C60R	C60 C60E C60R	60Г

Type	Japan	International	Other countries					
	JIS		ISO	U.S.A. AISI SAE	Great Britain BS BS/EN	Germany DIN DIN/EN	France NF NF/EN	Russia ГОСТ
Nickel chromium steel	SNC236	-	-	-	-	-	40XH	
	SNC415(H)	-	-	-	-	-	-	
	SNC631(H)	-	-	-	-	-	30XH3A	
	SNC815(H)	15NiCr13	-	15NiCr13	15NiCr13	15NiCr13	-	
	SNC836	-	-	-	-	-	-	
Alloy steel	Nickel chromium molybdenum steel	SNCM220	20NiCrMo2 20NiCrMoS2	8615 8617(H) 8620(H) 8622(H)	20NiCrMo2-2 20NiCrMoS2-2	20NiCrMo2-2 20NiCrMoS2-2	20NiCrMo2-2 20NiCrMoS2-2	-
		SNCM240	41CrNiMo2 41CrNiMoS2	8637 8640	-	-	-	-
	SNCM415	-	-	-	-	-	-	
	SNCM420(H)	-	4320(H)	-	-	-	20XH2M(20XHM)	
	SNCM431	-	-	-	-	-	-	
	SNCM439	-	4340	-	-	-	-	
	SNCM447	-	-	-	-	-	-	
	SNCM616	-	-	-	-	-	-	
	SNCM625	-	-	-	-	-	-	
	SNCM630	-	-	-	-	-	-	
	SNCM815	-	-	-	-	-	-	

Note: The above chart is based on published data and not authorized by each manufacturer.

● Alloy steel

Type	Japan	International	Other countries							
			JIS	ISO	U.S.A.		Great Britain	Germany	France	Russia
					AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	ГОСТ	
Alloy steel	Chromium steel	SCr415(H)	-	-	17Cr3 17CrS3	17Cr3 17CrS3	17Cr3 17CrS3	17Cr3 17CrS3	15X 15XA	
		SCr420(H)	20Cr4(H) 20CrS4	5120(H)	-	-	-	-	20X	
		SCr430(H)	34Cr4 34CrS4	5130(H) 5132(H)	34Cr4 34CrS4	34Cr4 34CrS4	34Cr4 34CrS4	34Cr4 34CrS4	30X	
		SCr435(H)	34Cr4 34CrS4 37Cr4 37CrS4	5132	37Cr4 37CrS4	37Cr4 37CrS4	37Cr4 37CrS4	37Cr4 37CrS4	35X	
		SCr440(H)	37Cr4 37CrS4 41Cr4 41CrS4	5140(H)	530M40 41Cr4 41CrS4	41Cr4 41CrS4	41Cr4 41CrS4	41Cr4 41CrS4	40X	
		SCr445(H)	-	-	-	-	-	-	45X	
	Chromium molybdenum steel	SCM415(H)	-	-	-	-	-	-	-	
		SCM418(H)	18CrMo4 18CrMoS4	-	18CrMo4 18CrMoS4	18CrMo4 18CrMoS4	18CrMo4 18CrMoS4	18CrMo4 18CrMoS4	20XM	
		SCM420(H)	-	-	708M20(708H20)	-	-	-	20XM	
		SCM430	-	4130	-	-	-	-	30XM 30XMA	
		SCM432	-	-	-	-	-	-	-	
		SCM435(H)	34CrMo4 34CrMoS4	4137(H)	34CrMo4 34CrMoS4	34CrMo4 34CrMoS4	34CrMo4 34CrMoS4	34CrMo4 34CrMoS4	35XM	
		SCM440(H)	42CrMo4 42CrMoS4	4140(H) 4142(H)	42CrMo4 42CrMoS4	42CrMo4 42CrMoS4	42CrMo4 42CrMoS4	42CrMo4 42CrMoS4	-	
	SCM445(H)	-	4145(H) 4147(H)	-	-	-	-	-		
	Manganese steel and manganese chromium steel	SMn420(H)	22Mn6(H)	1522(H)	-	-	-	-	-	
SMn433(H)		-	1534	-	-	-	-	30Г2 35Г2		
SMn438(H)		36Mn6(H)	1541(H)	-	-	-	-	35Г2 40Г2		
SMn443(H)		42Mn6(H)	1541(H)	-	-	-	-	40Г2 45Г2		
SMnC420(H)		-	-	-	-	-	-	-		
SMnC443(H)	-	-	-	-	-	-	-			
Aluminium chromium molybdenum steel	SACM645	41CrAlMo74	-	-	-	-	-	-		

● Stainless steel

Type	Japan	International	Other countries							
			JIS	ISO	U.S.A.		Great Britain	Germany	France	Russia
					UNS	AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	ГОСТ
Stainless steel	Austenitic	SUS201	X12CrMnNiN17-7-5	S20100	201				Z12CMN17-07Az	
		SUS202	X12CrMnNiN18-9-5	S20200	202	284S16				12X17T9AH4
		SUS301	X10CrNi18-8	S30100	301	301S21		X12CrNi17-7	Z11CN17-08	07X16H6
		SUS301L	X2CrNiN18-7					X2CrNiN18-7		
		SUS301J1						X12CrNi17-7		
		SUS302		S30200	302	302S25			Z12CN18-09	12X18H9
		SUS302B	X12CrNiSi18-9-3	S30215	302B					
		SUS303	X10CrNiS18-9	S30300	303	303S21		X10CrNiS18-9	Z8CNF18-09	
		SUS303Se		S30323	303Se	303S41				12X18H10E
		SUS303Cu								
		SUS304	X5CrNi18-9	S30400	304	304S31		X5CrNi18-10	Z7CN18-09	08X18H10
		SUS304L	X2CrNi18-9	S30403	304L	304S11		X2CrNi19-11	Z3CN19-11	03X18H11
		SUS304N1	X5CrNiN18-8	S30451	304N				Z6CN19-09Az	
		SUS304N2		S30452						
		SUS304LN	X2CrNiN18-9	S30453	304LN			X2CrNiN18-10	Z3CN18-10Az	
		SUS304J1								
		SUS304J2								
SUS304J3		S30431	S30431							
SUS305	X6CrNi18-12	S30500	305	305S19		X5CrNi18-12	Z8CN18-12	06X18H11		

Note: The above chart is based on published data and not authorized by each manufacturer.

Symbols of Metals

● Stainless steel

Type	Japan	International	Other countries						
	JIS		ISO	U.S.A.		Great Britain	Germany	France	Russia
		UNS		AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	ГОСТ	
Stainless steel	Austenitic	SUS305J1							
		SUS309S		S30908	309S			Z10CN24-13	
		SUS310S	X6CrNi25-21	S31008	310S	310S31		Z8CN25-20	10X23H18
		SUS315J1							
		SUS315J2							
		SUS316	X5CrNiMo17-12-2 X3CrNiMo17-12-3	S31600	316	316S31	X5CrNiMo17-12-2 X5CrNiMo17-13-3	Z7CND17-12-02 Z6CND18-12-03	
		SUS316F							
		SUS316L	X2CrNiMo17-12-2 X2CrNiMo17-12-3 X2CrNiMo18-14-3	S31603	316L	316S11	X2CrNiMo17-13-2 X2CrNiMo17-14-3	Z3CND17-12-02 Z3CND17-12-03	03X17H14M3
		SUS316N		S31651	316N				
		SUS316LN	X2CrNiMoN17-11-2 X2CrNiMoN17-12-3	S31653	316LN		X2CrNiMoN17-12-2 X2CrNiMoN17-13-3	Z3CND17-11Az Z3CND17-12Az	
		SUS316Ti	X6CrNiMoTi17-12-2	S31635			X6CrNiMoTi17-12-2	Z6CNDT17-12	08X17H13M2T
		SUS316J1							
		SUS316J1L							
		SUS317		S31700	317	317S16			
		SUS317L	X2CrNiMo19-14-4	S31703	317L	317S12	X2CrNiMo18-16-4	Z3CND19-15-04	
		SUS317LN	X2CrNiMoN18-12-4	S31753				Z3CND19-14Az	
		SUS317J1							
		SUS317J2							
		SUS317J3L							
		SUS836L		N08367					
	SUS890L	X1CrNiMoCu25-20-5	N08904	N08904	904S14		Z2NCU25-20		
	SUS321	X6CrNiTi18-10	S32100	321	321S31	X6CrNiTi18-10	Z6CNT18-10	08X18H10T	
	SUS347	X6CrNiNb18-10	S34700	347	347S31	X6CrNiNb18-10	Z6CNNb18-10	08X18H12B	
	SUS384	X3NiCr18-16	S38400	384			Z6CN18-16		
	SUSXM7	X3CrNiCu18-9-4	S30430	304Cu	394S17		Z2CNU18-10		
	SUSXM15J1		S38100				Z15CNS20-12		
	Austenitic Ferritic	SUS329J1		S32900	329				
		SUS329J3L	X2CrNiMoN22-5-3	S31803	31803		Z3CNDU22-05Az	08X21H6M2T	
		SUS329J4L	X2CrNiMoCuN25-6-3	S32250	32250		Z3CNDU25-07Az		
	Ferritic	SUS405	X6CrAl13	S40500	405	405S17	X6CrAl13	Z8CA12	
SUS410L						Z3C14			
SUS429			S42900	429					
SUS430		X6Cr17	S43000	430	430S17	X6Cr17	Z8C17	12X17	
SUS430F		X7CrS17	S43020	430F		X7CrS18	Z8CF17		
SUS430LX		X3CrTi17 X3CrNb17	S43035			X6CrTi17	Z4CT17		
SUS430J1L		X2CrTi17				X6CrNb17	Z4CNb17		
SUS434		X6CrMo17-1	S43400	434	434S17	X6CrMo17-1	Z8CD17-01		
SUS436L		X1CrMoTi16-1	S43600	436					
SUS436J1L									
SUS444		X2CrMoTi18-2	S44400	444			Z3CDT18-02		
SUS445J1									
SUS445J2									
SUS447J1			S44700						
SUSXM27			S44627				Z1CD26-01		
Martensitic	SUS403		S40300	403					
	SUS410	X12Cr13	S41000	410	410S21	X10Cr13	Z13C13		
	SUS410S	X6Cr13	S41008	410S	403S17	X6Cr13	Z8C12	08X13	
	SUS410F2								
	SUS410J1		S41025						
	SUS416	X12CrS13	S41600	416	416S21		Z11CF13		
	SUS420J1	X20Cr13	S42000	420	420S29	X20Cr13	Z20C13	20X13	
	SUS420J2	X30Cr13	S42000	420	420S37	X30Cr13	Z33C13	30X13	
	SUS420F	X29CrS13	S42020	420F			Z30CF13		
	SUS420F2								
	SUS429J1								
	SUS431	X19CrNi16-2	S43100	431	431S29	X20CrNi17-2	Z15CN16-02	20X17H2	
	SUS440A	X70CrMo15	S44002	440A			Z70C15		
	SUS440B		S44003	440B					
	SUS440C	X105CrMo17	S44004	440C			Z100CD17	95X18	
SUS440F		S44020	S44020						
Precipitation hardening type	SUS630	X5CrNiCuNb16-4	S17400	S17400			Z6CNU17-04		
	SUS631	X7CrNiAl17-7	S17700	S17700		X7CrNiAl17-7	Z9CNA17-07	09X17H7I0	
	SUS631J1								

Note: The above chart is based on published data and not authorized by each manufacturer.

● Heat resistant steel

Type	Japan	International	Other countries						
	JIS		ISO	U.S.A.		Great Britain	Germany	France	Russia
		UNS		AISI SAE	BS BS/EN	DIN DIN/EN	NF NF/EN	ГОСТ	
Heat resistant steel Austenitic	SUH31				331S42			Z35CNWS14-14	45X14H14B2M
	SUH35		S63008		349S52			Z52CMN21-09Az	
	SUH36				349S54		X53CrMnNi21-9	Z55CMN21-09Az	55X20T9 AH4
	SUH37		S63017		381S34				
	SUH38								
	SUH309		S30900	309	309S24			Z15CN24-13	
	SUH310		S31000	310	310S24		CrNi2520	Z15CN25-20	20X25H20C2
	SUH330		N08330	N08330				Z12NCS35-16	
	SUH660		S66286					Z6NCTV25-20	
	SUH661		R30155						
Heat resistant steel Ferritic	SUH21						CrAl1205		
	SUH409	X6CrTi12	S40900	409	409S19		X6CrTi12	Z6CT12	
	SUH409L	X2CrTi12						Z3CT12	
Heat resistant steel Martensitic	SUH446		S44600	446				Z12C25	15X28
	SUH1		S65007		401S45		X45CrSi9-3	Z45CS9	
	SUH3							Z40CSD10	40X10C2M
	SUH4				443S65			Z80CSN20-02	
	SUH11								40X9C2
	SUH600								20X12BHMБФП
	SUH616		S42200						

● Tool steel

Type	Japan	International	U.S.A.	Type	Japan	International	U.S.A.
	JIS				ISO		
Carbon tool steel	SK140	-	-	Alloy tool steel	SKS5	-	-
	SK120	C120U	W1-11 1/2		SKS51	-	L6
	SK105	C105U	W1-10		SKS7	-	-
	SK95	-	W1-9		SKS81	-	-
	SK90	C90U	-		SKS8	-	-
	SK85	-	W1-8		SKS4	-	-
	SK80	C80U	-		SKS41	-	-
	SK75	-	-		SKS43	105V	W2-9 1/2
	SK70	C70U	-		SKS44	-	W2-8 1/2
	SK65	-	-		SKS3	-	-
	SK60	-	-		SKS31	-	-
	High speed steel	SKH2	HS18-0-1		T1	SKS93	-
SKH3		-	T4	SKS94	-	-	
SKH4		-	T5	SKS95	-	-	
SKH10		-	T15	SKD1	X210Cr12	D3	
SKH40		HS6-5-3-8	-	SKD2	X210CrW12	-	
SKH50		HS1-8-1	-	SKD10	X153CrMoV12	-	
SKH51		HS6-5-2	M2	SKD11	-	D2	
SKH52		HS6-6-2	M3-1	SKD12	X100CrMoV5	A2	
SKH53		HS6-5-3	M3-2	SKD4	-	-	
SKH54		HS6-5-4	M4	SKD5	X30WCrV9-3	H21	
SKH55		HS6-5-2-5	-	SKD6	-	H11	
SKH56		-	M36	SKD61	X40CrMoV5-1	H13	
SKH57		HS10-4-3-10	-	SKD62	X35CrWMoV5	H12	
SKH58		HS2-9-2	M7	SKD7	32CrMoV12-28	H10	
SKH59	HS2-9-1-8	M42	SKD8	38CrCoW18-17-17	H19		
Alloy tool steel	SKS11	-	F2	SKT3	-	-	
	SKS2	-	-	SKT4	55NiCrMoV7	-	
	SKS21	-	-	SKT6	45NiCrMo16	-	

● Special use steel

Type	Japan	International	U.S.A.	Type	Japan	International	U.S.A.
	JIS				ISO		
Free cutting carbon steels	SUM11	-	1110	Free cutting carbon steels	SUM32	-	-
	SUM12	-	1109		SUM41	-	1137
	SUM21	9S20	1212		SUM42	-	1141
	SUM22	11SMn28	1213		SUM43	44SMn28	1144
	SUM22L	11SMnPb28	-				
	SUM23	-	1215				
	SUM23L	-	-				
	SUM24L	11SMnPb28	12L14				
	SUM25	12SMn35	-				
	SUM31	-	1117				
	SUM31L	-	-				
High carbon chromium				SUJ1	-	-	
				SUJ2	B1	52100	
				SUJ3	B2	ASTM A 485 Grade 1	
				SUJ4	-	-	
				SUJ5	-	-	

Note: The above chart is based on published data and not authorized by each manufacturer.

Symbols of Metals

● Casting or forging steel

Type	Japan	International	Other countries					
	JIS		ISO	U.S.A. AISI ASTM	Great Britain BS BS/EN	Germany DIN DIN/EN	France NF NF/EN	Russia ГОСТ
Casting steel	Carbon steel casting	SC	200-400, 230-450, 270-480	U-	A1, A2	GS-	GE230, GE280, GE320	-
	Steel casting for welded structure	SCW	200-400W, 230-450W, 270-480W, 340-550W	WCA, WCB, WCC	A4	-	GE230, GE280	-
	Heat resisting steel casting	SCH	GX40CrSi24, GX40CrNiSi22-10, GX40NiCrSi38-19	Grade HC, HD, HF	309C30, 310C45, 330C12	-	GX40NiCrNb45-35, GX50NiCrCoW35-25-15-5	-
	Steel casting for high temperature and high pressure service	SCPH	-	Grade WC1, WC6, WC9	A1, A2, B1, B2, B3, B4, B5, B7	G20Mo5, G17CrMo5-5, G17CrMo5-10	G17CrMo9-10, GX15CrMo5, GP240GH, GP280GH	-
Steel casting for low temperature and high pressure service	SCPL	-	Grade LCB, LC1, LC2, LC3	AL1, BL2	-	FB-M, FC1-M, FC2-M, FC3-M	-	
Casting iron	Grey iron casting	FC	100,150,200,250, 300,350	No.20,25,30,35, 40,45,50	EN-GJL-	EN-GJL-	EN-GJL-	-
	Spheroidal graphite iron casting	FCD	700-2, 600-3, 500-7, 450-10, 400-15, 400-18, 350-22	60-40-18, 65-45-12, 8-55-06, 100-70-03, 120-90-02	EN-GJS-	EN-GJS-	EN-GJS-	B4
	Austempered spheroidal graphite iron casting	FCAD	-	-	EN-GJS-	EN-GJS-	EN-GJS-	-
	Austenitic iron casting	FCA-FCDA-	L-, S-	Type 1, 2, Type D-2, D-3A Class 1, 2	F1, F2, S2W, S5S	GGL-, GGG-	L-, S-	-
Forging steel	Carbon steel forging for general use	SF	-	Class A, B, C, D, E, F	C22, C25, C30, C35, C40, C45, C50, C55, C60	P285, P355	P245, P280, P305	-
	Chromium molybdenum steel forgings for general use	SFCM	-	Class E, F, G, I Grade 3A, 4 Class G, J, K, L, M	-	-	-	-
	Nickel Chromium molybdenum steel forgings for general use	SFNCM	-	Class G, H, I, J Class 3A, 4, 5, 6 Class K, L, M	-	-	-	-

● Non-ferrous alloy

Type	Japan	International	Other countries		
	JIS		ISO	U.S.A. ASTM SAE	Great Britain BS BS/EN
Copper alloy casting	CAC101	-	-	-	-
	CAC102	-	-	-	-
	CAC103	-	-	-	-
Brass casting	CAC201	-	-	-	-
	CAC202	-	C85400	-	-
	CAC203	-	C85700	-	-
High strength brass casting	CAC301	-	C86500	-	-
	CAC302	-	C86400	-	-
	CAC303	-	C86200	-	-
	CAC304	-	C86300	-	-
Bronze casting	CAC401	-	C84400	-	-
	CAC402	-	C90300	-	-
	CAC403	-	C90500	-	-
	CAC406	-	C83600	-	-
	CAC407	-	C92200	-	-
Phosphor bronze casting	CAC502A	-	-	-	-
	CAC502B	-	C90700	-	-
	CAC503A	-	C90800	-	-
	CAC503B	-	-	-	-
Aluminium bronze casting	CAC701	-	C95200	-	-
	CAC702	-	C95400	-	-
	CAC703	-	C95410	-	-
	CAC704	-	C95800	-	-
Silicon bronze castings	CAC801	-	-	-	-
	CAC802	-	C87500	-	-
	CAC803	-	C87400	-	-
					CuZn16Si4-C(CC761S)

Note: The above chart is based on published data and not authorized by each manufacturer.






● Non-ferrous alloy


Type	Japan		Other countries					
	JIS	International ISO	U.S.A.	Great Britain	Germany	France		
			ASTM SAE	BS BS/EN	DIN DIN/EN	NF NF/EN		
Aluminium alloy	Aluminium alloy ingots for casting	AC1B	Al-Cu4MgTi	204.0		EN AC-2100		
		AC2A	-	-		-		
		AC2B	-	319.0		-		
		AC3A	-	-		EN AC-44100		
		AC4A	-	-		-		
		AC4B	Al-Si8Cu3	333.0		EN AC-46200		
		AC4C	Al-Si7Mg(Fe)	356.0		EN AC-42000		
		AC4CH	Al-Si7Mg0.3	A356.0		EN AC-42100		
		AC4D	-	355.0		EN AC-45300		
		AC5A	Al-Cu4Ni2Mg2	242.0		-		
		AC7A	-	514.0		-		
		AC8A	Al-Si12CuNiMg	-		EN AC-48000		
		AC8B	-	-		-		
		AC8C	-	332.0		-		
	AC9A	-	-		-			
	AC9B	-	-		-			
	Aluminium alloy die casting	ADC1	-	A413.0		-		
		ADC3	-	A360.0		-		
		ADC5	-	518.0		-		
		ADC6	-	-		-		
		ADC10	-	-		-		
		ADC10Z	-	A380.0		-		
		ADC12	-	-		-		
		ADC12Z	-	383.0		-		
	ADC14	-	B390.0		-			
	Magnesium alloy	Magnesium alloy casting	MC5	-	AM100A		-	
			MC6	-	ZK51A		-	
			MC7	-	ZK61A		-	
MC8			MgRE3Zn2Zr	EZ33A		EN MC65120		
MC9			MgAg3RE2Zr	QE22A		EN MC65210		
MC10			MgZn4RE1Zr	ZE41A		EN MC35110		
Magnesium alloy die casting		MD1A	-	AZ91A		G-A9Z1Y4		
		MDC1B	-	AZ91B		-		
		MDC1D	MgAl9Zn1(A)	AZ91D		EN MC21120		
		MDC2B	MgAl6Mn	AM60B		EN MC21320		
Type	Japan		Other countries					
	JIS	International ISO	U.S.A.	Great Britain	Germany	France		
			ASTM AA	BS BS/EN	DIN DIN/EN	NF NF/EN		
Aluminium alloy	Aluminium alloy extruded shapes	A5052S	-	5052		EN AW-5052		
		A5454S	-	5454		EN AW-5454		
		A5083S	AlMg4.5Mn0.7	5083		EN AW-5083		
		A5086S	-	5086		EN AW-5086		
		A6061S	AlMg1SiCu	6061		EN AW-6061		
		A6063S	AlMg0.7Si	6063		EN AW-6063		
		A7003S	-	-		EN AW-7003		
		A7N01S	-	-		-		
		A7075S	AlZn5.5MgCu	7075		EN AW-7075		

Note: The above chart is based on published data and not authorized by each manufacturer.





















Screws

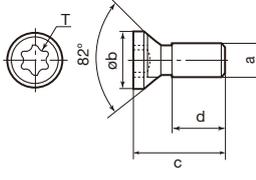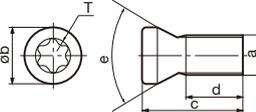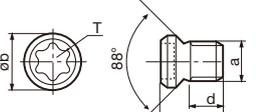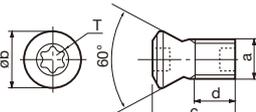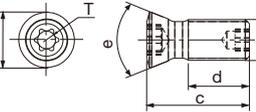Shape	Designation	Dimension (in)					T / f	Torque (lbs-ft)			
		a	øb	c	d	e					
 (Steel)	CSTA-NO2	#2-56UNC	0.157	0.236	0.157	82°	T8	0.96			
	CSTA-NO2S			0.197	0.118						
	CSTA-NO2L			0.315	0.236						
	CSTA-NO3	#3-48UNC	0.169	0.276	0.157	80°	T9	1.70			
	CSTA-NO5	#5-40UNC	0.197	0.315	0.197						
	CSTA-1.6	M1.6x0.35	0.098	0.122	0.035						
	CSTA-4	M4x0.7	0.276	0.394	0.303	82°	T15	2.58			
	CSTA-5	M5x0.8	0.283	0.591	0.433						
	CSTA-5S			0.472	0.315						
	CSTA-5SS			0.374	0.217						
	CSTA-5ST25			0.472	0.315						
	CSPA-5IP15			0.280	0.280				0.591	0.433	
	CSPA-5SIP15								0.472	0.315	
	CSPA-5IP20								0.591	0.433	
CSPA-5SIP20	0.472								0.315		
  CSP-2L033 type shown  CSTB-4SD type shown  CSTC-4L type shown (Steel)	CSP-2L033			M2x0.4	0.102				0.130	0.075	88°
	CSTB-2					0.106	0.130	0.055			
	CSTB-2L	0.205	0.130								
	CSTB-2L040	0.157	0.083								
	CSTB-2.2	M2.2x0.45	0.138	0.138	0.240	0.138	60°	T7	0.74		
	CSTB-2.2L038				0.150	0.087					
	CSTB-2.2S				0.181	0.079					
	CSTB-2.2L053DR				0.118	0.209				0.126	
	CSTB-2.2L053DL				0.118	0.209				0.126	
	CSTB-2.2R	0.122	0.240	0.146							
	CSTB-2.5	M2.5x0.45	0.138	0.138	0.236	0.134	T8	0.96			
	CSTB-2.5L046				0.128	0.181	0.102	T7	0.66		
	CSTB-2.5L080				0.138	0.138	0.315	0.213	T8	0.96	
	CSTB-2.5B						0.217	0.102			
	CSTB-2.5L054DR						0.213	0.114			
	CSTB-2.5L054DL						0.189	0.087			
	CSTB-2.5S	0.189	0.087	T8							
	CSTB-3	M3x0.5	0.161	0.161	0.315	0.177	T9	1.70			
	CSTB-3L042				0.165	0.028					
	CSTB-3L050				0.197	0.079					
	CSTB-3L081	M3.5x0.6	0.165	0.165	0.319	0.185	T8	0.96			
	CSTB-3S				0.161	0.236	0.098	T9	1.70		
	CSTB-3.5ST				0.209	0.492	0.157	T15	2.58		
	CSTB-3.5H				0.205	0.256	0.122				
	CSTB-3.5				0.217	0.217	0.217	0.331	0.169	T20	3.69
	CSTB-3.5T							0.394	0.217		
	CSTB-3.5TS							0.335	0.157		
	CSTB-3.5D							0.185	0.331		
	CSTB-3.5L110				M3.5x0.6	0.217	0.217	0.433	0.295	T9	1.70
	CSTB-3.5L115							0.189	0.453	0.276	T15
	CSTB-3.5L115-S	0.189	0.453	0.256							
	CSTB-3.5L	0.209	0.492	0.331				T10	1.84		
	CSTB-3.5L	0.209	0.492	0.331				T10	2.58		
	CSTB-4	M4x0.7	0.217	0.217	0.449	0.291	T15	2.58			
CSTB-4L060	0.236				0.079						
CSTB-4L085	0.334				0.137						
CSTB-4L090	0.224				0.354	0.217					
CSTB-4L115-S	0.217				0.453	0.256					
CSTB-4S	M4x0.5	0.217	0.217	0.315	0.157	T8	0.96				
CSTB-4ST				0.579							
CSTB-4SD				0.315							
CSTB-4M	M4x0.7	0.217	0.217	0.374	0.217	T15	2.58				
CSTB-4F	M4x0.5	0.276	0.579	0.343	T20	3.69					
CSTB-4TS	M4x0.7	0.256	0.354	0.177							
CSTB-5	M5x0.8	0.276	0.276	0.472			0.295				
CSTB-5S				0.374	0.197						
CSTB-5L105				0.413	0.240						




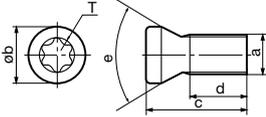
Shape	Designation	Dimension (in)						Torque (lbs-ft)
		a	øb	c	d	e	T / f	
	CSTB-5L120			0.472	0.256			
	CSTB-5L159		0.283	0.626	0.441			
	CSTB-5L163-S		0.272	0.642	0.445			4.43
	CSTC-4L055DR	M4x0.5	0.213	0.217	0.079	44°	T8/T10	0.96/1.84
	CSTC-4L055DL	M4x0.5	0.213	0.217	0.079		T8/T10	0.96/1.84
	CSTC-4L100DR	M4x0.7	0.213	0.394	0.234		T8/T10	0.96/1.84
	CSTC-4L100DL	M4x0.7	0.213	0.394	0.234		T8/T10	0.96/1.84
	CSPB-1.8L3.3	M1.8x0.35	0.094	0.130	0.039	60°	6IP	0.37
	CSPB-1.8L3.6			0.142	0.051			
	CSPB-1.8FL3.6	M1.8x0.2		0.142	0.063			
	CSPB-1.8FL4.3			0.169	0.091			
	CSPB-2L043	M2x0.4	0.106	0.169	0.098		6IP	0.52
	CSPB-2H		0.102	0.134	0.063			
	CSPB-2.2	M2.2x0.45	0.118	0.236	0.154		7IP	0.74
	CSPB-2.2SH			0.157	0.079			
	CSPB-2.5	M2.5x0.45	0.138	0.236	0.138		8IP	0.96
	CSPB-2.5S			0.165	0.067			
	CSPB-2.5SH			0.130	0.205	0.130	7IP	0.81
	CSPB-3.5			M3.5x0.6	0.205	0.354	0.220	15IP
	(Steel)	CSPB-3.5S	M3.5x0.6	0.205	0.256	0.122	60°	15IP
	CSPB-4	M4x0.7	0.217	0.457	0.291			
	CSPB-4S			0.323	0.157			
	CSPB-5	M5x0.8	0.276	0.472	0.295	20IP		
	VX040024A	M4	0.215	0.354	0.236	T15	3.32	
	VX040028A	M4	0.205	0.382	0.185	44°	T15	3.32
	SR M2.5X0.45-L6 IP7	M2.5x0.45	0.134	0.236	0.136	60°	7IP	0.89
	SR10503833L040	M2.5x0.45	0.128	0.157	0.079		T7	0.96
	SR14-500-L5.1	M4	0.217	0.201	0.091		T15	2.58
	SR 14-500-L7.0	M4	0.217	0.276	0.165		T15	2.58
	SR14-506	M4x0.7	0.224	0.315	0.185	T15	3.54	
	SR14-554/S	M4x0.7	0.224	0.366	0.197	T15	3.32	
	SR 14-560	M2.2x0.45	0.138	0.252	0.150	50°	T8	0.89
	SR 14-560/S	M2.5x0.45	0.138	0.211	0.108		T8	0.89
	SR 14-562	M3.5	0.189	0.344	0.219	60°	T10	2.36
	SR 14-562/S	M3.5	0.189	0.256	0.130		T10	2.36
	SR 14-571/S	M3.5x0.6	0.201	0.295	0.157		T10	2.36
	SR 14-591	M5x0.8	0.260	0.531	0.299		T20	3.69
	SR 34-508	M2.2x0.45	0.124	0.181	0.105	T7	0.66	
	SR 34-514	M2.5x0.45	0.130	0.205	0.126	T7	0.66	
	SR 76-943	M6	0.378	0.787	0.394	90°	T20	3.69
	SR 76-961	M5	0.260	0.531	0.289	61°	T15	2.58
	SR 76-963	M5	0.339	0.787	0.378	91°	T15	2.58
	SR 10503833-S	M2.5X0.45	0.128	0.150	0.069	60°	T7	0.66
	SR 114-018-L3.40	M2.5	0.142	0.132	0.079	56°	T6	0.52
	SM35-114-H0	M3.5x0.6	0.220	0.449	0.201	60°	T15	2.58
	SM40-143-H0	M4X0.7	0.220	0.563	0.331	61°	T15	2.58
	TS25F080A	M2.25X0.35	0.146	0.272	0.083	60°	T8	0.96
	TS25064I	M2.5X0.45	0.138	0.252	0.150	50°	T8	0.96
	TS30F100A	M3X0.35	0.181	0.327	0.087	60°	T10	1.84
	TS30085I/HG	M3X0.5	0.169	0.335	0.220		T9	1.70
	TS30100I/HG-P	M3x0.5	0.169	0.276	0.161		9IP	1.48
	TS30C72I	M3X0.5	0.165	0.283	0.177		T9	1.70
	TS40085I/HG	M4	0.224	0.335	0.177		T15	2.58
	TS35085I/HG	M3.5x0.6	0.209	0.335	0.169		T15	2.58
	TS40093I/HG	M4	0.224	0.366	0.169		T15	2.58
	TS40B100I	M4	0.236	0.394	0.236		R3.0	T15
	TS40F120A	M4X0.5	0.236	0.417	0.118	60°	T15	2.58
	TS45120I	M4.5	0.272	0.472	0.295	R3.5	T20	3.69
	TS50115I	M5	0.276	0.447	0.252	60°	T20	3.69
	TS50230D3	M5X0.8	0.276	0.906	0.531		T20	-
	TS50250D35	M5X0.8	0.295	0.984	0.571		T25	-
	TS50F160A	M5X0.5	0.276	0.547	0.138		T20	3.69
(Steel)								








Screws

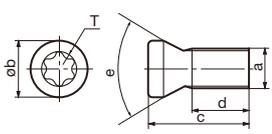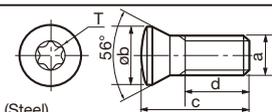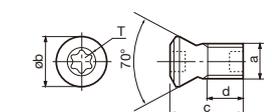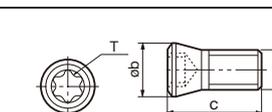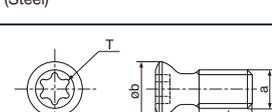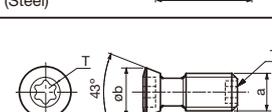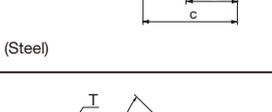Shape	Designation	Dimension (in)					T / f	Torque (lbs-ft)
		a	øb	c	d	e		
 (Steel)	TS60265D4	M6X1.0	0.315	1.043	0.610	60°	T25	-
	TS60285D42	M6X1.0	0.335	1.122	0.657		T25	-
	TS60320D5	M6X1.0	0.374	1.220	0.709		T25	-
	TS60F200A	M6X0.75	0.323	0.657	0.177		T20	5.16
	TS70F250A	M7X0.75	0.394	0.827	0.220		T25	5.16
	TS80340D6	M8X1.25	0.394	1.339	0.787		T25	-
	TS80F300A	M8X1.0	0.472	0.984	0.287		T30	7.38
 (Steel)	CSPD-1.8S	M1.8x0.35	0.094	0.130	0.055		6IP	0.52
	CSTD-3T	M3x0.5	0.169	0.276	0.177		T10	1.84
	CSPD-3				0.165		10IP	1.84
 (Steel)	CSTB-4.5L110P	M4.5X0.75	0.260	0.461	0.276		T15	2.58
 (Steel)	SRM5X0.8IP20X+ACROLYTE	M5X0.8	0.362	0.591	0.386		20IP	5.53
 (Steel)	CSTC-2	M2x0.4	0.122	0.201	-		T6	0.52
 (Steel)	CSTR-4L100	M4x0.7	0.224	0.394	0.217		T15	2.58
 (Steel)	SR16-212-01397	M5x0.8	0.252	0.492	0.268		T20/T10	1.84
	SR16-212-01397L							
 (Steel)	CST-3.5	M3.5X0.6	0.236	0.189	-		T9	1.70
	CST-3.5S			0.138	-			
	CST-5	M5x0.8	0.394	0.709	0.512		T25	3.69
	CST-5S			0.472	0.276			
	CSTF-2L055-S	M2x0.4	0.106	0.217	0.150		T6	0.52

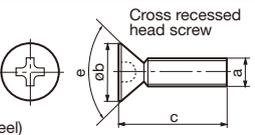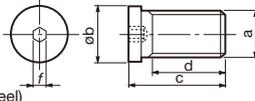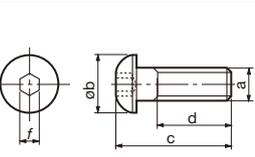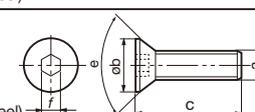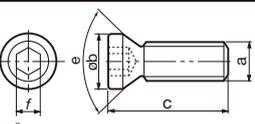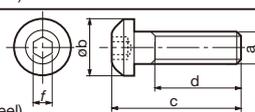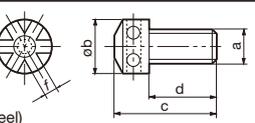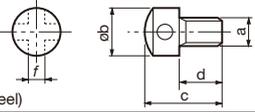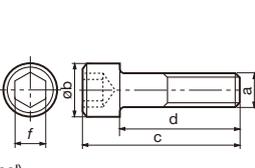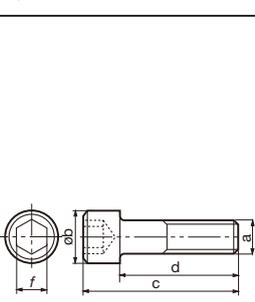
Shape	Designation	Dimension (in)						Torque (lbs-ft)
		a	ob	c	d	T / f	e	
 (Steel)	SM2.5x0.45x8	M2.5x0.45	0.197	0.315	-	-	90°	-
	SM2.5x0.5x8	M2.5x0.5	0.197	0.315	-	-	90°	-
	SM3x0.5x6	M3x0.5	0.236	0.236	-	-	90°	-
	SM3x0.5x8			0.315	-	-	90°	-
	SM3x0.5x10			0.394	-	-	90°	-
 (Steel)	MSP-5	M5x0.8	0.240	0.311	0.193	2	1.11	
	MSP-6.3	M6.3x1	0.303	0.500	0.390	2.5	2.21	
 (Steel)	BHM3-8	M3x0.5	0.217	0.394	0.315	2	1.11	
	BHM4-8	M4x0.7	0.276	0.417		2.5	1.62	
	BHM4-10			0.496	0.394			
	BHM5-14	M5x0.8	0.354	0.693	0.551	3	2.21	
	BHM6-20-A	M6x1.0	0.413	0.945	0.787	4	3.69	
	BHM8-25U	M8	0.551	1.154	0.984	5	6.27	
	BHM8-30U			1.350	1.181			
 (Steel)	CSHM-3-8	M3	0.236	0.315	-	2	90°	1.11
 (Steel)	CSHB-4-A	M4	0.217	0.433	-	T15	60°	1.48
	CSHB-6	M6	0.335	0.748	-	4	60°	3.69
	CSHB-6-A	M6	0.335	0.748	3.69			
 (Steel)	RT-1	M6	0.394	0.886	0.551	4	3.69	
	RT-2	M8	0.512	1.220	0.787	5	6.27	
 (Steel)	ASM6	M6	0.394	0.709	0.472	3	-	
	AJM5F	M5x0.5	0.354	0.512	0.315	2	-	
	AJM5	M5x0.8	0.354	0.512	0.315	2	-	
 (Steel)	ASM34S	M3	0.189	0.315	0.197	2	-	
	ASM34L			0.433	0.315		-	
	ASM54	M5x0.8	0.354	0.551	0.354	3	-	
 (Steel)	CHHM3.5-10	M3.5x0.6	0.236	0.531	0.394	3	2.21	
	CHHM4-10	M4x0.7	0.276	0.551				
	CHHM5-14	M5x0.8	0.335	0.748	0.551	4	3.69	
	CHHM5-18			0.906	0.709			
	CHHM6-15	M6	0.394	0.827	0.591	5	6.27	
	CHHM6-20			1.024	0.787			
	CHHM6-25			1.220	0.984			
 (Steel)	CM3X0.5X6	M3x0.5	0.217	0.354	0.236	2.5	1.62	
	CM3X0.5X10			0.512	0.394			
	CM4X0.7X10			0.551	0.394			
	CM4X0.7X12	M4x0.7	0.276	0.630	0.472	3	2.21	
	CM4X0.7X14			0.709	0.551			
	CM4X0.7X15			0.748	0.591			
	CM4X0.7X20			0.945	0.787			
	CM5X0.8X8	M5x0.8	0.335	0.512	0.315	4	3.69	
	CM5X0.8X10-A			0.591	0.394			
	CM5X0.8X12			0.669	0.472			
	CM5X0.8X12-A			0.669	0.472			
	CM5X0.8X14			0.709	0.551			
	CM5X0.8X16			0.827	0.630			
	CM5X0.8X16-A			0.827	0.630			
	CM5X0.8X18			0.906	0.709			
	CM5X0.8X20-A			0.984	0.787			
	CM5X0.8X25-A			1.181	0.984			


Screws

Shape	Designation	Dimension (in)							Torque (lbs-ft)				
		a	øb	c	d	e	f	g					
 <p>Hex. socket head screw (JISB1176)</p>  <p>CM***H</p>	CM6X1X16-A	M6x1.0	0.394	0.866	0.630	0.197		6.27					
	CM6X1X20-A			1.024	0.787								
	CM6X1X25-A			1.220	0.984								
	CM6X1.0X40-A			1.811	1.575								
	CM6X10			0.630	0.394								
	CM6X16			0.866	0.630								
	CM6X20	1.024	0.787	M6	0.394	0.197		6.27					
	CM6X25	1.220	0.984										
	CM6X30-S	1.417	1.181										
	CM8X1.25X20-A	1.102	0.787						M8x1.25	0.512	0.236		18.44
	CM8X1.25X25-A	1.299	0.984										
	CM8X30H	1.417	1.181										
	CM10X30H	M10x1.5	0.630	1.496	1.181	0.236		29.50					
	CM12X30H	M12x1.75	0.709	1.575		0.315		51.63					
	CM16X40H	M16x2	0.945	2.126	1.575	0.394		73.75					
	CM16x75	M16	0.945	3.583	2.953	0.551		73.75					
	CM16x120	M16	0.945	5.354	4.724	0.551		73.75					
	CM16x140	M16	0.945	6.142	5.512	0.551		73.75					
	CM20x80	M20	1.181	3.937	3.150	0.669		110.63					
	CM20x120	M20	1.181	5.512	4.724	0.669		110.63					
	CM20x150	M20	1.181	6.693	5.906	0.669		110.63					
	CAP-CM12x1.75x50	M12	0.709	2.441	1.969	0.394		51.63					
	CAP-CM16X2.0X55	M16	0.945	2.795	2.165	0.551		29.50					
	CAP-CM20X2.5X50	M20	1.181	2.756	1.969	0.669		73.75					
	C0.375X1.125H	3/8-24UNF	0.562	1.500	1.125	0.219		25.81					
	C0.500X1.375H	1/2-20UNF	0.750	1.875	1.375	0.313		51.63					
	SD06-A3	M10x1.5	0.630	2.756	2.362	0.315		29.50					
	SRM6X16DIN912-12.9	M6x1	0.394	0.866	0.630	0.197							
	VC00TEDI12040F	M12	1.024	2.008	1.575	0.315		44.25					
	VC00TEDI20040F	M20	1.929	1.969	1.358	0.472		110.63					
VC00TANG16040F	M16	1.811	1.831	1.299	0.394		44.25						
SD08-98	M12x1.75	0.709	3.031	2.559	0.394		51.63						
LHM12x1.75x30-C	M12	0.709	1.453	1.181	0.315		51.63						
VC004762110035F	M10	0.630	1.772	1.378	0.315		44.25						
FCS3	M3x0.5	0.217	0.630	0.472	0.098								
(Steel)	FCS6	M6x1	0.394	1.024	0.787	0.197							
 <p>FSHM*-H</p>	FSHM8-30	M8x1.25	0.433	1.181	1.063	0.197		18.44					
	FSHM8-30H							18.44					
	FSHM10-40	M10	0.551	1.575	1.437	0.236		29.50					
	FSHM10-40H							29.50					
 <p>SHCM4-H</p>	SHCM4-10	M4x0.7	0.236	0.551	0.394	0.118		2.21					
	SHCM4-12			0.630	0.472								
	SHCM4-16			0.787	0.630								
(Steel)	CTS-M6	M6x1	0.394	0.984	0.748	0.157		3.69					
(Steel)	RSFTS-050M	M10	0.984	2.047	1.673	0.236							




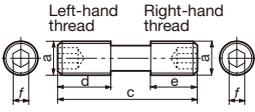
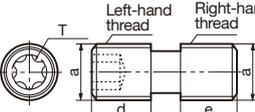
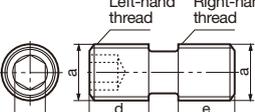
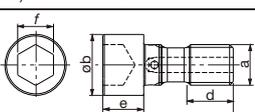
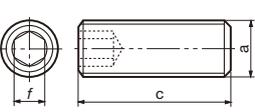

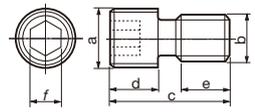
Shape	Designation	Dimension (in)						Torque (lbs-ft)
		a	øb	c	d	e	T / f	
 (Steel)	MCS520-2.5	M5x0.8		0.787	0.276	0.236	0.098	2.21
	MCS620-3	M6x1			0.276	0.118	4.43	
	MCS625-3			0.984	0.394			0.315
	MCS825-4	M8x1			0.492	0.157	5.90	
	MCS828-4			1.122	0.472			0.413
	NDS-8A			1.181	0.453			0.453
	NDS-8S	M8x1.25		0.787	0.315	0.315		
	RSRGR5M40	M4x0.5		0.354	0.144	0.164	T8	0.96
	SR PS 118-0273	M10		1.575	0.650	0.591	0.197	29.50
 (Steel)	DS-5T	M5x0.8		0.472	0.197	0.197	T10	2.58
	DS-6T	M6		0.591	0.236	0.236	T15	2.58
	DS-6P	M6x1		0.827	0.276	0.276	15IP	4.43
	FDS-8ST	M8x1		0.787	0.315	0.315	T27	7.38
	FDS-8ST-18			0.709		0.236		
 (Steel)	DS-6	M6x1		0.591	0.236	0.236	0.118	4.43
	DS-8	M8x1.25		0.630	0.276	0.276	0.157	5.90
	DS-8S			0.512	0.217	0.217		
	DS-10	M10x1.5		1.024	0.394	0.472	0.197	5.90
	FDS-6Z	M6x0.75		0.807		0.217	0.118	4.43
	FDS-8	M8x1		1.024	0.315	0.394	0.157	5.90
	FDS-8S			0.787		0.315		
	FDS-8SS			0.728		0.256		
	 (Steel)	SS100	1/4-20UNC			0.750		
S-412		10-32UNF			0.750			
 (Steel)	SHM8x1.25x35-C	M8	13	1.693	0.906	0.315	0.236	18.44
	SHM10x1.5x30-C	M10	16	1.575	0.669	0.394	0.315	29.50
	SHM16x2x35-C	M16	24	2.008	0.709	0.630	0.551	73.75
	SHM20x2.5x40-C	M20	30	2.283	0.787	0.709	0.669	110.63
	 Hex. socket screw (Flat end)(JISB1177)	SSHM2.5-3	M2.5		0.118			0.059
SSHM3-3		M3		0.118				
SSHM3-4				0.157				
SSHM3-6		M4		0.236			0.079	1.11
SSHM4-4				0.157				
SSHM4-5				0.197				
SSHM4-6				0.236				
SSHM4-8				0.315				
SSHM4-10				0.394				
SSHM4-14				0.551				
SSHM5-6		M5		0.236			0.098	1.48
SSHM5-10				0.394				
SSHM5-16				0.630				
SSHM6-12		M6		0.472			0.118	2.21
SSHM6-16				0.630				
SSHM6-18				0.709				
SSHM6-20				0.787				
SSHM8-8			M8		0.315			
SSHM8-10				0.394				
SSHM8-12				0.472				
SSHM8-14		0.551						
SSHM8-16		0.630						
SSHM8-18		0.709						
 Hex. socket screw (Cylindrical end) (JISB1177)	M5x7	M5	3.5	0.276	0.049	-	0.098	1.48
	M5x8			0.315		-		
	M5x10			0.394		-		
	M6x30	M6	4	1.181	0.059	-	0.118	2.21
 (Steel)	JDS-3525	M3.5x0.35	M2.5 x0.45	0.295	0.118	0.098	0.079	0.74
	JDS-5040	M5x0.5	M4 x0.7	0.394	0.157	0.157	0.098	0.74

Screws

Shape	Designation	Dimension (in)					T / f	Torque (lbs-ft)
		a	b	c	d	e		
 <p>LCS2 has a hex. socket in threaded end only.</p>	LCS2	M5	0.197	0.551	0.256		0.079	1.11
	LCS3	M6	0.236	0.669				
	LCS3B			0.591			0.098	1.48
	LCS4	M8	0.315	0.827	0.378	0.118	2.21	
	LCS4K			0.689				
	LCS4CA			0.256				
	LCS5			0.984				
	LCS5CA			0.807	0.335			
	LCS6	M10	0.386	1.071	0.390		0.157	3.69
	LCS8	M12	0.465	1.417	0.504		0.197	5.90
LCS8C	M10	0.386	1.189	0.524		0.157	3.69	
(Steel)	LCS22	M5	M5	0.394	0.185		0.079	1.11
	LCS22A	M6	M6	0.421				
	LCS23A	M5	M5	0.516	0.201		0.098	1.48
	LCS33	M5	M5	0.472	0.244		0.079	1.11
	LCS43	M6	M6	0.531	0.287		0.098	1.48
	(Steel)	DTS5-3.5	M5	0.248	0.341	M3.5		0.138
DTS5-3.5SS		0.268						
DTS5-3.5S		0.276						
DTS6-4		M6	0.303	0.402	M4		0.157	3.69
DTS6-4.5			0.295	0.394	M4.5		0.177	3.69
(Steel)	DLCS33	M5	0.354	1.240	0.394		0.118	2.21
	DLCS43	M6	0.472	1.339	0.374		0.157	3.69
	DLCS54	M8x1	0.551	1.614	0.433			5.16
	DLCS64	M10x1	0.630	1.969	0.591		0.197	5.90
(Steel)	ACS-5W	M5	0.315	0.787	0.335		T15	2.95
	ACS-6W	M6	0.394	1.024	0.476		T20	4.72
(Steel)	ACS3	M5x0.8	0.295	1.008	0.472 - 0.591		0.118	2.95
	ACS4	M6x1	0.354	1.091	0.551 - 0.669		0.157	5.16
(Steel)	WCS3	M6	0.374	0.886	0.315		0.118	2.21
(Steel)	PT1/4GN		0.519	0.394	-		0.236	7.01
	1/8-28		0.383	0.276	-		0.197	5.90
(Steel)	LS-8	M8	0.236	1.299	0.787		0.157	3.69
(Steel)	CCS4-A							
	BH5-10-A							
	BH4-10-A							
	BH-40050-A							
	TMBA-M10	M10x1.5	1.063	1.181	0.827		0.315	29.50
(Steel)	TMBA-M12	M12x1.75	1.299	1.417	1.024		0.394	51.63
	TMBA-M12H	M12x1.75		1.358			0.315	
	TMBA-M16	M16x2	1.575	1.969	1.575		0.551	73.75
	TMBA-M16H	M16x2						
	TMBA-M20	M20x2.5	1.969	2.205	1.654		0.669	110.63
	TMBA-M20H	M20x2.5						
	TMBA-M24	M24x3	2.559	2.717	2.165		0.748	110.63
	TMBA-M24H	M24x3						
	TMBA-0.500H	1/2-20UNF	1.299	1.335	1.000		0.313	51.63
	TMBA-0.6255.375H	5/8-11UNF	1.484	2.256	1.75		0.313	
TMBA-0.750H	3/4-16UNF	1.969	2.294	1.861		0.500	110.63	
(Steel)	SR-10400611	M4X0.5		0.260	0.118	1	0.079	

Shape	Designation	Dimension (in)			Torque (lbs-ft)
		a	øb	øc	
	SCR-TRM-T5	1.031	0.228	0.169	5.16 - 5.90
	SCR-TRM-T6	1.043	0.248	0.189	5.90 - 7.38
	SCR-TRM-T7	1.102	0.291	0.228	9.59 - 11.06
	SCR-TRM-T8	1.248	0.386	0.248	12.54 - 14.75
	SCR-TRM-T9	1.358	0.461	0.264	15.49 - 16.96













Shims

Shape	Designation	Dimension (in)				
		a	b	c	ød	
	AST322	0.366	0.520	0.126	0.173	
	AST422	0.492	0.709			
	MST-322	0.358	0.508	0.128	0.228	
	MST-432	0.492	0.705	0.189	0.287	
	MST-533	0.614	0.874		0.382	
	MST-644	0.740	1.047	0.252	0.445	
	LST317	0.366	0.520	0.106	0.197	
	LST42	0.492	0.709	0.126	0.264	
	LST53	0.618	0.878	0.189	0.303	
	LST42K	0.429	0.614	0.126	0.264	
	LST317CA	0.366	0.520	0.106	0.197	
	LST42CA	0.492	0.709	0.126	0.264	
	ELST42	0.453	0.650	0.126	0.256	
	ELST317	0.335	0.472	0.106	0.193	
	ELST317BR					
	ELST317BL					
	PAT-32	0.323	0.461	0.126	0.138	
	*PAT-53	0.528	0.780	0.189	0.197	
	NAT-32	0.374	0.528	0.126	0.138	
	NAT-42E	0.488	0.701		0.122	
	LST317BR	0.366	0.520	0.106	0.197	
	LST317BL					
	SST32	0.335	0.469	0.126	0.213	
	LST33	0.433	0.624	0.187	0.173	













Note: * marked shims are made of steel.


















Shims


Shape	Designation	Dimension (in)				
		a	b	c	ød	e
 (D30)	ASS422	0.492		0.126	0.173	
	CS44-A			0.185		
 (D30)	ASS533	0.618		0.189	0.217	
	ASS634	0.744				
 (D30)	ELSS32	0.335		0.126	0.193	
	LSS33	0.366		0.169	0.197	
	ELSS42	0.461		0.126	0.256	
	LSS42	0.492			0.264	
	ELSS53	0.579		0.189	0.315	
	LSS53	0.618			0.303	
	ELSS63	0.705			0.382	
	LSS63	0.744				
	ELSS84	0.953		0.252	0.508	
	LSS84	0.992			0.516	
 (D30)	NAS-42	0.500		0.126	0.138	
	NAS-04	1.240		0.252	0.358	
 (D30)	MSS-432	0.492		0.189	0.287	
	MSS-442			0.252		
 (D30)	SSS32	0.335		0.126	0.213	
 (D30)	LSS42BR	0.492		0.126	0.264	
	LSS42BL					
 (D30)	PAS-32	0.323		0.126	0.118	
	PAS-42	0.449			0.138	
	*PAS-63	0.669		0.189	0.197	
 (D30)	LSS42CA	0.492		0.126	0.264	8°
	LSS53CA	0.618		0.189	0.303	10°
 (D30)	FSSA1102	0.457		0.079	0.217	13°
 (D30)	FSSP1102	0.433		0.079	0.217	17°
 (D30)	ASC322	0.366		0.126	0.173	
	ASC422	0.492				
	ASC533	0.618		0.189	0.217	
	ASC634	0.744				
	CC44-A	0.492				

Note: * marked shims are made of steel.

Shape	Designation	Dimension (in)				
		a	b	c	ød	e
 (D30)	MSC-432	0.492		0.189	0.287	
	MSC-442			0.252		
	MSC-533	0.614		0.189	0.382	
	MSC-543			0.252		
	MSC-634	0.740			0.445	
 (D30)	ELSC32	0.335		0.126	0.244	
	LSC42	0.492			0.256	
	ELSC42	0.461		0.189	0.303	
	LSC53	0.618			0.319	
	ELSC53	0.579			0.382	
	ELSC63	0.705				
	LSC63	0.744				
	LSC317	0.366		0.106	0.197	
 (D30)	SSC32	0.335		0.126	0.213	
	SSC4T3	0.449		0.157	0.260	
 (D30)	SSC4T3-P	0.449		0.157	0.260	5°
	SSC54-P	0.528				5°
 (D30)	LSC42CA	0.492		0.126	0.264	8°
	LSC53CA	0.618		0.189	0.303	10°
 (D30)	LSC42BR	0.492		0.126	0.264	
	LSC42BL					
 (D30)	ZSA1102	0.413	11	0.079	0.216	11°
	ZSA1502	0.614	12.4		0.236	11°
 (D30)	ASD322	0.366		0.126	0.173	
	ASD423	0.492		0.126	0.173	
	ASD432	0.492		0.189	0.173	
	CD44-A	0.492		0.185		
 (D30)	ELSD32	0.335		0.126	0.193	
	ELSD42	0.461			0.256	
	LSD42	0.492		0.189	0.264	
	LSD42A					
	LSD43					
LSD43A						
 (D30)	MSD-322	0.366		0.126	0.228	
	MSD-432	0.492		0.189	0.287	
	MSD-442			0.252		
 (D30)	SSD32	0.335		0.126	0.213	
 (D30)	ELSD317BR	0.335		0.106	0.193	
	ELSD317BL					
	LSD42BR	0.492		0.126	0.264	
	LSD42BL					


Shims

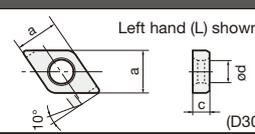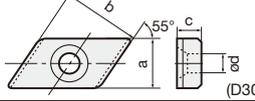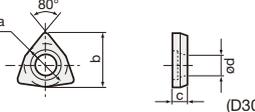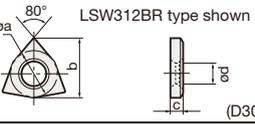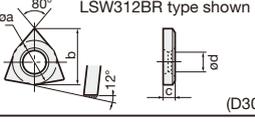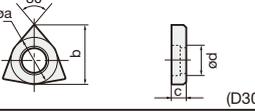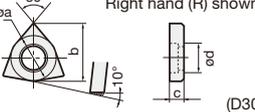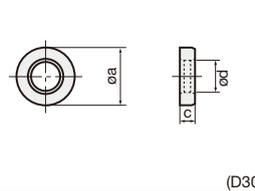
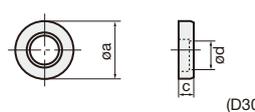

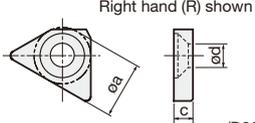
Shape	Designation	Dimension (in)				
		ϕa	b	c	ϕd	
 <p>Left hand (L) shown</p>	LSZ42BR	0.492		0.126	0.264	
	LSZ42BL					
	ASV322	0.366		0.126	0.173	
	CV34-A	0.366		0.185		
	MSV-322	0.365		0.126	0.228	
	SSV32	0.331			0.213	
	SSV42	0.433			0.248	
 <p>Left hand (L) shown</p>	CSK54R	0.370	0.583	0.189	0.138	
	CSK54L					
	ASW322	0.367	0.453	0.126	0.173	
	ASW422	0.492	0.598			
 <p>LSW312BR type shown</p>	LSW312	0.367	0.453	0.106	0.197	
	LSW42	0.492	0.610	0.126	0.264	
 <p>LSW312BR type shown</p>	LSW312BR	0.367	0.453	0.106	0.197	
	LSW312BL					
	MSW-432	0.504	0.622	0.189	0.287	
	MSW-533	0.630	0.776		0.382	
	MSW-633	0.756	0.933		0.445	
 <p>Right hand (R) shown</p>	MSW-432BR	0.504	0.622	0.189	0.287	
	MSW-432BL					
	CH44-A		0.492	0.185		
	ASR420	0.492		0.126	0.173	
	LSR32	0.350		0.126	0.197	
	LSR32C	0.331				
	LSR42	0.476				
	LSR42C	0.390		0.189	0.264	
	LSR53C	0.551			0.197	
	LSR63C	0.677			0.264	
LSR84C	0.862		0.252	0.382		
	MSR-43	0.492		0.189	0.287	
	MSR-44			0.252		
	SSR32	0.343		0.125	0.205	
 <p>Right hand (R) shown</p>	G16EL/IR	0.374	-	0.126	0.157	
	G16ER/IL			0.126		
	G16EL/IR-DT			0.156	0.213	
	G16ER/IL-DT			0.156		





Shape	Designation	Dimension (in)			
		ϕa	ℓ	Lead angle	
	AE16-4DT	0.374	0.213	4°	
	AE16-3DT		0.213	3°	
	AE16-2DT		0.213	2°	
	A16-1DT		0.213	1°	
	AE16-0DT		0.213	0°	
	AE16-99DT		0.213	-1°	
	AE16-98DT		0.213	-2°	
	AE16-4		0.157	4°	
	AE16-3		0.157	3°	
	AE16-2		0.157	2°	
	A16-1		0.169	1°	
	AE16-0		0.157	0°	
	AE16-99		0.157	-1°	
	AE16-98		0.157	-2°	
	AN16-4DT		0.374	0.213	4°
	AN16-3DT			0.213	3°
	AN16-2DT			0.213	2°
	AN16-0DT			0.213	0°
	AN16-99DT	0.213		-1°	
	AN16-98DT	0.213		-2°	
	AN16-4	0.157		4°	
	AN16-3	0.157		3°	
	AN16-2	0.157		2°	
	AN16-0	0.157		0°	
	AN16-99	0.157		-1°	
	AN16-98	0.157		-2°	
	GXE16-98	0.374		0.157	-2°
	GXE16-98DT			0.213	-2°
	GXE16-99			0.157	-1°
	GXE16-99DT			0.213	-1°
	GXE16-0			0.157	0°
	GXE16-0DT			0.213	0°
	GXE16-1		0.169	1°	
	GX16-1DT		0.213	1°	
	GXE16-2		0.157	2°	
	GXE16-2DT		0.213	2°	
	GXE16-3		0.157	3°	
	GXE16-3DT		0.213	3°	
	GXE16-4		0.157	4°	
	GXE16-4DT		0.213	4°	
	GXE22-98DT		0.500	0.260	-2°
	GXE22-99DT				-1°
GXE22-0DT	0°				
GX22-1DT	1°				
GXE22-2DT	2°				
GXE22-3DT	3°				
GXE22-4DT	4°				
GXN16-98	0.374	0.157			-2°
GXN16-98DT		0.213	-2°		
GXN16-99		0.157	-1°		
GXN16-99DT		0.213	-1°		
GXN16-0		0.157	0°		
GXN16-0DT		0.213	0°		
GXN16-1		0.169	1°		
GXN16-2		0.157	2°		
GXN16-2DT		0.213	2°		
GXN16-3		0.157	3°		
GXN16-3DT		0.213	3°		
GXN16-4		0.157	4°		
GXN16-4DT		0.213	4°		
GXN22-98DT		0.500	0.260	-2°	
GXN22-99DT				-1°	
GXN22-0DT				0°	
GXN22-2DT				2°	
GXN22-3DT				3°	
GXN22-4DT	4°				

(D30)











Shims

Shape	Designation	Dimension (in)					
		a	øa	ℓ	c	Lead angle	
	NXE22-98	0.500	0.500	0.157		-2°	
	NXE22-99					-1°	
	NXE22-0					0°	
	NXE22-1					1°	
	NXE22-2					2°	
	NXE22-3					3°	
	NXE22-4					4°	
	NXE27-98					0.626	0.626
	NXE27-99	-1°					
	NXE27-0	0°					
	NXE27-1	1°					
	NXE27-2	2°					
	NXE27-3	3°					
	NXE27-4	4°					
	NXN22-98	0.500	0.500	0.157			
	NXN22-99					-1°	
	NXN22-0					0°	
	NXN22-1					1°	
	NXN22-2					2°	
	NXN22-3					3°	
	NXN22-4					4°	
	NXN27-98					0.626	0.626
	NXN27-99	-1°					
	NXN27-0	0°					
NXN27-1	1°						
NXN27-2	2°						
NXN27-3	3°						
NXN27-4	4°						
(D30)							
	TSL12R	0.472		0.185	0.177	4.5°	
	TSL12L	0.472		0.185	0.177	4.5°	
	TSL16R	0.626		0.252	0.197	5°	
	TSL16L	0.626		0.252	0.197	5°	
	TSL24R	0.937		0.370	0.280	7°	
	TSL24L	0.937		0.370	0.280	7°	
	TSL12RI	0.421		0.185	0.177	4.5°	
	TSL12LI	0.421		0.185	0.177	4.5°	
	TSL16RI	0.740		0.252	0.197	5°	
	TSL16LI	0.740		0.252	0.197	5°	
	(D30)						

Shape	Designation
 (Steel) Right hand (R) shown	SL-1R
	SL-1L
 (Steel) Right hand (R) shown	SL-2R
	SL-2L
 (Steel) Right hand (R) shown	SL-3R
	SL-3L
 (Steel) Right hand (R) shown	SL-6R
	SL-6L

Shape	Designation
 (Steel) Right hand (R) shown	SL-7R
	SL-7L
 (Steel) Right hand (R) shown	SL-8R
	SL-8L
 (D30) Right hand (R) shown	SGSR151
	SGSL151
 (D30) Right hand (R) shown	STN62R
	STN62L



Clamps






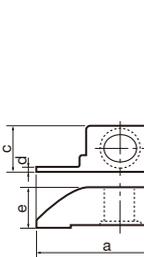
Shape	Designation	Dimension (in)					
		a	b	c	d	e	ℓ
 e (Left-hand thread)	MCL-5M	0.579	0.433	0.307	0.157	M5	0.425
	MCL-6	0.732	0.453	0.374		M6	0.543
	MCL-8S	0.752	0.531	0.429	0.197	M8	0.535
	MCL-8M	0.886					0.669
	MCL-8L	1.004	0.571	0.157	0.787		
 e (Left-hand thread)	MCPM-6	0.579	0.441	0.311	0.157	M5	0.425
	MCPM-9	0.752	0.661	0.429	0.197	M8×1	0.535
	MCPM-12	0.886					0.669
	MCPM-20	0.732	0.374	0.374	0.157	M6	0.543
	MCPM-21		0.480				
	MCPM-22	0.846	0.520				0.657
	MCPM-30	1.004	0.661	0.429	0.197	M8×1	0.787
		DCPM-33	0.630	0.366	0.413	0.094	
DCPM-43		0.835	0.453	0.531	0.118		0.520
DCPM-54		1.016	0.600	0.551	0.138		
DCPM-64		1.118	0.610	0.630	0.157		
	ACP3S	0.898	0.374	0.394			0.591
	ACP3S-E	0.854	0.374	0.394			0.547
	ACP3L	1.232	0.472	0.512			0.917
	ACP3L-E	1.039	0.472	0.512			0.724
	ACP4S	1.012	0.472	0.512			0.697
	ACP5S	1.185	0.508	0.591	-	-	0.815
	ACP6S	1.315	0.504	0.650	-	-	0.945
		ACP3	0.705	0.394	0.394	0.256	0.248
ACP4		1.020	0.547	0.472	0.276	0.425	
 Right hand (R) shown	CTC-3R	1.142	0.346	0.630	0.087	0.315	
	CTC-3L						
	CTC-4R			0.669	0.126		
	CTC-4L						
	CTC-5R			0.709	0.165		
	CTC-5L						
	CP81A	1.102	0.413	0.472	0.138	0.315	
	CP81B						
 TC-3 type shown, TC-4 : Left-hand thread	TC-3	0.748	0.492	0.327	-	-	-
	TC-4	0.850		0.315			
	TF-72	0.866	0.445				
	TF-73	0.866	0.445				
	TF-184	0.866	0.445				
	TF-185	0.866	0.445				
	CCR2	1.366	0.587	0.421	0.047	0.413	
	CCL2						
	CCR3				0.087		
	CCL3						
	CCR4				0.110		
	CCL4						
	CCR5				0.126		
	CCL5						
	CCR6				0.154		
	CCL6						
CCR8	0.193						
CCL8							






Grade
Insert
Ext. Toolholder
Int. Toolholder
Threading
Grooving
Miniature tool
Milling cutter
Endmill
Drilling tool
Tooling System
User's Guide
Index







Clamps



Shape	Designation	Dimension (in)					
		a	b	c	d	e	
 <p>Right hand (R) shown</p>	CFG-3SR	0.866	0.433	0.909	0.079	0.236	
	CFG-3SL						
	CFG-4SR						
	CFG-4SL	1.260			0.118	0.630	
	CFG-4DR						
	CFG-4DL						
	CFG-5SR	0.866		0.157	0.236		
	CFG-5SL	1.260				0.630	
	CFG-5DR						
	CFG-5DL						
	CFG-6SR	0.906		0.197	0.276		
	CFG-6SL	1.299				0.669	
	CFG-6DR						
	CFG-6DL						
	CFG-8SR	1.102		1.067	0.276	0.315	
	CFG-8SL	1.496					0.709
CFG-8DR							
CFG-8DL							
(Steel)							
	CCP4-A	1.146		0.551			
	(Steel)						



Shape	Designation
 <p>M8 Left-hand thread</p>	NF-84A
(Steel)	
 <p>M6 Left-hand thread</p>	CP536
(Steel)	
	CP91
(Steel)	
	CP900
(Steel)	
	CP910
(Steel)	
	JCP-1
(Steel)	

Shape	Designation
	JCP-2
(Steel)	
	JCP-3 JCP-3N
(Steel)	
	CQ-1
(Steel)	
 <p>Right hand (R) shown</p>	CPK5R CPK5L
(Steel)	
 <p>Right hand (R) shown</p>	C11R-5 C11L-5
(Steel)	








Clamp Sets

Shape	Designation	Dimension (in)						
		a	b	c	d	e	ℓ	T / f
 (Steel)	CSG-5S	M5×0.8	0.531	0.543	0.276	0.071	0.335	0.098
	CSG-5		0.610					
	CSG-6S	M6×1	0.709	0.642	0.335	0.098	0.394	0.118
	CSG-6L		0.846					
	CSG-8S	M8×1	0.827	0.807	0.433	0.138	0.492	0.157
	CSG-8		0.925					
	 (Steel)	CSW-00	M4×0.7	0.453	0.472	0.315	0.079	0.295
CSW-1		M5×0.8	0.650	0.650	0.374	0.157	0.394	0.118
CSW-0		M4×0.7	0.453	0.543	0.335	0.098	0.315	0.098
CSW-2		M6×1	0.787	0.807	0.433	0.236	0.512	0.157
CSW-40		M4×0.7	0.472	0.520	0.315	0.079	0.295	0.098
CSW-50		M5×0.8	0.591	0.665	0.394		0.374	0.118
 (Steel)		CSP16	M5×0.8	0.610	0.567	0.272	0.126	0.358
	CSP22	M6×1	0.787	0.713	0.350	0.165	0.453	T20
	CSP27	M8×1.25	0.925	0.961	0.469	0.154	0.614	0.157
 (Steel)	CSY-15	M4×0.7	0.457	0.453	0.276	0.118	0.236	15IP
	CSY-20	M5×0.8	0.472	0.709	0.374	0.157	0.433	20IP




Shape	Designation
 (Steel)	CSG-5T
 (Steel)	CSX20




Shape	Designation
 (Steel)	CSW-0T
 (Steel)	CSL-4




Levers

Shape	Designation	Dimension (in)				
		a	b	c	d	
 (Steel)	LCL3	0.394	0.472	0.146	0.142	
	LCL4	0.575	0.551	0.185	0.185	
	LCL5	0.673	0.669	0.236	0.236	
	LCL6	0.807	0.827	0.295	0.295	
	LCL8	1.000	1.000	0.339	0.339	
 (Steel)	LCL3C	0.425	0.465	0.134	0.118	
	LCL4C	0.512	0.528	0.146	0.134	
	LCL5C	0.732	0.697	0.185	0.177	
	LCL6C	0.807	0.748	0.236	0.224	
	LCL8C	0.953	0.925	0.295	0.244	
 (Steel)	LCL22N	0.295	0.256	0.102	0.081	
	LCL32N	0.394	0.307	0.126	0.126	
	LCL33NL	0.453	0.374	0.122	0.142	
	LCL33N	0.394	0.370	0.126	0.126	
	LCL43N	0.528	0.394	0.185	0.185	
 (Steel)	LCL23	0.307	0.335	0.102	0.083	
	LCL33	0.398	0.476	0.142	0.146	
	LCL33L	0.472	0.453	0.122	0.142	
	LCL43S	0.531	0.520	0.185	0.185	
	LCL43M					
	LCL44	0.634	0.575	0.185	0.185	
	LCL54	0.650	0.677	0.240	0.236	
 (Steel)	DLCL43	0.612	0.551	0.197	0.185	
	DLCL54	0.752	0.752	0.240	0.236	
	DLCL64	0.846	0.827	0.295	0.295	
 (Steel)	SLLV-1		0.305	0.134	0.096	
	SLLV-2		0.305	0.134	0.108	
 (Steel)	FCL4	0.197	0.306	0.150		
	FCL8	0.394	0.563	0.212		








Pins

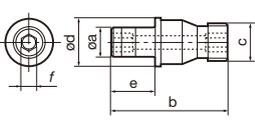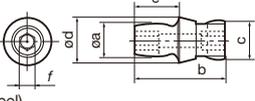Shape	Designation	Dimension (in)					
		ϕa	b	ϕc	ϕd	e	f
 (Steel)	MLP32L	0.154	0.346	M5×0.8	0.220	0.138	0.079
	MLP33	0.146					
	MLP34L	0.146			0.516		
	MLP46	0.197	0.677	M6.3×1	0.307	0.217	0.098
	MLP46L		0.732				
	MLP58	0.244	0.862	M8×1	0.406	0.272	0.118
	MLP68	0.307		M10×1			0.469
	MLP68L						
 (Steel)	MLP44	0.197	0.520	M6.3×1	0.280	0.217	0.098
	MLP33L	0.146	0.409	M5×0.8	0.220	0.201	0.079
 (Steel)	SW99	0.315	1.870				









Shape	Designation
 (Steel)	SP-8
 (Steel)	SP-6
 (Steel)	BP-3

Shape	Designation
 (Steel)	BP-360
 (Steel)	BP-490
 (Steel)	SL-PI-2

Chipbreaker Pieces

Shape	Designation	Dimension (in)				
		a	b	c		
 (TX30)	CBT-2S	0.346	0.299	0.079		
	CBT-2M	0.291	0.260			
	CBT-3S	0.524	0.476	0.098		
	CBT-3M	0.484	0.437			
	CBT-3L	0.445	0.398			
	CBT-4S	0.740	0.665			
	CBT-4M	0.701	0.626			
	CBT-4L	0.661	0.567			
	NCT-2S	0.559	0.465			
	NCT-2M	0.512	0.425			
	NCT-2L	0.469	0.386			
 (TX30)	CBS-3S	0.374	0.327		0.079	
	CBS-3M		0.287			
	CBS-4S	0.500	0.457	0.098		
	CBS-4SN					
	CBS-4M		0.417			
	CBS-4L		0.358			
	NCS-3S		0.441			
	NCS-3M		0.402			
	NCS-3L		0.343			
 Right hand (R) shown (TX30)	B11 R-5	0.945	0.512		0.197	
	B11 L-5					
 (TX30)	CBS-4SN	0.453	0.453	0.098		
	CBS-4MN	0.413	0.413			
	CBS-4LN	0.354	0.354			
	NCS-3SN	0.441	0.441			
	NCS-3MN	0.402	0.402			
	NCS-3LN	0.343	0.343			
 (TX30)	CBC-4SN	0.453	0.453	0.098		
	CBC-4MN	0.413	0.413			
	CBC-4LN	0.374	0.374			
 Right hand (R) shown (TX30)	CBD-4SR	0.500	0.453	0.098		
	CBD-4MR		0.413			
	CBD-4ML					
	CBD-4LR		0.374			
 (TX30)	CBD-4SN	0.453	0.453	0.098		
	CBD-4MN	0.413	0.413			
 (TX30)	CBR-4SN	0.500	0.469	0.098		
	CBR-4MN		0.429			

Springs (Springs for Shims)



Shape	Designation	Dimension (in)					
		a	b	c	d		
 (Steel)	SP-2.5	0.472	0.106				
 (Steel)	SP-16-L14	0.535	0.112				
 (Steel)	LSP3	0.217	0.118	0.232			
	LSP3L	0.276					
	LSP4		0.157	0.299			
	LSP4S	0.236					
	LSP5	0.335	0.177	0.346			
	LSP6	0.433	0.232	0.429			
	LSP6C	0.335	0.189	0.366			
	LSP8	0.472	0.394	0.606			
 (Steel)	PSP-2.5	0.394	0.106				
	PSP-4.0	0.630	0.165				
	PSP301	0.299	0.118				
 (Steel)	PSP-16	0.384	0.112				
 (Steel)	BP-0	0.142	0.512				
	BP-5-A						
	BP-7	0.276	0.433				
	BP-8.8	0.346	0.394				
	BP-9	0.346					
	BP-10	0.386					
	SP913	0.354	0.512				
 (Steel)	BSP-1	0.307	0.295	0.189	0.236		
 (Steel)	PN3-4	2.520	0.354	0.394			

Grade
 Insert
 Ext. Toolholder
 Int. Toolholder
 Threading
 Grooving
 Miniature tool
 Milling cutter
 Endmill
 Drilling tool
 Tooling System
 User's Guide
 Index




Parts for Tools


Coolant Supply Attachment

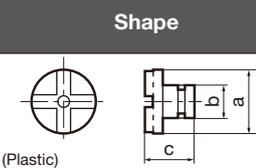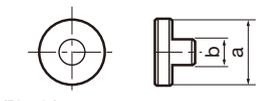Shape	Designation	Dimension (in)				
		a	b	c	Thread	
 (Plastic)	EA-20	0.787	0.394	0.591		
	EA-25	0.984				
	EA-32	1.260	0.630			
 (Plastic)	CA-16	0.630	0.315		M6	
	CA-20	0.787	0.335		M6	
	CA-25	0.984	0.453		R1/8	
	CA-32	1.260	0.453		R1/8	
	CA-40	1.575	0.453		R1/8	


Pistons

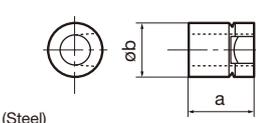Shape	Designation	Dimension (in)			
		a	øb		
 (Steel)	DPIS33	0.496	0.354		
	DPIS43	0.465	0.394		
	DPIS44	0.528	0.394		
	DPIS54	0.630	0.512		
	DPIS64		0.591		


Nuts

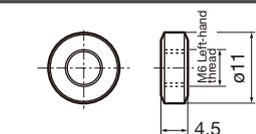Shape	Designation
	SRW11



Coolant Pipe & Nozzle

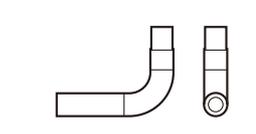Shape	Designation
	PNZ5


Coolant Nozzle

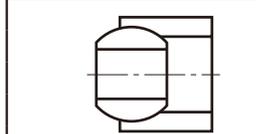Shape	Designation
	CNZ125
	SATZ-M8X1-M3
	SATZ-M10X1-M5
	EZ104
	EZ83


Coolant unit

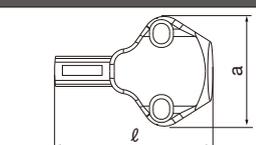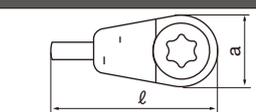Shape	Designation	Dimension (in)	
		a	ℓ
	CU-CW-CHP	0.819	1.169
	CU-D-CHP	0.819	1.165
	CU-V-CHP	0.819	1.181
	S-CU-CHP	0.276	0.638


O-ring for TungTurn-Jet

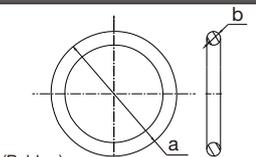Shape	Designation	Dimension (in)			
		a	øb		
 (Rubber)	OR6.4X0.9N	0.323	0.035		
	OR14X2.5NN	0.748	0.098		






Coolant screw for TungTurn-Jet

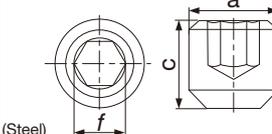Shape	Designation	Dimension (in)				
		a	c			T/f
 (Steel)	SRM4X4 TL360	M4	0.157			0.079

Mounting screw for TungTurn-Jet

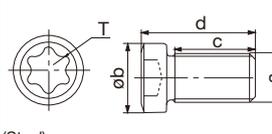Shape	Designation	Dimension (in)				
		a	øb	c	d	T/f
 (Steel)	SRM3	M3X0.5	0.165	0.276	0.193	T8

Sizing Plates

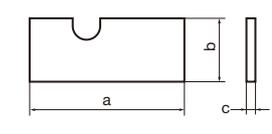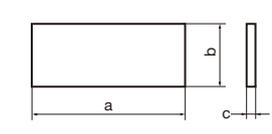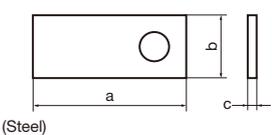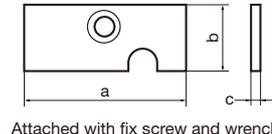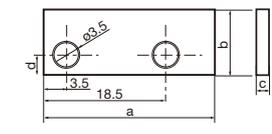
Shape	Designation	Dimension (in)				
		a	b	c	d	
 (Steel)	S0816A	2.165	0.610	0.031		
	S1016A			0.039		
	S0816B	1.969		0.031		
	S1016B			0.039		
	S0816C	1.772		0.031		
	S1016C			0.039		
	S0820A	2.402	0.768	0.031		
	S1020A			0.039		
	S0820B	2.146		0.031		
	S1020B			0.039		
	SM-00	0.709		0.315	0.039	
 (Steel)	SW04	1.004		0.228	0.010	
	SW05	1.457	0.327	0.010		
	SW06	1.417	0.425	0.020		
	SW08	1.398	0.484	0.039		
 (Steel)	S0810	1.575	0.433	0.031		
	S1010			0.039		
 Attached with fix screw and wrench. (Steel)	PSTR08	0.945	0.433	0.059		
	PSTL08					
	PSTR10	1.654	0.650	0.079		
	PSTL10					
	PSTR12	1.850	0.748	0.079		
	PSTL12					
 (Steel)	AP0801	1.024	0.374	0.020	0.118	
	AP0802			0.039		
	AP0803			0.059		
	AP0804			0.079		
	AP0805			0.098		
	AP1101	1.181	0.453	0.020	0.197	
	AP1102			0.039		
	AP1103			0.059		
	AP1104			0.079		
	AP1105			0.098		
	AP1106			0.118		



SW04 is composed of three plates and SW05 to SW08 are composed of four plates.

Note on fixing screws: PSTR/L08 is attached with CSSM2-4 and other types are attached with CSHM3-8.








Parts for Tools

Washers









Shape	Designation	Dimension (in)					
		ϕa	ϕb				
	VA4	0.299	0.161				
	VA5	0.362	0.201				
	VA6	0.413	0.240				

Shape	Designation
	CPW5
	CDW6

Wrenches and Drivers

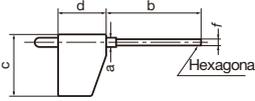Shape	Designation	Dimension (in)						
		a	b	c	d	f	T	
	CRW23	0.382	3.091	2.165				
	CRW33	0.366						
	T-6F	0.079	1.378	0.571	0.591		T6	
	T-7F			0.748	0.748		T7	
	T-8F	0.098	1.575	0.925	0.787		T8	
	T-9F	0.118					T9	
	T-15F	0.138	1.772	1.102	0.827		T15	
	T-20F	0.157					T20	
	IP-6F	0.079	1.378	0.583	0.587		6IP	
	SET T-15/5	0.138	1.772	1.102	0.827		T15	
	T-20TORX	0.154	1.929	1.181	0.866		T20	
	T-6L		1.890	0.630			T6	
	T-8L							T8
	T-9L							T9
	T-15L		2.323	0.866			T15	
	T-25TORX		2.598	0.917			T25	
	KEYV-T20		2.362	0.866			T20	
	KEYV-T25		2.559	0.906			T25	
	KEYV-T30L		7.480	1.457			T30	
	KEYV-T40L		8.189	1.693			T40	
	KEYV-T50L		9.134	1.890			T50	
	QL-39		3.346	1.181				
	P-2F	0.157	1.732	0.787	0.492	0.079		
	P-2.5F	0.197	1.772	0.984	0.787	0.098		
	HW2.0/5RED	0.118	1.496	0.591	0.591	0.079		
	P-2.5T		1.654		0.591	0.098		
	T-15DF		1.575		0.787		T15	







Wrenches, Drivers and Lubricant

Shape	Designation	Dimension (in)						
		a	b	c	d	f	T	
	T-1008/5	0.256	3.346	1.102	0.984	-	T10/T8	
	T-2010/5					-	T10/T20	
	1/4HEX					0.250		
	5/32HEX					0.156		
	1/8HEX					0.125		
	3/32HEX					0.094		
	P-2					0.079		
	P-2.5					0.098		
	P-3					0.118		
	P-3.5					0.138		
	P-4					0.157		
	P-4.5					0.177		
P-5					0.197			
P-6					0.236			
	TP-3A		2.756	1.181	1.791	0.118		
	TP-4			1.260		0.157		
	TP-5		3.346	1.594	2.087	0.197		
	T-27T		3.268	1.063	2.008		T27	
	T-15T	0.157	3.150		3.937		T15	
	T-20T					T20		
	IP-20T					20IP		
 <p>Handle shape somewhat varies depending on the type number from the above figure.</p>	T-6D	0.098	1.772	2.756			T6	
	T-7DB			2.953			T7	
	T-7D	0.079		2.756				
	T-8D	0.102	2.402	2.657				T8
	T-9D	0.118	2.559	3.150				T9
	T-10D	0.130	2.756	3.543				T10
	T-15D	0.144	2.795	3.937				T15
	T-20D	0.181	3.543					T20
	T-25D	0.173	3.425	3.386				T25
	IP-6DB	0.000	1.772	2.756				6IP
	IP-7D	0.098	1.772	2.953				7IP
	IP-8D	0.118	2.165	3.150				8IP
	IP-9D	0.130	2.362	3.937				9IP
	IP-10D	0.130	2.795	3.504				10IP
	IP-15D	0.157	3.150	3.937				15IP
	IP-20D	0.157	3.543	3.937				20IP
	KS-21	0.827	7.677					
	KS-24	0.945	8.465					
	KS-27	1.063	9.252					
	KS-32	1.260	10.827					
	KS-36	1.417	12.008					
	M-1000							
	BT15S	0.154	1.969	3.543		0.236	T15	
	BT15M	0.154	1.969	4.646		0.236	T15	
	BT20S	0.181	1.969	3.543		0.236	T20	
	BT20M	0.181	1.969	4.646		0.236	T20	
	BLD IP15/S7	0.154	1.969	3.543		0.236	15IP	
	BLD IP15/M7	0.154	1.969	4.646		0.236	15IP	
	BLD IP20/S7	0.181	1.969	3.543		0.236	20IP	
	BLD IP20/M7	0.181	1.969	4.646		0.236	20IP	
	BLD T10/S7	0.154	2.244	2.953		0.236	T10	
	BLD T10/S7-A	0.154	2.244	2.953		0.236	T10	
	H-TB		3.937		1.457	0.236		
	H-TBS		2.953		1.457	0.236		

Grade
Insert
Toolholder
Ext. Toolholder
Int. Toolholder
Threading
Grooving
Miniature tool
Milling cutter
Endmill
Drilling tool
Tooling System
User's Guide
Index



Wrenches and Drivers

Shape	Designation	Dimension (in)					
		a	b	c	d	f	T
	H-TB2W		3.740		1.236	0.236	
	AJC08		0.433		0.669	0.161	
	ECW-456EF	3.425	0.591	0.157	0.453		
	ECW-456I	3.169	0.866	0.157	0.413		
	KEYV-S05	0.157	0.217	3.937			
	KEYV-S06	0.213	0.315	4.921			
	KEYV-S08	0.260	0.394	5.906			
	KEYV-S10	0.303	0.512	6.890			
	KEYV-S12	0.370	0.630	9.843			
	KEYV-W20						
	KEYV-177	1.142	4.331				
	KEYV-217	1.142	4.331				
	KGDT-100	1.260	4.272				
	KGDT-110	1.260	4.272				
	KGDT-120	1.260	4.272				
	KGDT-130	1.260	4.272				
	KGDT-140	1.260	4.272				
	KGDT-150	1.260	4.272				
	K-TRM-T5	0.866	3.209				
	K-TRM-T6	1.063	3.622				
	K-TRM-T7	1.236	4.213				
	K-TRM-T8	1.417	4.331				
	K-TRM-T9	1.496	4.331				

Parts for Tools

Grade

Insert

Ext. Toolholder

Int. Toolholder

Threading

Grooving

Miniature tool

Milling cutter

Endmill

Drilling tool

Tooling System

User's Guide

Index



Locators

Designation	Applicable Tool
LD150R	TXD15125R ~ TXD15315R
LD440R/L	TMD44 TGD4400R/L-A TFD44
LD442R/L	EGD4400R
LD540R/L	TMD54
LE302R	ESE3050R (RS**) ~ 3063R (RS**)
LE303R/L	TSE3003R/LIA ~ 3006R/LIA
LE402AR	ESE4050RA ESE4063RA
LE403R/L	TSE4003R/LIA TSE4004R/LIA ESE4003RIA-S32
LE405R/L	TSE4005R/LIA ~ 4012R/LIA
LE413R/L	THE40
LE444R/L	TME4403R/LI ~ 4405R/LI TME4403R/LB ~ 4405R/LB EME4405R ~ 4404RI
LE446R/L	TME4406R/LI ~ 4412R/LI TME4406R/LB ~ 4412R/LB
LE540R/L	TME54
LF440R/L	THF44
LF540R/L	THF54
LF602R	ERF6050R ~ ERF6063R
LF602R/L	TRF6003R/LI ~ TRF6006R/LI TRF6008R/LI ~ TRF6012R/LI
LMS56R/L	MS08R/L ~ MS12R/L
LN423R/L	TGN42
LN645R/L	TPN64
LP403R/L	TSP4003R/LIA ~ TSP4004R/LIA TFP4004R/LIA
LP405R/L	TSP4005R/LIA ~ TSP4012R/LIA TFP4005R/LIA ~ TFP4012R/LIA
LP413R/L	TGP41 TGP42
LP514R/L	TGP51
LPP16R	TPP16
LR602R/L	ERD6050RA ~ ERD6063RA
LR603R/L	TRD6003R/L TRD6004R/L ~ TRD6008R/L
LV525R/L	VSN 1
LV530R/L	VSN 2
LV556R/L	VSN60
LW400R	EFP4063R
LW400R/L	TFD44 TFP4000 SFP4000
LW402R	EFP4050R

Insert locking wedges

Designation	Applicable Tool
FDS-8SST	EDPD09063R EDPD09063RB
FDS-8ST-18	EDP09080R EDPD09080RB DPD09100R~DPD09160R DPD09100RB~DPD09160RB
FW-242R/L	ø63
FW-243R/L	ø80~100
FW-245R/L	ø125 ~
FW304R/L-D	DAD15 DPD15 EDPD15 QPP15
WF150R	TXD15125R ~ TXD15315R
WF310R/L	TGP4100BA TGP4103R/LIA
WF330N	TSE4003R/LIA TSE4004R/LIA ESE4003RIA-S32 TSP4003R/LIA ~ TSP4004R/LIA TFP4004R/LIA
WF330R/L	TSE3003R/LIA ~ 3006R/LIA
WF444R/L	TME4403R/LI ~ 4405R/LI TME4403R/LB ~ 4405R/LB EME4405R ~ 4404RI TME4406R/LI ~ 4412R/LI TME4406R/LB ~ 4412R/LB
WF500R	TSE4005R/LIA ~ 4012R/LIA TSP4005R/LIA ~ TSP4012R/LIA TFP4005R/LIA ~ TFP4012R/LIA
WF500R/L	TMD54 TGP51 THF54
WF50R/L	TME54
WF602R	ERF6050R ~ ERF6063R
WF603R/L	TRF6003R/LI ~ TRF600R/LI
WF608R/L	TRF6008R/LI ~ TRF6012R/LI
WF875N	TPYD06 EPYD06
WN645R/L	TPN64
WP193TR/L	EGD4400R
WP440R/L	TMD44 TGD4400R/L-A TFD44 TGP4100IA ~ TGP4112R/LIA TGP42 THF44 THE40
WR602R/LW	ERD6050RA ~ ERD6063RA
WR603R/L	TRD6003R/L TRD6004R/L ~ TRD6008R/L
WT402R	ESE4050RA ESE4063RA
WT402R/L	EME4450RB ~ 4404RB

Parts for Tools

Locator adjusting wedges

Designation	Applicable Tool
FW-305	TFD44 TFP40 SFP4000 EFP4063
FW325R/L-D	DAD15 QPP15 DPD15 EDPD15
RSFTC1008	TPYP12...
RSFTC1009	EPYP12M032C25.0R05
RSFTC1011	EPYP12M025C25.0R03

Fine adjusting screws

Designation	Applicable Tool
AJM5	DPD09 EDPD09
ASM34L	DPD24

Cover

Designation	Applicable Tool
RSFTS6063M	TPYP12M063B22.0R10
RSFTS6080	TPYP12*080B**R12
RSFTS6100	TPYP12*100B**R16
RSFTS6125	TPYP12*125B**R20