

ISO^{CO}TURN

Tungaloy Report No. 426S3-US

Introducing GNMG and FNMG inserts






New **GNMG** and **FNMG** insert shapes for **ISO-EcoTurn**, an economical insert series


Innovative insert designs with reduced corner angles for better chip control and machining stability

- **GNMG33** insert with **70° corners**: good alternative to CNMG with 80° corners
- **FNMG33** insert with **45° corners**: good alternative to DNMG with 55° corners
- 70° and 45° corner angles provide the inserts with larger clearances with the workpiece
- Better chip control and chip flow generated by larger clearances of the insert side and end eliminate part damage. In addition, reduced corner angles help reduce the radial force that acts on the insert during machining, eliminating chatter, while providing stability

New GNMG type
Corner angle: **70°**

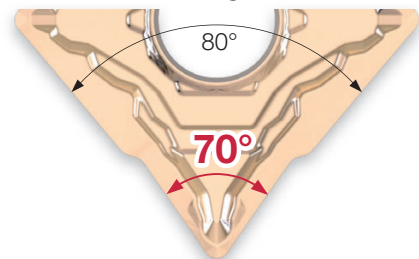


New FNMG type
Corner angle: **45°**

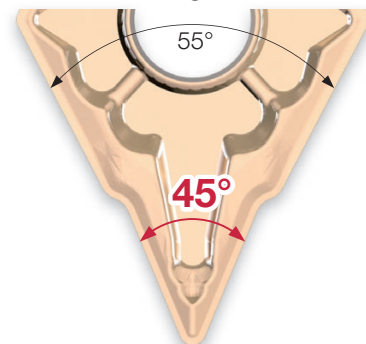

Versatility and economy

- The new inserts can be used with existing **ISO-EcoTurn** toolholders for CNMG33 or DNMG33
- **ISO-EcoTurn** decreases cost per insert on the production line without compromising insert performance
- Three types of insert grades are available for machining of a wide range of materials

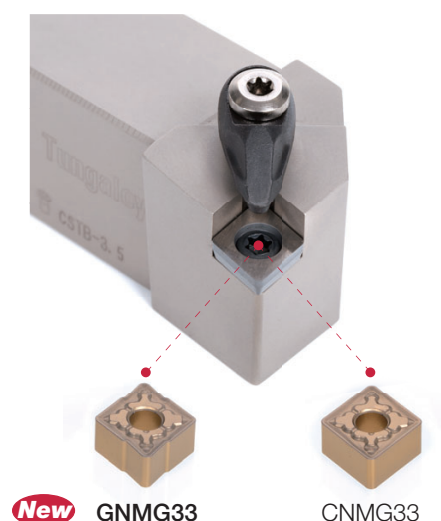

CUTTING PERFORMANCE

1. Excellent chip control during profiling (longitudinal turning and outward face turning)



New FNMG type
Corner angle: 45°


GNMG and **FNMG** inserts provide larger clearances for low cutting force and excellent chip control during profile machining.



DNMG type
Corner angle: 55°

P	Toolholder	: ADJNL1633-A
	Insert	: FNMG331E -TSF T9215 DNMG331E-TSF T9215
	Workpiece material	: 4140
	Cutting speed	: ① Vc = 820 sfm, ② Vc = 490 sfm
	Feed	: ① f = 0.012 ipr, ② f = 0.010 ipr
	Depth of cut	: ① ap = 0.020", ② ap = 0.010"
	Machining	: ① External turning, ② Face turning
	Coolant	: Dry

2. Excellent chip evacuation during face turning

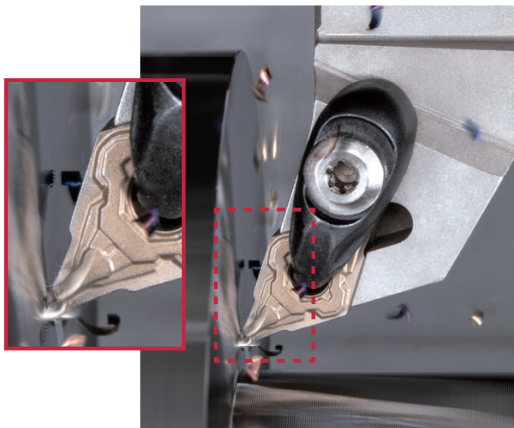

New FNMG type
Corner angle: 45°



GNMG and **FNMG** inserts provide larger clearances for the chips to smoothly flow and evacuate out of the cutting zone. This significantly reduces chip re-cutting when the insert is fed in any direction.



DNMG type
Corner angle: 55°

P	Toolholder	: ADQNL1633-A
	Insert	: FNMG331E -TSF T9215 DNMG331E-TSF T9215
	Workpiece material	: 4140
	Cutting speed	: Vc = 490 sfm
	Feed	: f = 0.010 ipr
	Depth of cut	: ap = 0.010"
	Machining	: Face turning
	Coolant	: Dry

3. Cutting force (thrust force)

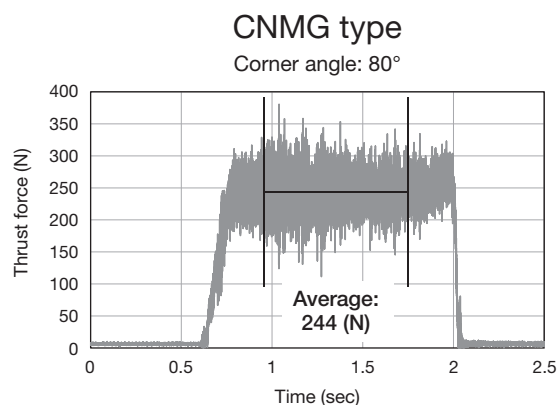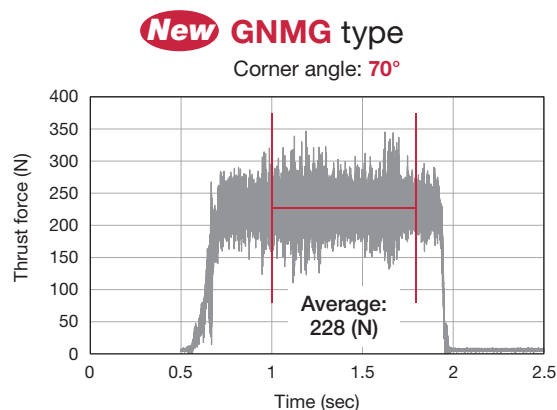

Reduced corner angles of **GNMG** and **FNMG** inserts enable less cutting contact with the workpiece. This lowers the radial cutting force that applies on the insert during machining, eliminating chatter, while improving machining stability.


P Toolholder : ACLNR1633-A
Insert : **GNMG332E-TM** T9215
CNMG332E-TM T9215

Workpiece material : 4140
Cutting speed : $V_c = 980$ sfm
Feed : $f = 0.008$ ipr
Depth of cut : $a_p = 0.118$ "
Machining : External turning
Coolant : Dry

APPLICATION AREA



TSF chipbreaker

Excellent chip control and low cutting force geometry for finish machining.

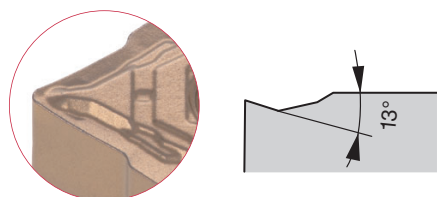

TM chipbreaker

Excellent chip control and stable machining for medium machining.

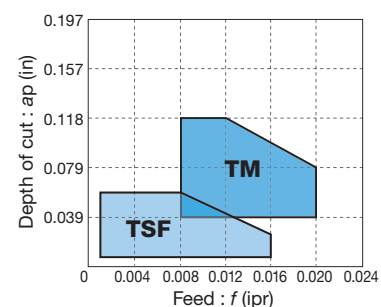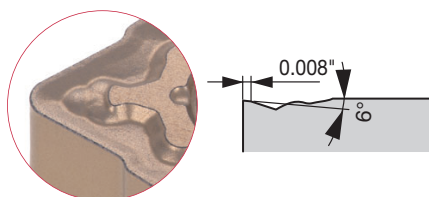


GRADES

Grade	Recommended workpiece material	Feature
PREMIUMTEC T9215	P M K	- Well-balanced between wear and chipping resistance - First choice for steel - High versatility for a wide range of applications
PREMIUMTEC T9225	P	- First choice for roughing to medium cutting - High fracture resistance
PREMIUMTEC AH8015	P M K S	- PVD coated grade with a balanced resistance to wear and fracture - First choice for stainless steel and heat-resistant superalloys


- : Continuous cutting
- ◐ : Light interrupted cutting
- ⊗ : Heavy interrupted cutting

**Rhombic, 70°
with hole**

[illegible]

Make sure to offset the cutting edge position after insert change. ● : New product
Do not use ISO-EcoTurn cartridge set for CNMG33 (AD-CL-4/3-SET or -SET-S) with GNMG33 insert.
The insert may move during machining.

**Rhombic, 45°
with hole**

[illegible]

Make sure to offset the cutting edge position after insert change. ● : New product
Please note that the insert shim may interfere with the workpiece when FNMG insert is used with Q-style toolholder to undercut a work diameter of 1.969" or smaller.

STANDARD CUTTING CONDITIONS

ISO	Operation	Chipbreaker	Grade	Depth of cut ap (in)	Feed f (ipr)	Cutting speed: Vc (sfm)		
						Low carbon steel, alloy steel	Medium carbon steel, alloy steel	High carbon steel, alloy steel
	Finishing	TSF	T9215	0.008 - 0.059	0.003 - 0.016	492 - 1312	492 - 1312	394 - 984
			T9225	0.008 - 0.059	0.003 - 0.016	394 - 984	394 - 984	328 - 820
	Medium cutting	TM	T9215	0.039 - 0.118	0.008 - 0.020	492 - 1312	492 - 1312	394 - 984
			T9225	0.039 - 0.118	0.008 - 0.020	394 - 984	394 - 984	328 - 820
Stainless steel								
	Finishing	TSF	T9215	0.008 - 0.059	0.003 - 0.016	328 - 820		
			T9225	0.008 - 0.059	0.003 - 0.016	328 - 820		
			AH8015	0.008 - 0.059	0.003 - 0.016	295 - 623		
	Medium cutting	TM	T9215	0.039 - 0.118	0.008 - 0.020	328 - 820		
			T9225	0.039 - 0.118	0.008 - 0.020	328 - 820		
			AH8015	0.039 - 0.118	0.008 - 0.020	295 - 623		
Cast iron								
	Finishing	TSF	T9215	0.008 - 0.059	0.003 - 0.016	459 - 1640		
			T9225	0.008 - 0.059	0.003 - 0.016	459 - 1640		
	Medium cutting	TM	T9215	0.039 - 0.118	0.008 - 0.020	459 - 1640		
			T9225	0.039 - 0.118	0.008 - 0.020	459 - 1640		
Heat-resistant alloys								
	Finishing	TSF	AH8015	0.008 - 0.059	0.003 - 0.016	66 - 262		
	Medium cutting	TM	AH8015	0.039 - 0.118	0.008 - 0.020	66 - 262		

Tungaloy America, Inc.

3726 N Ventura Drive, Arlington Heights, IL 60004, U.S.A.

Inside Sales: +1-888-554-8394

Technical Support: +1-888-554-8391

Fax: +1-888-554-8392

www.tungaloy.com/us

Tungaloy Canada

432 Elgin St. Unit 3, Brantford, Ontario N3S 7P7, Canada

Phone: +1-519-758-5779 Fax: +1-519-758-5791

www.tungaloy.com/ca

Tungaloy de Mexico S.A.

C Los Arellano 113, Parque Industrial Siglo XXI

Aguascalientes, AGS, Mexico 20290

Phone: +52-449-929-5410 Fax: +52-449-929-5411

www.tungaloy.com/mx



Scan for instant
web access



www.tungaloy.com/us

follow us at:

facebook.com/tungaloyamerica

twitter.com/tungaloy

instagram.com/tungaloyamerica

linkedin.com/company/tungaloy-america

To see Tungaloy products in action visit:




www.youtube.com/tungaloycorporation

Distributed by:



 FIND US ON THE CLOUD!
machiningcloud.com



Available on the
App Store



Available on the
App Store



GET IT ON
Google play



GET IT ON
Google play

Aug. 2021 (TJ)